

# Package: keras3 (via r-universe)

July 3, 2024

**Type** Package

**Title** R Interface to 'Keras'

**Version** 1.0.0.9001

**Description** Interface to 'Keras' <<https://keras.io>>, a high-level neural networks API. 'Keras' was developed with a focus on enabling fast experimentation, supports both convolution based networks and recurrent networks (as well as combinations of the two), and runs seamlessly on both CPU and GPU devices.

**Encoding** UTF-8

**License** MIT + file LICENSE

**URL** <https://keras3.posit.co/>, <https://github.com/rstudio/keras3>

**BugReports** <https://github.com/rstudio/keras3/issues>

**Depends** R (>= 4.0)

**Imports** generics (>= 0.0.1), reticulate (>= 1.36.0), tensorflow (>= 2.16.0), tfruns (>= 1.5.2), magrittr, zeallot, fastmap, glue, cli, rlang

**Suggests** ggplot2, testthat (>= 2.1.0), knitr, rmarkdown, callr, tfdatasets, withr, jsonlite, purrr, rstudioapi, R6, jpeg

**RoxygenNote** 7.3.2

**VignetteBuilder** knitr

**Repository** <https://rstudio.r-universe.dev>

**RemoteUrl** <https://github.com/rstudio/keras3>

**RemoteRef** HEAD

**RemoteSha** a965e043c72c4568206210d3e26ad099ae03c015

## Contents

activation_elu . . . . .	14
activation_exponential . . . . .	16
activation_gelu . . . . .	17

activation_hard_sigmoid . . . . .	18
activation_hard_silu . . . . .	19
activation_leaky_relu . . . . .	20
activation_linear . . . . .	21
activation_log_softmax . . . . .	22
activation_mish . . . . .	23
activation_relu . . . . .	24
activation_relu6 . . . . .	25
activation_selu . . . . .	26
activation_sigmoid . . . . .	27
activation_silu . . . . .	28
activation_softmax . . . . .	29
activation_softplus . . . . .	30
activation_softsign . . . . .	31
activation_tanh . . . . .	32
active_property . . . . .	33
adapt . . . . .	34
application_convnext_base . . . . .	36
application_convnext_large . . . . .	37
application_convnext_small . . . . .	39
application_convnext_tiny . . . . .	41
application_convnext_xlarge . . . . .	43
application_densenet121 . . . . .	44
application_densenet169 . . . . .	46
application_densenet201 . . . . .	47
application_efficientnet_b0 . . . . .	49
application_efficientnet_b1 . . . . .	51
application_efficientnet_b2 . . . . .	52
application_efficientnet_b3 . . . . .	54
application_efficientnet_b4 . . . . .	56
application_efficientnet_b5 . . . . .	57
application_efficientnet_b6 . . . . .	59
application_efficientnet_b7 . . . . .	61
application_efficientnet_v2b0 . . . . .	62
application_efficientnet_v2b1 . . . . .	64
application_efficientnet_v2b2 . . . . .	66
application_efficientnet_v2b3 . . . . .	68
application_efficientnet_v2l . . . . .	69
application_efficientnet_v2m . . . . .	71
application_efficientnet_v2s . . . . .	73
application_inception_resnet_v2 . . . . .	75
application_inception_v3 . . . . .	76
application_mobilenet . . . . .	78
application_mobilenet_v2 . . . . .	80
application_mobilenet_v3_large . . . . .	82
application_mobilenet_v3_small . . . . .	84
application_nasnet_large . . . . .	87
application_nasnet_mobile . . . . .	88

application_resnet101 . . . . .	90
application_resnet101_v2 . . . . .	91
application_resnet152 . . . . .	93
application_resnet152_v2 . . . . .	94
application_resnet50 . . . . .	96
application_resnet50_v2 . . . . .	97
application_vgg16 . . . . .	99
application_vgg19 . . . . .	100
application_xception . . . . .	102
audio_dataset_from_directory . . . . .	103
Callback . . . . .	106
callback_backup_and_restore . . . . .	111
callback_csv_logger . . . . .	113
callback_early_stopping . . . . .	114
callback_lambda . . . . .	117
callback_learning_rate_scheduler . . . . .	119
callback_model_checkpoint . . . . .	120
callback_reduce_lr_on_plateau . . . . .	124
callback_remote_monitor . . . . .	125
callback_swap_ema_weights . . . . .	126
callback_tensorboard . . . . .	128
callback_terminate_on_nan . . . . .	131
clear_session . . . . .	132
clone_model . . . . .	134
compile.keras.src.models.model.Model . . . . .	137
config_backend . . . . .	139
config_disable_interactive_logging . . . . .	141
config_disable_traceback_filtering . . . . .	142
config_dtype_policy . . . . .	143
config_enable_interactive_logging . . . . .	144
config_enable_traceback_filtering . . . . .	145
config_enable_unsafe_deserialization . . . . .	147
config_epsilon . . . . .	148
config_floatx . . . . .	149
config_image_data_format . . . . .	150
config_is_interactive_logging_enabled . . . . .	151
config_is_traceback_filtering_enabled . . . . .	153
config_set_backend . . . . .	154
config_set_dtype_policy . . . . .	155
config_set_epsilon . . . . .	156
config_set_floatx . . . . .	157
config_set_image_data_format . . . . .	159
Constraint . . . . .	161
constraint_maxnorm . . . . .	163
constraint_minmaxnorm . . . . .	163
constraint_nonneg . . . . .	164
constraint_unitnorm . . . . .	165
count_params . . . . .	166

custom_metric . . . . .	166
dataset_boston_housing . . . . .	168
dataset_cifar10 . . . . .	169
dataset_cifar100 . . . . .	170
dataset_fashion_mnist . . . . .	170
dataset_imdb . . . . .	171
dataset_mnist . . . . .	173
dataset_reuters . . . . .	174
deserialize_keras_object . . . . .	175
evaluate.keras.src.models.model.Model . . . . .	178
export_savedmodel.keras.src.models.model.Model . . . . .	180
fit.keras.src.models.model.Model . . . . .	181
freeze_weights . . . . .	184
get_config . . . . .	193
get_custom_objects . . . . .	194
get_file . . . . .	196
get_layer . . . . .	198
get_registered_name . . . . .	198
get_registered_object . . . . .	199
get_source_inputs . . . . .	200
get_weights . . . . .	201
image_array_save . . . . .	202
image_dataset_from_directory . . . . .	204
image_from_array . . . . .	207
image_load . . . . .	209
image_smart_resize . . . . .	211
image_to_array . . . . .	213
initializer_constant . . . . .	215
initializer_glorot_normal . . . . .	216
initializer_glorot_uniform . . . . .	218
initializer_he_normal . . . . .	219
initializer_he_uniform . . . . .	221
initializer_identity . . . . .	222
initializer_lecun_normal . . . . .	224
initializer_lecun_uniform . . . . .	225
initializer_ones . . . . .	227
initializer_orthogonal . . . . .	228
initializer_random_normal . . . . .	229
initializer_random_uniform . . . . .	231
initializer_truncated_normal . . . . .	232
initializer_variance_scaling . . . . .	234
initializer_zeros . . . . .	236
install_keras . . . . .	237
keras . . . . .	238
keras_input . . . . .	238
keras_model . . . . .	240
keras_model_sequential . . . . .	241
Layer . . . . .	243



layer_activation . . . . .	255
layer_activation_elu . . . . .	258
layer_activation_leaky_relu . . . . .	262
layer_activation_parametric_relu . . . . .	265
layer_activation_relu . . . . .	269
layer_activation_softmax . . . . .	272
layer_activity_regularization . . . . .	276
layer_add . . . . .	279
layer_additive_attention . . . . .	283
layer_alpha_dropout . . . . .	287
layer_attention . . . . .	290
layer_average . . . . .	294
layer_average_pooling_1d . . . . .	298
layer_average_pooling_2d . . . . .	303
layer_average_pooling_3d . . . . .	308
layer_batch_normalization . . . . .	312
layer_bidirectional . . . . .	318
layer_category_encoding . . . . .	323
layer_center_crop . . . . .	328
layer_concatenate . . . . .	332
layer_conv_1d . . . . .	336
layer_conv_1d_transpose . . . . .	341
layer_conv_2d . . . . .	346
layer_conv_2d_transpose . . . . .	350
layer_conv_3d . . . . .	355
layer_conv_3d_transpose . . . . .	360
layer_conv_lstm_1d . . . . .	365
layer_conv_lstm_2d . . . . .	371
layer_conv_lstm_3d . . . . .	377
layer_cropping_1d . . . . .	383
layer_cropping_2d . . . . .	387
layer_cropping_3d . . . . .	391
layer_dense . . . . .	395
layer_depthwise_conv_1d . . . . .	400
layer_depthwise_conv_2d . . . . .	405
layer_discretization . . . . .	410
layer_dot . . . . .	415
layer_dropout . . . . .	419
layer_einsum_dense . . . . .	423
layer_embedding . . . . .	428
layer_feature_space . . . . .	433
layer_flatten . . . . .	442
layer_flax_module_wrapper . . . . .	446
layer_gaussian_dropout . . . . .	451
layer_gaussian_noise . . . . .	454
layer_global_average_pooling_1d . . . . .	457
layer_global_average_pooling_2d . . . . .	462
layer_global_average_pooling_3d . . . . .	466

layer_global_max_pooling_1d . . . . .	470
layer_global_max_pooling_2d . . . . .	473
layer_global_max_pooling_3d . . . . .	477
layer_group_normalization . . . . .	481
layer_group_query_attention . . . . .	485
layer_gru . . . . .	490
layer_hashed_crossing . . . . .	496
layer_hashing . . . . .	501
layer_identity . . . . .	507
layer_integer_lookup . . . . .	510
layer_jax_model_wrapper . . . . .	520
layer_lambda . . . . .	526
layer_layer_normalization . . . . .	530
layer_lstm . . . . .	535
layer_masking . . . . .	541
layer_maximum . . . . .	545
layer_max_pooling_1d . . . . .	548
layer_max_pooling_2d . . . . .	553
layer_max_pooling_3d . . . . .	558
layer_mel_spectrogram . . . . .	563
layer_minimum . . . . .	568
layer_multiply . . . . .	571
layer_multi_head_attention . . . . .	575
layer_normalization . . . . .	580
layer_permute . . . . .	585
layer_random_brightness . . . . .	589
layer_random_contrast . . . . .	594
layer_random_crop . . . . .	598
layer_random_flip . . . . .	602
layer_random_rotation . . . . .	606
layer_random_translation . . . . .	611
layer_random_zoom . . . . .	616
layer_repeat_vector . . . . .	621
layer_rescaling . . . . .	624
layer_reshape . . . . .	628
layer_resizing . . . . .	632
layer_rnn . . . . .	636
layer_separable_conv_1d . . . . .	643
layer_separable_conv_2d . . . . .	648
layer_simple_rnn . . . . .	653
layer_spatial_dropout_1d . . . . .	658
layer_spatial_dropout_2d . . . . .	662
layer_spatial_dropout_3d . . . . .	666
layer_spectral_normalization . . . . .	670
layer_string_lookup . . . . .	674
layer_subtract . . . . .	683
layer_text_vectorization . . . . .	686
layer_tfsn . . . . .	694

layer_time_distributed . . . . .	698
layer_torch_module_wrapper . . . . .	702
layer_unit_normalization . . . . .	706
layer_upsampling_1d . . . . .	710
layer_upsampling_2d . . . . .	714
layer_upsampling_3d . . . . .	718
layer_zero_padding_1d . . . . .	722
layer_zero_padding_2d . . . . .	726
layer_zero_padding_3d . . . . .	731
LearningRateSchedule . . . . .	735
learning_rate_schedule_cosine_decay . . . . .	738
learning_rate_schedule_cosine_decay_restarts . . . . .	740
learning_rate_schedule_exponential_decay . . . . .	742
learning_rate_schedule_inverse_time_decay . . . . .	743
learning_rate_schedule_piecewise_constant_decay . . . . .	745
learning_rate_schedule_polynomial_decay . . . . .	747
load_model . . . . .	749
load_model_weights . . . . .	750
Loss . . . . .	751
loss_binary_crossentropy . . . . .	754
loss_binary_focal_crossentropy . . . . .	758
loss_categorical_crossentropy . . . . .	762
loss_categorical_focal_crossentropy . . . . .	765
loss_categorical_hinge . . . . .	769
loss_cosine_similarity . . . . .	771
loss_ctc . . . . .	773
loss_dice . . . . .	775
loss_hinge . . . . .	777
loss_huber . . . . .	779
loss_kl_divergence . . . . .	781
loss_log_cosh . . . . .	783
loss_mean_absolute_error . . . . .	785
loss_mean_absolute_percentage_error . . . . .	787
loss_mean_squared_error . . . . .	789
loss_mean_squared_logarithmic_error . . . . .	790
loss_poisson . . . . .	792
loss_sparse_categorical_crossentropy . . . . .	794
loss_squared_hinge . . . . .	797
loss_tversky . . . . .	799
Metric . . . . .	801
metric_auc . . . . .	806
metric_binary_accuracy . . . . .	810
metric_binary_crossentropy . . . . .	813
metric_binary_focal_crossentropy . . . . .	816
metric_binary_iou . . . . .	819
metric_categorical_accuracy . . . . .	822
metric_categorical_crossentropy . . . . .	825
metric_categorical_focal_crossentropy . . . . .	829

metric_categorical_hinge . . . . .	832
metric_cosine_similarity . . . . .	835
metric_f1_score . . . . .	837
metric_false_negatives . . . . .	840
metric_false_positives . . . . .	842
metric_fbeta_score . . . . .	845
metric_hinge . . . . .	848
metric_huber . . . . .	851
metric_iou . . . . .	853
metric_kl_divergence . . . . .	856
metric_log_cosh . . . . .	860
metric_log_cosh_error . . . . .	862
metric_mean . . . . .	865
metric_mean_absolute_error . . . . .	867
metric_mean_absolute_percentage_error . . . . .	870
metric_mean_iou . . . . .	874
metric_mean_squared_error . . . . .	877
metric_mean_squared_logarithmic_error . . . . .	880
metric_mean_wrapper . . . . .	883
metric_one_hot_iou . . . . .	885
metric_one_hot_mean_iou . . . . .	888
metric_poisson . . . . .	891
metric_precision . . . . .	895
metric_precision_at_recall . . . . .	898
metric_r2_score . . . . .	901
metric_recall . . . . .	903
metric_recall_at_precision . . . . .	907
metric_root_mean_squared_error . . . . .	910
metric_sensitivity_at_specificity . . . . .	912
metric_sparse_categorical_accuracy . . . . .	915
metric_sparse_categorical_crossentropy . . . . .	918
metric_sparse_top_k_categorical_accuracy . . . . .	921
metric_specificity_at_sensitivity . . . . .	924
metric_squared_hinge . . . . .	927
metric_sum . . . . .	930
metric_top_k_categorical_accuracy . . . . .	932
metric_true_negatives . . . . .	935
metric_true_positives . . . . .	937
Model . . . . .	939
normalize . . . . .	941
optimizer_adadelta . . . . .	942
optimizer_adafactor . . . . .	944
optimizer_adagrad . . . . .	947
optimizer_adam . . . . .	949
optimizer_adamax . . . . .	951
optimizer_adam_w . . . . .	954
optimizer_ftrl . . . . .	956
optimizer_lion . . . . .	959

optimizer_loss_scale . . . . .	961
optimizer_nadam . . . . .	964
optimizer_rmsprop . . . . .	966
optimizer_sgd . . . . .	969
op_abs . . . . .	971
op_add . . . . .	979
op_all . . . . .	988
op_any . . . . .	997
op_append . . . . .	1006
op_arange . . . . .	1015
op_arccos . . . . .	1024
op_arccosh . . . . .	1033
op_arcsin . . . . .	1041
op_arcsinh . . . . .	1049
op_arctan . . . . .	1058
op_arctan2 . . . . .	1066
op_arctanh . . . . .	1075
op_argmax . . . . .	1083
op_argmin . . . . .	1092
op_argpartition . . . . .	1101
op_argsort . . . . .	1109
op_array . . . . .	1118
op_average . . . . .	1127
op_average_pool . . . . .	1136
op_batch_normalization . . . . .	1143
op_binary_crossentropy . . . . .	1149
op_bincount . . . . .	1155
op_broadcast_to . . . . .	1164
op_cast . . . . .	1173
op_categorical_crossentropy . . . . .	1179
op_ceil . . . . .	1185
op_cholesky . . . . .	1193
op_clip . . . . .	1199
op_concatenate . . . . .	1207
op_cond . . . . .	1215
op_conj . . . . .	1222
op_conv . . . . .	1230
op_convert_to_numpy . . . . .	1237
op_convert_to_tensor . . . . .	1242
op_conv_transpose . . . . .	1249
op_copy . . . . .	1255
op_correlate . . . . .	1263
op_cos . . . . .	1272
op_cosh . . . . .	1280
op_count_nonzero . . . . .	1288
op_cross . . . . .	1297
op_ctc_decode . . . . .	1305
op_ctc_loss . . . . .	1314

op_cumprod . . . . .	1320
op_cumsum . . . . .	1328
op_custom_gradient . . . . .	1336
op_depthwise_conv . . . . .	1343
op_det . . . . .	1349
op_diag . . . . .	1355
op_diagonal . . . . .	1364
op_diff . . . . .	1373
op_digitize . . . . .	1382
op_divide . . . . .	1391
op_divide_no_nan . . . . .	1399
op_dot . . . . .	1407
op_dtype . . . . .	1416
op_eig . . . . .	1422
op_eigh . . . . .	1427
op_einsum . . . . .	1433
op_elu . . . . .	1443
op_empty . . . . .	1449
op_equal . . . . .	1457
op_erf . . . . .	1465
op_erfinv . . . . .	1471
op_exp . . . . .	1477
op_expand_dims . . . . .	1485
op_expm1 . . . . .	1493
op_extract_sequences . . . . .	1501
op_eye . . . . .	1507
op_fft . . . . .	1516
op_fft2 . . . . .	1522
op_flip . . . . .	1528
op_floor . . . . .	1536
op_floor_divide . . . . .	1544
op_fori_loop . . . . .	1553
op_full . . . . .	1559
op_full_like . . . . .	1567
op_gelu . . . . .	1575
op_get_item . . . . .	1582
op_greater . . . . .	1590
op_greater_equal . . . . .	1599
op_hard_sigmoid . . . . .	1607
op_hard_silu . . . . .	1614
op_hstack . . . . .	1620
op_identity . . . . .	1628
op_imag . . . . .	1637
op_image_affine_transform . . . . .	1645
op_image_crop . . . . .	1652
op_image_extract_patches . . . . .	1658
op_image_hsv_to_rgb . . . . .	1665
op_image_map_coordinates . . . . .	1671

op_image_pad . . . . .	1678
op_image_resize . . . . .	1684
op_image_rgb_to_grayscale . . . . .	1691
op_image_rgb_to_hsv . . . . .	1697
op_inv . . . . .	1704
op_in_top_k . . . . .	1709
op_irfft . . . . .	1715
op_isclose . . . . .	1721
op_isfinite . . . . .	1730
op_isinf . . . . .	1738
op_isnan . . . . .	1746
op_istft . . . . .	1754
op_is_tensor . . . . .	1761
op_leaky_relu . . . . .	1766
op_less . . . . .	1774
op_less_equal . . . . .	1782
op_linspace . . . . .	1791
op_log . . . . .	1799
op_log10 . . . . .	1807
op_log1p . . . . .	1816
op_log2 . . . . .	1824
op_logaddexp . . . . .	1832
op_logical_and . . . . .	1840
op_logical_not . . . . .	1849
op_logical_or . . . . .	1857
op_logical_xor . . . . .	1865
op_logspace . . . . .	1873
op_logsumexp . . . . .	1882
op_log_sigmoid . . . . .	1888
op_log_softmax . . . . .	1894
op_lstsq . . . . .	1900
op_lu_factor . . . . .	1909
op_map . . . . .	1914
op_matmul . . . . .	1921
op_max . . . . .	1929
op_maximum . . . . .	1938
op_max_pool . . . . .	1946
op_mean . . . . .	1953
op_median . . . . .	1961
op_meshgrid . . . . .	1969
op_min . . . . .	1978
op_minimum . . . . .	1987
op_mod . . . . .	1995
op_moments . . . . .	2003
op_moveaxis . . . . .	2010
op_multiply . . . . .	2018
op_multi_hot . . . . .	2026
op_nan_to_num . . . . .	2033

op_ndim . . . . .	2041
op_negative . . . . .	2050
op_nonzero . . . . .	2058
op_norm . . . . .	2066
op_normalize . . . . .	2073
op_not_equal . . . . .	2079
op_ones . . . . .	2088
op_ones_like . . . . .	2096
op_one_hot . . . . .	2104
op_outer . . . . .	2110
op_pad . . . . .	2119
op_power . . . . .	2127
op_prod . . . . .	2136
op_psnr . . . . .	2144
op_qr . . . . .	2150
op_quantile . . . . .	2156
op_ravel . . . . .	2165
op_real . . . . .	2173
op_reciprocal . . . . .	2181
op_relu . . . . .	2189
op_relu6 . . . . .	2196
op_repeat . . . . .	2203
op_reshape . . . . .	2211
op_rfft . . . . .	2219
op_roll . . . . .	2226
op_round . . . . .	2234
op_rsqrtd . . . . .	2242
op_scan . . . . .	2248
op_scatter . . . . .	2255
op_scatter_update . . . . .	2261
op_segment_max . . . . .	2268
op_segment_sum . . . . .	2274
op_select . . . . .	2280
op_selu . . . . .	2288
op_separable_conv . . . . .	2295
op_shape . . . . .	2301
op_sigmoid . . . . .	2307
op_sign . . . . .	2313
op_silu . . . . .	2321
op_sin . . . . .	2327
op_sinh . . . . .	2336
op_size . . . . .	2344
op_slice . . . . .	2352
op_slice_update . . . . .	2358
op_slogdet . . . . .	2364
op_softmax . . . . .	2370
op_softplus . . . . .	2376
op_softsign . . . . .	2383



op_solve . . . . .	2390
op_solve_triangular . . . . .	2395
op_sort . . . . .	2401
op_sparse_categorical_crossentropy . . . . .	2409
op_split . . . . .	2416
op_sqrt . . . . .	2424
op_square . . . . .	2432
op_squeeze . . . . .	2440
op_stack . . . . .	2449
op_std . . . . .	2457
op_stft . . . . .	2465
op_stop_gradient . . . . .	2472
op_subtract . . . . .	2477
op_sum . . . . .	2486
op_svd . . . . .	2494
op_swapaxes . . . . .	2500
op_switch . . . . .	2508
op_take . . . . .	2514
op_take_along_axis . . . . .	2522
op_tan . . . . .	2531
op_tanh . . . . .	2539
op_tensordot . . . . .	2547
op_tile . . . . .	2555
op_top_k . . . . .	2564
op_trace . . . . .	2570
op_transpose . . . . .	2578
op_tri . . . . .	2586
op_tril . . . . .	2595
op_triu . . . . .	2603
op_unstack . . . . .	2611
op_var . . . . .	2618
op_vdot . . . . .	2626
op_vectorize . . . . .	2634
op_vectorized_map . . . . .	2643
op_vstack . . . . .	2652
op_where . . . . .	2660
op_while_loop . . . . .	2669
op_zeros . . . . .	2675
op_zeros_like . . . . .	2683
pad_sequences . . . . .	2691
plot.keras.src.models.model.Model . . . . .	2694
plot.keras_training_history . . . . .	2696
pop_layer . . . . .	2697
predict.keras.src.models.model.Model . . . . .	2697
predict_on_batch . . . . .	2699
process_utils . . . . .	2700
quantize_weights . . . . .	2701
random_beta . . . . .	2701

random_binomial . . . . .	2702
random_categorical . . . . .	2703
random_dropout . . . . .	2704
random_gamma . . . . .	2705
random_integer . . . . .	2706
random_normal . . . . .	2707
random_seed_generator . . . . .	2708
random_shuffle . . . . .	2709
random_truncated_normal . . . . .	2710
random_uniform . . . . .	2711
register_keras_serializable . . . . .	2712
regularizer_l1 . . . . .	2714
regularizer_l1_l2 . . . . .	2714
regularizer_l2 . . . . .	2715
regularizer_orthogonal . . . . .	2716
reset_state . . . . .	2717
rnn_cells_stack . . . . .	2718
rnn_cell_gru . . . . .	2721
rnn_cell_lstm . . . . .	2726
rnn_cell_simple . . . . .	2731
save_model . . . . .	2736
save_model_config . . . . .	2738
save_model_weights . . . . .	2739
serialize_keras_object . . . . .	2740
set_random_seed . . . . .	2741
shape . . . . .	2742
split_dataset . . . . .	2746
summary.keras.src.models.model.Model . . . . .	2748
test_on_batch . . . . .	2750
text_dataset_from_directory . . . . .	2751
timeseries_dataset_from_array . . . . .	2753
to_categorical . . . . .	2757
train_on_batch . . . . .	2759
use_backend . . . . .	2760
with_custom_object_scope . . . . .	2760
zip_lists . . . . .	2762

**Index****2764**

activation\_elu

*Exponential Linear Unit.*

## Description

The exponential linear unit (ELU) with  $\alpha > 0$  is defined as:

- $x$  if  $x > 0$
- $\alpha * \exp(x) - 1$  if  $x < 0$

ELUs have negative values which pushes the mean of the activations closer to zero.

Mean activations that are closer to zero enable faster learning as they bring the gradient closer to the natural gradient. ELUs saturate to a negative value when the argument gets smaller. Saturation means a small derivative which decreases the variation and the information that is propagated to the next layer.

## Usage

```
activation_elu(x, alpha = 1)
```

## Arguments

x	Input tensor.
alpha	Numeric. See description for details.

## Value

A tensor, the result from applying the activation to the input tensor x.

## Reference

- [Clevert et al., 2016](#)

## See Also

- <https://keras.io/api/layers/activations#elu-function>

Other activations:

```
activation_exponential()  
activation_gelu()  
activation_hard_sigmoid()  
activation_leaky_relu()  
activation_linear()  
activation_log_softmax()  
activation_mish()  
activation_relu()  
activation_relu6()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()  
activation_softplus()  
activation_softsign()
```

`activation_tanh()`

---

`activation_exponential`

*Exponential activation function.*

---

### Description

Exponential activation function.

### Usage

`activation_exponential(x)`

### Arguments

`x`                    Input tensor.

### Value

A tensor, the result from applying the activation to the input tensor `x`.

### See Also

- <https://keras.io/api/layers/activations#exponential-function>

Other activations:

`activation_elu()`  
`activation_gelu()`  
`activation_hard_sigmoid()`  
`activation_leaky_relu()`  
`activation_linear()`  
`activation_log_softmax()`  
`activation_mish()`  
`activation_relu()`  
`activation_relu6()`  
`activation_selu()`  
`activation_sigmoid()`  
`activation_silu()`  
`activation_softmax()`  
`activation_softplus()`  
`activation_softsign()`  
`activation_tanh()`

---

activation_gelu	<i>Gaussian error linear unit (GELU) activation function.</i>
-----------------	---

---

### Description

The Gaussian error linear unit (GELU) is defined as:

$\text{gelu}(x) = x * P(X \leq x)$  where  $P(X) \sim N(0, 1)$ , i.e.  $\text{gelu}(x) = 0.5 * x * (1 + \text{erf}(x / \text{sqrt}(2)))$ .

GELU weights inputs by their value, rather than gating inputs by their sign as in ReLU.

### Usage

```
activation_gelu(x, approximate = FALSE)
```

### Arguments

x	Input tensor.
approximate	A bool, whether to enable approximation.

### Value

A tensor, the result from applying the activation to the input tensor x.

### Reference

- [Hendrycks et al., 2016](#)

### See Also

- <https://keras.io/api/layers/activations#gelu-function>

Other activations:

```
activation_elu()  
activation_exponential()  
activation_hard_sigmoid()  
activation_leaky_relu()  
activation_linear()  
activation_log_softmax()  
activation_mish()  
activation_relu()  
activation_relu6()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()  
activation_softplus()  
activation_softsign()  
activation_tanh()
```

---

`activation_hard_sigmoid`*Hard sigmoid activation function.*

---

### Description

The hard sigmoid activation is defined as:

- 0 if  $x \leq -3$
- 1 if  $x \geq 3$
- $(x/6) + 0.5$  if  $-3 < x < 3$

It's a faster, piecewise linear approximation of the sigmoid activation.

### Usage

```
activation_hard_sigmoid(x)
```

### Arguments

`x`                    Input tensor.

### Value

A tensor, the result from applying the activation to the input tensor `x`.

### Reference

- [Wikipedia "Hard sigmoid"](#)

### See Also

- <https://keras.io/api/layers/activations#hardsigmoid-function>

Other activations:

```
activation_elu()  
activation_exponential()  
activation_gelu()  
activation_leaky_relu()  
activation_linear()  
activation_log_softmax()  
activation_mish()  
activation_relu()  
activation_relu6()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()
```

```
activation_softplus()  
activation_softsign()  
activation_tanh()
```

---

activation\_hard\_silu *Hard SiLU activation function, also known as Hard Swish.*

---

### Description

It is defined as:

- 0 if  $x < -3$
- $x$  if  $x > 3$
- $x * (x + 3) / 6$  if  $-3 \leq x \leq 3$

It's a faster, piecewise linear approximation of the silu activation.

### Usage

```
activation_hard_silu(x)
```

```
activation_hard_swish(x)
```

### Arguments

`x` Input tensor.

### Value

A tensor, the result from applying the activation to the input tensor `x`.

### Reference

- [A Howard, 2019](#)

---

activation\_leaky\_relu *Leaky relu activation function.*

---

### Description

Leaky relu activation function.

### Usage

```
activation_leaky_relu(x, negative_slope = 0.2)
```

### Arguments

`x` Input tensor.  
`negative_slope` A float that controls the slope for values lower than the threshold.

### Value

A tensor, the result from applying the activation to the input tensor `x`.

### See Also

- <https://keras.io/api/layers/activations#leakyrelu-function>

Other activations:

```
activation_elu()  
activation_exponential()  
activation_gelu()  
activation_hard_sigmoid()  
activation_linear()  
activation_log_softmax()  
activation_mish()  
activation_relu()  
activation_relu6()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()  
activation_softplus()  
activation_softsign()  
activation_tanh()
```



---

activation_linear	<i>Linear activation function (pass-through).</i>
-------------------	---

---

### Description

A "linear" activation is an identity function: it returns the input, unmodified.

### Usage

```
activation_linear(x)
```

### Arguments

x	Input tensor.
---	---------------

### Value

A tensor, the result from applying the activation to the input tensor x.

### See Also

- <https://keras.io/api/layers/activations#linear-function>

Other activations:

```
activation_elu()  
activation_exponential()  
activation_gelu()  
activation_hard_sigmoid()  
activation_leaky_relu()  
activation_log_softmax()  
activation_mish()  
activation_relu()  
activation_relu6()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()  
activation_softplus()  
activation_softsign()  
activation_tanh()
```

---

activation\_log\_softmax

*Log-Softmax activation function.*

---

### Description

Each input vector is handled independently. The `axis` argument sets which axis of the input the function is applied along.

### Usage

```
activation_log_softmax(x, axis = -1L)
```

### Arguments

<code>x</code>	Input tensor.
<code>axis</code>	Integer, axis along which the softmax is applied.

### Value

A tensor, the result from applying the activation to the input tensor `x`.

### See Also

- <https://keras.io/api/layers/activations#logsoftmax-function>

Other activations:

```
activation_elu()  
activation_exponential()  
activation_gelu()  
activation_hard_sigmoid()  
activation_leaky_relu()  
activation_linear()  
activation_mish()  
activation_relu()  
activation_relu6()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()  
activation_softplus()  
activation_softsign()  
activation_tanh()
```

---

activation_mish	<i>Mish activation function.</i>
-----------------	----------------------------------

---

**Description**

It is defined as:

$$\text{mish}(x) = x * \tanh(\text{softplus}(x))$$

where softplus is defined as:

$$\text{softplus}(x) = \log(\exp(x) + 1)$$

**Usage**

```
activation_mish(x)
```

**Arguments**

x                    Input tensor.

**Value**

A tensor, the result from applying the activation to the input tensor x.

**Reference**

- [Misra, 2019](#)

**See Also**

- <https://keras.io/api/layers/activations#mish-function>

Other activations:

[activation\\_elu\(\)](#)

[activation\\_exponential\(\)](#)

[activation\\_gelu\(\)](#)

[activation\\_hard\\_sigmoid\(\)](#)

[activation\\_leaky\\_relu\(\)](#)

[activation\\_linear\(\)](#)

[activation\\_log\\_softmax\(\)](#)

[activation\\_relu\(\)](#)

[activation\\_relu6\(\)](#)

[activation\\_selu\(\)](#)

[activation\\_sigmoid\(\)](#)

[activation\\_silu\(\)](#)

[activation\\_softmax\(\)](#)

[activation\\_softplus\(\)](#)

[activation\\_softsign\(\)](#)

[activation\\_tanh\(\)](#)

---

activation_relu	<i>Applies the rectified linear unit activation function.</i>
-----------------	---

---

### Description

With default values, this returns the standard ReLU activation:  $\max(x, 0)$ , the element-wise maximum of 0 and the input tensor.

Modifying default parameters allows you to use non-zero thresholds, change the max value of the activation, and to use a non-zero multiple of the input for values below the threshold.

### Usage

```
activation_relu(x, negative_slope = 0, max_value = NULL, threshold = 0)
```

### Arguments

x	Input tensor.
negative_slope	A numeric that controls the slope for values lower than the threshold.
max_value	A numeric that sets the saturation threshold (the largest value the function will return).
threshold	A numeric giving the threshold value of the activation function below which values will be damped or set to zero.

### Value

A tensor with the same shape and dtype as input x.

### Examples

```
x <- c(-10, -5, 0, 5, 10)
activation_relu(x)

## tf.Tensor([ 0.  0.  0.  5. 10.], shape=(5), dtype=float32)

activation_relu(x, negative_slope = 0.5)

## tf.Tensor([-5. -2.5  0.  5. 10. ], shape=(5), dtype=float32)

activation_relu(x, max_value = 5)

## tf.Tensor([0. 0. 0. 5. 5.], shape=(5), dtype=float32)

activation_relu(x, threshold = 5)

## tf.Tensor([-0. -0.  0.  0. 10.], shape=(5), dtype=float32)
```

**See Also**

- <https://keras.io/api/layers/activations#relu-function>

Other activations:

`activation_elu()`  
`activation_exponential()`  
`activation_gelu()`  
`activation_hard_sigmoid()`  
`activation_leaky_relu()`  
`activation_linear()`  
`activation_log_softmax()`  
`activation_mish()`  
`activation_relu6()`  
`activation_selu()`  
`activation_sigmoid()`  
`activation_silu()`  
`activation_softmax()`  
`activation_softplus()`  
`activation_softsign()`  
`activation_tanh()`

---

<code>activation_relu6</code>	<i>Relu6 activation function.</i>
-------------------------------	-----------------------------------

---

**Description**

It's the ReLU function, but truncated to a maximum value of 6.

**Usage**

```
activation_relu6(x)
```

**Arguments**

x                    Input tensor.

**Value**

A tensor, the result from applying the activation to the input tensor x.

**See Also**

- <https://keras.io/api/layers/activations#relu6-function>

Other activations:

`activation_elu()`  
`activation_exponential()`

```
activation_gelu()  
activation_hard_sigmoid()  
activation_leaky_relu()  
activation_linear()  
activation_log_softmax()  
activation_mish()  
activation_relu()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()  
activation_softplus()  
activation_softsign()  
activation_tanh()
```

---

activation_selu	<i>Scaled Exponential Linear Unit (SELU).</i>
-----------------	---

---

### Description

The Scaled Exponential Linear Unit (SELU) activation function is defined as:

- $\text{scale} * x$  if  $x > 0$
- $\text{scale} * \alpha * (\exp(x) - 1)$  if  $x < 0$

where  $\alpha$  and  $\text{scale}$  are pre-defined constants ( $\alpha = 1.67326324$  and  $\text{scale} = 1.05070098$ ).

Basically, the SELU activation function multiplies  $\text{scale}$  ( $> 1$ ) with the output of the `activation_elu` function to ensure a slope larger than one for positive inputs.

The values of  $\alpha$  and  $\text{scale}$  are chosen so that the mean and variance of the inputs are preserved between two consecutive layers as long as the weights are initialized correctly (see `initializer_lecun_normal()`) and the number of input units is "large enough" (see reference paper for more information).

### Usage

```
activation_selu(x)
```

### Arguments

x                    Input tensor.

### Value

A tensor, the result from applying the activation to the input tensor x.

**Notes**

- To be used together with `initializer_lecun_normal()`.
- To be used together with the dropout variant `layer_alpha_dropout()` (legacy, deprecated).

**Reference**

- [Klambauer et al., 2017](#)

**See Also**

- <https://keras.io/api/layers/activations#selu-function>

Other activations:

`activation_elu()`  
`activation_exponential()`  
`activation_gelu()`  
`activation_hard_sigmoid()`  
`activation_leaky_relu()`  
`activation_linear()`  
`activation_log_softmax()`  
`activation_mish()`  
`activation_relu()`  
`activation_relu6()`  
`activation_sigmoid()`  
`activation_silu()`  
`activation_softmax()`  
`activation_softplus()`  
`activation_softsign()`  
`activation_tanh()`

---

`activation_sigmoid`     *Sigmoid activation function.*

---

**Description**

It is defined as:  $\text{sigmoid}(x) = 1 / (1 + \exp(-x))$ .

For small values (<-5), sigmoid returns a value close to zero, and for large values (>5) the result of the function gets close to 1.

Sigmoid is equivalent to a 2-element softmax, where the second element is assumed to be zero. The sigmoid function always returns a value between 0 and 1.

**Usage**

`activation_sigmoid(x)`

**Arguments**

x                    Input tensor.

**Value**

A tensor, the result from applying the activation to the input tensor x.

**See Also**

- <https://keras.io/api/layers/activations#sigmoid-function>

Other activations:

`activation_elu()`  
`activation_exponential()`  
`activation_gelu()`  
`activation_hard_sigmoid()`  
`activation_leaky_relu()`  
`activation_linear()`  
`activation_log_softmax()`  
`activation_mish()`  
`activation_relu()`  
`activation_relu6()`  
`activation_selu()`  
`activation_silu()`  
`activation_softmax()`  
`activation_softplus()`  
`activation_softsign()`  
`activation_tanh()`

---

activation\_silu                    *Swish (or Silu) activation function.*

---

**Description**

It is defined as:  $\text{swish}(x) = x * \text{sigmoid}(x)$ .

The Swish (or Silu) activation function is a smooth, non-monotonic function that is unbounded above and bounded below.

**Usage**

`activation_silu(x)`

**Arguments**

x                    Input tensor.



**Value**

A tensor, the result from applying the activation to the input tensor x.

**Reference**

- [Ramachandran et al., 2017](#)

**See Also**

- <https://keras.io/api/layers/activations#silu-function>

Other activations:

`activation_elu()`  
`activation_exponential()`  
`activation_gelu()`  
`activation_hard_sigmoid()`  
`activation_leaky_relu()`  
`activation_linear()`  
`activation_log_softmax()`  
`activation_mish()`  
`activation_relu()`  
`activation_relu6()`  
`activation_selu()`  
`activation_sigmoid()`  
`activation_softmax()`  
`activation_softplus()`  
`activation_softsign()`  
`activation_tanh()`

---

`activation_softmax`      *Softmax converts a vector of values to a probability distribution.*

---

**Description**

The elements of the output vector are in range  $[0, 1]$  and sum to 1.

Each input vector is handled independently. The `axis` argument sets which axis of the input the function is applied along.

Softmax is often used as the activation for the last layer of a classification network because the result could be interpreted as a probability distribution.

The softmax of each vector  $x$  is computed as  $\exp(x) / \sum(\exp(x))$ .

The input values in are the log-odds of the resulting probability.

**Usage**

```
activation_softmax(x, axis = -1L)
```

**Arguments**

x	Input tensor.
axis	Integer, axis along which the softmax is applied.

**Value**

A tensor, the result from applying the activation to the input tensor x.

**See Also**

- <https://keras.io/api/layers/activations#softmax-function>

Other activations:

`activation_elu()`  
`activation_exponential()`  
`activation_gelu()`  
`activation_hard_sigmoid()`  
`activation_leaky_relu()`  
`activation_linear()`  
`activation_log_softmax()`  
`activation_mish()`  
`activation_relu()`  
`activation_relu6()`  
`activation_selu()`  
`activation_sigmoid()`  
`activation_silu()`  
`activation_softplus()`  
`activation_softsign()`  
`activation_tanh()`

---

activation\_softplus    *Softplus activation function.*

---

**Description**

It is defined as:  $\text{softplus}(x) = \log(\exp(x) + 1)$ .

**Usage**

```
activation_softplus(x)
```

**Arguments**

x	Input tensor.
---	---------------

**Value**

A tensor, the result from applying the activation to the input tensor x.

**See Also**

- <https://keras.io/api/layers/activations#softplus-function>

Other activations:

```
activation_elu()  
activation_exponential()  
activation_gelu()  
activation_hard_sigmoid()  
activation_leaky_relu()  
activation_linear()  
activation_log_softmax()  
activation_mish()  
activation_relu()  
activation_relu6()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()  
activation_softsign()  
activation_tanh()
```

---

activation\_softsign     *Softsign activation function.*

---

**Description**

Softsign is defined as:  $\text{softsign}(x) = x / (\text{abs}(x) + 1)$ .

**Usage**

```
activation_softsign(x)
```

**Arguments**

x                     Input tensor.

**Value**

A tensor, the result from applying the activation to the input tensor x.

**See Also**

- <https://keras.io/api/layers/activations#softsign-function>

Other activations:

`activation_elu()`  
`activation_exponential()`  
`activation_gelu()`  
`activation_hard_sigmoid()`  
`activation_leaky_relu()`  
`activation_linear()`  
`activation_log_softmax()`  
`activation_mish()`  
`activation_relu()`  
`activation_relu6()`  
`activation_selu()`  
`activation_sigmoid()`  
`activation_silu()`  
`activation_softmax()`  
`activation_softplus()`  
`activation_tanh()`

---

activation\_tanh

*Hyperbolic tangent activation function.*

---

**Description**

It is defined as:  $\tanh(x) = \sinh(x) / \cosh(x)$ , i.e.  $\tanh(x) = ((\exp(x) - \exp(-x)) / (\exp(x) + \exp(-x)))$ .

**Usage**

```
activation_tanh(x)
```

**Arguments**

x                    Input tensor.

**Value**

A tensor, the result from applying the activation to the input tensor x.

**See Also**

- <https://keras.io/api/layers/activations#tanh-function>

Other activations:

`activation_elu()`

```
activation_exponential()  
activation_gelu()  
activation_hard_sigmoid()  
activation_leaky_relu()  
activation_linear()  
activation_log_softmax()  
activation_mish()  
activation_relu()  
activation_relu6()  
activation_selu()  
activation_sigmoid()  
activation_silu()  
activation_softmax()  
activation_softplus()  
activation_softsign()
```

---

active_property	<i>Create an active property class method</i>
-----------------	---

---

## Description

Create an active property class method

## Usage

```
active_property(fn)
```

## Arguments

fn	An R function
----	---------------

## Value

fn, with an additional R attribute that will cause fn to be converted to an active property when being converted to a method of a custom subclass.

## Example

```
layer_foo <- Model("Foo", ...,  
  metrics = active_property(function() {  
    list(self$d_loss_metric,  
         self$g_loss_metric)  
  })))
```

---

 adapt
 

---

*Fits the state of the preprocessing layer to the data being passed*


---

### Description

Fits the state of the preprocessing layer to the data being passed

### Usage

```
adapt(object, data, ..., batch_size = NULL, steps = NULL)
```

### Arguments

object	Preprocessing layer object
data	The data to train on. It can be passed either as a <code>tf.data.Dataset</code> or as an R array.
...	Used for forwards and backwards compatibility. Passed on to the underlying method.
batch_size	Integer or NULL. Number of asamples per state update. If unspecified, <code>batch_size</code> will default to 32. Do not specify the <code>batch_size</code> if your data is in the form of a TF Dataset or a generator (since they generate batches).
steps	Integer or NULL. Total number of steps (batches of samples) When training with input tensors such as TensorFlow data tensors, the default NULL is equal to the number of samples in your dataset divided by the batch size, or 1 if that cannot be determined. If <code>x</code> is a <code>tf.data.Dataset</code> , and <code>steps</code> is NULL, the epoch will run until the input dataset is exhausted. When passing an infinitely repeating dataset, you must specify the <code>steps</code> argument. This argument is not supported with array inputs.

### Details

After calling `adapt` on a layer, a preprocessing layer's state will not update during training. In order to make preprocessing layers efficient in any distribution context, they are kept constant with respect to any compiled `tf.Graphs` that call the layer. This does not affect the layer use when adapting each layer only once, but if you adapt a layer multiple times you will need to take care to re-compile any compiled functions as follows:

- If you are adding a preprocessing layer to a keras model, you need to call `compile(model)` after each subsequent call to `adapt()`.
- If you are calling a preprocessing layer inside `tfdatasets::dataset_map()`, you should call `dataset_map()` again on the input Dataset after each `adapt()`.
- If you are using a `tensorflow::tf_function()` directly which calls a preprocessing layer, you need to call `tf_function()` again on your callable after each subsequent call to `adapt()`.

`keras_model()` example with multiple adapts:

```

layer <- layer_normalization(axis = NULL)
adapt(layer, c(0, 2))
model <- keras_model_sequential() |> layer()
predict(model, c(0, 1, 2), verbose = FALSE) # [1] -1 0 1

## [1] -1 0 1

```

```

adapt(layer, c(-1, 1))
compile(model) # This is needed to re-compile model.predict!
predict(model, c(0, 1, 2), verbose = FALSE) # [1] 0 1 2

## [1] 0 1 2

```

tfdatasets example with multiple adapts:

```

layer <- layer_normalization(axis = NULL)
adapt(layer, c(0, 2))
input_ds <- tfdatasets::range_dataset(0, 3)
normalized_ds <- input_ds |>
  tfdatasets::dataset_map(layer)
str(tfdatasets::iterate(normalized_ds))

## List of 3
## $ :<tf.Tensor: shape=(1), dtype=float32, numpy=array([-1.], dtype=float32)>
## $ :<tf.Tensor: shape=(1), dtype=float32, numpy=array([0.], dtype=float32)>
## $ :<tf.Tensor: shape=(1), dtype=float32, numpy=array([1.], dtype=float32)>

```

```

adapt(layer, c(-1, 1))
normalized_ds <- input_ds |>
  tfdatasets::dataset_map(layer) # Re-map over the input dataset.

```

```

normalized_ds |>
  tfdatasets::as_array_iterator() |>
  tfdatasets::iterate(simplify = FALSE) |>
  str()

```

```

## List of 3
## $ : num [1(1d)] 0
## $ : num [1(1d)] 1
## $ : num [1(1d)] 2

```

## Value

Returns object, invisibly.

---

application\_convnext\_base

*Instantiates the ConvNeXtBase architecture.*

---

### Description

Instantiates the ConvNeXtBase architecture.

### Usage

```
application_convnext_base(
    include_top = TRUE,
    include_preprocessing = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "convnext_base"
)
```

### Arguments

include_top	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
include_preprocessing	Boolean, whether to include the preprocessing layer at the bottom of the network.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet-1k), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	Optional shape tuple, only to be specified if include_top is FALSE. It should have exactly 3 inputs channels.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. Defaults to 1000 (number of ImageNet classes).



classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

### Value

A model instance.

### References

- [A ConvNet for the 2020s \(CVPR 2022\)](#)

For image classification use cases, see [this page for detailed examples](#). For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

The base, large, and xlarge models were first pre-trained on the ImageNet-21k dataset and then fine-tuned on the ImageNet-1k dataset. The pre-trained parameters of the models were assembled from the [official repository](#). To get a sense of how these parameters were converted to Keras compatible parameters, please refer to [this repository](#).

### Note

Each Keras Application expects a specific kind of input preprocessing. For ConvNeXt, preprocessing is included in the model using a Normalization layer. ConvNeXt models expect their inputs to be float or uint8 tensors of pixels with values in the [0-255] range.

When calling the summary() method after instantiating a ConvNeXt model, prefer setting the expand\_nested argument summary() to TRUE to better investigate the instantiated model.

### See Also

- <https://keras.io/api/applications/convnext#convnextbase-function>

---

application\_convnext\_large

*Instantiates the ConvNeXtLarge architecture.*

---

### Description

Instantiates the ConvNeXtLarge architecture.

**Usage**

```

application_convnext_large(
    include_top = TRUE,
    include_preprocessing = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "convnext_large"
)

```

**Arguments**

<code>include_top</code>	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
<code>include_preprocessing</code>	Boolean, whether to include the preprocessing layer at the bottom of the network.
<code>weights</code>	One of NULL (random initialization), "imagenet" (pre-training on ImageNet-1k), or the path to the weights file to be loaded. Defaults to "imagenet".
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is FALSE. It should have exactly 3 inputs channels.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
<code>classes</code>	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified. Defaults to 1000 (number of ImageNet classes).
<code>classifier_activation</code>	A str or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, <code>classifier_activation</code> can only be NULL or "softmax".
<code>name</code>	The name of the model (string).

**Value**

A model instance.

## References

- [A ConvNet for the 2020s](#) (CVPR 2022)

For image classification use cases, see [this page for detailed examples](#). For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

The base, large, and xlarge models were first pre-trained on the ImageNet-21k dataset and then fine-tuned on the ImageNet-1k dataset. The pre-trained parameters of the models were assembled from the [official repository](#). To get a sense of how these parameters were converted to Keras compatible parameters, please refer to [this repository](#).

## Note

Each Keras Application expects a specific kind of input preprocessing. For ConvNeXt, preprocessing is included in the model using a Normalization layer. ConvNeXt models expect their inputs to be float or uint8 tensors of pixels with values in the [0-255] range.

When calling the `summary()` method after instantiating a ConvNeXt model, prefer setting the `expand_nested` argument of `summary()` to `TRUE` to better investigate the instantiated model.

## See Also

- <https://keras.io/api/applications/convnext#convnextlarge-function>

---

application\_convnext\_small

*Instantiates the ConvNeXtSmall architecture.*

---

## Description

Instantiates the ConvNeXtSmall architecture.

## Usage

```
application_convnext_small(  
    include_top = TRUE,  
    include_preprocessing = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    input_shape = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    name = "convnext_small"  
)
```

### Arguments

include_top	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
include_preprocessing	Boolean, whether to include the preprocessing layer at the bottom of the network.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet-1k), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	Optional shape tuple, only to be specified if include_top is FALSE. It should have exactly 3 inputs channels.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. Defaults to NULL. <ul style="list-style-type: none"><li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li><li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li><li>• max means that global max pooling will be applied.</li></ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. Defaults to 1000 (number of ImageNet classes).
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

### Value

A model instance.

### References

- [A ConvNet for the 2020s](#) (CVPR 2022)

For image classification use cases, see [this page for detailed examples](#). For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

The base, large, and xlarge models were first pre-trained on the ImageNet-21k dataset and then fine-tuned on the ImageNet-1k dataset. The pre-trained parameters of the models were assembled from the [official repository](#). To get a sense of how these parameters were converted to Keras compatible parameters, please refer to [this repository](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For ConvNeXt, preprocessing is included in the model using a Normalization layer. ConvNeXt models expect their inputs to be float or uint8 tensors of pixels with values in the [0-255] range.

When calling the `summary()` method after instantiating a ConvNeXt model, prefer setting the `expand_nested` argument `summary()` to `TRUE` to better investigate the instantiated model.

**See Also**

- <https://keras.io/api/applications/convnext#convnextsmall-function>

---

`application_convnext_tiny`

*Instantiates the ConvNeXtTiny architecture.*

---

**Description**

Instantiates the ConvNeXtTiny architecture.

**Usage**

```
application_convnext_tiny(  
    include_top = TRUE,  
    include_preprocessing = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    input_shape = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    name = "convnext_tiny"  
)
```

**Arguments**

<code>include_top</code>	Whether to include the fully-connected layer at the top of the network. Defaults to <code>TRUE</code> .
<code>include_preprocessing</code>	Boolean, whether to include the preprocessing layer at the bottom of the network.
<code>weights</code>	One of <code>NULL</code> (random initialization), <code>"imagenet"</code> (pre-training on ImageNet-1k), or the path to the weights file to be loaded. Defaults to <code>"imagenet"</code> .
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is <code>FALSE</code> . It should have exactly 3 inputs channels.

pooling	Optional pooling mode for feature extraction when <code>include_top</code> is <code>FALSE</code> . Defaults to <code>NULL</code> . <ul style="list-style-type: none"> <li>• <code>NULL</code> means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• <code>avg</code> means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• <code>max</code> means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is <code>TRUE</code> , and if no <code>weights</code> argument is specified. Defaults to 1000 (number of ImageNet classes).
classifier_activation	A <code>str</code> or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. Defaults to <code>"softmax"</code> . When loading pretrained weights, <code>classifier_activation</code> can only be <code>NULL</code> or <code>"softmax"</code> .
name	The name of the model (string).

**Value**

A model instance.

**References**

- [A ConvNet for the 2020s](#) (CVPR 2022)

For image classification use cases, see [this page for detailed examples](#). For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

The base, large, and xlarge models were first pre-trained on the ImageNet-21k dataset and then fine-tuned on the ImageNet-1k dataset. The pre-trained parameters of the models were assembled from the [official repository](#). To get a sense of how these parameters were converted to Keras compatible parameters, please refer to [this repository](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For ConvNeXt, preprocessing is included in the model using a Normalization layer. ConvNeXt models expect their inputs to be float or uint8 tensors of pixels with values in the `[0-255]` range.

When calling the `summary()` method after instantiating a ConvNeXt model, prefer setting the `expand_nested` argument `summary()` to `TRUE` to better investigate the instantiated model.

**See Also**

- <https://keras.io/api/applications/convnext#convnexttiny-function>

---

`application_convnext_xlarge`*Instantiates the ConvNeXtXLarge architecture.*

---

## Description

Instantiates the ConvNeXtXLarge architecture.

## Usage

```
application_convnext_xlarge(  
    include_top = TRUE,  
    include_preprocessing = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    input_shape = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    name = "convnext_xlarge"  
)
```

## Arguments

- |                                    |  |
|------------------------------------|--|
| <code>include_top</code>           | Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.  |
| <code>include_preprocessing</code> | Boolean, whether to include the preprocessing layer at the bottom of the network.  |
| <code>weights</code>               | One of NULL (random initialization), "imagenet" (pre-training on ImageNet-1k), or the path to the weights file to be loaded. Defaults to "imagenet".   |
| <code>input_tensor</code>          | Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.  |
| <code>input_shape</code>           | Optional shape tuple, only to be specified if <code>include_top</code> is FALSE. It should have exactly 3 inputs channels.   |
| <code>pooling</code>               | Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. Defaults to NULL. <ul style="list-style-type: none"><li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li><li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li><li>• max means that global max pooling will be applied.</li></ul> |

classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. Defaults to 1000 (number of ImageNet classes).
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

### Value

A model instance.

### References

- [A ConvNet for the 2020s \(CVPR 2022\)](#)

For image classification use cases, see [this page for detailed examples](#). For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

The base, large, and xlarge models were first pre-trained on the ImageNet-21k dataset and then fine-tuned on the ImageNet-1k dataset. The pre-trained parameters of the models were assembled from the [official repository](#). To get a sense of how these parameters were converted to Keras compatible parameters, please refer to [this repository](#).

### Note

Each Keras Application expects a specific kind of input preprocessing. For ConvNeXt, preprocessing is included in the model using a Normalization layer. ConvNeXt models expect their inputs to be float or uint8 tensors of pixels with values in the [0-255] range.

When calling the summary() method after instantiating a ConvNeXt model, prefer setting the expand\_nested argument summary() to TRUE to better investigate the instantiated model.

### See Also

- <https://keras.io/api/applications/convnext#convnextxlarge-function>

---

application\_densenet121

*Instantiates the Densenet121 architecture.*

---

### Description

Instantiates the Densenet121 architecture.



**Usage**

```

application_densenet121(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "densenet121"
)

```

**Arguments**

<code>include_top</code>	whether to include the fully-connected layer at the top of the network.
<code>weights</code>	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
<code>input_tensor</code>	optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	optional shape tuple, only to be specified if <code>include_top</code> is FALSE (otherwise the input shape has to be (224, 224, 3) (with 'channels_last' data format) or (3, 224, 224) (with 'channels_first' data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
<code>classes</code>	optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified.
<code>classifier_activation</code>	A str or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. When loading pretrained weights, <code>classifier_activation</code> can only be NULL or "softmax".
<code>name</code>	The name of the model (string).

**Value**

A Keras model instance.

**Reference**

- [Densely Connected Convolutional Networks](#) (CVPR 2017)

Optionally loads weights pre-trained on ImageNet. Note that the data format convention used by the model is the one specified in your Keras config at `~/keras/keras.json`.

**Note**

Each Keras Application expects a specific kind of input preprocessing. For DenseNet, call `application_preprocess_input` on your inputs before passing them to the model.

**See Also**

- <https://keras.io/api/applications/densenet#densenet121-function>

---

application\_densenet169

*Instantiates the Densenet169 architecture.*

---

**Description**

Instantiates the Densenet169 architecture.

**Usage**

```
application_densenet169(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "densenet169"
)
```

**Arguments**

<code>include_top</code>	whether to include the fully-connected layer at the top of the network.
<code>weights</code>	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
<code>input_tensor</code>	optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	optional shape tuple, only to be specified if <code>include_top</code> is FALSE (otherwise the input shape has to be (224, 224, 3) (with 'channels_last' data format) or (3, 224, 224) (with 'channels_first' data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.

pooling	Optional pooling mode for feature extraction when <code>include_top</code> is <code>FALSE</code> . <ul style="list-style-type: none"> <li>• <code>NULL</code> means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• <code>avg</code> means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• <code>max</code> means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if <code>include_top</code> is <code>TRUE</code> , and if no <code>weights</code> argument is specified.
classifier_activation	A <code>str</code> or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. When loading pretrained weights, <code>classifier_activation</code> can only be <code>NULL</code> or <code>"softmax"</code> .
name	The name of the model (string).

**Value**

A Keras model instance.

**Reference**

- [Densely Connected Convolutional Networks](#) (CVPR 2017)

Optionally loads weights pre-trained on ImageNet. Note that the data format convention used by the model is the one specified in your Keras config at `~/keras/keras.json`.

**Note**

Each Keras Application expects a specific kind of input preprocessing. For DenseNet, call `application_preprocess_input` on your inputs before passing them to the model.

**See Also**

- <https://keras.io/api/applications/densenet#densenet169-function>

---

`application_densenet201`

*Instantiates the Densenet201 architecture.*

---

**Description**

Instantiates the Densenet201 architecture.

**Usage**

```

application_densenet201(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "densenet201"
)

```

**Arguments**

<code>include_top</code>	whether to include the fully-connected layer at the top of the network.
<code>weights</code>	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
<code>input_tensor</code>	optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	optional shape tuple, only to be specified if <code>include_top</code> is FALSE (otherwise the input shape has to be (224, 224, 3) (with 'channels_last' data format) or (3, 224, 224) (with 'channels_first' data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
<code>classes</code>	optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified.
<code>classifier_activation</code>	A str or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. When loading pretrained weights, <code>classifier_activation</code> can only be NULL or "softmax".
<code>name</code>	The name of the model (string).

**Value**

A Keras model instance.

**Reference**

- [Densely Connected Convolutional Networks](#) (CVPR 2017)

Optionally loads weights pre-trained on ImageNet. Note that the data format convention used by the model is the one specified in your Keras config at `~/keras/keras.json`.

**Note**

Each Keras Application expects a specific kind of input preprocessing. For DenseNet, call `application_preprocess_input` on your inputs before passing them to the model.

**See Also**

- <https://keras.io/api/applications/densenet#densenet201-function>

---

`application_efficientnet_b0`

*Instantiates the EfficientNetB0 architecture.*

---

**Description**

Instantiates the EfficientNetB0 architecture.

**Usage**

```
application_efficientnet_b0(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "efficientnetb0",
    ...
)
```

**Arguments**

<code>include_top</code>	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
<code>weights</code>	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is FALSE. It should have exactly 3 inputs channels.

pooling	Optional pooling mode for feature extraction when include_top is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. 1000 is how many ImageNet classes there are. Defaults to 1000.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to 'softmax'. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).
...	For forward/backward compatability.

**Value**

A model instance.

**Reference**

- [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#) (ICML 2019)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNet, input preprocessing is included as part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. EfficientNet models expect their inputs to be float tensors of pixels with values in the [0-255] range.

**See Also**

- <https://keras.io/api/applications/efficientnet#efficientnetb0-function>

---

```
application_efficientnet_b1
```

*Instantiates the EfficientNetB1 architecture.*

---

### Description

Instantiates the EfficientNetB1 architecture.

### Usage

```
application_efficientnet_b1(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "efficientnetb1",
    ...
)
```

### Arguments

<code>include_top</code>	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
<code>weights</code>	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is FALSE. It should have exactly 3 inputs channels.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
<code>classes</code>	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified. 1000 is how many ImageNet classes there are. Defaults to 1000.

classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to 'softmax'. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).
...	For forward/backward compatability.

**Value**

A model instance.

**Reference**

- [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#) (ICML 2019)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNet, input preprocessing is included as part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. EfficientNet models expect their inputs to be float tensors of pixels with values in the [0-255] range.

**See Also**

- <https://keras.io/api/applications/efficientnet#efficientnetb1-function>

---

application\_efficientnet\_b2

*Instantiates the EfficientNetB2 architecture.*

---

**Description**

Instantiates the EfficientNetB2 architecture.

**Usage**

```
application_efficientnet_b2(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
```



```

    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "efficientnetb2",
    ...
)

```

### Arguments

include_top	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	Optional shape tuple, only to be specified if include_top is FALSE. It should have exactly 3 inputs channels.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. 1000 is how many ImageNet classes there are. Defaults to 1000.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to 'softmax'. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).
...	For forward/backward compatability.

### Value

A model instance.

### Reference

- [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#) (ICML 2019)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNet, input preprocessing is included as part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. EfficientNet models expect their inputs to be float tensors of pixels with values in the [0-255] range.

**See Also**

- <https://keras.io/api/applications/efficientnet#efficientnetb2-function>

---

application\_efficientnet\_b3

*Instantiates the EfficientNetB3 architecture.*

---

**Description**

Instantiates the EfficientNetB3 architecture.

**Usage**

```
application_efficientnet_b3(
    include_top = True,
    weights = "imagenet",
    input_tensor = None,
    input_shape = None,
    pooling = None,
    classes = 1000,
    classifier_activation = "softmax",
    name = "efficientnetb3",
    ...
)
```

**Arguments**

<code>include_top</code>	Whether to include the fully-connected layer at the top of the network. Defaults to <code>True</code> .
<code>weights</code>	One of <code>None</code> (random initialization), <code>"imagenet"</code> (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to <code>"imagenet"</code> .
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is <code>False</code> . It should have exactly 3 inputs channels.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is <code>False</code> . Defaults to <code>None</code> . <ul style="list-style-type: none"> <li>• <code>None</code> means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> </ul>

- avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.
- max means that global max pooling will be applied.

classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. 1000 is how many ImageNet classes there are. Defaults to 1000.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to 'softmax'. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).
...	For forward/backward compatability.

**Value**

A model instance.

**Reference**

- [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#) (ICML 2019)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNet, input preprocessing is included as part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. EfficientNet models expect their inputs to be float tensors of pixels with values in the [0-255] range.

**See Also**

- <https://keras.io/api/applications/efficientnet#efficientnetb3-function>

---

```
application_efficientnet_b4
```

*Instantiates the EfficientNetB4 architecture.*

---

### Description

Instantiates the EfficientNetB4 architecture.

### Usage

```
application_efficientnet_b4(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "efficientnetb4",
    ...
)
```

### Arguments

<code>include_top</code>	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
<code>weights</code>	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is FALSE. It should have exactly 3 inputs channels.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
<code>classes</code>	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified. 1000 is how many ImageNet classes there are. Defaults to 1000.

classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to 'softmax'. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).
...	For forward/backward compatibility.

**Value**

A model instance.

**Reference**

- [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#) (ICML 2019)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNet, input preprocessing is included as part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. EfficientNet models expect their inputs to be float tensors of pixels with values in the [0-255] range.

**See Also**

- <https://keras.io/api/applications/efficientnet#efficientnetb4-function>

---

application\_efficientnet\_b5

*Instantiates the EfficientNetB5 architecture.*

---

**Description**

Instantiates the EfficientNetB5 architecture.

**Usage**

```
application_efficientnet_b5(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
```

```

pooling = NULL,
classes = 1000L,
classifier_activation = "softmax",
name = "efficientnetb5",
...
)

```

### Arguments

include_top	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	Optional shape tuple, only to be specified if include_top is FALSE. It should have exactly 3 inputs channels.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. 1000 is how many ImageNet classes there are. Defaults to 1000.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to 'softmax'. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).
...	For forward/backward compatability.

### Value

A model instance.

### Reference

- [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#) (ICML 2019)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNet, input preprocessing is included as part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. EfficientNet models expect their inputs to be float tensors of pixels with values in the [0-255] range.

**See Also**

- <https://keras.io/api/applications/efficientnet#efficientnetb5-function>

---

application\_efficientnet\_b6

*Instantiates the EfficientNetB6 architecture.*

---

**Description**

Instantiates the EfficientNetB6 architecture.

**Usage**

```
application_efficientnet_b6(
    include_top = True,
    weights = "imagenet",
    input_tensor = None,
    input_shape = None,
    pooling = None,
    classes = 1000,
    classifier_activation = "softmax",
    name = "efficientnetb6",
    ...
)
```

**Arguments**

<code>include_top</code>	Whether to include the fully-connected layer at the top of the network. Defaults to <code>True</code> .
<code>weights</code>	One of <code>None</code> (random initialization), <code>"imagenet"</code> (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to <code>"imagenet"</code> .
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is <code>False</code> . It should have exactly 3 inputs channels.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is <code>False</code> . Defaults to <code>None</code> . <ul style="list-style-type: none"> <li>• <code>None</code> means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> </ul>

- avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.
- max means that global max pooling will be applied.

classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. 1000 is how many ImageNet classes there are. Defaults to 1000.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to 'softmax'. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).
...	For forward/backward compatability.

**Value**

A model instance.

**Reference**

- [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#) (ICML 2019)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNet, input preprocessing is included as part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. EfficientNet models expect their inputs to be float tensors of pixels with values in the [0-255] range.

**See Also**

- <https://keras.io/api/applications/efficientnet#efficientnetb6-function>



---

```
application_efficientnet_b7
```

*Instantiates the EfficientNetB7 architecture.*

---

### Description

Instantiates the EfficientNetB7 architecture.

### Usage

```
application_efficientnet_b7(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "efficientnetb7",
    ...
)
```

### Arguments

<code>include_top</code>	Whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
<code>weights</code>	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is FALSE. It should have exactly 3 inputs channels.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
<code>classes</code>	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified. 1000 is how many ImageNet classes there are. Defaults to 1000.

classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to 'softmax'. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).
...	For forward/backward compatability.

**Value**

A model instance.

**Reference**

- [EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks](#) (ICML 2019)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNet, input preprocessing is included as part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. EfficientNet models expect their inputs to be float tensors of pixels with values in the [0-255] range.

**See Also**

- <https://keras.io/api/applications/efficientnet#efficientnetb7-function>

---

application\_efficientnet\_v2b0

*Instantiates the EfficientNetV2B0 architecture.*

---

**Description**

Instantiates the EfficientNetV2B0 architecture.

**Usage**

```
application_efficientnet_v2b0(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
```

```

pooling = NULL,
classes = 1000L,
classifier_activation = "softmax",
include_preprocessing = TRUE,
name = "efficientnetv2-b0"
)

```

### Arguments

include_top	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	Optional shape tuple, only to be specified if include_top is FALSE. It should have exactly 3 inputs channels.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• "avg" means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• "max" means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. Defaults to 1000 (number of ImageNet classes).
classifier_activation	A string or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, classifier_activation can only be NULL or "softmax".
include_preprocessing	Boolean, whether to include the preprocessing layer at the bottom of the network.
name	The name of the model (string).

### Value

A model instance.

### Reference

- [EfficientNetV2: Smaller Models and Faster Training \(ICML 2021\)](#)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

### Note

Each Keras Application expects a specific kind of input preprocessing. For EfficientNetV2, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the `[0, 255]` range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the `[-1, 1]` range.

### See Also

- [https://keras.io/api/applications/efficientnet\\_v2#efficientnetv2b0-function](https://keras.io/api/applications/efficientnet_v2#efficientnetv2b0-function)

---

application\_efficientnet\_v2b1

*Instantiates the EfficientNetV2B1 architecture.*

---

### Description

Instantiates the EfficientNetV2B1 architecture.

### Usage

```
application_efficientnet_v2b1(  
    include_top = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    input_shape = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    include_preprocessing = TRUE,  
    name = "efficientnetv2-b1"  
)
```

**Arguments**

include_top	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	Optional shape tuple, only to be specified if include_top is FALSE. It should have exactly 3 inputs channels.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• "avg" means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• "max" means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. Defaults to 1000 (number of ImageNet classes).
classifier_activation	A string or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, classifier_activation can only be NULL or "softmax".
include_preprocessing	Boolean, whether to include the preprocessing layer at the bottom of the network.
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [EfficientNetV2: Smaller Models and Faster Training](#) (ICML 2021)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNetV2, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the  $[0, 255]$  range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the  $[-1, 1]$  range.

**See Also**

- [https://keras.io/api/applications/efficientnet\\_v2#efficientnetv2b1-function](https://keras.io/api/applications/efficientnet_v2#efficientnetv2b1-function)

---

`application_efficientnet_v2b2`

*Instantiates the EfficientNetV2B2 architecture.*

---

**Description**

Instantiates the EfficientNetV2B2 architecture.

**Usage**

```
application_efficientnet_v2b2(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    include_preprocessing = TRUE,
    name = "efficientnetv2-b2"
)
```

**Arguments**

<code>include_top</code>	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to <code>TRUE</code> .
<code>weights</code>	One of <code>NULL</code> (random initialization), <code>"imagenet"</code> (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to <code>"imagenet"</code> .
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is <code>FALSE</code> . It should have exactly 3 inputs channels.

pooling	Optional pooling mode for feature extraction when <code>include_top</code> is <code>FALSE</code> . Defaults to <code>NULL</code> . <ul style="list-style-type: none"> <li>• <code>NULL</code> means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• <code>"avg"</code> means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• <code>"max"</code> means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is <code>TRUE</code> , and if no <code>weights</code> argument is specified. Defaults to 1000 (number of ImageNet classes).
classifier_activation	A string or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. Defaults to <code>"softmax"</code> . When loading pretrained weights, <code>classifier_activation</code> can only be <code>NULL</code> or <code>"softmax"</code> .
include_preprocessing	Boolean, whether to include the preprocessing layer at the bottom of the network.
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [EfficientNetV2: Smaller Models and Faster Training \(ICML 2021\)](#)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNetV2, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the `[0, 255]` range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the `[-1, 1]` range.

**See Also**

- [https://keras.io/api/applications/efficientnet\\_v2#efficientnetv2b2-function](https://keras.io/api/applications/efficientnet_v2#efficientnetv2b2-function)

---

```
application_efficientnet_v2b3
```

*Instantiates the EfficientNetV2B3 architecture.*

---

### Description

Instantiates the EfficientNetV2B3 architecture.

### Usage

```
application_efficientnet_v2b3(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    include_preprocessing = TRUE,
    name = "efficientnetv2-b3"
)
```

### Arguments

include_top	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	Optional shape tuple, only to be specified if include_top is FALSE. It should have exactly 3 inputs channels.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• "avg" means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• "max" means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. Defaults to 1000 (number of ImageNet classes).



classifier_activation	A string or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, classifier_activation can only be NULL or "softmax".
include_preprocessing	Boolean, whether to include the preprocessing layer at the bottom of the network.
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [EfficientNetV2: Smaller Models and Faster Training](#) (ICML 2021)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNetV2, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the  $[0, 255]$  range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the  $[-1, 1]$  range.

**See Also**

- [https://keras.io/api/applications/efficientnet\\_v2#efficientnetv2b3-function](https://keras.io/api/applications/efficientnet_v2#efficientnetv2b3-function)

---

application\_efficientnet\_v2l

*Instantiates the EfficientNetV2L architecture.*

---

**Description**

Instantiates the EfficientNetV2L architecture.

**Usage**

```

application_efficientnet_v2l(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    include_preprocessing = TRUE,
    name = "efficientnetv2-l"
)

```

**Arguments**

<code>include_top</code>	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
<code>weights</code>	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is FALSE. It should have exactly 3 inputs channels.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• "avg" means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• "max" means that global max pooling will be applied.</li> </ul>
<code>classes</code>	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified. Defaults to 1000 (number of ImageNet classes).
<code>classifier_activation</code>	A string or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, <code>classifier_activation</code> can only be NULL or "softmax".
<code>include_preprocessing</code>	Boolean, whether to include the preprocessing layer at the bottom of the network.
<code>name</code>	The name of the model (string).

**Value**

A model instance.

## Reference

- [EfficientNetV2: Smaller Models and Faster Training \(ICML 2021\)](#)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

## Note

Each Keras Application expects a specific kind of input preprocessing. For EfficientNetV2, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the  $[0, 255]$  range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the  $[-1, 1]$  range.

## See Also

- [https://keras.io/api/applications/efficientnet\\_v2#efficientnetv2l-function](https://keras.io/api/applications/efficientnet_v2#efficientnetv2l-function)

---

application\_efficientnet\_v2m

*Instantiates the EfficientNetV2M architecture.*

---

## Description

Instantiates the EfficientNetV2M architecture.

## Usage

```
application_efficientnet_v2m(  
    include_top = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    input_shape = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    include_preprocessing = TRUE,  
    name = "efficientnetv2-m"  
)
```

**Arguments**

<code>include_top</code>	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
<code>weights</code>	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is FALSE. It should have exactly 3 inputs channels.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. Defaults to NULL. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• "avg" means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• "max" means that global max pooling will be applied.</li> </ul>
<code>classes</code>	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified. Defaults to 1000 (number of ImageNet classes).
<code>classifier_activation</code>	A string or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. Defaults to "softmax". When loading pretrained weights, <code>classifier_activation</code> can only be NULL or "softmax".
<code>include_preprocessing</code>	Boolean, whether to include the preprocessing layer at the bottom of the network.
<code>name</code>	The name of the model (string).

**Value**

A model instance.

**Reference**

- [EfficientNetV2: Smaller Models and Faster Training](#) (ICML 2021)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNetV2, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the  $[0, 255]$  range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the  $[-1, 1]$  range.

**See Also**

- [https://keras.io/api/applications/efficientnet\\_v2#efficientnetv2m-function](https://keras.io/api/applications/efficientnet_v2#efficientnetv2m-function)

---

application\_efficientnet\_v2s

*Instantiates the EfficientNetV2S architecture.*

---

**Description**

Instantiates the EfficientNetV2S architecture.

**Usage**

```
application_efficientnet_v2s(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    include_preprocessing = TRUE,
    name = "efficientnetv2-s"
)
```

**Arguments**

<code>include_top</code>	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to <code>TRUE</code> .
<code>weights</code>	One of <code>NULL</code> (random initialization), <code>"imagenet"</code> (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to <code>"imagenet"</code> .
<code>input_tensor</code>	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	Optional shape tuple, only to be specified if <code>include_top</code> is <code>FALSE</code> . It should have exactly 3 inputs channels.

pooling	Optional pooling mode for feature extraction when <code>include_top</code> is <code>FALSE</code> . Defaults to <code>NULL</code> . <ul style="list-style-type: none"> <li>• <code>NULL</code> means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• <code>"avg"</code> means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• <code>"max"</code> means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is <code>TRUE</code> , and if no <code>weights</code> argument is specified. Defaults to 1000 (number of ImageNet classes).
classifier_activation	A string or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. Defaults to <code>"softmax"</code> . When loading pretrained weights, <code>classifier_activation</code> can only be <code>NULL</code> or <code>"softmax"</code> .
include_preprocessing	Boolean, whether to include the preprocessing layer at the bottom of the network.
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [EfficientNetV2: Smaller Models and Faster Training \(ICML 2021\)](#)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For EfficientNetV2, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the `[0, 255]` range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled EfficientNetV2 models expect their inputs to be float tensors of pixels with values in the `[-1, 1]` range.

**See Also**

- [https://keras.io/api/applications/efficientnet\\_v2#efficientnetv2s-function](https://keras.io/api/applications/efficientnet_v2#efficientnetv2s-function)

---

application\_inception\_resnet\_v2

*Instantiates the Inception-ResNet v2 architecture.*

---

## Description

Instantiates the Inception-ResNet v2 architecture.

## Usage

```
application_inception_resnet_v2(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "inception_resnet_v2"
)
```

## Arguments

include_top	whether to include the fully-connected layer at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (299, 299, 3) (with 'channels_last' data format) or (3, 299, 299) (with 'channels_first' data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 75. E.g. (150, 150, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• 'avg' means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• 'max' means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.

classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [Inception-v4, Inception-ResNet and the Impact of Residual Connections on Learning](#) (AAAI 2017)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For InceptionResNetV2, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs` will scale input pixels between -1 and 1.

**See Also**

- <https://keras.io/api/applications/inceptionresnetv2#inceptionresnetv2-function>

---

application\_inception\_v3

*Instantiates the Inception v3 architecture.*

---

**Description**

Instantiates the Inception v3 architecture.

**Usage**

```
application_inception_v3(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
```



```

    classifier_activation = "softmax",
    name = "inception_v3"
)

```

### Arguments

include_top	Boolean, whether to include the fully-connected layer at the top, as the last layer of the network. Defaults to TRUE.
weights	One of NULL (random initialization), imagenet (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model. input_tensor is useful for sharing inputs between multiple different networks. Defaults to NULL.
input_shape	Optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (299, 299, 3) (with channels_last data format) or (3, 299, 299) (with channels_first data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 75. E.g. (150, 150, 3) would be one valid value. input_shape will be ignored if the input_tensor is provided.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL (default) means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. Defaults to 1000.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

### Value

A model instance.

### Reference

- [Rethinking the Inception Architecture for Computer Vision](#) (CVPR 2016)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For InceptionV3, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs` will scale input pixels between -1 and 1.

**See Also**

- <https://keras.io/api/applications/inceptionv3#inceptionv3-function>

---

`application_mobilenet` *Instantiates the MobileNet architecture.*

---

**Description**

Instantiates the MobileNet architecture.

**Usage**

```
application_mobilenet(
    input_shape = NULL,
    alpha = 1,
    depth_multiplier = 1L,
    dropout = 0.001,
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = NULL
)
```

**Arguments**

- |                          |  |
|--------------------------|--|
| <code>input_shape</code> | Optional shape tuple, only to be specified if <code>include_top</code> is FALSE (otherwise the input shape has to be (224, 224, 3) (with "channels_last" data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value. Defaults to NULL. <code>input_shape</code> will be ignored if the <code>input_tensor</code> is provided.       |
| <code>alpha</code>       | Controls the width of the network. This is known as the width multiplier in the MobileNet paper. <ul style="list-style-type: none"> <li>• If <code>alpha &lt; 1.0</code>, proportionally decreases the number of filters in each layer.</li> <li>• If <code>alpha &gt; 1.0</code>, proportionally increases the number of filters in each layer.</li> <li>• If <code>alpha == 1</code>, default number of filters from the paper are used at each layer. Defaults to 1.0.</li> </ul> |

depth_multiplier	Depth multiplier for depthwise convolution. This is called the resolution multiplier in the MobileNet paper. Defaults to 1.0.
dropout	Dropout rate. Defaults to 0.001.
include_top	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model. input_tensor is useful for sharing inputs between multiple different networks. Defaults to NULL.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL (default) means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified. Defaults to 1000.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [MobileNets: Efficient Convolutional Neural Networks for Mobile Vision Applications](#)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For MobileNet, call `application_preprocess_inputs` on your inputs before passing them to the model. `application_preprocess_inputs()` will scale input pixels between -1 and 1.

**See Also**

- <https://keras.io/api/applications/mobilenet#mobilenet-function>

---

application\_mobilenet\_v2

*Instantiates the MobileNetV2 architecture.*

---

**Description**

MobileNetV2 is very similar to the original MobileNet, except that it uses inverted residual blocks with bottlenecking features. It has a drastically lower parameter count than the original MobileNet. MobileNets support any input size greater than 32 x 32, with larger image sizes offering better performance.

**Usage**

```
application_mobilenet_v2(
    input_shape = NULL,
    alpha = 1,
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = NULL
)
```

**Arguments**

input_shape	Optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) (with "channels_last" data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value. Defaults to NULL. input_shape will be ignored if the input_tensor is provided.
alpha	Controls the width of the network. This is known as the width multiplier in the MobileNet paper. <ul style="list-style-type: none"> <li>• If alpha &lt; 1.0, proportionally decreases the number of filters in each layer.</li> <li>• If alpha &gt; 1.0, proportionally increases the number of filters in each layer.</li> <li>• If alpha == 1, default number of filters from the paper are used at each layer. Defaults to 1.0.</li> </ul>
include_top	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	One of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded. Defaults to "imagenet".

input_tensor	Optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model. <code>input_tensor</code> is useful for sharing inputs between multiple different networks. Defaults to <code>NULL</code> .
pooling	Optional pooling mode for feature extraction when <code>include_top</code> is <code>FALSE</code> . <ul style="list-style-type: none"> <li>• <code>NULL</code> (default) means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• <code>avg</code> means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• <code>max</code> means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if <code>include_top</code> is <code>TRUE</code> , and if no <code>weights</code> argument is specified. Defaults to <code>1000</code> .
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. When loading pretrained weights, <code>classifier_activation</code> can only be <code>NULL</code> or <code>"softmax"</code> .
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [MobileNetV2: Inverted Residuals and Linear Bottlenecks](#) (CVPR 2018)

This function returns a Keras image classification model, optionally loaded with weights pre-trained on ImageNet.

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For MobileNetV2, call [application\\_preprocess\\_inputs\(\)](#) on your inputs before passing them to the model. [application\\_preprocess\\_inputs](#) will scale input pixels between -1 and 1.

**See Also**

- <https://keras.io/api/applications/mobilenet#mobilenetv2-function>

---

```
application_mobilenet_v3_large
```

*Instantiates the MobileNetV3Large architecture.*

---

### Description

Instantiates the MobileNetV3Large architecture.

### Usage

```
application_mobilenet_v3_large(  
    input_shape = NULL,  
    alpha = 1,  
    minimalistic = FALSE,  
    include_top = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    classes = 1000L,  
    pooling = NULL,  
    dropout_rate = 0.2,  
    classifier_activation = "softmax",  
    include_preprocessing = TRUE,  
    name = "MobileNetV3Large"  
)
```

### Arguments

<code>input_shape</code>	Optional shape tuple, to be specified if you would like to use a model with an input image resolution that is not (224, 224, 3). It should have exactly 3 inputs channels. You can also omit this option if you would like to infer <code>input_shape</code> from an <code>input_tensor</code> . If you choose to include both <code>input_tensor</code> and <code>input_shape</code> then <code>input_shape</code> will be used if they match, if the shapes do not match then we will throw an error. E.g. (160, 160, 3) would be one valid value.
<code>alpha</code>	controls the width of the network. This is known as the depth multiplier in the MobileNetV3 paper, but the name is kept for consistency with MobileNetV1 in Keras. <ul style="list-style-type: none"> <li>• If <code>alpha &lt; 1.0</code>, proportionally decreases the number of filters in each layer.</li> <li>• If <code>alpha &gt; 1.0</code>, proportionally increases the number of filters in each layer.</li> <li>• If <code>alpha == 1</code>, default number of filters from the paper are used at each layer.</li> </ul>
<code>minimalistic</code>	In addition to large and small models this module also contains so-called minimalistic models, these models have the same per-layer dimensions characteristic as MobileNetV3 however, they don't utilize any of the advanced blocks (squeeze-and-excite units, hard-swish, and 5x5 convolutions). While these models are less efficient on CPU, they are much more performant on GPU/DSP.

include_top	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	String, one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
classes	Integer, optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
pooling	String, optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
dropout_rate	fraction of the input units to drop on the last layer.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
include_preprocessing	Boolean, whether to include the preprocessing layer (Rescaling) at the bottom of the network. Defaults to TRUE.
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [Searching for MobileNetV3](#) (ICCV 2019)

**The following table describes the performance of MobileNets v3::**

MACs stands for Multiply Adds

Classification Checkpoint	MACs(M)	Parameters(M)	Top1 Accuracy	Pixel1 CPU(ms)
mobilenet_v3_large_1.0_224	217	5.4	75.6	51.2
mobilenet_v3_large_0.75_224	155	4.0	73.3	39.8
mobilenet_v3_large_minimalistic_1.0_224	209	3.9	72.3	44.1
mobilenet_v3_small_1.0_224	66	2.9	68.1	15.8
mobilenet_v3_small_0.75_224	44	2.4	65.4	12.8
mobilenet_v3_small_minimalistic_1.0_224	65	2.0	61.9	12.2

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For MobileNetV3, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, MobileNetV3 models expect their inputs to be float tensors of pixels with values in the  $[0-255]$  range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled MobileNetV3 models expect their inputs to be float tensors of pixels with values in the  $[-1, 1]$  range.

**Call Arguments**

- `inputs`: A floating point `numpy.array` or backend-native tensor, 4D with 3 color channels, with values in the range  $[0, 255]$  if `include_preprocessing` is `TRUE` and in the range  $[-1, 1]$  otherwise.

**See Also**

- <https://keras.io/api/applications/mobilenet#mobilenetv3large-function>

---

`application_mobilenet_v3_small`

*Instantiates the MobileNetV3Small architecture.*

---

**Description**

Instantiates the MobileNetV3Small architecture.

**Usage**

```
application_mobilenet_v3_small(  
    input_shape = NULL,  
    alpha = 1,  
    minimalistic = FALSE,  
    include_top = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    classes = 1000L,  
    pooling = NULL,  
    dropout_rate = 0.2,  
    classifier_activation = "softmax",  
    include_preprocessing = TRUE,  
    name = "MobileNetV3Small"  
)
```



**Arguments**

input_shape	Optional shape tuple, to be specified if you would like to use a model with an input image resolution that is not (224, 224, 3). It should have exactly 3 inputs channels. You can also omit this option if you would like to infer input_shape from an input_tensor. If you choose to include both input_tensor and input_shape then input_shape will be used if they match, if the shapes do not match then we will throw an error. E.g. (160, 160, 3) would be one valid value.
alpha	controls the width of the network. This is known as the depth multiplier in the MobileNetV3 paper, but the name is kept for consistency with MobileNetV1 in Keras. <ul style="list-style-type: none"> <li>• If <math>\alpha &lt; 1.0</math>, proportionally decreases the number of filters in each layer.</li> <li>• If <math>\alpha &gt; 1.0</math>, proportionally increases the number of filters in each layer.</li> <li>• If <math>\alpha == 1</math>, default number of filters from the paper are used at each layer.</li> </ul>
minimalistic	In addition to large and small models this module also contains so-called minimalistic models, these models have the same per-layer dimensions characteristic as MobilenetV3 however, they don't utilize any of the advanced blocks (squeeze-and-excite units, hard-swish, and 5x5 convolutions). While these models are less efficient on CPU, they are much more performant on GPU/DSP.
include_top	Boolean, whether to include the fully-connected layer at the top of the network. Defaults to TRUE.
weights	String, one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
classes	Integer, optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
pooling	String, optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
dropout_rate	fraction of the input units to drop on the last layer.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
include_preprocessing	Boolean, whether to include the preprocessing layer (Rescaling) at the bottom of the network. Defaults to TRUE.
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [Searching for MobileNetV3](#) (ICCV 2019)

**The following table describes the performance of MobileNets v3::**

MACs stands for Multiply Adds

Classification Checkpoint	MACs(M)	Parameters(M)	Top1 Accuracy	Pixel1 CPU(ms)
mobilenet_v3_large_1.0_224	217	5.4	75.6	51.2
mobilenet_v3_large_0.75_224	155	4.0	73.3	39.8
mobilenet_v3_large_minimalistic_1.0_224	209	3.9	72.3	44.1
mobilenet_v3_small_1.0_224	66	2.9	68.1	15.8
mobilenet_v3_small_0.75_224	44	2.4	65.4	12.8
mobilenet_v3_small_minimalistic_1.0_224	65	2.0	61.9	12.2

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For MobileNetV3, by default input preprocessing is included as a part of the model (as a Rescaling layer), and thus `application_preprocess_inputs()` is actually a pass-through function. In this use case, MobileNetV3 models expect their inputs to be float tensors of pixels with values in the  $[0-255]$  range. At the same time, preprocessing as a part of the model (i.e. Rescaling layer) can be disabled by setting `include_preprocessing` argument to `FALSE`. With preprocessing disabled MobileNetV3 models expect their inputs to be float tensors of pixels with values in the  $[-1, 1]$  range.

**Call Arguments**

- `inputs`: A floating point `numpy.array` or backend-native tensor, 4D with 3 color channels, with values in the range  $[0, 255]$  if `include_preprocessing` is `TRUE` and in the range  $[-1, 1]$  otherwise.

**See Also**

- <https://keras.io/api/applications/mobilenet#mobilenetv3small-function>

---

 application\_nasnet\_large

*Instantiates a NASNet model in ImageNet mode.*


---

## Description

Instantiates a NASNet model in ImageNet mode.

## Usage

```
application_nasnet_large(
    input_shape = NULL,
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "nasnet_large"
)
```

## Arguments

input_shape	Optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (331, 331, 3) for NASNetLarge. It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (224, 224, 3) would be one valid value.
include_top	Whether to include the fully-connected layer at the top of the network.
weights	NULL (random initialization) or imagenet (ImageNet weights). For loading imagenet weights, input_shape should be (331, 331, 3)
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".

name            The name of the model (string).

### Value

A Keras model instance.

### Reference

- [Learning Transferable Architectures for Scalable Image Recognition \(CVPR 2018\)](#)

Optionally loads weights pre-trained on ImageNet. Note that the data format convention used by the model is the one specified in your Keras config at `~/keras/keras.json`.

### Note

Each Keras Application expects a specific kind of input preprocessing. For NASNet, call [application\\_preprocess\\_inputs](#) on your inputs before passing them to the model.

### See Also

- <https://keras.io/api/applications/nasnet#nasnetlarge-function>

---

application\_nasnet\_mobile

*Instantiates a Mobile NASNet model in ImageNet mode.*

---

### Description

Instantiates a Mobile NASNet model in ImageNet mode.

### Usage

```
application_nasnet_mobile(  
    input_shape = NULL,  
    include_top = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    name = "nasnet_mobile"  
)
```

**Arguments**

input_shape	Optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) for NASNetMobile. It should have exactly 3 input channels, and width and height should be no smaller than 32. E.g. (224, 224, 3) would be one valid value.
include_top	Whether to include the fully-connected layer at the top of the network.
weights	NULL (random initialization) or imagenet (ImageNet weights). For loading imagenet weights, input_shape should be (224, 224, 3)
input_tensor	Optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional layer.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional layer, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	Optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

**Value**

A Keras model instance.

**Reference**

- [Learning Transferable Architectures for Scalable Image Recognition](#) (CVPR 2018)

Optionally loads weights pre-trained on ImageNet. Note that the data format convention used by the model is the one specified in your Keras config at ~/.keras/keras.json.

**Note**

Each Keras Application expects a specific kind of input preprocessing. For NASNet, call [application\\_preprocess\\_inputs](#) on your inputs before passing them to the model.

**See Also**

- <https://keras.io/api/applications/nasnet#nasnetmobile-function>

---

application\_resnet101 *Instantiates the ResNet101 architecture.*

---

### Description

Instantiates the ResNet101 architecture.

### Usage

```
application_resnet101(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "resnet101"
)
```

### Arguments

include_top	whether to include the fully-connected layer at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) (with "channels_last" data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".

name            The name of the model (string).

### Value

A Model instance.

### Reference

- [Deep Residual Learning for Image Recognition \(CVPR 2015\)](#)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

### Note

Each Keras Application expects a specific kind of input preprocessing. For ResNet, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs()` will convert the input images from RGB to BGR, then will zero-center each color channel with respect to the ImageNet dataset, without scaling.

### See Also

- <https://keras.io/api/applications/resnet#resnet101-function>

---

application\_resnet101\_v2

*Instantiates the ResNet101V2 architecture.*

---

### Description

Instantiates the ResNet101V2 architecture.

### Usage

```
application_resnet101_v2(  
    include_top = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    input_shape = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    name = "resnet101v2"  
)
```

**Arguments**

include_top	whether to include the fully-connected layer at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) (with "channels_last" data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

**Value**

A Model instance.

**Reference**

- [Identity Mappings in Deep Residual Networks](#) (CVPR 2016)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For ResNet, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs()` will scale input pixels between -1 and 1.

**See Also**

- <https://keras.io/api/applications/resnet#resnet101v2-function>



---

application\_resnet152 *Instantiates the ResNet152 architecture.*

---

## Description

Instantiates the ResNet152 architecture.

## Usage

```
application_resnet152(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "resnet152"
)
```

## Arguments

include_top	whether to include the fully-connected layer at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) (with "channels_last" data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".

name            The name of the model (string).

### Value

A Model instance.

### Reference

- [Deep Residual Learning for Image Recognition \(CVPR 2015\)](#)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

### Note

Each Keras Application expects a specific kind of input preprocessing. For ResNet, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs()` will convert the input images from RGB to BGR, then will zero-center each color channel with respect to the ImageNet dataset, without scaling.

### See Also

- <https://keras.io/api/applications/resnet#resnet152-function>

---

application\_resnet152\_v2

*Instantiates the ResNet152V2 architecture.*

---

### Description

Instantiates the ResNet152V2 architecture.

### Usage

```
application_resnet152_v2(  
    include_top = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    input_shape = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    name = "resnet152v2"  
)
```

**Arguments**

include_top	whether to include the fully-connected layer at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) (with "channels_last" data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

**Value**

A Model instance.

**Reference**

- [Identity Mappings in Deep Residual Networks](#) (CVPR 2016)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For ResNet, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs()` will scale input pixels between -1 and 1.

**See Also**

- <https://keras.io/api/applications/resnet#resnet152v2-function>

---

`application_resnet50` *Instantiates the ResNet50 architecture.*

---

### Description

Instantiates the ResNet50 architecture.

### Usage

```
application_resnet50(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "resnet50"
)
```

### Arguments

<code>include_top</code>	whether to include the fully-connected layer at the top of the network.
<code>weights</code>	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
<code>input_tensor</code>	optional Keras tensor (i.e. output of <code>keras_input()</code> ) to use as image input for the model.
<code>input_shape</code>	optional shape tuple, only to be specified if <code>include_top</code> is FALSE (otherwise the input shape has to be (224, 224, 3) (with "channels_last" data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
<code>pooling</code>	Optional pooling mode for feature extraction when <code>include_top</code> is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
<code>classes</code>	optional number of classes to classify images into, only to be specified if <code>include_top</code> is TRUE, and if no <code>weights</code> argument is specified.
<code>classifier_activation</code>	A str or callable. The activation function to use on the "top" layer. Ignored unless <code>include_top=TRUE</code> . Set <code>classifier_activation=NULL</code> to return the logits of the "top" layer. When loading pretrained weights, <code>classifier_activation</code> can only be NULL or "softmax".

name            The name of the model (string).

### Value

A Model instance.

### Reference

- [Deep Residual Learning for Image Recognition \(CVPR 2015\)](#)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

### Note

Each Keras Application expects a specific kind of input preprocessing. For ResNet, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs()` will convert the input images from RGB to BGR, then will zero-center each color channel with respect to the ImageNet dataset, without scaling.

### See Also

- <https://keras.io/api/applications/resnet#resnet50-function>

---

application\_resnet50\_v2

*Instantiates the ResNet50V2 architecture.*

---

### Description

Instantiates the ResNet50V2 architecture.

### Usage

```
application_resnet50_v2(  
    include_top = TRUE,  
    weights = "imagenet",  
    input_tensor = NULL,  
    input_shape = NULL,  
    pooling = NULL,  
    classes = 1000L,  
    classifier_activation = "softmax",  
    name = "resnet50v2"  
)
```

**Arguments**

include_top	whether to include the fully-connected layer at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) (with "channels_last" data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 inputs channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

**Value**

A Model instance.

**Reference**

- [Identity Mappings in Deep Residual Networks](#) (CVPR 2016)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

**Note**

Each Keras Application expects a specific kind of input preprocessing. For ResNet, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs()` will scale input pixels between -1 and 1.

**See Also**

- <https://keras.io/api/applications/resnet#resnet50v2-function>

---

application\_vgg16      *Instantiates the VGG16 model.*

---

### Description

Instantiates the VGG16 model.

### Usage

```
application_vgg16(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "vgg16"
)
```

### Arguments

include_top	whether to include the 3 fully-connected layers at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) (with channels_last data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 input channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".

name            The name of the model (string).

### Value

A Model instance.

### Reference

- [Very Deep Convolutional Networks for Large-Scale Image Recognition \(ICLR 2015\)](#)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

The default input size for this model is 224x224.

### Note

Each Keras Application expects a specific kind of input preprocessing. For VGG16, call `application_preprocess_inputs` on your inputs before passing them to the model. `application_preprocess_inputs()` will convert the input images from RGB to BGR, then will zero-center each color channel with respect to the ImageNet dataset, without scaling.

### See Also

- <https://keras.io/api/applications/vgg#vgg16-function>

---

`application_vgg19`      *Instantiates the VGG19 model.*

---

### Description

Instantiates the VGG19 model.

### Usage

```
application_vgg19(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "vgg19"
)
```



**Arguments**

include_top	whether to include the 3 fully-connected layers at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (224, 224, 3) (with channels_last data format) or (3, 224, 224) (with "channels_first" data format). It should have exactly 3 input channels, and width and height should be no smaller than 32. E.g. (200, 200, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.
classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [Very Deep Convolutional Networks for Large-Scale Image Recognition](#) (ICLR 2015)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

The default input size for this model is 224x224.

**Note**

Each Keras Application expects a specific kind of input preprocessing. For VGG19, call `application_preprocess_inputs()` on your inputs before passing them to the model. `application_preprocess_inputs()` will convert the input images from RGB to BGR, then will zero-center each color channel with respect to the ImageNet dataset, without scaling.

**See Also**

- <https://keras.io/api/applications/vgg#vgg19-function>

---

application\_xception *Instantiates the Xception architecture.*

---

**Description**

Instantiates the Xception architecture.

**Usage**

```
application_xception(
    include_top = TRUE,
    weights = "imagenet",
    input_tensor = NULL,
    input_shape = NULL,
    pooling = NULL,
    classes = 1000L,
    classifier_activation = "softmax",
    name = "xception"
)
```

**Arguments**

include_top	whether to include the 3 fully-connected layers at the top of the network.
weights	one of NULL (random initialization), "imagenet" (pre-training on ImageNet), or the path to the weights file to be loaded.
input_tensor	optional Keras tensor (i.e. output of keras_input()) to use as image input for the model.
input_shape	optional shape tuple, only to be specified if include_top is FALSE (otherwise the input shape has to be (299, 299, 3). It should have exactly 3 inputs channels, and width and height should be no smaller than 71. E.g. (150, 150, 3) would be one valid value.
pooling	Optional pooling mode for feature extraction when include_top is FALSE. <ul style="list-style-type: none"> <li>• NULL means that the output of the model will be the 4D tensor output of the last convolutional block.</li> <li>• avg means that global average pooling will be applied to the output of the last convolutional block, and thus the output of the model will be a 2D tensor.</li> <li>• max means that global max pooling will be applied.</li> </ul>
classes	optional number of classes to classify images into, only to be specified if include_top is TRUE, and if no weights argument is specified.

classifier_activation	A str or callable. The activation function to use on the "top" layer. Ignored unless include_top=TRUE. Set classifier_activation=NULL to return the logits of the "top" layer. When loading pretrained weights, classifier_activation can only be NULL or "softmax".
name	The name of the model (string).

**Value**

A model instance.

**Reference**

- [Xception: Deep Learning with Depthwise Separable Convolutions \(CVPR 2017\)](#)

For image classification use cases, see [this page for detailed examples](#).

For transfer learning use cases, make sure to read the [guide to transfer learning & fine-tuning](#).

The default input image size for this model is 299x299.

**Note**

Each Keras Application expects a specific kind of input preprocessing. For Xception, call [application\\_preprocess\\_inputs](#) on your inputs before passing them to the model. [application\\_preprocess\\_inputs\(\)](#) will scale input pixels between -1 and 1.

**See Also**

- <https://keras.io/api/applications/xception#xception-function>

---

audio\_dataset\_from\_directory

*Generates a tf.data.Dataset from audio files in a directory.*

---

**Description**

If your directory structure is:

```
main_directory/
...class_a/
.....a_audio_1.wav
.....a_audio_2.wav
...class_b/
.....b_audio_1.wav
.....b_audio_2.wav
```

Then calling `audio_dataset_from_directory(main_directory, labels = 'inferred')` will return a `tf.data.Dataset` that yields batches of audio files from the subdirectories `class_a` and `class_b`, together with labels 0 and 1 (0 corresponding to `class_a` and 1 corresponding to `class_b`).

Only `.wav` files are supported at this time.

**Usage**

```

audio_dataset_from_directory(
    directory,
    labels = "inferred",
    label_mode = "int",
    class_names = NULL,
    batch_size = 32,
    sampling_rate = NULL,
    output_sequence_length = NULL,
    ragged = FALSE,
    shuffle = TRUE,
    seed = NULL,
    validation_split = NULL,
    subset = NULL,
    follow_links = FALSE,
    verbose = TRUE
)

```

**Arguments**

directory	Directory where the data is located. If labels is "inferred", it should contain subdirectories, each containing audio files for a class. Otherwise, the directory structure is ignored.
labels	Either "inferred" (labels are generated from the directory structure), NULL (no labels), or a list/tuple of integer labels of the same size as the number of audio files found in the directory. Labels should be sorted according to the alphanumeric order of the audio file paths (obtained via <code>os.walk(directory)</code> in Python).
label_mode	String describing the encoding of labels. Options are: <ul style="list-style-type: none"> <li>• "int": means that the labels are encoded as integers (e.g. for <code>sparse_categorical_crossentropy</code> loss).</li> <li>• "categorical" means that the labels are encoded as a categorical vector (e.g. for <code>categorical_crossentropy</code> loss)</li> <li>• "binary" means that the labels (there can be only 2) are encoded as float32 scalars with values 0 or 1 (e.g. for <code>binary_crossentropy</code>).</li> <li>• NULL (no labels).</li> </ul>
class_names	Only valid if "labels" is "inferred". This is the explicit list of class names (must match names of subdirectories). Used to control the order of the classes (otherwise alphabetical order is used).
batch_size	Size of the batches of data. Default: 32. If NULL, the data will not be batched (the dataset will yield individual samples).
sampling_rate	Audio sampling rate (in samples per second).
output_sequence_length	Maximum length of an audio sequence. Audio files longer than this will be truncated to <code>output_sequence_length</code> . If set to NULL, then all sequences in the same batch will be padded to the length of the longest sequence in the batch.

ragged	Whether to return a Ragged dataset (where each sequence has its own length). Defaults to FALSE.
shuffle	Whether to shuffle the data. Defaults to TRUE. If set to FALSE, sorts the data in alphanumeric order.
seed	Optional random seed for shuffling and transformations.
validation_split	Optional float between 0 and 1, fraction of data to reserve for validation.
subset	Subset of the data to return. One of "training", "validation" or "both". Only used if validation_split is set.
follow_links	Whether to visits subdirectories pointed to by symlinks. Defaults to FALSE.
verbose	Whether to display number information on classes and number of files found. Defaults to TRUE.

**Value**

A `tf.data.Dataset` object.

- If `label_mode` is `NULL`, it yields string tensors of shape `(batch_size,)`, containing the contents of a batch of audio files.
- Otherwise, it yields a tuple `(audio, labels)`, where `audio` has shape `(batch_size, sequence_length, num_channels)` and `labels` follows the format described below.

Rules regarding labels format:

- if `label_mode` is `int`, the labels are an `int32` tensor of shape `(batch_size,)`.
- if `label_mode` is `binary`, the labels are a `float32` tensor of 1s and 0s of shape `(batch_size, 1)`.
- if `label_mode` is `categorical`, the labels are a `float32` tensor of shape `(batch_size, num_classes)`, representing a one-hot encoding of the class index.

**See Also**

- [https://keras.io/api/data\\_loading/audio#audiodatasetfromdirectory-function](https://keras.io/api/data_loading/audio#audiodatasetfromdirectory-function)

Other dataset utils:

```
image_dataset_from_directory()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
```

Other utils:

```
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
```

```
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()
```

---

Callback

*Define a custom Callback class*

---

### Description

Callbacks can be passed to keras methods such as `fit()`, `evaluate()`, and `predict()` in order to hook into the various stages of the model training, evaluation, and inference lifecycle.

To create a custom callback, call `Callback()` and override the method associated with the stage of interest.

### Usage

```
Callback(
    classname,
    on_epoch_begin = NULL,
    on_epoch_end = NULL,
    on_train_begin = NULL,
    on_train_end = NULL,
    on_train_batch_begin = NULL,
    on_train_batch_end = NULL,
    on_test_begin = NULL,
    on_test_end = NULL,
    on_test_batch_begin = NULL,
    on_test_batch_end = NULL,
    on_predict_begin = NULL,
    on_predict_end = NULL,
    on_predict_batch_begin = NULL,
    on_predict_batch_end = NULL,
    ...,
)
```

```

    public = list(),
    private = list(),
    inherit = NULL,
    parent_env = parent.frame()
)

```

## Arguments

- classname** String, the name of the custom class. (Conventionally, CamelCase).
- on\_epoch\_begin** `\(epoch, logs = NULL)`  
 Called at the start of an epoch.  
 Subclasses should override for any actions to run. This function should only be called during TRAIN mode.  
 Args:
- **epoch**: Integer, index of epoch.
  - **logs**: Named List. Currently no data is passed to this argument for this method but that may change in the future.
- on\_epoch\_end** `\(epoch, logs = NULL)`  
 Called at the end of an epoch.  
 Subclasses should override for any actions to run. This function should only be called during TRAIN mode.  
 Args:
- **epoch**: Integer, index of epoch.
  - **logs**: Named List, metric results for this training epoch, and for the validation epoch if validation is performed. Validation result keys are prefixed with `val_`. For training epoch, the values of the Model's metrics are returned. Example: `list(loss = 0.2, accuracy = 0.7)`.
- on\_train\_begin** `\(logs = NULL)`  
 Called at the beginning of training.  
 Subclasses should override for any actions to run.  
 Args:
- **logs**: Named list. Currently no data is passed to this argument for this method but that may change in the future.
- on\_train\_end** `\(logs = NULL)`  
 Called at the end of training.  
 Subclasses should override for any actions to run.  
 Args:
- **logs**: Named list. Currently the output of the last call to `on_epoch_end()` is passed to this argument for this method but that may change in the future.
- on\_train\_batch\_begin**  
`\(batch, logs = NULL)`  
 Called at the beginning of a training batch in `fit()` methods.  
 Subclasses should override for any actions to run.

Note that if the `steps_per_execution` argument to `compile` in `Model` is set to `N`, this method will only be called every `N` batches.

Args:

- `batch`: Integer, index of batch within the current epoch.
- `logs`: Named list. Currently no data is passed to this argument for this method but that may change in the future.

`on_train_batch_end`

`\(batch, logs=NULL)`

Called at the end of a training batch in `fit()` methods.

Subclasses should override for any actions to run.

Note that if the `steps_per_execution` argument to `compile` in `Model` is set to `N`, this method will only be called every `N` batches.

Args:

- `batch`: Integer, index of batch within the current epoch.
- `logs`: Named list. Aggregated metric results up until this batch.

`on_test_begin`

`\(logs = NULL)`

Called at the beginning of evaluation or validation.

Subclasses should override for any actions to run.

Args:

- `logs`: Named list. Currently no data is passed to this argument for this method but that may change in the future.

`on_test_end`

`\(logs = NULL)`

Called at the end of evaluation or validation.

Subclasses should override for any actions to run.

Args:

- `logs`: Named list. Currently the output of the last call to `on_test_batch_end()` is passed to this argument for this method but that may change in the future.

`on_test_batch_begin`

`\(batch, logs = NULL)`

Called at the beginning of a batch in `evaluate()` methods.

Also called at the beginning of a validation batch in the `fit()` methods, if validation data is provided.

Subclasses should override for any actions to run.

Note that if the `steps_per_execution` argument to `compile()` in `Model` is set to `N`, this method will only be called every `N` batches.

Args:

- `batch`: Integer, index of batch within the current epoch.
- `logs`: Named list. Currently no data is passed to this argument for this method but that may change in the future.

`on_test_batch_end`

`\(batch, logs = NULL)`

Called at the end of a batch in `evaluate()` methods.



Also called at the end of a validation batch in the `fit()` methods, if validation data is provided.

Subclasses should override for any actions to run.

Note that if the `steps_per_execution` argument to `compile()` in `Model` is set to `N`, this method will only be called every `N` batches.

Args:

- `batch`: Integer, index of batch within the current epoch.
- `logs`: Named list. Aggregated metric results up until this batch.

`on_predict_begin`

`\(logs = NULL)`

Called at the beginning of prediction.

Subclasses should override for any actions to run.

Args:

- `logs`: Named list. Currently no data is passed to this argument for this method but that may change in the future.

`on_predict_end` `\(logs = NULL)`

Called at the end of prediction.

Subclasses should override for any actions to run.

Args:

- `logs`: Named list. Currently no data is passed to this argument for this method but that may change in the future.

`on_predict_batch_begin`

`\(batch, logs = NULL)`

Called at the beginning of a batch in `predict()` methods.

Subclasses should override for any actions to run.

Note that if the `steps_per_execution` argument to `compile()` in `Model` is set to `N`, this method will only be called every `N` batches.

Args:

- `batch`: Integer, index of batch within the current epoch.
- `logs`: Named list. Currently no data is passed to this argument for this method but that may change in the future.

`on_predict_batch_end`

`\(batch, logs = NULL)`

Called at the end of a batch in `predict()` methods.

Subclasses should override for any actions to run.

Note that if the `steps_per_execution` argument to `compile` in `Model` is set to `N`, this method will only be called every `N` batches.

Args:

- `batch`: Integer, index of batch within the current epoch.
- `logs`: Named list. Aggregated metric results up until this batch.

`..., public`

Additional methods or public members of the custom class.

<code>private</code>	Named list of R objects (typically, functions) to include in instance private environments. <code>private</code> methods will have all the same symbols in scope as public methods (See section "Symbols in Scope"). Each instance will have its own private environment. Any objects in <code>private</code> will be invisible from the Keras framework and the Python runtime.
<code>inherit</code>	What the custom class will subclass. By default, the base keras class.
<code>parent_env</code>	The R environment that all class methods will have as a grandparent.

**Value**

A function that returns the custom Callback instances, similar to the builtin callback functions.

**Examples**

```
training_finished <- FALSE
callback_mark_finished <- Callback("MarkFinished",
  on_train_end = function(logs = NULL) {
    training_finished <-< TRUE
  }
)

model <- keras_model_sequential(input_shape = c(1)) |>
  layer_dense(1)
model |> compile(loss = 'mean_squared_error')
model |> fit(op_ones(c(1, 1)), op_ones(c(1, 1)),
  callbacks = callback_mark_finished())
stopifnot(isTRUE(training_finished))
```

All R function custom methods (public and private) will have the following symbols in scope:

- `self`: the Layer instance.
- `super`: the Layer superclass.
- `private`: An R environment specific to the class instance. Any objects defined here will be invisible to the Keras framework.
- `__class__` the current class type object. This will also be available as an alias symbol, the value supplied to `Layer(classname = )`

**Attributes (accessible via `self$`)**

- `params`: Named list, Training parameters (e.g. verbosity, batch size, number of epochs, ...).
- `model`: Instance of `Model`. Reference of the model being trained.

The `logs` named list that callback methods take as argument will contain keys for quantities relevant to the current batch or epoch (see method-specific docstrings).

**Symbols in scope**

All R function custom methods (public and private) will have the following symbols in scope:

- `self`: The custom class instance.

- `super`: The custom class superclass.
- `private`: An R environment specific to the class instance. Any objects assigned here are invisible to the Keras framework.
- `__class__` and `as.symbol(classname)`: the custom class type object.

### See Also

- [https://keras.io/api/callbacks/base\\_callback#callback-class](https://keras.io/api/callbacks/base_callback#callback-class)

Other callbacks:

```
callback_backup_and_restore()
callback_csv_logger()
callback_early_stopping()
callback_lambda()
callback_learning_rate_scheduler()
callback_model_checkpoint()
callback_reduce_lr_on_plateau()
callback_remote_monitor()
callback_swap_ema_weights()
callback_tensorboard()
callback_terminate_on_nan()
```

callback\_backup\_and\_restore

*Callback to back up and restore the training state.*

### Description

`callback_backup_and_restore()` callback is intended to recover training from an interruption that has happened in the middle of a `fit` execution, by backing up the training states in a temporary checkpoint file, at the end of each epoch. Each backup overwrites the previously written checkpoint file, so at any given time there is at most one such checkpoint file for backup/restoring purpose.

If training restarts before completion, the training state (which includes the model weights and epoch number) is restored to the most recently saved state at the beginning of a new `fit` run. At the completion of a `fit` run, the temporary checkpoint file is deleted.

Note that the user is responsible to bring jobs back after the interruption. This callback is important for the backup and restore mechanism for fault tolerance purpose, and the model to be restored from a previous checkpoint is expected to be the same as the one used to back up. If user changes arguments passed to `compile` or `fit`, the checkpoint saved for fault tolerance can become invalid.

### Usage

```
callback_backup_and_restore(
    backup_dir,
    save_freq = "epoch",
    delete_checkpoint = TRUE
)
```

**Arguments**

backup_dir	String, path of directory where to store the data needed to restore the model. The directory cannot be reused elsewhere to store other files, e.g. by the backup_and_restore callback of another training run, or by another callback (e.g. callback_model_checkpoint) of the same training run.
save_freq	"epoch", integer, or FALSE. When set to "epoch", the callback saves the checkpoint at the end of each epoch. When set to an integer, the callback saves the checkpoint every save_freq batches. Set save_freq = FALSE only if using pre-emption checkpointing (i.e. with save_before_preemption = TRUE).
delete_checkpoint	Boolean, defaults to TRUE. This backup_and_restore callback works by saving a checkpoint to back up the training state. If delete_checkpoint = TRUE, the checkpoint will be deleted after training is finished. Use FALSE if you'd like to keep the checkpoint for future usage.

**Value**

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

**Examples**

```
callback_interrupting <- new_callback_class(
  "InterruptingCallback",
  on_epoch_begin = function(epoch, logs = NULL) {
    if (epoch == 4) {
      stop('Interrupting!')
    }
  }
)

backup_dir <- tempfile()
callback <- callback_backup_and_restore(backup_dir = backup_dir)
model <- keras_model_sequential() %>%
  layer_dense(10)
model %>% compile(optimizer = optimizer_sgd(), loss = 'mse')

# ensure model is built (i.e., weights are initialized) for
# callback_backup_and_restore()
model(op_ones(c(5, 20))) |> invisible()

tryCatch({
  model %>% fit(x = op_ones(c(5, 20)),
              y = op_zeros(5),
              epochs = 10, batch_size = 1,
              callbacks = list(callback, callback_interrupting()),
              verbose = 0)
}, python.builtin.RuntimeError = function(e) message("Interrupted!"))
```

```
## Interrupted!

model$history$epoch

## [1] 0 1 2

# model$history %>% keras3::to_keras_training_history() %>% as.data.frame() %>% print()

history <- model %>% fit(x = op_ones(c(5, 20)),
                        y = op_zeros(5),
                        epochs = 10, batch_size = 1,
                        callbacks = list(callback),
                        verbose = 0)

# Only 6 more epochs are run, since first training got interrupted at
# zero-indexed epoch 4, second training will continue from 4 to 9.
nrow(as.data.frame(history))

## [1] 10
```

### See Also

- [https://keras.io/api/callbacks/backup\\_and\\_restore#backupandrestore-class](https://keras.io/api/callbacks/backup_and_restore#backupandrestore-class)

Other callbacks:

```
Callback()
callback_csv_logger()
callback_early_stopping()
callback_lambda()
callback_learning_rate_scheduler()
callback_model_checkpoint()
callback_reduce_lr_on_plateau()
callback_remote_monitor()
callback_swap_ema_weights()
callback_tensorboard()
callback_terminate_on_nan()
```

---

callback\_csv\_logger     *Callback that streams epoch results to a CSV file.*

---

### Description

Supports all values that can be represented as a string, including 1D iterables such as atomic vectors.

**Usage**

```
callback_csv_logger(filename, separator = ",", append = FALSE)
```

**Arguments**

filename	Filename of the CSV file, e.g. 'run/log.csv'.
separator	String used to separate elements in the CSV file.
append	Boolean. TRUE: append if file exists (useful for continuing training). FALSE: overwrite existing file.

**Value**

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

**Examples**

```
csv_logger <- callback_csv_logger('training.log')
model %>% fit(X_train, Y_train, callbacks = list(csv_logger))
```

**See Also**

- [https://keras.io/api/callbacks/csv\\_logger#csvlogger-class](https://keras.io/api/callbacks/csv_logger#csvlogger-class)

Other callbacks:

```
Callback()
callback_backup_and_restore()
callback_early_stopping()
callback_lambda()
callback_learning_rate_scheduler()
callback_model_checkpoint()
callback_reduce_lr_on_plateau()
callback_remote_monitor()
callback_swap_ema_weights()
callback_tensorboard()
callback_terminate_on_nan()
```

---

callback\_early\_stopping

*Stop training when a monitored metric has stopped improving.*

---

**Description**

Assuming the goal of a training is to minimize the loss. With this, the metric to be monitored would be 'loss', and mode would be 'min'. A `model$fit()` training loop will check at end of every epoch whether the loss is no longer decreasing, considering the `min_delta` and `patience` if applicable. Once it's found no longer decreasing, `model$stop_training` is marked TRUE and the training terminates.

The quantity to be monitored needs to be available in logs list. To make it so, pass the loss or metrics at `model$compile()`.

**Usage**

```
callback_early_stopping(
  monitor = "val_loss",
  min_delta = 0L,
  patience = 0L,
  verbose = 0L,
  mode = "auto",
  baseline = NULL,
  restore_best_weights = FALSE,
  start_from_epoch = 0L
)
```

**Arguments**

<code>monitor</code>	Quantity to be monitored. Defaults to "val_loss".
<code>min_delta</code>	Minimum change in the monitored quantity to qualify as an improvement, i.e. an absolute change of less than <code>min_delta</code> , will count as no improvement. Defaults to 0.
<code>patience</code>	Number of epochs with no improvement after which training will be stopped. Defaults to 0.
<code>verbose</code>	Verbosity mode, 0 or 1. Mode 0 is silent, and mode 1 displays messages when the callback takes an action. Defaults to 0.
<code>mode</code>	One of {"auto", "min", "max"}. In min mode, training will stop when the quantity monitored has stopped decreasing; in "max" mode it will stop when the quantity monitored has stopped increasing; in "auto" mode, the direction is automatically inferred from the name of the monitored quantity. Defaults to "auto".
<code>baseline</code>	Baseline value for the monitored quantity. If not NULL, training will stop if the model doesn't show improvement over the baseline. Defaults to NULL.
<code>restore_best_weights</code>	Whether to restore model weights from the epoch with the best value of the monitored quantity. If FALSE, the model weights obtained at the last step of training are used. An epoch will be restored regardless of the performance relative to the baseline. If no epoch improves on baseline, training will run for <code>patience</code> epochs and restore weights from the best epoch in that set. Defaults to FALSE.

start\_from\_epoch

Number of epochs to wait before starting to monitor improvement. This allows for a warm-up period in which no improvement is expected and thus training will not be stopped. Defaults to 0.

### Value

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

### Examples

```
callback <- callback_early_stopping(monitor = 'loss',
                                   patience = 3)
# This callback will stop the training when there is no improvement in
# the loss for three consecutive epochs.
model <- keras_model_sequential() %>%
  layer_dense(10)
model %>% compile(optimizer = optimizer_sgd(), loss = 'mse')
history <- model %>% fit(x = op_ones(c(5, 20)),
                       y = op_zeros(5),
                       epochs = 10, batch_size = 1,
                       callbacks = list(callback),
                       verbose = 0)
nrow(as.data.frame(history)) # Only 4 epochs are run.

## [1] 10
```

### See Also

- [https://keras.io/api/callbacks/early\\_stopping#earlystopping-class](https://keras.io/api/callbacks/early_stopping#earlystopping-class)

Other callbacks:

```
Callback()
callback_backup_and_restore()
callback_csv_logger()
callback_lambda()
callback_learning_rate_scheduler()
callback_model_checkpoint()
callback_reduce_lr_on_plateau()
callback_remote_monitor()
callback_swap_ema_weights()
callback_tensorboard()
callback_terminate_on_nan()
```



---

callback_lambda	<i>Callback for creating simple, custom callbacks on-the-fly.</i>
-----------------	---

---

### Description

This callback is constructed with anonymous functions that will be called at the appropriate time (during `Model.{fit | evaluate | predict}`). Note that the callback expects positional arguments, as:

- `on_epoch_begin` and `on_epoch_end` expect two positional arguments: `epoch`, `logs`
- `on_train_begin` and `on_train_end` expect one positional argument: `logs`
- `on_train_batch_begin` and `on_train_batch_end` expect two positional arguments: `batch`, `logs`
- See `Callback` class definition for the full list of functions and their expected arguments.

### Usage

```
callback_lambda(
    on_epoch_begin = NULL,
    on_epoch_end = NULL,
    on_train_begin = NULL,
    on_train_end = NULL,
    on_train_batch_begin = NULL,
    on_train_batch_end = NULL,
    ...
)
```

### Arguments

<code>on_epoch_begin</code>	called at the beginning of every epoch.
<code>on_epoch_end</code>	called at the end of every epoch.
<code>on_train_begin</code>	called at the beginning of model training.
<code>on_train_end</code>	called at the end of model training.
<code>on_train_batch_begin</code>	called at the beginning of every train batch.
<code>on_train_batch_end</code>	called at the end of every train batch.
...	Any function in <code>Callback()</code> that you want to override by passing <code>function_name = function</code> . For example, <code>callback_lambda(.., on_train_end = train_end_fn)</code> . The custom function needs to have same arguments as the ones defined in <code>Callback()</code> .

### Value

A `Callback` instance that can be passed to `fit.keras.src.models.model.Model()`.

**Examples**

```
# Print the batch number at the beginning of every batch.
batch_print_callback <- callback_lambda(
  on_train_batch_begin = function(batch, logs) {
    print(batch)
  }
)

# Stream the epoch loss to a file in new-line delimited JSON format
# (one valid JSON object per line)
json_log <- file('loss_log.json', open = 'wt')
json_logging_callback <- callback_lambda(
  on_epoch_end = function(epoch, logs) {
    jsonlite::write_json(
      list(epoch = epoch, loss = logs$loss),
      json_log,
      append = TRUE
    )
  },
  on_train_end = function(logs) {
    close(json_log)
  }
)

# Terminate some processes after having finished model training.
processes <- ...
cleanup_callback <- callback_lambda(
  on_train_end = function(logs) {
    for (p in processes) {
      if (is_alive(p)) {
        terminate(p)
      }
    }
  }
)

model %>% fit(
  ...,
  callbacks = list(
    batch_print_callback,
    json_logging_callback,
    cleanup_callback
  )
)
```

**See Also**

- [https://keras.io/api/callbacks/lambda\\_callback#lambdacallback-class](https://keras.io/api/callbacks/lambda_callback#lambdacallback-class)

Other callbacks:  
Callback()  
callback\_backup\_and\_restore()  
callback\_csv\_logger()  
callback\_early\_stopping()  
callback\_learning\_rate\_scheduler()  
callback\_model\_checkpoint()  
callback\_reduce\_lr\_on\_plateau()  
callback\_remote\_monitor()  
callback\_swap\_ema\_weights()  
callback\_tensorboard()  
callback\_terminate\_on\_nan()

---

callback\_learning\_rate\_scheduler  
*Learning rate scheduler.*

---

### Description

At the beginning of every epoch, this callback gets the updated learning rate value from schedule function provided, with the current epoch and current learning rate, and applies the updated learning rate on the optimizer.

### Usage

```
callback_learning_rate_scheduler(schedule, verbose = 0L)
```

### Arguments

schedule	A function that takes an epoch index (integer, indexed from 0) and current learning rate (float) as inputs and returns a new learning rate as output (float).
verbose	Integer. 0: quiet, 1: log update messages.

### Value

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

### Examples

```
# This function keeps the initial learning rate steady for the first ten epochs  
# and decreases it exponentially after that.  
scheduler <- function(epoch, lr) {  
  if (epoch < 10)  
    return(lr)  
  else  
    return(lr * exp(-0.1))  
}
```

```
}

model <- keras_model_sequential() |> layer_dense(units = 10)
model |> compile(optimizer = optimizer_sgd(), loss = 'mse')
model$optimizer$learning_rate |> as.array() |> round(5)

## [1] 0.01

callback <- callback_learning_rate_scheduler(schedule = scheduler)
history <- model |> fit(x = array(runif(100), c(5, 20)),
                      y = array(0, c(5, 1)),
                      epochs = 15, callbacks = list(callback), verbose = 0)
model$optimizer$learning_rate |> as.array() |> round(5)

## [1] 0.00607
```

### See Also

- [https://keras.io/api/callbacks/learning\\_rate\\_scheduler#learningratescheduler-class](https://keras.io/api/callbacks/learning_rate_scheduler#learningratescheduler-class)

Other callbacks:

```
Callback()
callback_backup_and_restore()
callback_csv_logger()
callback_early_stopping()
callback_lambda()
callback_model_checkpoint()
callback_reduce_lr_on_plateau()
callback_remote_monitor()
callback_swap_ema_weights()
callback_tensorboard()
callback_terminate_on_nan()
```

---

callback\_model\_checkpoint

*Callback to save the Keras model or model weights at some frequency.*

---

### Description

callback\_model\_checkpoint() is used in conjunction with training using model |> fit() to save a model or weights (in a checkpoint file) at some interval, so the model or weights can be loaded later to continue the training from the state saved.

A few options this callback provides include:

- Whether to only keep the model that has achieved the "best performance" so far, or whether to save the model at the end of every epoch regardless of performance.
- Definition of "best"; which quantity to monitor and whether it should be maximized or minimized.
- The frequency it should save at. Currently, the callback supports saving at the end of every epoch, or after a fixed number of training batches.
- Whether only weights are saved, or the whole model is saved.

### Usage

```
callback_model_checkpoint(
  filepath,
  monitor = "val_loss",
  verbose = 0L,
  save_best_only = FALSE,
  save_weights_only = FALSE,
  mode = "auto",
  save_freq = "epoch",
  initial_value_threshold = NULL
)
```

### Arguments

filepath	string, path to save the model file. filepath can contain named formatting options, which will be filled the value of epoch and keys in logs (passed in on_epoch_end). The filepath name needs to end with ".weights.h5" when save_weights_only = TRUE or should end with ".keras" when checkpoint saving the whole model (default). For example: if filepath is "{epoch:02d}-{val_loss:.2f}.keras" then the model checkpoints will be saved with the epoch number and the validation loss in the filename. The directory of the filepath should not be reused by any other callbacks to avoid conflicts.
monitor	The metric name to monitor. Typically the metrics are set by the model  > compile() method. Note: <ul style="list-style-type: none"> <li>• Prefix the name with "val_" to monitor validation metrics.</li> <li>• Use "loss" or "val_loss" to monitor the model's total loss.</li> <li>• If you specify metrics as strings, like "accuracy", pass the same string (with or without the "val_" prefix).</li> <li>• If you pass Metric objects (created by one of metric_*()), monitor should be set to metric\$name.</li> <li>• If you're not sure about the metric names you can check the contents of the history\$metrics list returned by history &lt;- model  &gt; fit()</li> <li>• Multi-output models set additional prefixes on the metric names.</li> </ul>
verbose	Verbosity mode, 0 or 1. Mode 0 is silent, and mode 1 displays messages when the callback takes an action.
save_best_only	if save_best_only = TRUE, it only saves when the model is considered the "best" and the latest best model according to the quantity monitored will not

	be overwritten. If filepath doesn't contain formatting options like {epoch} then filepath will be overwritten by each new better model.
save_weights_only	if TRUE, then only the model's weights will be saved ( <code>model  &gt; save_model_weights(filepath)</code> ), else the full model is saved ( <code>model  &gt; save_model(filepath)</code> ).
mode	one of {"auto", "min", "max"}. If <code>save_best_only = TRUE</code> , the decision to overwrite the current save file is made based on either the maximization or the minimization of the monitored quantity. For <code>val_acc</code> , this should be "max", for <code>val_loss</code> this should be "min", etc. In "auto" mode, the mode is set to "max" if the quantities monitored are "acc" or start with "fmeasure" and are set to "min" for the rest of the quantities.
save_freq	"epoch" or integer. When using "epoch", the callback saves the model after each epoch. When using integer, the callback saves the model at end of this many batches. If the Model is compiled with <code>steps_per_execution = N</code> , then the saving criteria will be checked every Nth batch. Note that if the saving isn't aligned to epochs, the monitored metric may potentially be less reliable (it could reflect as little as 1 batch, since the metrics get reset every epoch). Defaults to "epoch".
initial_value_threshold	Floating point initial "best" value of the metric to be monitored. Only applies if <code>save_best_value = TRUE</code> . Only overwrites the model weights already saved if the performance of current model is better than this value.

### Value

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

### Examples

```
model <- keras_model_sequential(input_shape = c(10)) |>
  layer_dense(1, activation = "sigmoid") |>
  compile(loss = "binary_crossentropy", optimizer = "adam",
          metrics = c('accuracy'))

EPOCHS <- 10
checkpoint_filepath <- tempfile('checkpoint-model-', fileext = ".keras")
model_checkpoint_callback <- callback_model_checkpoint(
  filepath = checkpoint_filepath,
  monitor = 'val_accuracy',
  mode = 'max',
  save_best_only = TRUE
)

# Model is saved at the end of every epoch, if it's the best seen so far.
model |> fit(x = random_uniform(c(2, 10)), y = op_ones(2, 1),
           epochs = EPOCHS, validation_split = .5, verbose = 0,
           callbacks = list(model_checkpoint_callback))
```

```

# The model (that are considered the best) can be loaded as -
load_model(checkpoint_filepath)

## Model: "sequential"
## +-----+-----+-----+
## | Layer (type)          | Output Shape      | Param # |
## +-----+-----+-----+
## | dense (Dense)        | (None, 1)         | 11      |
## +-----+-----+-----+
## Total params: 35 (144.00 B)
## Trainable params: 11 (44.00 B)
## Non-trainable params: 0 (0.00 B)
## Optimizer params: 24 (100.00 B)

# Alternatively, one could checkpoint just the model weights as -
checkpoint_filepath <- tempfile('checkpoint-', fileext = ".weights.h5")
model_checkpoint_callback <- callback_model_checkpoint(
  filepath = checkpoint_filepath,
  save_weights_only = TRUE,
  monitor = 'val_accuracy',
  mode = 'max',
  save_best_only = TRUE
)

# Model weights are saved at the end of every epoch, if it's the best seen
# so far.
# same as above
model |> fit(x = random_uniform(c(2, 10)), y = op_ones(2, 1),
           epochs = EPOCHS, validation_split = .5, verbose = 0,
           callbacks = list(model_checkpoint_callback))

# The model weights (that are considered the best) can be loaded
model |> load_model_weights(checkpoint_filepath)

```

### See Also

- [https://keras.io/api/callbacks/model\\_checkpoint#modelcheckpoint-class](https://keras.io/api/callbacks/model_checkpoint#modelcheckpoint-class)

Other callbacks:

```

Callback()
callback_backup_and_restore()
callback_csv_logger()
callback_early_stopping()
callback_lambda()
callback_learning_rate_scheduler()
callback_reduce_lr_on_plateau()
callback_remote_monitor()
callback_swap_ema_weights()

```

[callback\\_tensorboard\(\)](#)  
[callback\\_terminate\\_on\\_nan\(\)](#)

---

callback\_reduce\_lr\_on\_plateau

*Reduce learning rate when a metric has stopped improving.*

---

### Description

Models often benefit from reducing the learning rate by a factor of 2-10 once learning stagnates. This callback monitors a quantity and if no improvement is seen for a 'patience' number of epochs, the learning rate is reduced.

### Usage

```

callback_reduce_lr_on_plateau(
    monitor = "val_loss",
    factor = 0.1,
    patience = 10L,
    verbose = 0L,
    mode = "auto",
    min_delta = 1e-04,
    cooldown = 0L,
    min_lr = 0,
    ...
)

```

### Arguments

monitor	String. Quantity to be monitored.
factor	Float. Factor by which the learning rate will be reduced. $\text{new\_lr} = \text{lr} * \text{factor}$ .
patience	Integer. Number of epochs with no improvement after which learning rate will be reduced.
verbose	Integer. 0: quiet, 1: update messages.
mode	String. One of {'auto', 'min', 'max'}. In 'min' mode, the learning rate will be reduced when the quantity monitored has stopped decreasing; in 'max' mode it will be reduced when the quantity monitored has stopped increasing; in 'auto' mode, the direction is automatically inferred from the name of the monitored quantity.
min_delta	Float. Threshold for measuring the new optimum, to only focus on significant changes.
cooldown	Integer. Number of epochs to wait before resuming normal operation after the learning rate has been reduced.
min_lr	Float. Lower bound on the learning rate.
...	For forward/backward compatibility.



**Value**

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

**Examples**

```
reduce_lr <- callback_reduce_lr_on_plateau(monitor = 'val_loss', factor = 0.2,
                                           patience = 5, min_lr = 0.001)
model %>% fit(x_train, y_train, callbacks = list(reduce_lr))
```

**See Also**

- [https://keras.io/api/callbacks/reduce\\_lr\\_on\\_plateau#reduce\\_lr\\_on\\_plateau-class](https://keras.io/api/callbacks/reduce_lr_on_plateau#reduce_lr_on_plateau-class)

Other callbacks:

```
Callback()
callback_backup_and_restore()
callback_csv_logger()
callback_early_stopping()
callback_lambda()
callback_learning_rate_scheduler()
callback_model_checkpoint()
callback_remote_monitor()
callback_swap_ema_weights()
callback_tensorboard()
callback_terminate_on_nan()
```

---

callback\_remote\_monitor

*Callback used to stream events to a server.*

---

**Description**

Requires the requests library. Events are sent to `root + '/publish/epoch/end/'` by default. Calls are HTTP POST, with a data argument which is a JSON-encoded named list of event data. If `send_as_json = TRUE`, the content type of the request will be "application/json". Otherwise the serialized JSON will be sent within a form.

**Usage**

```
callback_remote_monitor(  
  root = "http://localhost:9000",  
  path = "/publish/epoch/end/",  
  field = "data",  
  headers = NULL,  
  send_as_json = FALSE  
)
```

**Arguments**

root	String; root url of the target server.
path	String; path relative to root to which the events will be sent.
field	String; JSON field under which the data will be stored. The field is used only if the payload is sent within a form (i.e. when send_as_json = FALSE).
headers	Named list; optional custom HTTP headers.
send_as_json	Boolean; whether the request should be sent as "application/json".

**Value**

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

**See Also**

- [https://keras.io/api/callbacks/remote\\_monitor#remotemonitor-class](https://keras.io/api/callbacks/remote_monitor#remotemonitor-class)

Other callbacks:

[Callback\(\)](#)  
[callback\\_backup\\_and\\_restore\(\)](#)  
[callback\\_csv\\_logger\(\)](#)  
[callback\\_early\\_stopping\(\)](#)  
[callback\\_lambda\(\)](#)  
[callback\\_learning\\_rate\\_scheduler\(\)](#)  
[callback\\_model\\_checkpoint\(\)](#)  
[callback\\_reduce\\_lr\\_on\\_plateau\(\)](#)  
[callback\\_swap\\_ema\\_weights\(\)](#)  
[callback\\_tensorboard\(\)](#)  
[callback\\_terminate\\_on\\_nan\(\)](#)

---

callback\_swap\_ema\_weights

*Swaps model weights and EMA weights before and after evaluation.*

---

**Description**

This callback replaces the model's weight values with the values of the optimizer's EMA weights (the exponential moving average of the past model weights values, implementing "Polyak averaging") before model evaluation, and restores the previous weights after evaluation.

The SwapEMAWeights callback is to be used in conjunction with an optimizer that sets `use_ema = TRUE`.

Note that the weights are swapped in-place in order to save memory. The behavior is undefined if you modify the EMA weights or model weights in other callbacks.

**Usage**

```
callback_swap_ema_weights(swap_on_epoch = FALSE)
```

**Arguments**

`swap_on_epoch` Whether to perform swapping at `on_epoch_begin()` and `on_epoch_end()`. This is useful if you want to use EMA weights for other callbacks such as `callback_model_checkpoint()`. Defaults to `FALSE`.

**Value**

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

**Examples**

```
# Remember to set `use_ema=TRUE` in the optimizer
optimizer <- optimizer_sgd(use_ema = TRUE)
model |> compile(optimizer = optimizer, loss = ..., metrics = ...)

# Metrics will be computed with EMA weights
model |> fit(X_train, Y_train,
           callbacks = c(callback_swap_ema_weights()))

# If you want to save model checkpoint with EMA weights, you can set
# `swap_on_epoch=TRUE` and place ModelCheckpoint after SwapEMAWeights.
model |> fit(
  X_train, Y_train,
  callbacks = c(
    callback_swap_ema_weights(swap_on_epoch = TRUE),
    callback_model_checkpoint(...)
  )
)
```

**See Also**

Other callbacks:

```
Callback()
callback_backup_and_restore()
callback_csv_logger()
callback_early_stopping()
callback_lambda()
callback_learning_rate_scheduler()
callback_model_checkpoint()
callback_reduce_lr_on_plateau()
callback_remote_monitor()
callback_tensorboard()
callback_terminate_on_nan()
```

---

callback\_tensorboard *Enable visualizations for TensorBoard.*

---

## Description

TensorBoard is a visualization tool provided with TensorFlow. A TensorFlow installation is required to use this callback.

This callback logs events for TensorBoard, including:

- Metrics summary plots
- Training graph visualization
- Weight histograms
- Sampled profiling

When used in `model |> evaluate()` or regular validation in addition to epoch summaries, there will be a summary that records evaluation metrics vs `model$optimizer$iterations` written. The metric names will be prepended with `evaluation`, with `model$optimizer$iterations` being the step in the visualized TensorBoard.

If you have installed TensorFlow with `pip` or `reticulate::py_install()`, you should be able to launch TensorBoard from the command line:

```
tensorboard --logdir=path_to_your_logs
```

or from R with `tensorflow::tensorboard()`.

You can find more information about TensorBoard [here](#).

## Usage

```
callback_tensorboard(  
  log_dir = "logs",  
  histogram_freq = 0L,  
  write_graph = TRUE,  
  write_images = FALSE,  
  write_steps_per_second = FALSE,  
  update_freq = "epoch",  
  profile_batch = 0L,  
  embeddings_freq = 0L,  
  embeddings_metadata = NULL  
)
```

## Arguments

`log_dir` the path of the directory where to save the log files to be parsed by TensorBoard. e.g., `log_dir = file.path(working_dir, 'logs')`. This directory should not be reused by any other callbacks.

histogram_freq	frequency (in epochs) at which to compute weight histograms for the layers of the model. If set to 0, histograms won't be computed. Validation data (or split) must be specified for histogram visualizations.
write_graph	(Not supported at this time) Whether to visualize the graph in TensorBoard. Note that the log file can become quite large when write_graph is set to TRUE.
write_images	whether to write model weights to visualize as image in TensorBoard.
write_steps_per_second	whether to log the training steps per second into TensorBoard. This supports both epoch and batch frequency logging.
update_freq	"batch" or "epoch" or integer. When using "epoch", writes the losses and metrics to TensorBoard after every epoch. If using an integer, let's say 1000, all metrics and losses (including custom ones added by Model.compile) will be logged to TensorBoard every 1000 batches. "batch" is a synonym for 1, meaning that they will be written every batch. Note however that writing too frequently to TensorBoard can slow down your training, especially when used with distribution strategies as it will incur additional synchronization overhead. Batch-level summary writing is also available via train_step override. Please see <a href="#">TensorBoard Scalars tutorial</a> # noqa: E501 for more details.
profile_batch	(Not supported at this time) Profile the batch(es) to sample compute characteristics. profile_batch must be a non-negative integer or a tuple of integers. A pair of positive integers signify a range of batches to profile. By default, profiling is disabled.
embeddings_freq	frequency (in epochs) at which embedding layers will be visualized. If set to 0, embeddings won't be visualized.
embeddings_metadata	Named list which maps embedding layer names to the filename of a file in which to save metadata for the embedding layer. In case the same metadata file is to be used for all embedding layers, a single filename can be passed.

**Value**

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

**Examples**

```
tensorboard_callback <- callback_tensorboard(log_dir = "./logs")
model %>% fit(x_train, y_train, epochs = 2, callbacks = list(tensorboard_callback))
# Then run the tensorboard command to view the visualizations.
```

Custom batch-level summaries in a subclassed Model:

```
MyModel <- new_model_class("MyModel",
  initialize = function() {
    self$dense <- layer_dense(units = 10)
  },
  call = function(x) {
    outputs <- x |> self$dense()
```

```

    tf$summary$histogram('outputs', outputs)
  outputs
}
)

model <- MyModel()
model |> compile(optimizer = 'sgd', loss = 'mse')

# Make sure to set `update_freq = N` to log a batch-level summary every N
# batches. In addition to any `tf.summary` contained in `model$call()`,
# metrics added in `model |>compile` will be logged every N batches.
tb_callback <- callback_tensorboard(log_dir = './logs', update_freq = 1)
model |> fit(x_train, y_train, callbacks = list(tb_callback))

```

Custom batch-level summaries in a Functional API Model:

```

my_summary <- function(x) {
  tf.summary$histogram('x', x)
  x
}

inputs <- layer_input(10)
outputs <- inputs |>
  layer_dense(10) |>
  layer_lambda(my_summary)

model <- keras_model(inputs, outputs)
model |> compile(optimizer = 'sgd', loss = 'mse')

# Make sure to set `update_freq = N` to log a batch-level summary every N
# batches. In addition to any `tf.summary` contained in `Model.call`,
# metrics added in `Model.compile` will be logged every N batches.
tb_callback <- callback_tensorboard(log_dir = './logs', update_freq = 1)
model |> fit(x_train, y_train, callbacks = list(tb_callback))

```

Profiling:

```

# Profile a single batch, e.g. the 5th batch.
tensorboard_callback <- callback_tensorboard(
  log_dir = './logs', profile_batch = 5)
model |> fit(x_train, y_train, epochs = 2,
  callbacks = list(tensorboard_callback))

# Profile a range of batches, e.g. from 10 to 20.
tensorboard_callback <- callback_tensorboard(
  log_dir = './logs', profile_batch = c(10, 20))
model |> fit(x_train, y_train, epochs = 2,
  callbacks = list(tensorboard_callback))

```

**See Also**

- <https://keras.io/api/callbacks/tensorboard#tensorboard-class>

Other callbacks:

`Callback()`  
`callback_backup_and_restore()`  
`callback_csv_logger()`  
`callback_early_stopping()`  
`callback_lambda()`  
`callback_learning_rate_scheduler()`  
`callback_model_checkpoint()`  
`callback_reduce_lr_on_plateau()`  
`callback_remote_monitor()`  
`callback_swap_ema_weights()`  
`callback_terminate_on_nan()`

---

callback\_terminate\_on\_nan

*Callback that terminates training when a NaN loss is encountered.*

---

**Description**

Callback that terminates training when a NaN loss is encountered.

**Usage**

```
callback_terminate_on_nan()
```

**Value**

A Callback instance that can be passed to `fit.keras.src.models.model.Model()`.

**See Also**

- [https://keras.io/api/callbacks/terminate\\_on\\_nan#terminateonnan-class](https://keras.io/api/callbacks/terminate_on_nan#terminateonnan-class)

Other callbacks:

`Callback()`  
`callback_backup_and_restore()`  
`callback_csv_logger()`  
`callback_early_stopping()`  
`callback_lambda()`  
`callback_learning_rate_scheduler()`  
`callback_model_checkpoint()`  
`callback_reduce_lr_on_plateau()`  
`callback_remote_monitor()`  
`callback_swap_ema_weights()`

```
callback_tensorboard()
```

---

clear\_session                      *Resets all state generated by Keras.*

---

### Description

Keras manages a global state, which it uses to implement the Functional model-building API and to unify autogenerated layer names.

If you are creating many models in a loop, this global state will consume an increasing amount of memory over time, and you may want to clear it. Calling `clear_session()` releases the global state: this helps avoid clutter from old models and layers, especially when memory is limited.

Example 1: calling `clear_session()` when creating models in a loop

```
for (i in 1:100) {
  # Without `clear_session()`, each iteration of this loop will
  # slightly increase the size of the global state managed by Keras
  model <- keras_model_sequential()
  for (j in 1:10) {
    model <- model |> layer_dense(units = 10)
  }
}

for (i in 1:100) {
  # With `clear_session()` called at the beginning,
  # Keras starts with a blank state at each iteration
  # and memory consumption is constant over time.
  clear_session()
  model <- keras_model_sequential()
  for (j in 1:10) {
    model <- model |> layer_dense(units = 10)
  }
}
```

Example 2: resetting the layer name generation counter

```
layers <- lapply(1:10, \(i) layer_dense(units = 10))

new_layer <- layer_dense(units = 10)
print(new_layer$name)

## [1] "dense_10"
```



```
clear_session()
new_layer <- layer_dense(units = 10)
print(new_layer$name)

## [1] "dense"
```

## Usage

```
clear_session(free_memory = TRUE)
```

## Arguments

`free_memory` Whether to call Python garbage collection. It's usually a good practice to call it to make sure memory used by deleted objects is immediately freed. However, it may take a few seconds to execute, so when using `clear_session()` in a short loop, you may want to skip it.

## Value

NULL, invisibly, called for side effects.

## See Also

- [https://keras.io/api/utils/config\\_utils#clearsession-function](https://keras.io/api/utils/config_utils#clearsession-function)

Other backend:

```
config_backend()
config_epsilon()
config_floatx()
config_image_data_format()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

Other utils:

```
audio_dataset_from_directory()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_smart_resize()
```

```

image_to_array()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()

```

---

clone\_model

*Clone a Functional or Sequential Model instance.*


---

### Description

Model cloning is similar to calling a model on new inputs, except that it creates new layers (and thus new weights) instead of sharing the weights of the existing layers.

Note that `clone_model()` will not preserve the uniqueness of shared objects within the model (e.g. a single variable attached to two distinct layers will be restored as two separate variables).

### Usage

```

clone_model(
    model,
    input_tensors = NULL,
    clone_function = NULL,
    call_function = NULL,
    recursive = FALSE,
    ...
)

```

### Arguments

<code>model</code>	Instance of Model (could be a Functional model or a Sequential model).
<code>input_tensors</code>	Optional list of input tensors to build the model upon. If not provided, new <code>keras_input()</code> objects will be created.
<code>clone_function</code>	Callable with signature <code>function(layer)</code> to be used to clone each layer in the target model (except Input instances). It takes as argument the layer instance to be cloned, and returns the corresponding layer instance to be used in the model copy. If unspecified, this callable defaults to the following serialization/deserialization function: <code>function(layer) layer\$`__class__`\$from_config(layer\$get_conf...</code> By passing a custom callable, you can customize your copy of the model, e.g. by wrapping certain layers of interest (you might want to replace all LSTM instances with equivalent <code>Bidirectional(LSTM(...))</code> instances, for example). Defaults to NULL.

call_function	Callable with signature <code>function(layer, ...)</code> to be used to call each cloned layer and a set of inputs. It takes the layer instance, and the call arguments, and returns the call outputs. If unspecified, this callable defaults to the regular <code>call()</code> method: <code>function(layer, ...) do.call(layer, list(...))</code> . By passing a custom callable, you can insert new layers before or after a given layer.
recursive	Note, This argument can only be used with Functional models. Boolean. Whether to recursively clone any Sequential or Functional models encountered in the original Sequential/Functional model. If <code>FALSE</code> , then inner models are cloned by calling <code>clone_function()</code> . If <code>TRUE</code> , then inner models are cloned by calling <code>clone_model()</code> with the same <code>clone_function</code> , <code>call_function</code> , and <code>recursive</code> arguments. Note that in this case, <code>call_function</code> will not be propagated to any Sequential model (since it is not applicable to Sequential models).
...	For forward/backward compatibility.

### Value

An instance of `Model` reproducing the behavior of the original model, on top of new inputs tensors, using newly instantiated weights. The cloned model may behave differently from the original model if a custom `clone_function` or `call_function` modifies a layer or layer call.

### Examples

```
# Create a test Sequential model.
model <- keras_model_sequential(input_shape = c(728)) |>
  layer_dense(32, activation = 'relu') |>
  layer_dense(1, activation = 'sigmoid')
```

```
# Create a copy of the test model (with freshly initialized weights).
new_model <- clone_model(model)
```

Using a `clone_function` to make a model deterministic by setting the random seed everywhere:

```
clone_function <- function(layer) {
  config <- layer$get_config()
  if ("seed" %in% names(config))
    config$seed <- 1337L
  layer$`__class__`$from_config(config)
}
```

```
new_model <- clone_model(model, clone_function = clone_function)
```

Using a `call_function` to add a Dropout layer after each Dense layer (without recreating new layers):

```
call_function <- function(layer, ...) {
  out <- layer(...)
  if (inherits(layer, keras$layers$Dense))
    out <- out |> layer_dropout(0.5)
```

```

    out
  }

inputs <- keras_input(c(728))
outputs <- inputs |>
  layer_dense(32, activation = 'relu') |>
  layer_dense(1, activation = 'sigmoid')
model <- keras_model(inputs, outputs)

new_model <- clone_model(
  model,
  clone_function = function(x) x, # Reuse the same layers.
  call_function = call_function,
)
new_model

## Model: "functional_4"
## +-----+-----+-----+
## | Layer (type)          | Output Shape      | Param # |
## +=====+=====+=====+
## | keras_tensor_8 (InputLayer) | (None, 728)      | 0 |
## +-----+-----+-----+
## | dense_2 (Dense)         | (None, 32)       | 23,328 |
## +-----+-----+-----+
## | dropout (Dropout)       | (None, 32)       | 0 |
## +-----+-----+-----+
## | dense_3 (Dense)         | (None, 1)        | 33 |
## +-----+-----+-----+
## | dropout_1 (Dropout)     | (None, 1)        | 0 |
## +-----+-----+-----+
## Total params: 23,361 (91.25 KB)
## Trainable params: 23,361 (91.25 KB)
## Non-trainable params: 0 (0.00 B)

```

Note that subclassed models cannot be cloned by default, since their internal layer structure is not known. To achieve equivalent functionality as `clone_model` in the case of a subclassed model, simply make sure that the model class implements `get_config()` (and optionally `from_config()`), and call:

```
new_model <- model$`__class__`$from_config(model$get_config())
```

In the case of a subclassed model, you cannot using a custom `clone_function`.

---

```
compile.keras.src.models.model.Model
```

*Configure a model for training.*

---

## Description

Configure a model for training.

## Usage

```
## S3 method for class 'keras.src.models.model.Model'
compile(
  object,
  optimizer = "rmsprop",
  loss = NULL,
  metrics = NULL,
  ...,
  loss_weights = NULL,
  weighted_metrics = NULL,
  run_eagerly = FALSE,
  steps_per_execution = 1L,
  jit_compile = "auto",
  auto_scale_loss = TRUE
)
```

## Arguments

object	Keras model object
optimizer	String (name of optimizer) or optimizer instance. See optimizer_* family.
loss	Loss function. May be: <ul style="list-style-type: none"> <li>• a string (name of builtin loss function),</li> <li>• a custom function, or</li> <li>• a <a href="#">Loss</a> instance (returned by the loss_* family of functions).</li> </ul>

A loss function is any callable with the signature `loss = fn(y_true, y_pred)`, where `y_true` are the ground truth values, and `y_pred` are the model's predictions. `y_true` should have shape `(batch_size, d1, .. dN)` (except in the case of sparse loss functions such as sparse categorical crossentropy which expects integer arrays of shape `(batch_size, d1, .. dN-1)`). `y_pred` should have shape `(batch_size, d1, .. dN)`. The loss function should return a float tensor.

metrics	List of metrics to be evaluated by the model during training and testing. Each of these can be: <ul style="list-style-type: none"> <li>• a string (name of a built-in function),</li> <li>• a function, optionally with a "name" attribute or</li> </ul>
---------	--

- a `Metric()` instance. See the `metric_*` family of functions.

Typically you will use `metrics = c('accuracy')`. A function is any callable with the signature `result = fn(y_true, y_pred)`. To specify different metrics for different outputs of a multi-output model, you could also pass a named list, such as `metrics = list(a = 'accuracy', b = c('accuracy', 'mse'))`. You can also pass a list to specify a metric or a list of metrics for each output, such as `metrics = list(c('accuracy'), c('accuracy', 'mse'))` or `metrics = list('accuracy', c('accuracy', 'mse'))`. When you pass the strings 'accuracy' or 'acc', we convert this to one of `metric_binary_accuracy()`, `metric_categorical_accuracy()`, `metric_sparse_categorical_accuracy()` based on the shapes of the targets and of the model output. A similar conversion is done for the strings "crossentropy" and "ce" as well. The metrics passed here are evaluated without sample weighting; if you would like sample weighting to apply, you can specify your metrics via the `weighted_metrics` argument instead.

If providing an anonymous R function, you can customize the printed name during training by assigning `attr(<fn>, "name") <- "my_custom_metric_name"`, or by calling `custom_metric("my_custom_metric_name", <fn>)`

...	Additional arguments passed on to the <code>compile()</code> model method.
<code>loss_weights</code>	Optional list (named or unnamed) specifying scalar coefficients (R numerics) to weight the loss contributions of different model outputs. The loss value that will be minimized by the model will then be the <i>weighted sum</i> of all individual losses, weighted by the <code>loss_weights</code> coefficients. If an unnamed list, it is expected to have a 1:1 mapping to the model's outputs. If a named list, it is expected to map output names (strings) to scalar coefficients.
<code>weighted_metrics</code>	List of metrics to be evaluated and weighted by <code>sample_weight</code> or <code>class_weight</code> during training and testing.
<code>run_eagerly</code>	Bool. If TRUE, this model's forward pass will never be compiled. It is recommended to leave this as FALSE when training (for best performance), and to set it to TRUE when debugging.
<code>steps_per_execution</code>	Int. The number of batches to run during each a single compiled function call. Running multiple batches inside a single compiled function call can greatly improve performance on TPUs or small models with a large R/Python overhead. At most, one full epoch will be run each execution. If a number larger than the size of the epoch is passed, the execution will be truncated to the size of the epoch. Note that if <code>steps_per_execution</code> is set to N, <code>Callback\$on_batch_begin</code> and <code>Callback\$on_batch_end</code> methods will only be called every N batches (i.e. before/after each compiled function execution). Not supported with the PyTorch backend.
<code>jit_compile</code>	Bool or "auto". Whether to use XLA compilation when compiling a model. For jax and tensorflow backends, <code>jit_compile="auto"</code> enables XLA compilation if the model supports it, and disabled otherwise. For torch backend, "auto" will default to eager execution and <code>jit_compile=True</code> will run with <code>torch.compile</code> with the "inductor" backend.

auto\_scale\_loss

Bool. If TRUE and the model dtype policy is "mixed\_float16", the passed optimizer will be automatically wrapped in a LossScaleOptimizer, which will dynamically scale the loss to prevent underflow.

### Value

This is called primarily for the side effect of modifying object in-place. The first argument object is also returned, invisibly, to enable usage with the pipe.

### Examples

```
model |> compile(
  optimizer = optimizer_adam(learning_rate = 1e-3),
  loss = loss_binary_crossentropy(),
  metrics = c(metric_binary_accuracy(),
              metric_false_negatives())
)
```

### See Also

- [https://keras.io/api/models/model\\_training\\_apis#compile-method](https://keras.io/api/models/model_training_apis#compile-method)

Other model training:

```
evaluate.keras.src.models.model.Model()
predict.keras.src.models.model.Model()
predict_on_batch()
test_on_batch()
train_on_batch()
```

---

config\_backend

*Publicly accessible method for determining the current backend.*

---

### Description

Publicly accessible method for determining the current backend.

### Usage

```
config_backend()
```

### Value

String, the name of the backend Keras is currently using. One of "tensorflow", "torch", or "jax".

**Examples**

```
config_backend()

## [1] "tensorflow"
```

**See Also**

[use\\_backend\(\)](#)

Other config backend:

```
config_epsilon()
config_floatx()
config_image_data_format()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

Other backend:

```
clear_session()
config_epsilon()
config_floatx()
config_image_data_format()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

Other config:

```
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_epsilon()
config_floatx()
config_image_data_format()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```



---

`config_disable_interactive_logging`*Turn off interactive logging.*

---

**Description**

When interactive logging is disabled, Keras sends logs to `absl.logging`. This is the best option when using Keras in a non-interactive way, such as running a training or inference job on a server.

**Usage**

```
config_disable_interactive_logging()
```

**Value**

No return value, called for side effects.

**See Also**

Other io utils:

```
config\_enable\_interactive\_logging\(\)  
config\_is\_interactive\_logging\_enabled\(\)
```

Other utils:

```
audio\_dataset\_from\_directory\(\)  
clear\_session\(\)  
config\_disable\_traceback\_filtering\(\)  
config\_enable\_interactive\_logging\(\)  
config\_enable\_traceback\_filtering\(\)  
config\_is\_interactive\_logging\_enabled\(\)  
config\_is\_traceback\_filtering\_enabled\(\)  
get\_file\(\)  
get\_source\_inputs\(\)  
image\_array\_save\(\)  
image\_dataset\_from\_directory\(\)  
image\_from\_array\(\)  
image\_load\(\)  
image\_smart\_resize\(\)  
image\_to\_array\(\)  
layer\_feature\_space\(\)  
normalize\(\)  
pad\_sequences\(\)  
set\_random\_seed\(\)  
split\_dataset\(\)  
text\_dataset\_from\_directory\(\)  
timeseries\_dataset\_from\_array\(\)  
to\_categorical\(\)
```

```
zip_lists()
```

Other config:

```
config_backend()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_epsilon()
config_floatx()
config_image_data_format()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

---

config\_disable\_traceback\_filtering

*Turn off traceback filtering.*

---

## Description

Raw Keras tracebacks (also known as stack traces) involve many internal frames, which can be challenging to read through, while not being actionable for end users. By default, Keras filters internal frames in most exceptions that it raises, to keep traceback short, readable, and focused on what's actionable for you (your own code).

See also [config\\_enable\\_traceback\\_filtering\(\)](#) and [config\\_is\\_traceback\\_filtering\\_enabled\(\)](#).

If you have previously disabled traceback filtering via [config\\_disable\\_traceback\\_filtering\(\)](#), you can re-enable it via [config\\_enable\\_traceback\\_filtering\(\)](#).

## Usage

```
config_disable_traceback_filtering()
```

## Value

No return value, called for side effects.

## See Also

Other traceback utils:

```
config_enable_traceback_filtering()
config_is_traceback_filtering_enabled()
```

## Other utils:

```
audio_dataset_from_directory()  
clear_session()  
config_disable_interactive_logging()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_is_interactive_logging_enabled()  
config_is_traceback_filtering_enabled()  
get_file()  
get_source_inputs()  
image_array_save()  
image_dataset_from_directory()  
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
layer_feature_space()  
normalize()  
pad_sequences()  
set_random_seed()  
split_dataset()  
text_dataset_from_directory()  
timeseries_dataset_from_array()  
to_categorical()  
zip_lists()
```

## Other config:

```
config_backend()  
config_disable_interactive_logging()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_enable_unsafe_deserialization()  
config_epsilon()  
config_floatx()  
config_image_data_format()  
config_is_interactive_logging_enabled()  
config_is_traceback_filtering_enabled()  
config_set_backend()  
config_set_epsilon()  
config_set_floatx()  
config_set_image_data_format()
```

---

config\_dtype\_policy    *Returns the current default dtype policy object.*

---

**Description**

Returns the current default dtype policy object.

**Usage**

```
config_dtype_policy()
```

**Value**

A DTypePolicy object.

---

config\_enable\_interactive\_logging  
*Turn on interactive logging.*

---

**Description**

When interactive logging is enabled, Keras displays logs via stdout. This provides the best experience when using Keras in an interactive environment such as a shell or a notebook.

**Usage**

```
config_enable_interactive_logging()
```

**Value**

No return value, called for side effects.

**See Also**

Other io utils:

```
config\_disable\_interactive\_logging\(\)  
config\_is\_interactive\_logging\_enabled\(\)
```

Other utils:

```
audio\_dataset\_from\_directory\(\)  
clear\_session\(\)  
config\_disable\_interactive\_logging\(\)  
config\_disable\_traceback\_filtering\(\)  
config\_enable\_traceback\_filtering\(\)  
config\_is\_interactive\_logging\_enabled\(\)  
config\_is\_traceback\_filtering\_enabled\(\)  
get\_file\(\)  
get\_source\_inputs\(\)  
image\_array\_save\(\)  
image\_dataset\_from\_directory\(\)  
image\_from\_array\(\)
```

```
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()
```

Other config:

```
config_backend()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_epsilon()
config_floatx()
config_image_data_format()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

---

config\_enable\_traceback\_filtering

*Turn on traceback filtering.*

---

## Description

Raw Keras tracebacks (also known as stack traces) involve many internal frames, which can be challenging to read through, while not being actionable for end users. By default, Keras filters internal frames in most exceptions that it raises, to keep traceback short, readable, and focused on what's actionable for you (your own code).

See also [config\\_disable\\_traceback\\_filtering\(\)](#) and [config\\_is\\_traceback\\_filtering\\_enabled\(\)](#).

If you have previously disabled traceback filtering via [config\\_disable\\_traceback\\_filtering\(\)](#), you can re-enable it via [config\\_enable\\_traceback\\_filtering\(\)](#).

## Usage

```
config_enable_traceback_filtering()
```

**Value**

No return value, called for side effects.

**See Also**

Other traceback utils:

[config\\_disable\\_traceback\\_filtering\(\)](#)  
[config\\_is\\_traceback\\_filtering\\_enabled\(\)](#)

Other utils:

[audio\\_dataset\\_from\\_directory\(\)](#)  
[clear\\_session\(\)](#)  
[config\\_disable\\_interactive\\_logging\(\)](#)  
[config\\_disable\\_traceback\\_filtering\(\)](#)  
[config\\_enable\\_interactive\\_logging\(\)](#)  
[config\\_is\\_interactive\\_logging\\_enabled\(\)](#)  
[config\\_is\\_traceback\\_filtering\\_enabled\(\)](#)  
[get\\_file\(\)](#)  
[get\\_source\\_inputs\(\)](#)  
[image\\_array\\_save\(\)](#)  
[image\\_dataset\\_from\\_directory\(\)](#)  
[image\\_from\\_array\(\)](#)  
[image\\_load\(\)](#)  
[image\\_smart\\_resize\(\)](#)  
[image\\_to\\_array\(\)](#)  
[layer\\_feature\\_space\(\)](#)  
[normalize\(\)](#)  
[pad\\_sequences\(\)](#)  
[set\\_random\\_seed\(\)](#)  
[split\\_dataset\(\)](#)  
[text\\_dataset\\_from\\_directory\(\)](#)  
[timeseries\\_dataset\\_from\\_array\(\)](#)  
[to\\_categorical\(\)](#)  
[zip\\_lists\(\)](#)

Other config:

[config\\_backend\(\)](#)  
[config\\_disable\\_interactive\\_logging\(\)](#)  
[config\\_disable\\_traceback\\_filtering\(\)](#)  
[config\\_enable\\_interactive\\_logging\(\)](#)  
[config\\_enable\\_unsafe\\_deserialization\(\)](#)  
[config\\_epsilon\(\)](#)  
[config\\_floatx\(\)](#)  
[config\\_image\\_data\\_format\(\)](#)  
[config\\_is\\_interactive\\_logging\\_enabled\(\)](#)  
[config\\_is\\_traceback\\_filtering\\_enabled\(\)](#)  
[config\\_set\\_backend\(\)](#)  
[config\\_set\\_epsilon\(\)](#)

```
config_set_floatx()  
config_set_image_data_format()
```

---

`config_enable_unsafe_deserialization`

*Disables safe mode globally, allowing deserialization of lambdas.*

---

### **Description**

Disables safe mode globally, allowing deserialization of lambdas.

### **Usage**

```
config_enable_unsafe_deserialization()
```

### **Value**

No return value, called for side effects.

### **See Also**

Other config:

```
config_backend()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_epsilon()  
config_floatx()  
config_image_data_format()  
config_is_interactive_logging_enabled()  
config_is_traceback_filtering_enabled()  
config_set_backend()  
config_set_epsilon()  
config_set_floatx()  
config_set_image_data_format()
```

---

config_epsilon	<i>Return the value of the fuzz factor used in numeric expressions.</i>
----------------	---

---

**Description**

Return the value of the fuzz factor used in numeric expressions.

**Usage**

```
config_epsilon()
```

**Value**

A float.

**Examples**

```
config_epsilon()
```

```
## [1] 1e-07
```

**See Also**

- [https://keras.io/api/utils/config\\_utils#epsilon-function](https://keras.io/api/utils/config_utils#epsilon-function)

Other config backend:

```
config_backend()  
config_floatx()  
config_image_data_format()  
config_set_epsilon()  
config_set_floatx()  
config_set_image_data_format()
```

Other backend:

```
clear_session()  
config_backend()  
config_floatx()  
config_image_data_format()  
config_set_epsilon()  
config_set_floatx()  
config_set_image_data_format()
```

Other config:

```
config_backend()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()
```



```
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_floatx()
config_image_data_format()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

---

config_floatx	<i>Return the default float type, as a string.</i>
---------------	--

---

### Description

E.g. 'bfloat16' 'float16', 'float32', 'float64'.

### Usage

```
config_floatx()
```

### Value

String, the current default float type.

### Examples

```
keras3::config_floatx()
```

```
## [1] "float32"
```

### See Also

- [https://keras.io/api/utils/config\\_utils#floatx-function](https://keras.io/api/utils/config_utils#floatx-function)

Other config backend:

```
config_backend()
config_epsilon()
config_image_data_format()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

Other backend:

```
clear_session()
config_backend()
config_epsilon()
config_image_data_format()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

Other config:

```
config_backend()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_epsilon()
config_image_data_format()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

---

config\_image\_data\_format

*Return the default image data format convention.*

---

### **Description**

Return the default image data format convention.

### **Usage**

```
config_image_data_format()
```

### **Value**

A string, either 'channels\_first' or 'channels\_last'.

### **Examples**

```
config_image_data_format()

## [1] "channels_last"
```

**See Also**

- [https://keras.io/api/utils/config\\_utils#imagedataformat-function](https://keras.io/api/utils/config_utils#imagedataformat-function)

Other config backend:

```
config_backend()
config_epsilon()
config_floatx()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

Other backend:

```
clear_session()
config_backend()
config_epsilon()
config_floatx()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

Other config:

```
config_backend()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_epsilon()
config_floatx()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

---

config\_is\_interactive\_logging\_enabled

*Check if interactive logging is enabled.*

---

**Description**

To switch between writing logs to stdout and `absl.logging`, you may use `config_enable_interactive_logging()` and `config_disable_interactive_logging()`.

**Usage**

```
config_is_interactive_logging_enabled()
```

**Value**

Boolean, TRUE if interactive logging is enabled, and FALSE otherwise.

**See Also**

Other io utils:

```
config_disable_interactive_logging()  
config_enable_interactive_logging()
```

Other utils:

```
audio_dataset_from_directory()  
clear_session()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_is_traceback_filtering_enabled()  
get_file()  
get_source_inputs()  
image_array_save()  
image_dataset_from_directory()  
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
layer_feature_space()  
normalize()  
pad_sequences()  
set_random_seed()  
split_dataset()  
text_dataset_from_directory()  
timeseries_dataset_from_array()  
to_categorical()  
zip_lists()
```

Other config:

```
config_backend()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_enable_unsafe_deserialization()  
config_epsilon()  
config_floatx()
```

```
config_image_data_format()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_floatx()
config_set_image_data_format()
```

---

config\_is\_traceback\_filtering\_enabled  
*Check if traceback filtering is enabled.*

---

### Description

Raw Keras tracebacks (also known as stack traces) involve many internal frames, which can be challenging to read through, while not being actionable for end users. By default, Keras filters internal frames in most exceptions that it raises, to keep traceback short, readable, and focused on what's actionable for you (your own code).

See also [config\\_enable\\_traceback\\_filtering\(\)](#) and [config\\_disable\\_traceback\\_filtering\(\)](#).

If you have previously disabled traceback filtering via [config\\_disable\\_traceback\\_filtering\(\)](#), you can re-enable it via [config\\_enable\\_traceback\\_filtering\(\)](#).

### Usage

```
config_is_traceback_filtering_enabled()
```

### Value

Boolean, TRUE if traceback filtering is enabled, and FALSE otherwise.

### See Also

Other traceback utils:

```
config_disable_traceback_filtering()
config_enable_traceback_filtering()
```

Other utils:

```
audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
get_file()
get_source_inputs()
```

```
image_array_save()  
image_dataset_from_directory()  
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
layer_feature_space()  
normalize()  
pad_sequences()  
set_random_seed()  
split_dataset()  
text_dataset_from_directory()  
timeseries_dataset_from_array()  
to_categorical()  
zip_lists()
```

Other config:

```
config_backend()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_enable_unsafe_deserialization()  
config_epsilon()  
config_floatx()  
config_image_data_format()  
config_is_interactive_logging_enabled()  
config_set_backend()  
config_set_epsilon()  
config_set_floatx()  
config_set_image_data_format()
```

---

config\_set\_backend      *Reload the backend (and the Keras package).*

---

### Description

Reload the backend (and the Keras package).

### Usage

```
config_set_backend(backend)
```

### Arguments

backend      String

**Value**

Nothing, this function is called for its side effect.

**Examples**

```
config_set_backend("jax")
```

**WARNING**

Using this function is dangerous and should be done carefully. Changing the backend will **NOT** convert the type of any already-instantiated objects. Thus, any layers / tensors / etc. already created will no longer be usable without errors. It is strongly recommended **not** to keep around **any** Keras-originated objects instances created before calling `config_set_backend()`.

This includes any function or class instance that uses any Keras functionality. All such code needs to be re-executed after calling `config_set_backend()`.

**See Also**

Other config:

```
config_backend()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_enable_unsafe_deserialization()  
config_epsilon()  
config_floatx()  
config_image_data_format()  
config_is_interactive_logging_enabled()  
config_is_traceback_filtering_enabled()  
config_set_epsilon()  
config_set_floatx()  
config_set_image_data_format()
```

---

config\_set\_dtype\_policy

*Sets the default dtype policy globally.*

---

**Description**

Sets the default dtype policy globally.

**Usage**

```
config_set_dtype_policy(policy)
```

**Arguments**

policy            A string or DTypePolicy object.

**Value**

No return value, called for side effects.

**Examples**

```
config_set_dtype_policy("mixed_float16")
```

---

config\_set\_epsilon     *Set the value of the fuzz factor used in numeric expressions.*

---

**Description**

Set the value of the fuzz factor used in numeric expressions.

**Usage**

```
config_set_epsilon(value)
```

**Arguments**

value            float. New value of epsilon.

**Value**

No return value, called for side effects.

**Examples**

```
config_epsilon()
```

```
## [1] 1e-07
```

```
config_set_epsilon(1e-5)
config_epsilon()
```

```
## [1] 1e-05
```

```
# Set it back to the default value.
config_set_epsilon(1e-7)
```



**See Also**

- [https://keras.io/api/utils/config\\_utils#setepsilon-function](https://keras.io/api/utils/config_utils#setepsilon-function)

Other config backend:

```
config_backend()
config_epsilon()
config_floatx()
config_image_data_format()
config_set_floatx()
config_set_image_data_format()
```

Other backend:

```
clear_session()
config_backend()
config_epsilon()
config_floatx()
config_image_data_format()
config_set_floatx()
config_set_image_data_format()
```

Other config:

```
config_backend()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_epsilon()
config_floatx()
config_image_data_format()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_floatx()
config_set_image_data_format()
```

---

config\_set\_floatx      *Set the default float dtype.*

---

**Description**

Set the default float dtype.

**Usage**

```
config_set_floatx(value)
```

**Arguments**

value                   String; 'bfloat16', 'float16', 'float32', or 'float64'.

**Value**

No return value, called for side effects.

**Note**

It is not recommended to set this to "float16" for training, as this will likely cause numeric stability issues. Instead, mixed precision, which leverages a mix of float16 and float32. It can be configured by calling `keras3::keras$mixed_precision$set_dtype_policy('mixed_float16')`.

**Examples**

```
config_floatx()

## [1] "float32"

config_set_floatx('float64')
config_floatx()

## [1] "float64"

# Set it back to float32
config_set_floatx('float32')
```

**Raises**

ValueError: In case of invalid value.

**See Also**

- [https://keras.io/api/utils/config\\_utils#setfloatx-function](https://keras.io/api/utils/config_utils#setfloatx-function)

Other config backend:

```
config_backend()
config_epsilon()
config_floatx()
config_image_data_format()
config_set_epsilon()
config_set_image_data_format()
```

Other backend:

```
clear_session()
config_backend()
config_epsilon()
```

```
config_floatx()
config_image_data_format()
config_set_epsilon()
config_set_image_data_format()
```

Other config:

```
config_backend()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_epsilon()
config_floatx()
config_image_data_format()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_image_data_format()
```

---

config\_set\_image\_data\_format

*Set the value of the image data format convention.*

---

### Description

Set the value of the image data format convention.

### Usage

```
config_set_image_data_format(data_format)
```

### Arguments

data\_format     string. 'channels\_first' or 'channels\_last'.

### Value

No return value, called for side effects.

### Examples

```
config_image_data_format()

## [1] "channels_last"
```

```
# 'channels_last'

keras3::config_set_image_data_format('channels_first')
config_image_data_format()

## [1] "channels_first"

# Set it back to `channels_last`
keras3::config_set_image_data_format('channels_last')
```

### See Also

- [https://keras.io/api/utils/config\\_utils#setimagedataformat-function](https://keras.io/api/utils/config_utils#setimagedataformat-function)

Other config backend:

```
config_backend()
config_epsilon()
config_floatx()
config_image_data_format()
config_set_epsilon()
config_set_floatx()
```

Other backend:

```
clear_session()
config_backend()
config_epsilon()
config_floatx()
config_image_data_format()
config_set_epsilon()
config_set_floatx()
```

Other config:

```
config_backend()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_enable_unsafe_deserialization()
config_epsilon()
config_floatx()
config_image_data_format()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
config_set_backend()
config_set_epsilon()
config_set_floatx()
```

---

 Constraint

*Define a custom Constraint class*


---

### Description

Base class for weight constraints.

A `Constraint()` instance works like a stateless function. Users who subclass the `Constraint` class should override the `call()` method, which takes a single weight parameter and return a projected version of that parameter (e.g. normalized or clipped). Constraints can be used with various Keras layers via the `kernel_constraint` or `bias_constraint` arguments.

Here's a simple example of a non-negative weight constraint:

```
constraint_nonnegative <- Constraint("NonNegative",
  call = function(w) {
    w * op_cast(w >= 0, dtype = w$dtype)
  }
)
weight <- op_convert_to_tensor(c(-1, 1))
constraint_nonnegative()(weight)

## tf.Tensor([-0.  1.], shape=(2), dtype=float32)
```

Usage in a layer:

```
layer_dense(units = 4, kernel_constraint = constraint_nonnegative())

## <Dense name=dense, built=False>
## signature: (*args, **kwargs)
```

### Usage

```
Constraint(
  classname,
  call = NULL,
  get_config = NULL,
  ...,
  public = list(),
  private = list(),
  inherit = NULL,
  parent_env = parent.frame()
)
```

**Arguments**

<code>classname</code>	String, the name of the custom class. (Conventionally, CamelCase).
<code>call</code>	$\backslash(w)$ Applies the constraint to the input weight variable. By default, the inputs weight variable is not modified. Users should override this method to implement their own projection function. Args: <ul style="list-style-type: none"> <li>• <code>w</code>: Input weight variable.</li> </ul> Returns: Projected variable (by default, returns unmodified inputs).
<code>get_config</code>	$\backslash()$ Function that returns a named list of the object config. A constraint config is a named list (JSON-serializable) that can be used to reinstantiate the same object (via <code>do.call(&lt;constraint_class&gt;, &lt;config&gt;)</code> ).
<code>..., public</code>	Additional methods or public members of the custom class.
<code>private</code>	Named list of R objects (typically, functions) to include in instance private environments. <code>private</code> methods will have all the same symbols in scope as public methods (See section "Symbols in Scope"). Each instance will have it's own private environment. Any objects in <code>private</code> will be invisible from the Keras framework and the Python runtime.
<code>inherit</code>	What the custom class will subclass. By default, the base keras class.
<code>parent_env</code>	The R environment that all class methods will have as a grandparent.

**Value**

A function that returns `Constraint` instances, similar to the builtin constraint functions like `constraint_maxnorm()`.

**Symbols in scope**

All R function custom methods (public and private) will have the following symbols in scope:

- `self`: The custom class instance.
- `super`: The custom class superclass.
- `private`: An R environment specific to the class instance. Any objects assigned here are invisible to the Keras framework.
- `__class__` and `as.symbol(classname)`: the custom class type object.

**See Also**

Other constraints:

[constraint\\_maxnorm\(\)](#)  
[constraint\\_minmaxnorm\(\)](#)  
[constraint\\_nonneg\(\)](#)  
[constraint\\_unitnorm\(\)](#)

---

constraint\_maxnorm     *MaxNorm weight constraint.*

---

### Description

Constrains the weights incident to each hidden unit to have a norm less than or equal to a desired value.

### Usage

```
constraint_maxnorm(max_value = 2L, axis = 1L)
```

### Arguments

max_value	the maximum norm value for the incoming weights.
axis	integer, axis along which to calculate weight norms. For instance, in a Dense layer the weight matrix has shape (input_dim, output_dim), set axis to 0 to constrain each weight vector of length (input_dim,). In a Conv2D layer with data_format = "channels_last", the weight tensor has shape (rows, cols, input_depth, output_depth), set axis to [0, 1, 2] to constrain the weights of each filter tensor of size (rows, cols, input_depth).

### Value

A Constraint instance, a callable that can be passed to layer constructors or used directly by calling it with tensors.

### See Also

- <https://keras.io/api/layers/constraints#maxnorm-class>

Other constraints:

```
Constraint()
constraint_minmaxnorm()
constraint_nonneg()
constraint_unitnorm()
```

---

constraint\_minmaxnorm     *MinMaxNorm weight constraint.*

---

### Description

Constrains the weights incident to each hidden unit to have the norm between a lower bound and an upper bound.

**Usage**

```
constraint_minmaxnorm(min_value = 0, max_value = 1, rate = 1, axis = 1L)
```

**Arguments**

min_value	the minimum norm for the incoming weights.
max_value	the maximum norm for the incoming weights.
rate	rate for enforcing the constraint: weights will be rescaled to yield $\text{op\_clip?} (1 - \text{rate}) * \text{norm} + \text{rate} * \text{op\_clip}(\text{norm}, \text{min\_value}, \text{max\_value})$ . Effectively, this means that $\text{rate} = 1.0$ stands for strict enforcement of the constraint, while $\text{rate} < 1.0$ means that weights will be rescaled at each step to slowly move towards a value inside the desired interval.
axis	integer, axis along which to calculate weight norms. For instance, in a Dense layer the weight matrix has shape (input_dim, output_dim), set axis to 0 to constrain each weight vector of length (input_dim,). In a Conv2D layer with data_format = "channels_last", the weight tensor has shape (rows, cols, input_depth, output_depth), set axis to [0, 1, 2] to constrain the weights of each filter tensor of size (rows, cols, input_depth).

**Value**

A Constraint instance, a callable that can be passed to layer constructors or used directly by calling it with tensors.

**See Also**

- <https://keras.io/api/layers/constraints#minmaxnorm-class>

Other constraints:

```
Constraint()
constraint_maxnorm()
constraint_nonneg()
constraint_unitnorm()
```

---

constraint_nonneg	<i>Constrains the weights to be non-negative.</i>
-------------------	---

---

**Description**

Constrains the weights to be non-negative.

**Usage**

```
constraint_nonneg()
```



**Value**

A Constraint instance, a callable that can be passed to layer constructors or used directly by calling it with tensors.

**See Also**

- <https://keras.io/api/layers/constraints#nonneg-class>

Other constraints:

[Constraint\(\)](#)  
[constraint\\_maxnorm\(\)](#)  
[constraint\\_minmaxnorm\(\)](#)  
[constraint\\_unitnorm\(\)](#)

---

constraint\_unitnorm     *Constrains the weights incident to each hidden unit to have unit norm.*

---

**Description**

Constrains the weights incident to each hidden unit to have unit norm.

**Usage**

```
constraint_unitnorm(axis = 1L)
```

**Arguments**

**axis** integer, axis along which to calculate weight norms. For instance, in a Dense layer the weight matrix has shape (input\_dim, output\_dim), set axis to 0 to constrain each weight vector of length (input\_dim,). In a Conv2D layer with data\_format = "channels\_last", the weight tensor has shape (rows, cols, input\_depth, output\_depth), set axis to [0, 1, 2] to constrain the weights of each filter tensor of size (rows, cols, input\_depth).

**Value**

A Constraint instance, a callable that can be passed to layer constructors or used directly by calling it with tensors.

**See Also**

- <https://keras.io/api/layers/constraints#unitnorm-class>

Other constraints:

[Constraint\(\)](#)  
[constraint\\_maxnorm\(\)](#)  
[constraint\\_minmaxnorm\(\)](#)  
[constraint\\_nonneg\(\)](#)

---

count_params	<i>Count the total number of scalars composing the weights.</i>
--------------	---

---

**Description**

Count the total number of scalars composing the weights.

**Usage**

```
count_params(object)
```

**Arguments**

object	Layer or model object
--------	-----------------------

**Value**

An integer count

**See Also**

Other layer methods:

[get\\_config\(\)](#)

[get\\_weights\(\)](#)

[quantize\\_weights\(\)](#)

[reset\\_state\(\)](#)

---

custom_metric	<i>Custom metric function</i>
---------------	-------------------------------

---

**Description**

Custom metric function

**Usage**

```
custom_metric(name, metric_fn)
```

**Arguments**

name	name used to show training progress output
------	--

metric_fn	An R function with signature <code>function(y_true, y_pred)</code> that accepts tensors.
-----------	--

## Details

You can provide an arbitrary R function as a custom metric. Note that the `y_true` and `y_pred` parameters are tensors, so computations on them should use `op_*` tensor functions.

Use the `custom_metric()` function to define a custom metric. Note that a name (`'mean_pred'`) is provided for the custom metric function: this name is used within training progress output.

If you want to save and load a model with custom metrics, you should also call `register_keras_serializable()`, or specify the metric in the call the `load_model()`. For example: `load_model("my_model.keras", c('mean_pred' = metric_mean_pred))`.

Alternatively, you can wrap all of your code in a call to `with_custom_object_scope()` which will allow you to refer to the metric by name just like you do with built in keras metrics.

Alternative ways of supplying custom metrics:

- `custom_metric()`: Arbitrary R function.
- `metric_mean_wrapper()`: Wrap an arbitrary R function in a `Metric` instance.
- Create a custom `Metric()` subclass.

## Value

A callable function with a `__name__` attribute.

## See Also

Other metrics:

```
Metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
```

```
metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

---

dataset\_boston\_housing

*Boston housing price regression dataset*

---

## Description

Dataset taken from the StatLib library which is maintained at Carnegie Mellon University.

## Usage

```
dataset_boston_housing(  
    path = "boston_housing.npz",  
    test_split = 0.2,  
    seed = 113L  
)
```

## Arguments

path	Path where to cache the dataset locally (relative to ~/.keras/datasets).
test_split	fraction of the data to reserve as test set.
seed	Random seed for shuffling the data before computing the test split.

**Value**

Lists of training and test data: train\$x, train\$y, test\$x, test\$y.

Samples contain 13 attributes of houses at different locations around the Boston suburbs in the late 1970s. Targets are the median values of the houses at a location (in k\$).

**See Also**

Other datasets:

[dataset\\_cifar10\(\)](#)

[dataset\\_cifar100\(\)](#)

[dataset\\_fashion\\_mnist\(\)](#)

[dataset\\_imdb\(\)](#)

[dataset\\_mnist\(\)](#)

[dataset\\_reuters\(\)](#)

---

dataset\_cifar10

*CIFAR10 small image classification*

---

**Description**

Dataset of 50,000 32x32 color training images, labeled over 10 categories, and 10,000 test images.

**Usage**

```
dataset_cifar10()
```

**Value**

Lists of training and test data: train\$x, train\$y, test\$x, test\$y.

The x data is an array of RGB image data with shape (num\_samples, 3, 32, 32).

The y data is an array of category labels (integers in range 0-9) with shape (num\_samples).

**See Also**

Other datasets:

[dataset\\_boston\\_housing\(\)](#)

[dataset\\_cifar100\(\)](#)

[dataset\\_fashion\\_mnist\(\)](#)

[dataset\\_imdb\(\)](#)

[dataset\\_mnist\(\)](#)

[dataset\\_reuters\(\)](#)

---

dataset\_cifar100      *CIFAR100 small image classification*

---

**Description**

Dataset of 50,000 32x32 color training images, labeled over 100 categories, and 10,000 test images.

**Usage**

```
dataset_cifar100(label_mode = c("fine", "coarse"))
```

**Arguments**

label\_mode      one of "fine", "coarse".

**Value**

Lists of training and test data: train\$x, train\$y, test\$x, test\$y.

The x data is an array of RGB image data with shape (num\_samples, 3, 32, 32).

The y data is an array of category labels with shape (num\_samples).

**See Also**

Other datasets:

[dataset\\_boston\\_housing\(\)](#)

[dataset\\_cifar10\(\)](#)

[dataset\\_fashion\\_mnist\(\)](#)

[dataset\\_imdb\(\)](#)

[dataset\\_mnist\(\)](#)

[dataset\\_reuters\(\)](#)

---

dataset\_fashion\_mnist      *Fashion-MNIST database of fashion articles*

---

**Description**

Dataset of 60,000 28x28 grayscale images of the 10 fashion article classes, along with a test set of 10,000 images. This dataset can be used as a drop-in replacement for MNIST. The class labels are encoded as integers from 0-9 which correspond to T-shirt/top, Trouser, Pullover, Dress, Coat, Sandal, Shirt,

**Usage**

```
dataset_fashion_mnist()
```

### Details

Dataset of 60,000 28x28 grayscale images of 10 fashion categories, along with a test set of 10,000 images. This dataset can be used as a drop-in replacement for MNIST. The class labels are:

- 0 - T-shirt/top
- 1 - Trouser
- 2 - Pullover
- 3 - Dress
- 4 - Coat
- 5 - Sandal
- 6 - Shirt
- 7 - Sneaker
- 8 - Bag
- 9 - Ankle boot

### Value

Lists of training and test data: `train$x`, `train$y`, `test$x`, `test$y`, where `x` is an array of grayscale image data with shape `(num_samples, 28, 28)` and `y` is an array of article labels (integers in range 0-9) with shape `(num_samples)`.

### See Also

Other datasets:

[dataset\\_boston\\_housing\(\)](#)  
[dataset\\_cifar10\(\)](#)  
[dataset\\_cifar100\(\)](#)  
[dataset\\_imdb\(\)](#)  
[dataset\\_mnist\(\)](#)  
[dataset\\_reuters\(\)](#)

---

dataset\_imdb

*IMDB Movie reviews sentiment classification*

---

### Description

Dataset of 25,000 movies reviews from IMDB, labeled by sentiment (positive/negative). Reviews have been preprocessed, and each review is encoded as a sequence of word indexes (integers). For convenience, words are indexed by overall frequency in the dataset, so that for instance the integer "3" encodes the 3rd most frequent word in the data. This allows for quick filtering operations such as: "only consider the top 10,000 most common words, but eliminate the top 20 most common words".

**Usage**

```
dataset_imdb(
  path = "imdb.npz",
  num_words = NULL,
  skip_top = 0L,
  maxlen = NULL,
  seed = 113L,
  start_char = 1L,
  oov_char = 2L,
  index_from = 3L
)

dataset_imdb_word_index(path = "imdb_word_index.json")
```

**Arguments**

path	Where to cache the data (relative to ~/.keras/dataset).
num_words	Max number of words to include. Words are ranked by how often they occur (in the training set) and only the most frequent words are kept
skip_top	Skip the top N most frequently occurring words (which may not be informative).
maxlen	sequences longer than this will be filtered out.
seed	random seed for sample shuffling.
start_char	The start of a sequence will be marked with this character. Set to 1 because 0 is usually the padding character.
oov_char	Words that were cut out because of the num_words or skip_top limit will be replaced with this character.
index_from	Index actual words with this index and higher.

**Details**

As a convention, "0" does not stand for a specific word, but instead is used to encode any unknown word.

**Value**

Lists of training and test data: train\$x, train\$y, test\$x, test\$y.

The x data includes integer sequences. If the num\_words argument was specific, the maximum possible index value is num\_words-1. If the maxlen argument was specified, the largest possible sequence length is maxlen.

The y data includes a set of integer labels (0 or 1).

The dataset\_imdb\_word\_index() function returns a list where the names are words and the values are integer.



**See Also**

Other datasets:

[dataset\\_boston\\_housing\(\)](#)  
[dataset\\_cifar10\(\)](#)  
[dataset\\_cifar100\(\)](#)  
[dataset\\_fashion\\_mnist\(\)](#)  
[dataset\\_mnist\(\)](#)  
[dataset\\_reuters\(\)](#)

---

dataset\_mnist

*MNIST database of handwritten digits*

---

**Description**

Dataset of 60,000 28x28 grayscale images of the 10 digits, along with a test set of 10,000 images.

**Usage**

```
dataset_mnist(path = "mnist.npz")
```

**Arguments**

path                    Path where to cache the dataset locally (relative to ~/.keras/datasets).

**Value**

Lists of training and test data: train\$x, train\$y, test\$x, test\$y, where x is an array of grayscale image data with shape (num\_samples, 28, 28) and y is an array of digit labels (integers in range 0-9) with shape (num\_samples).

**See Also**

Other datasets:

[dataset\\_boston\\_housing\(\)](#)  
[dataset\\_cifar10\(\)](#)  
[dataset\\_cifar100\(\)](#)  
[dataset\\_fashion\\_mnist\(\)](#)  
[dataset\\_imdb\(\)](#)  
[dataset\\_reuters\(\)](#)

---

dataset_reuters	<i>Reuters newswire topics classification</i>
-----------------	---

---

### Description

Dataset of 11,228 newswires from Reuters, labeled over 46 topics. As with `dataset_imdb()`, each wire is encoded as a sequence of word indexes (same conventions).

### Usage

```
dataset_reuters(
  path = "reuters.npz",
  num_words = NULL,
  skip_top = 0L,
  maxlen = NULL,
  test_split = 0.2,
  seed = 113L,
  start_char = 1L,
  oov_char = 2L,
  index_from = 3L
)
```

```
dataset_reuters_word_index(path = "reuters_word_index.pkl")
```

### Arguments

<code>path</code>	Where to cache the data (relative to <code>~/ .keras/dataset</code> ).
<code>num_words</code>	Max number of words to include. Words are ranked by how often they occur (in the training set) and only the most frequent words are kept
<code>skip_top</code>	Skip the top N most frequently occurring words (which may not be informative).
<code>maxlen</code>	Truncate sequences after this length.
<code>test_split</code>	Fraction of the dataset to be used as test data.
<code>seed</code>	Random seed for sample shuffling.
<code>start_char</code>	The start of a sequence will be marked with this character. Set to 1 because 0 is usually the padding character.
<code>oov_char</code>	words that were cut out because of the <code>num_words</code> or <code>skip_top</code> limit will be replaced with this character.
<code>index_from</code>	index actual words with this index and higher.

### Value

Lists of training and test data: `train$x`, `train$y`, `test$x`, `test$y` with same format as `dataset_imdb()`. The `dataset_reuters_word_index()` function returns a list where the names are words and the values are integer. e.g. `word_index[["giraffe"]]` might return 1234.

**See Also**

Other datasets:

[dataset\\_boston\\_housing\(\)](#)  
[dataset\\_cifar10\(\)](#)  
[dataset\\_cifar100\(\)](#)  
[dataset\\_fashion\\_mnist\(\)](#)  
[dataset\\_imdb\(\)](#)  
[dataset\\_mnist\(\)](#)

---

deserialize\_keras\_object

*Retrieve the object by deserializing the config dict.*

---

**Description**

The config dict is a Python dictionary that consists of a set of key-value pairs, and represents a Keras object, such as an Optimizer, Layer, Metrics, etc. The saving and loading library uses the following keys to record information of a Keras object:

- `class_name`: String. This is the name of the class, as exactly defined in the source code, such as "LossesContainer".
- `config`: Named List. Library-defined or user-defined key-value pairs that store the configuration of the object, as obtained by `object$get_config()`.
- `module`: String. The path of the python module. Built-in Keras classes expect to have prefix `keras`.
- `registered_name`: String. The key the class is registered under via `register_keras_serializable(package, name)` API. The key has the format of '`{package}>{name}`', where `package` and `name` are the arguments passed to `register_keras_serializable()`. If `name` is not provided, it uses the class name. If `registered_name` successfully resolves to a class (that was registered), the `class_name` and `config` values in the config dict will not be used. `registered_name` is only used for non-built-in classes.

For example, the following config list represents the built-in Adam optimizer with the relevant config:

```
config <- list(  
  class_name = "Adam",  
  config = list(  
    amsgrad = FALSE,  
    beta_1 = 0.8999999761581421,  
    beta_2 = 0.9990000128746033,  
    epsilon = 1e-07,  
    learning_rate = 0.0010000000474974513,  
    name = "Adam"  
  ),  
)
```

```

    module = "keras.optimizers",
    registered_name = NULL
  )
# Returns an `Adam` instance identical to the original one.
deserialize_keras_object(config)

## <keras.src.optimizers.adam.Adam object>

```

If the class does not have an exported Keras namespace, the library tracks it by its module and class\_name. For example:

```

config <- list(
  class_name = "MetricsList",
  config = list(
    ...
  ),
  module = "keras.trainers.compile_utils",
  registered_name = "MetricsList"
)

# Returns a `MetricsList` instance identical to the original one.
deserialize_keras_object(config)

```

And the following config represents a user-customized MeanSquaredError loss:

```

# define a custom object
loss_modified_mse <- Loss(
  "ModifiedMeanSquaredError",
  inherit = loss_mean_squared_error)

# register the custom object
register_keras_serializable(loss_modified_mse)

# confirm object is registered
get_custom_objects()

## `$`keras3>ModifiedMeanSquaredError`
## <class 'r-namespace:keras3>.ModifiedMeanSquaredError'>
## signature: (
##   reduction='sum_over_batch_size',
##   name='mean_squared_error',
##   dtype=None
## )

get_registered_name(loss_modified_mse)

```

```
## [1] "keras3>ModifiedMeanSquaredError"

# now custom object instances can be serialized
full_config <- serialize_keras_object(loss_modified_mse())

# the `config` arguments will be passed to loss_modified_mse()
str(full_config)

## List of 4
## $ module      : chr "<r-namespace:keras3>"
## $ class_name  : chr "ModifiedMeanSquaredError"
## $ config      :List of 2
## ..$ name      : chr "mean_squared_error"
## ..$ reduction: chr "sum_over_batch_size"
## $ registered_name: chr "keras3>ModifiedMeanSquaredError"

# and custom object instances can be deserialized
deserialize_keras_object(full_config)

## <<r-namespace:keras3>.ModifiedMeanSquaredError object>
## signature: (y_true, y_pred, sample_weight=None)

# Returns the `ModifiedMeanSquaredError` object
```

**Usage**

```
deserialize_keras_object(config, custom_objects = NULL, safe_mode = TRUE, ...)
```

**Arguments**

config	Named list describing the object.
custom_objects	Named list containing a mapping between custom object names the corresponding classes or functions.
safe_mode	Boolean, whether to disallow unsafe lambda deserialization. When safe_mode=FALSE, loading an object has the potential to trigger arbitrary code execution. This argument is only applicable to the Keras v3 model format. Defaults to TRUE.
...	For forward/backward compatibility.

**Value**

The object described by the config dictionary.

**See Also**

- [https://keras.io/api/models/model\\_saving\\_apis/serialization\\_utils#deserializekerasobject-function](https://keras.io/api/models/model_saving_apis/serialization_utils#deserializekerasobject-function)

Other serialization utilities:

```
get_custom_objects()
get_registered_name()
get_registered_object()
register_keras_serializable()
serialize_keras_object()
with_custom_object_scope()
```

---

```
evaluate.keras.src.models.model.Model
```

*Evaluate a Keras Model*

---

**Description**

This functions returns the loss value and metrics values for the model in test mode. Computation is done in batches (see the `batch_size` arg.)

**Usage**

```
## S3 method for class 'keras.src.models.model.Model'
evaluate(
  object,
  x = NULL,
  y = NULL,
  ...,
  batch_size = NULL,
  verbose = getOption("keras.verbose", default = "auto"),
  sample_weight = NULL,
  steps = NULL,
  callbacks = NULL
)
```

**Arguments**

<code>object</code>	Keras model object
<code>x</code>	Input data. It could be: <ul style="list-style-type: none"> <li>• An R array (or array-like), or a list of arrays (in case the model has multiple inputs).</li> <li>• A tensor, or a list of tensors (in case the model has multiple inputs).</li> <li>• A named list mapping input names to the corresponding array/tensors, if the model has named inputs.</li> <li>• A <code>tf.data.Dataset</code>. Should return a tuple of either <code>(inputs, targets)</code> or <code>(inputs, targets, sample_weights)</code>.</li> </ul>

	<ul style="list-style-type: none"> <li>• A generator returning (inputs, targets) or (inputs, targets, sample_weights).</li> </ul>
y	Target data. Like the input data x, it could be either R array(s) or backend-native tensor(s). If x is a <code>tf.data.Dataset</code> or generator function, y should not be specified (since targets will be obtained from the iterator/dataset).
...	For forward/backward compatability.
batch_size	Integer or NULL. Number of samples per batch of computation. If unspecified, batch_size will default to 32. Do not specify the batch_size if your data is in the form of a a tf dataset or generator (since they generate batches).
verbose	"auto", 0, 1, or 2. Verbosity mode. 0 = silent, 1 = progress bar, 2 = single line. "auto" becomes 1 for most cases, 2 if in a knitr render or running on a distributed training server. Note that the progress bar is not particularly useful when logged to a file, so verbose=2 is recommended when not running interactively (e.g. in a production environment). Defaults to "auto".
sample_weight	Optional array of weights for the test samples, used for weighting the loss function. You can either pass a flat (1D) R array with the same length as the input samples (1:1 mapping between weights and samples), or in the case of temporal data, you can pass a 2D array with shape (samples, sequence_length), to apply a different weight to every timestep of every sample. This argument is not supported when x is a tfdataset, instead pass sample weights as the third element of x.
steps	Integer or NULL. Total number of steps (batches of samples) before declaring the evaluation round finished. Ignored with the default value of NULL. If x is a <code>tf.data.Dataset</code> and steps is NULL, evaluation will run until the dataset is exhausted.
callbacks	List of Callback instances. List of callbacks to apply during evaluation.

**Value**

Scalar test loss (if the model has a single output and no metrics) or list of scalars (if the model has multiple outputs and/or metrics). The attribute `model$metrics_names` will give you the display labels for the scalar outputs.

**See Also**

- [https://keras.io/api/models/model\\_training\\_apis#evaluate-method](https://keras.io/api/models/model_training_apis#evaluate-method)

Other model training:

```

compile.keras.src.models.model.Model()
predict.keras.src.models.model.Model()
predict_on_batch()
test_on_batch()
train_on_batch()

```

---

```
export_savedmodel.keras.src.models.model.Model
```

*Create a TF SavedModel artifact for inference (e.g. via TF-Serving).*

---

## Description

(e.g. via TF-Serving).

**Note:** This can currently only be used with the TensorFlow or JAX backends.

This method lets you export a model to a lightweight SavedModel artifact that contains the model's forward pass only (its `call()` method) and can be served via e.g. TF-Serving. The forward pass is registered under the name `serve()` (see example below).

The original code of the model (including any custom layers you may have used) is *no longer* necessary to reload the artifact – it is entirely standalone.

## Usage

```
## S3 method for class 'keras.src.models.model.Model'
export_savedmodel(object, export_dir_base, ...)
```

## Arguments

<code>object</code>	A keras model.
<code>export_dir_base</code>	string, file path where to save the artifact.
<code>...</code>	For forward/backward compatability.

## Value

This is called primarily for the side effect of exporting `object`. The first argument, `object` is also returned, invisibly, to enable usage with the pipe.

## Examples

```
# Create the artifact
model |> tensorflow::export_savedmodel("path/to/location")

# Later, in a different process/environment...
library(tensorflow)
reloaded_artifact <- tf$saved_model$load("path/to/location")
predictions <- reloaded_artifact$serve(input_data)

# see tfdeploy::serve_savedmodel() for serving a model over a local web api.
```



**See Also**

Other saving and loading functions:

```
layer_t fsm()  
load_model()  
load_model_weights()  
register_keras_serializable()  
save_model()  
save_model_config()  
save_model_weights()  
with_custom_object_scope()
```

---

```
fit.keras.src.models.model.Model
```

*Train a model for a fixed number of epochs (dataset iterations).*

---

**Description**

Train a model for a fixed number of epochs (dataset iterations).

**Usage**

```
## S3 method for class 'keras.src.models.model.Model'  
fit(  
  object,  
  x = NULL,  
  y = NULL,  
  ...,  
  batch_size = NULL,  
  epochs = 1L,  
  callbacks = NULL,  
  validation_split = 0,  
  validation_data = NULL,  
  shuffle = TRUE,  
  class_weight = NULL,  
  sample_weight = NULL,  
  initial_epoch = 1L,  
  steps_per_epoch = NULL,  
  validation_steps = NULL,  
  validation_batch_size = NULL,  
  validation_freq = 1L,  
  verbose = getOption("keras.verbose", default = "auto"),  
  view_metrics = getOption("keras.view_metrics", default = "auto")  
)
```

**Arguments**

<code>object</code>	Keras model object
<code>x</code>	Input data. It could be: <ul style="list-style-type: none"> <li>• An array (or array-like), or a list of arrays (in case the model has multiple inputs).</li> <li>• A tensor, or a list of tensors (in case the model has multiple inputs).</li> <li>• A named list mapping input names to the corresponding array/tensors, if the model has named inputs.</li> <li>• A <code>tf.data.Dataset</code>. Should return a tuple of either <code>(inputs, targets)</code> or <code>(inputs, targets, sample_weights)</code>.</li> <li>• A generator returning <code>(inputs, targets)</code> or <code>(inputs, targets, sample_weights)</code>.</li> </ul>
<code>y</code>	Target data. Like the input data <code>x</code> , it could be either array(s) or backend-native tensor(s). If <code>x</code> is a TF Dataset or generator, <code>y</code> should not be specified (since targets will be obtained from <code>x</code> ).
<code>...</code>	Additional arguments passed on to the model <code>fit()</code> method.
<code>batch_size</code>	Integer or NULL. Number of samples per gradient update. If unspecified, <code>batch_size</code> will default to 32. Do not specify the <code>batch_size</code> if your data is in the form of TF Datasets or generators, (since they generate batches).
<code>epochs</code>	Integer. Number of epochs to train the model. An epoch is an iteration over the entire <code>x</code> and <code>y</code> data provided (unless the <code>steps_per_epoch</code> flag is set to something other than NULL). Note that in conjunction with <code>initial_epoch</code> , <code>epochs</code> is to be understood as "final epoch". The model is not trained for a number of iterations given by <code>epochs</code> , but merely until the epoch of index <code>epochs</code> is reached.
<code>callbacks</code>	List of <code>Callback()</code> instances. List of callbacks to apply during training. See <code>callback_*</code> .
<code>validation_split</code>	Float between 0 and 1. Fraction of the training data to be used as validation data. The model will set apart this fraction of the training data, will not train on it, and will evaluate the loss and any model metrics on this data at the end of each epoch. The validation data is selected from the last samples in the <code>x</code> and <code>y</code> data provided, before shuffling. This argument is not supported when <code>x</code> is a TF Dataset or generator. If both <code>validation_data</code> and <code>validation_split</code> are provided, <code>validation_data</code> will override <code>validation_split</code> .
<code>validation_data</code>	Data on which to evaluate the loss and any model metrics at the end of each epoch. The model will not be trained on this data. Thus, note the fact that the validation loss of data provided using <code>validation_split</code> or <code>validation_data</code> is not affected by regularization layers like noise and dropout. <code>validation_data</code> will override <code>validation_split</code> . It could be: <ul style="list-style-type: none"> <li>• A tuple <code>(x_val, y_val)</code> of arrays or tensors.</li> <li>• A tuple <code>(x_val, y_val, val_sample_weights)</code> of arrays.</li> <li>• A generator returning <code>(inputs, targets)</code> or <code>(inputs, targets, sample_weights)</code>.</li> </ul>
<code>shuffle</code>	Boolean, whether to shuffle the training data before each epoch. This argument is ignored when <code>x</code> is a generator or a TF Dataset.

<code>class_weight</code>	Optional named list mapping class indices (integers, 0-based) to a weight (float) value, used for weighting the loss function (during training only). This can be useful to tell the model to "pay more attention" to samples from an under-represented class. When <code>class_weight</code> is specified and targets have a rank of 2 or greater, either <code>y</code> must be one-hot encoded, or an explicit final dimension of 1 must be included for sparse class labels.
<code>sample_weight</code>	Optional array of weights for the training samples, used for weighting the loss function (during training only). You can either pass a flat (1D) array/vector with the same length as the input samples (1:1 mapping between weights and samples), or in the case of temporal data, you can pass a 2D array (matrix) with shape (samples, sequence_length), to apply a different weight to every timestep of every sample. This argument is not supported when <code>x</code> is a TF Dataset or generator, instead provide the <code>sample_weights</code> as the third element of <code>x</code> . Note that sample weighting does not apply to metrics specified via the <code>metrics</code> argument in <code>compile()</code> . To apply sample weighting to your metrics, you can specify them via the <code>weighted_metrics</code> in <code>compile()</code> instead.
<code>initial_epoch</code>	Integer. Epoch at which to start training (useful for resuming a previous training run).
<code>steps_per_epoch</code>	Integer or NULL. Total number of steps (batches of samples) before declaring one epoch finished and starting the next epoch. When training with input tensors such as backend-native tensors, the default NULL is equal to the number of samples in your dataset divided by the batch size, or 1 if that cannot be determined. If <code>x</code> is a TF Dataset, and <code>steps_per_epoch</code> is NULL, the epoch will run until the input dataset is exhausted. When passing an infinitely repeating dataset, you must specify the <code>steps_per_epoch</code> argument. If <code>steps_per_epoch = -1</code> the training will run indefinitely with an infinitely repeating dataset.
<code>validation_steps</code>	Only relevant if <code>validation_data</code> is provided. Total number of steps (batches of samples) to draw before stopping when performing validation at the end of every epoch. If <code>validation_steps</code> is NULL, validation will run until the <code>validation_data</code> dataset is exhausted. In the case of an infinitely repeated dataset, it will run into an infinite loop. If <code>validation_steps</code> is specified and only part of the dataset will be consumed, the evaluation will start from the beginning of the dataset at each epoch. This ensures that the same validation samples are used every time.
<code>validation_batch_size</code>	Integer or NULL. Number of samples per validation batch. If unspecified, will default to <code>batch_size</code> . Do not specify the <code>validation_batch_size</code> if your data is in the form of TF Datasets or generator instances (since they generate batches).
<code>validation_freq</code>	Only relevant if validation data is provided. Specifies how many training epochs to run before a new validation run is performed, e.g. <code>validation_freq=2</code> runs validation every 2 epochs.
<code>verbose</code>	"auto", 0, 1, or 2. Verbosity mode. 0 = silent, 1 = progress bar, 2 = one line per epoch. "auto" becomes 1 for most cases, 2 if in a knitr render or running

on a distributed training server. Note that the progress bar is not particularly useful when logged to a file, so `verbose=2` is recommended when not running interactively (e.g., in a production environment). Defaults to "auto".

`view_metrics` View realtime plot of training metrics (by epoch). The default ("auto") will display the plot when running within RStudio, metrics were specified during model `compile()`, `epochs > 1` and `verbose > 0`. Set the global options(`keras.view_metrics =` ) option to establish a different default.

## Details

Unpacking behavior for iterator-like inputs:

A common pattern is to pass an iterator like object such as a `tf.data.Dataset` or a generator to `fit()`, which will in fact yield not only features (`x`) but optionally targets (`y`) and sample weights (`sample_weight`). Keras requires that the output of such iterator-likes be unambiguous. The iterator should return a `tuple()` of length 1, 2, or 3, where the optional second and third elements will be used for `y` and `sample_weight` respectively. Any other type provided will be wrapped in a length-one `tuple()`, effectively treating everything as `x`. When yielding named lists, they should still adhere to the top-level tuple structure, e.g. `tuple(list(x0 = x0, x = x1), y)`. Keras will not attempt to separate features, targets, and weights from the keys of a single dict.

## Value

A `keras_training_history` object, which is a named list: `list(params = <params>, metrics = <metrics>")`, with S3 methods `print()`, `plot()`, and `as.data.frame()`. The metrics field is a record of training loss values and metrics values at successive epochs, as well as validation loss values and validation metrics values (if applicable).

## See Also

- [https://keras.io/api/models/model\\_training\\_apis#fit-method](https://keras.io/api/models/model_training_apis#fit-method)

---

freeze\_weights

*Freeze and unfreeze weights*

---

## Description

Freeze weights in a model or layer so that they are no longer trainable.

## Usage

```
freeze_weights(object, from = NULL, to = NULL, which = NULL)
```

```
unfreeze_weights(object, from = NULL, to = NULL, which = NULL)
```

**Arguments**

object	Keras model or layer object
from	Layer instance, layer name, or layer index within model
to	Layer instance, layer name, or layer index within model
which	layer names, integer positions, layers, logical vector (of length(object\$layers)), or a function returning a logical vector.

**Value**

The input object with frozen weights is returned, invisibly. Note, object is modified in place, and the return value is only provided to make usage with the pipe convenient.

**Examples**

```
# instantiate a VGG16 model
conv_base <- application_vgg16(
  weights = "imagenet",
  include_top = FALSE,
  input_shape = c(150, 150, 3)
)
```

```
# freeze it's weights
freeze_weights(conv_base)
```

```
# Note the "Trainable" column
conv_base
```

```
## Model: "vgg16"
## +-----+-----+-----+-----+
## | Layer (type)          | Output Shape          | Param # | Trai... |
## +-----+-----+-----+-----+
## | input_layer (InputLayer) | (None, 150, 150, 3) | 0 | - |
## +-----+-----+-----+-----+
## | block1_conv1 (Conv2D)   | (None, 150, 150, 64) | 1,792 | N |
## +-----+-----+-----+-----+
## | block1_conv2 (Conv2D)   | (None, 150, 150, 64) | 36,928 | N |
## +-----+-----+-----+-----+
## | block1_pool (MaxPooling2D) | (None, 75, 75, 64) | 0 | - |
## +-----+-----+-----+-----+
## | block2_conv1 (Conv2D)   | (None, 75, 75, 128) | 73,856 | N |
## +-----+-----+-----+-----+
## | block2_conv2 (Conv2D)   | (None, 75, 75, 128) | 147,584 | N |
## +-----+-----+-----+-----+
## | block2_pool (MaxPooling2D) | (None, 37, 37, 128) | 0 | - |
## +-----+-----+-----+-----+
## | block3_conv1 (Conv2D)   | (None, 37, 37, 256) | 295,168 | N |
## +-----+-----+-----+-----+
```

```

## | block3_conv2 (Conv2D)      | (None, 37, 37, 256) | 590,080 | N |
## +-----+-----+-----+-----+
## | block3_conv3 (Conv2D)      | (None, 37, 37, 256) | 590,080 | N |
## +-----+-----+-----+-----+
## | block3_pool1 (MaxPooling2D) | (None, 18, 18, 256) | 0 | - |
## +-----+-----+-----+-----+
## | block4_conv1 (Conv2D)      | (None, 18, 18, 512) | 1,180,160 | N |
## +-----+-----+-----+-----+
## | block4_conv2 (Conv2D)      | (None, 18, 18, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block4_conv3 (Conv2D)      | (None, 18, 18, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block4_pool1 (MaxPooling2D) | (None, 9, 9, 512) | 0 | - |
## +-----+-----+-----+-----+
## | block5_conv1 (Conv2D)      | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_conv2 (Conv2D)      | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_conv3 (Conv2D)      | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_pool1 (MaxPooling2D) | (None, 4, 4, 512) | 0 | - |
## +-----+-----+-----+-----+
## Total params: 14,714,688 (56.13 MB)
## Trainable params: 0 (0.00 B)
## Non-trainable params: 14,714,688 (56.13 MB)

```

```

# create a composite model that includes the base + more layers
model <- keras_model_sequential(input_batch_shape = shape(conv_base$input)) |>
  conv_base() |>
  layer_flatten() |>
  layer_dense(units = 256, activation = "relu") |>
  layer_dense(units = 1, activation = "sigmoid")

```

```

# compile
model |> compile(
  loss = "binary_crossentropy",
  optimizer = optimizer_rmsprop(learning_rate = 2e-5),
  metrics = c("accuracy")
)

```

```
model
```

```

## Model: "sequential"
## +-----+-----+-----+-----+
## | Layer (type)          | Output Shape          | Param # | Trai... |
## +-----+-----+-----+-----+
## | vgg16 (Functional)    | (None, 4, 4, 512)    | 14,714,688 | N |
## +-----+-----+-----+-----+

```

```

## | flatten (Flatten)          | (None, 8192)          |          0 | - |
## +-----+-----+-----+-----+
## | dense (Dense)              | (None, 256)           | 2,097,408 | Y |
## +-----+-----+-----+-----+
## | dense_1 (Dense)           | (None, 1)             |          257 | Y |
## +-----+-----+-----+-----+
## Total params: 16,812,353 (64.13 MB)
## Trainable params: 2,097,665 (8.00 MB)
## Non-trainable params: 14,714,688 (56.13 MB)

```

```
print(model, expand_nested = TRUE)
```

```

## Model: "sequential"
## +-----+-----+-----+-----+
## | Layer (type)                | Output Shape          | Param # | Trai... |
## +-----+-----+-----+-----+
## | vgg16 (Functional)          | (None, 4, 4, 512)    | 14,714,688 | N |
## +-----+-----+-----+-----+
## |   > input_layer            | (None, 150, 150, 3)  |          0 | - |
## | (InputLayer)                |                       |          |   |
## +-----+-----+-----+-----+
## |   > block1_conv1 (Conv2D)   | (None, 150, 150, 64) |          1,792 | N |
## +-----+-----+-----+-----+
## |   > block1_conv2 (Conv2D)   | (None, 150, 150, 64) |          36,928 | N |
## +-----+-----+-----+-----+
## |   > block1_pool            | (None, 75, 75, 64)  |          0 | - |
## | (MaxPooling2D)              |                       |          |   |
## +-----+-----+-----+-----+
## |   > block2_conv1 (Conv2D)   | (None, 75, 75, 128) |          73,856 | N |
## +-----+-----+-----+-----+
## |   > block2_conv2 (Conv2D)   | (None, 75, 75, 128) |          147,584 | N |
## +-----+-----+-----+-----+
## |   > block2_pool            | (None, 37, 37, 128) |          0 | - |
## | (MaxPooling2D)              |                       |          |   |
## +-----+-----+-----+-----+
## |   > block3_conv1 (Conv2D)   | (None, 37, 37, 256) |          295,168 | N |
## +-----+-----+-----+-----+
## |   > block3_conv2 (Conv2D)   | (None, 37, 37, 256) |          590,080 | N |
## +-----+-----+-----+-----+
## |   > block3_conv3 (Conv2D)   | (None, 37, 37, 256) |          590,080 | N |
## +-----+-----+-----+-----+
## |   > block3_pool            | (None, 18, 18, 256) |          0 | - |
## | (MaxPooling2D)              |                       |          |   |
## +-----+-----+-----+-----+
## |   > block4_conv1 (Conv2D)   | (None, 18, 18, 512) |          1,180,160 | N |
## +-----+-----+-----+-----+
## |   > block4_conv2 (Conv2D)   | (None, 18, 18, 512) |          2,359,808 | N |
## +-----+-----+-----+-----+

```

```

## | > block4_conv3 (Conv2D) | (None, 18, 18, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | > block4_pool          | (None, 9, 9, 512) | 0 | - |
## | (MaxPooling2D)        |                    |   |   |
## +-----+-----+-----+-----+
## | > block5_conv1 (Conv2D) | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | > block5_conv2 (Conv2D) | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | > block5_conv3 (Conv2D) | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | > block5_pool          | (None, 4, 4, 512) | 0 | - |
## | (MaxPooling2D)        |                    |   |   |
## +-----+-----+-----+-----+
## | flatten (Flatten)      | (None, 8192)       | 0 | - |
## +-----+-----+-----+-----+
## | dense (Dense)          | (None, 256)        | 2,097,408 | Y |
## +-----+-----+-----+-----+
## | dense_1 (Dense)        | (None, 1)          | 257 | Y |
## +-----+-----+-----+-----+
## Total params: 16,812,353 (64.13 MB)
## Trainable params: 2,097,665 (8.00 MB)
## Non-trainable params: 14,714,688 (56.13 MB)

```

```

# unfreeze weights from "block5_conv1" on
unfreeze_weights(conv_base, from = "block5_conv1")

```

```

# compile again since we froze or unfroze weights
model |> compile(
  loss = "binary_crossentropy",
  optimizer = optimizer_rmsprop(learning_rate = 2e-5),
  metrics = c("accuracy")
)

```

```
conv_base
```

```

## Model: "vgg16"
## +-----+-----+-----+-----+
## | Layer (type)          | Output Shape       | Param # | Trainable |
## +-----+-----+-----+-----+
## | input_layer (InputLayer) | (None, 150, 150, 3) | 0 | - |
## +-----+-----+-----+-----+
## | block1_conv1 (Conv2D)   | (None, 150, 150, 64) | 1,792 | N |
## +-----+-----+-----+-----+
## | block1_conv2 (Conv2D)   | (None, 150, 150, 64) | 36,928 | N |
## +-----+-----+-----+-----+
## | block1_pool (MaxPooling2D) | (None, 75, 75, 64) | 0 | - |

```



```

## +-----+-----+-----+-----+
## | block2_conv1 (Conv2D)      | (None, 75, 75, 128) | 73,856 | N |
## +-----+-----+-----+-----+
## | block2_conv2 (Conv2D)      | (None, 75, 75, 128) | 147,584 | N |
## +-----+-----+-----+-----+
## | block2_pool1 (MaxPooling2D) | (None, 37, 37, 128) | 0 | - |
## +-----+-----+-----+-----+
## | block3_conv1 (Conv2D)      | (None, 37, 37, 256) | 295,168 | N |
## +-----+-----+-----+-----+
## | block3_conv2 (Conv2D)      | (None, 37, 37, 256) | 590,080 | N |
## +-----+-----+-----+-----+
## | block3_conv3 (Conv2D)      | (None, 37, 37, 256) | 590,080 | N |
## +-----+-----+-----+-----+
## | block3_pool1 (MaxPooling2D) | (None, 18, 18, 256) | 0 | - |
## +-----+-----+-----+-----+
## | block4_conv1 (Conv2D)      | (None, 18, 18, 512) | 1,180,160 | N |
## +-----+-----+-----+-----+
## | block4_conv2 (Conv2D)      | (None, 18, 18, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block4_conv3 (Conv2D)      | (None, 18, 18, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block4_pool1 (MaxPooling2D) | (None, 9, 9, 512)   | 0 | - |
## +-----+-----+-----+-----+
## | block5_conv1 (Conv2D)      | (None, 9, 9, 512)   | 2,359,808 | Y |
## +-----+-----+-----+-----+
## | block5_conv2 (Conv2D)      | (None, 9, 9, 512)   | 2,359,808 | Y |
## +-----+-----+-----+-----+
## | block5_conv3 (Conv2D)      | (None, 9, 9, 512)   | 2,359,808 | Y |
## +-----+-----+-----+-----+
## | block5_pool1 (MaxPooling2D) | (None, 4, 4, 512)   | 0 | - |
## +-----+-----+-----+-----+
## Total params: 14,714,688 (56.13 MB)
## Trainable params: 7,079,424 (27.01 MB)
## Non-trainable params: 7,635,264 (29.13 MB)

```

```
print(model, expand_nested = True)
```

```

## Model: "sequential"
## +-----+-----+-----+-----+
## | Layer (type)                | Output Shape         | Param # | Trai... |
## +-----+-----+-----+-----+
## | vgg16 (Functional)          | (None, 4, 4, 512)   | 14,714,688 | Y |
## +-----+-----+-----+-----+
## | > input_layer               | (None, 150, 150, 3) | 0 | - |
## | (InputLayer)                |                      |          |   |
## +-----+-----+-----+-----+
## | > block1_conv1 (Conv2D)     | (None, 150, 150, 64) | 1,792 | N |
## +-----+-----+-----+-----+

```

##		> block1_conv2 (Conv2D)		(None, 150, 150, 64)		36,928		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block1_pool		(None, 75, 75, 64)		0		-	
##		(MaxPooling2D)							
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block2_conv1 (Conv2D)		(None, 75, 75, 128)		73,856		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block2_conv2 (Conv2D)		(None, 75, 75, 128)		147,584		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block2_pool		(None, 37, 37, 128)		0		-	
##		(MaxPooling2D)							
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block3_conv1 (Conv2D)		(None, 37, 37, 256)		295,168		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block3_conv2 (Conv2D)		(None, 37, 37, 256)		590,080		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block3_conv3 (Conv2D)		(None, 37, 37, 256)		590,080		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block3_pool		(None, 18, 18, 256)		0		-	
##		(MaxPooling2D)							
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block4_conv1 (Conv2D)		(None, 18, 18, 512)		1,180,160		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block4_conv2 (Conv2D)		(None, 18, 18, 512)		2,359,808		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block4_conv3 (Conv2D)		(None, 18, 18, 512)		2,359,808		N	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block4_pool		(None, 9, 9, 512)		0		-	
##		(MaxPooling2D)							
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block5_conv1 (Conv2D)		(None, 9, 9, 512)		2,359,808		Y	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block5_conv2 (Conv2D)		(None, 9, 9, 512)		2,359,808		Y	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block5_conv3 (Conv2D)		(None, 9, 9, 512)		2,359,808		Y	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		> block5_pool		(None, 4, 4, 512)		0		-	
##		(MaxPooling2D)							
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		flatten (Flatten)		(None, 8192)		0		-	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		dense (Dense)		(None, 256)		2,097,408		Y	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##		dense_1 (Dense)		(None, 1)		257		Y	
##	+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+								
##	Total params: 16,812,353 (64.13 MB)								
##	Trainable params: 9,177,089 (35.01 MB)								
##	Non-trainable params: 7,635,264 (29.13 MB)								

```
# freeze only the last 5 layers
freeze_weights(conv_base, from = -5)
conv_base
```

```
## Model: "vgg16"
```

```
## +-----+-----+-----+-----+
## | Layer (type)          | Output Shape      | Param # | Trainable |
## +-----+-----+-----+-----+
## | input_layer (InputLayer) | (None, 150, 150, 3) | 0 | - |
## +-----+-----+-----+-----+
## | block1_conv1 (Conv2D)    | (None, 150, 150, 64) | 1,792 | Y |
## +-----+-----+-----+-----+
## | block1_conv2 (Conv2D)    | (None, 150, 150, 64) | 36,928 | Y |
## +-----+-----+-----+-----+
## | block1_pool (MaxPooling2D) | (None, 75, 75, 64) | 0 | - |
## +-----+-----+-----+-----+
## | block2_conv1 (Conv2D)    | (None, 75, 75, 128) | 73,856 | Y |
## +-----+-----+-----+-----+
## | block2_conv2 (Conv2D)    | (None, 75, 75, 128) | 147,584 | Y |
## +-----+-----+-----+-----+
## | block2_pool (MaxPooling2D) | (None, 37, 37, 128) | 0 | - |
## +-----+-----+-----+-----+
## | block3_conv1 (Conv2D)    | (None, 37, 37, 256) | 295,168 | Y |
## +-----+-----+-----+-----+
## | block3_conv2 (Conv2D)    | (None, 37, 37, 256) | 590,080 | Y |
## +-----+-----+-----+-----+
## | block3_conv3 (Conv2D)    | (None, 37, 37, 256) | 590,080 | Y |
## +-----+-----+-----+-----+
## | block3_pool (MaxPooling2D) | (None, 18, 18, 256) | 0 | - |
## +-----+-----+-----+-----+
## | block4_conv1 (Conv2D)    | (None, 18, 18, 512) | 1,180,160 | Y |
## +-----+-----+-----+-----+
## | block4_conv2 (Conv2D)    | (None, 18, 18, 512) | 2,359,808 | Y |
## +-----+-----+-----+-----+
## | block4_conv3 (Conv2D)    | (None, 18, 18, 512) | 2,359,808 | Y |
## +-----+-----+-----+-----+
## | block4_pool (MaxPooling2D) | (None, 9, 9, 512) | 0 | - |
## +-----+-----+-----+-----+
## | block5_conv1 (Conv2D)    | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_conv2 (Conv2D)    | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_conv3 (Conv2D)    | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_pool (MaxPooling2D) | (None, 4, 4, 512) | 0 | - |
## +-----+-----+-----+-----+
## Total params: 14,714,688 (56.13 MB)
```

```
## Trainable params: 7,635,264 (29.13 MB)
## Non-trainable params: 7,079,424 (27.01 MB)
```

```
# freeze only the last 5 layers, a different way
unfreeze_weights(conv_base, to = -6)
conv_base
```

```
## Model: "vgg16"
```

```
## +-----+-----+-----+-----+
## | Layer (type)          | Output Shape      | Param # | Trai. . . |
## +-----+-----+-----+-----+
## | input_layer (InputLayer) | (None, 150, 150, 3) | 0 | - |
## +-----+-----+-----+-----+
## | block1_conv1 (Conv2D)    | (None, 150, 150, 64) | 1,792 | Y |
## +-----+-----+-----+-----+
## | block1_conv2 (Conv2D)    | (None, 150, 150, 64) | 36,928 | Y |
## +-----+-----+-----+-----+
## | block1_pool (MaxPooling2D) | (None, 75, 75, 64) | 0 | - |
## +-----+-----+-----+-----+
## | block2_conv1 (Conv2D)    | (None, 75, 75, 128) | 73,856 | Y |
## +-----+-----+-----+-----+
## | block2_conv2 (Conv2D)    | (None, 75, 75, 128) | 147,584 | Y |
## +-----+-----+-----+-----+
## | block2_pool (MaxPooling2D) | (None, 37, 37, 128) | 0 | - |
## +-----+-----+-----+-----+
## | block3_conv1 (Conv2D)    | (None, 37, 37, 256) | 295,168 | Y |
## +-----+-----+-----+-----+
## | block3_conv2 (Conv2D)    | (None, 37, 37, 256) | 590,080 | Y |
## +-----+-----+-----+-----+
## | block3_conv3 (Conv2D)    | (None, 37, 37, 256) | 590,080 | Y |
## +-----+-----+-----+-----+
## | block3_pool (MaxPooling2D) | (None, 18, 18, 256) | 0 | - |
## +-----+-----+-----+-----+
## | block4_conv1 (Conv2D)    | (None, 18, 18, 512) | 1,180,160 | Y |
## +-----+-----+-----+-----+
## | block4_conv2 (Conv2D)    | (None, 18, 18, 512) | 2,359,808 | Y |
## +-----+-----+-----+-----+
## | block4_conv3 (Conv2D)    | (None, 18, 18, 512) | 2,359,808 | Y |
## +-----+-----+-----+-----+
## | block4_pool (MaxPooling2D) | (None, 9, 9, 512) | 0 | - |
## +-----+-----+-----+-----+
## | block5_conv1 (Conv2D)    | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_conv2 (Conv2D)    | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_conv3 (Conv2D)    | (None, 9, 9, 512) | 2,359,808 | N |
## +-----+-----+-----+-----+
## | block5_pool (MaxPooling2D) | (None, 4, 4, 512) | 0 | - |
```

```

## +-----+-----+-----+-----+
## Total params: 14,714,688 (56.13 MB)
## Trainable params: 7,635,264 (29.13 MB)
## Non-trainable params: 7,079,424 (27.01 MB)

# Freeze only layers of a certain type, e.g, BatchNorm layers
batch_norm_layer_class_name <- class(layer_batch_normalization())[1]
is_batch_norm_layer <- function(x) inherits(x, batch_norm_layer_class_name)

model <- application_efficientnet_b0()
freeze_weights(model, which = is_batch_norm_layer)
# print(model)

# equivalent to:
for(layer in model$layers) {
  if(is_batch_norm_layer(layer))
    layer$trainable <- FALSE
  else
    layer$trainable <- TRUE
}

```

**Note**

The from and to layer arguments are both inclusive.

When applied to a model, the freeze or unfreeze is a global operation over all layers in the model (i.e. layers not within the specified range will be set to the opposite value, e.g. unfrozen for a call to freeze).

Models must be compiled again after weights are frozen or unfrozen.

---

get\_config

*Layer/Model configuration*


---

**Description**

A layer config is an object returned from `get_config()` that contains the configuration of a layer or model. The same layer or model can be instantiated later (without its trained weights) from this configuration using `from_config()`. The config does not include connectivity information, nor the class name (those are handled externally).

**Usage**

```
get_config(object)
```

```
from_config(config, custom_objects = NULL)
```

**Arguments**

object	Layer or model object
config	Object with layer or model configuration
custom_objects	list of custom objects needed to instantiate the layer, e.g., custom layers defined by <code>new_layer_class()</code> or similar.

**Value**

`get_config()` returns an object with the configuration, `from_config()` returns a re-instantiation of the object.

**Note**

Objects returned from `get_config()` are not serializable via RDS. If you want to save and restore a model across sessions, you can use `save_model_config()` (for model configuration only, not weights) or `save_model()` to save the model configuration and weights to the filesystem.

**See Also**

Other model functions:

`get_layer()`  
`keras_model()`  
`keras_model_sequential()`  
`pop_layer()`  
`summary.keras.src.models.model.Model()`

Other layer methods:

`count_params()`  
`get_weights()`  
`quantize_weights()`  
`reset_state()`

---

`get_custom_objects`      *Get/set the currently registered custom objects.*

---

**Description**

Custom objects set using `custom_object_scope()` are not added to the global list of custom objects, and will not appear in the returned list.

**Usage**

```
get_custom_objects()

set_custom_objects(objects = named_list(), clear = TRUE)
```

**Arguments**

objects	A named list of custom objects, as returned by <code>get_custom_objects()</code> and <code>set_custom_objects()</code> .
clear	bool, whether to clear the custom object registry before populating it with objects.

**Value**

An R named list mapping registered names to registered objects. `set_custom_objects()` returns the registry values before updating, invisibly.

**Examples**

```
get_custom_objects()
```

You can use `set_custom_objects()` to restore a previous registry state.

```
# within a function, if you want to temporarily modify the registry,
function() {
  orig_objects <- set_custom_objects(clear = TRUE)
  on.exit(set_custom_objects(orig_objects))

  ## temporarily modify the global registry
  # register_keras_serializable(...)
  # ... <do work>
  # on.exit(), the previous registry state is restored.
}
```

**Note**

`register_keras_serializable()` is preferred over `set_custom_objects()` for registering new objects.

**See Also**

Other serialization utilities:  
[deserialize\\_keras\\_object\(\)](#)  
[get\\_registered\\_name\(\)](#)  
[get\\_registered\\_object\(\)](#)  
[register\\_keras\\_serializable\(\)](#)  
[serialize\\_keras\\_object\(\)](#)  
[with\\_custom\\_object\\_scope\(\)](#)

---

get\_file

*Downloads a file from a URL if it not already in the cache.*


---

### Description

By default the file at the url origin is downloaded to the cache\_dir ~/.keras, placed in the cache\_subdir datasets, and given the filename fname. The final location of a file example.txt would therefore be ~/.keras/datasets/example.txt. Files in .tar, .tar.gz, .tar.bz, and .zip formats can also be extracted.

Passing a hash will verify the file after download. The command line programs shasum and sha256sum can compute the hash.

### Usage

```
get_file(
    fname = NULL,
    origin = NULL,
    ...,
    file_hash = NULL,
    cache_subdir = "datasets",
    hash_algorithm = "auto",
    extract = FALSE,
    archive_format = "auto",
    cache_dir = NULL,
    force_download = FALSE
)
```

### Arguments

fname	Name of the file. If an absolute path, e.g. <code>"/path/to/file.txt"</code> is specified, the file will be saved at that location. If NULL, the name of the file at origin will be used.
origin	Original URL of the file.
...	For forward/backward compatability.
file_hash	The expected hash string of the file after download. The sha256 and md5 hash algorithms are both supported.
cache_subdir	Subdirectory under the Keras cache dir where the file is saved. If an absolute path, e.g. <code>"/path/to/folder"</code> is specified, the file will be saved at that location.
hash_algorithm	Select the hash algorithm to verify the file. options are <code>"md5"</code> , <code>"sha256"</code> , and <code>"auto"</code> . The default <code>'auto'</code> detects the hash algorithm in use.
extract	TRUE tries extracting the file as an Archive, like tar or zip.
archive_format	Archive format to try for extracting the file. Options are <code>"auto"</code> , <code>"tar"</code> , <code>"zip"</code> , and NULL. <code>"tar"</code> includes tar, tar.gz, and tar.bz files. The default <code>"auto"</code> corresponds to <code>c("tar", "zip")</code> . NULL or an empty list will return no matches found.



cache\_dir        Location to store cached files, when NULL it defaults to `Sys.getenv("KERAS_HOME", "~/.keras/").`

force\_download   If TRUE, the file will always be re-downloaded regardless of the cache state.

### Value

Path to the downloaded file.

**\*\* Warning on malicious downloads \*\***

Downloading something from the Internet carries a risk. NEVER download a file/archive if you do not trust the source. We recommend that you specify the `file_hash` argument (if the hash of the source file is known) to make sure that the file you are getting is the one you expect.

### Examples

```
path_to_downloaded_file <- get_file(
  origin = "https://storage.googleapis.com/download.tensorflow.org/example_images/flower_photos.tgz"
  extract = TRUE
)
```

### See Also

- [https://keras.io/api/utils/python\\_utils#getfile-function](https://keras.io/api/utils/python_utils#getfile-function)

Other utils:

```
audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()
```

---

get_layer	<i>Retrieves a layer based on either its name (unique) or index.</i>
-----------	--

---

### Description

Indices are based on order of horizontal graph traversal (bottom-up) and are 1-based. If name and index are both provided, index will take precedence.

### Usage

```
get_layer(object, name = NULL, index = NULL)
```

### Arguments

object	Keras model object
name	String, name of layer.
index	Integer, index of layer (1-based). Also valid are negative values, which count from the end of model.

### Value

A layer instance.

### See Also

Other model functions:

- [get\\_config\(\)](#)
- [keras\\_model\(\)](#)
- [keras\\_model\\_sequential\(\)](#)
- [pop\\_layer\(\)](#)
- [summary.keras.src.models.model.Model\(\)](#)

---

get_registered_name	<i>Returns the name registered to an object within the Keras framework.</i>
---------------------	---

---

### Description

This function is part of the Keras serialization and deserialization framework. It maps objects to the string names associated with those objects for serialization/deserialization.

### Usage

```
get_registered_name(obj)
```

**Arguments**

obj                    The object to look up.

**Value**

The name associated with the object, or the default name if the object is not registered.

**See Also**

Other serialization utilities:

[deserialize\\_keras\\_object\(\)](#)

[get\\_custom\\_objects\(\)](#)

[get\\_registered\\_object\(\)](#)

[register\\_keras\\_serializable\(\)](#)

[serialize\\_keras\\_object\(\)](#)

[with\\_custom\\_object\\_scope\(\)](#)

---

`get_registered_object` *Returns the class associated with name if it is registered with Keras.*

---

**Description**

This function is part of the Keras serialization and deserialization framework. It maps strings to the objects associated with them for serialization/deserialization.

**Usage**

```
get_registered_object(name, custom_objects = NULL, module_objects = NULL)
```

**Arguments**

name                    The name to look up.

custom\_objects        A named list of custom objects to look the name up in. Generally, custom\_objects is provided by the user.

module\_objects        A named list of custom objects to look the name up in. Generally, module\_objects is provided by midlevel library implementers.

**Value**

An instantiable class associated with name, or NULL if no such class exists.

### Examples

```
from_config <- function(cls, config, custom_objects = NULL) {  
  if ('my_custom_object_name' %in% names(config)) {  
    config$hidden_cls <- get_registered_object(  
      config$my_custom_object_name,  
      custom_objects = custom_objects)  
    }  
}
```

### See Also

Other serialization utilities:  
[deserialize\\_keras\\_object\(\)](#)  
[get\\_custom\\_objects\(\)](#)  
[get\\_registered\\_name\(\)](#)  
[register\\_keras\\_serializable\(\)](#)  
[serialize\\_keras\\_object\(\)](#)  
[with\\_custom\\_object\\_scope\(\)](#)

---

get_source_inputs	Returns the list of input tensors necessary to compute tensor.
-------------------	--

---

### Description

Output will always be a list of tensors (potentially with 1 element).

### Usage

```
get_source_inputs(tensor)
```

### Arguments

tensor            The tensor to start from.

### Value

List of input tensors.

### Example

```
input <- keras_input(c(3))  
output <- input |> layer_dense(4) |> op_multiply(5)  
reticulate::py_id(get_source_inputs(output)[[1]]) ==  
reticulate::py_id(input)  
  
## [1] TRUE
```

**See Also**

Other utils:

[audio\\_dataset\\_from\\_directory\(\)](#)  
[clear\\_session\(\)](#)  
[config\\_disable\\_interactive\\_logging\(\)](#)  
[config\\_disable\\_traceback\\_filtering\(\)](#)  
[config\\_enable\\_interactive\\_logging\(\)](#)  
[config\\_enable\\_traceback\\_filtering\(\)](#)  
[config\\_is\\_interactive\\_logging\\_enabled\(\)](#)  
[config\\_is\\_traceback\\_filtering\\_enabled\(\)](#)  
[get\\_file\(\)](#)  
[image\\_array\\_save\(\)](#)  
[image\\_dataset\\_from\\_directory\(\)](#)  
[image\\_from\\_array\(\)](#)  
[image\\_load\(\)](#)  
[image\\_smart\\_resize\(\)](#)  
[image\\_to\\_array\(\)](#)  
[layer\\_feature\\_space\(\)](#)  
[normalize\(\)](#)  
[pad\\_sequences\(\)](#)  
[set\\_random\\_seed\(\)](#)  
[split\\_dataset\(\)](#)  
[text\\_dataset\\_from\\_directory\(\)](#)  
[timeseries\\_dataset\\_from\\_array\(\)](#)  
[to\\_categorical\(\)](#)  
[zip\\_lists\(\)](#)

---

get\_weights

*Layer/Model weights as R arrays*

---

**Description**

Layer/Model weights as R arrays

**Usage**

```
get_weights(object, trainable = NA)
```

```
set_weights(object, weights)
```

**Arguments**

object	Layer or model object
trainable	if NA (the default), all weights are returned. If TRUE, only weights of trainable variables are returned. If FALSE, only weights of non-trainable variables are returned.
weights	Weights as R array

**Value**

A list of R arrays.

**Note**

You can access the Layer/Model as KerasVariables (which are also backend-native tensors like `tf.Variable`) at `object$weights`, `object$trainable_weights`, or `object$non_trainable_weights`

**See Also**

Other layer methods:

`count_params()`

`get_config()`

`quantize_weights()`

`reset_state()`

---

<code>image_array_save</code>	<i>Saves an image stored as an array to a path or file object.</i>
-------------------------------	--

---

**Description**

Saves an image stored as an array to a path or file object.

**Usage**

```
image_array_save(
  x,
  path,
  data_format = NULL,
  file_format = NULL,
  scale = TRUE,
  ...
)
```

**Arguments**

<code>x</code>	An array.
<code>path</code>	Path or file object.
<code>data_format</code>	Image data format, either "channels_first" or "channels_last".
<code>file_format</code>	Optional file format override. If omitted, the format to use is determined from the filename extension. If a file object was used instead of a filename, this parameter should always be used.
<code>scale</code>	Whether to rescale image values to be within [0, 255].
<code>...</code>	Additional keyword arguments passed to <code>PIL.Image.save()</code> .

**Value**

Called primarily for side effects. The input `x` is returned, invisibly, to enable usage with the pipe.

**See Also**

- [https://keras.io/api/data\\_loading/image#saveimg-function](https://keras.io/api/data_loading/image#saveimg-function)

Other image utils:

```
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()
```

Other utils:

```
audio_dataset_from_directory()  
clear_session()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_is_interactive_logging_enabled()  
config_is_traceback_filtering_enabled()  
get_file()  
get_source_inputs()  
image_dataset_from_directory()  
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
layer_feature_space()  
normalize()  
pad_sequences()  
set_random_seed()  
split_dataset()  
text_dataset_from_directory()  
timeseries_dataset_from_array()  
to_categorical()  
zip_lists()
```

---

`image_dataset_from_directory`*Generates a `tf.data.Dataset` from image files in a directory.*

---

## Description

If your directory structure is:

```
main_directory/  
...class_a/  
.....a_image_1.jpg  
.....a_image_2.jpg  
...class_b/  
.....b_image_1.jpg  
.....b_image_2.jpg
```

Then calling `image_dataset_from_directory(main_directory, labels = 'inferred')` will return a `tf.data.Dataset` that yields batches of images from the subdirectories `class_a` and `class_b`, together with labels 0 and 1 (0 corresponding to `class_a` and 1 corresponding to `class_b`).

Supported image formats: `.jpeg`, `.jpg`, `.png`, `.bmp`, `.gif`. Animated gifs are truncated to the first frame.

## Usage

```
image_dataset_from_directory(  
    directory,  
    labels = "inferred",  
    label_mode = "int",  
    class_names = NULL,  
    color_mode = "rgb",  
    batch_size = 32L,  
    image_size = c(256L, 256L),  
    shuffle = TRUE,  
    seed = NULL,  
    validation_split = NULL,  
    subset = NULL,  
    interpolation = "bilinear",  
    follow_links = FALSE,  
    crop_to_aspect_ratio = FALSE,  
    pad_to_aspect_ratio = FALSE,  
    data_format = NULL,  
    verbose = TRUE  
)
```



**Arguments**

directory	Directory where the data is located. If labels is "inferred", it should contain subdirectories, each containing images for a class. Otherwise, the directory structure is ignored.
labels	Either "inferred" (labels are generated from the directory structure), NULL (no labels), or a list/tuple of integer labels of the same size as the number of image files found in the directory. Labels should be sorted according to the alphanumeric order of the image file paths (obtained via <code>os.walk(directory)</code> in Python).
label_mode	String describing the encoding of labels. Options are: <ul style="list-style-type: none"> <li>• "int": means that the labels are encoded as integers (e.g. for <code>sparse_categorical_crossentropy</code> loss).</li> <li>• "categorical" means that the labels are encoded as a categorical vector (e.g. for <code>categorical_crossentropy</code> loss).</li> <li>• "binary" means that the labels (there can be only 2) are encoded as <code>float32</code> scalars with values 0 or 1 (e.g. for <code>binary_crossentropy</code>).</li> <li>• NULL (no labels).</li> </ul>
class_names	Only valid if labels is "inferred". This is the explicit list of class names (must match names of subdirectories). Used to control the order of the classes (otherwise alphabetical order is used).
color_mode	One of "grayscale", "rgb", "rgba". Defaults to "rgb". Whether the images will be converted to have 1, 3, or 4 channels.
batch_size	Size of the batches of data. Defaults to 32. If NULL, the data will not be batched (the dataset will yield individual samples).
image_size	Size to resize images to after they are read from disk, specified as (height, width). Defaults to (256, 256). Since the pipeline processes batches of images that must all have the same size, this must be provided.
shuffle	Whether to shuffle the data. Defaults to TRUE. If set to FALSE, sorts the data in alphanumeric order.
seed	Optional random seed for shuffling and transformations.
validation_split	Optional float between 0 and 1, fraction of data to reserve for validation.
subset	Subset of the data to return. One of "training", "validation", or "both". Only used if <code>validation_split</code> is set. When <code>subset = "both"</code> , the utility returns a tuple of two datasets (the training and validation datasets respectively).
interpolation	String, the interpolation method used when resizing images. Defaults to "bilinear". Supports "bilinear", "nearest", "bicubic", "area", "lanczos3", "lanczos5", "gaussian", "mitchellcubic".
follow_links	Whether to visit subdirectories pointed to by symlinks. Defaults to FALSE.
crop_to_aspect_ratio	If TRUE, resize the images without aspect ratio distortion. When the original aspect ratio differs from the target aspect ratio, the output image will be cropped so as to return the largest possible window in the image (of size <code>image_size</code> ) that matches the target aspect ratio. By default ( <code>crop_to_aspect_ratio = FALSE</code> ), aspect ratio may not be preserved.

pad_to_aspect_ratio	If TRUE, resize the images without aspect ratio distortion. When the original aspect ratio differs from the target aspect ratio, the output image will be padded so as to return the largest possible window in the image (of size image_size) that matches the target aspect ratio. By default (pad_to_aspect_ratio=FALSE), aspect ratio may not be preserved.
data_format	If NULL uses <code>config_image_data_format()</code> otherwise either 'channel_last' or 'channel_first'.
verbose	Whether to display number information on classes and number of files found. Defaults to TRUE.

**Value**

A `tf.data.Dataset` object.

- If `label_mode` is NULL, it yields float32 tensors of shape `(batch_size, image_size[1], image_size[2], num_channels)` encoding images (see below for rules regarding `num_channels`).
- Otherwise, it yields a tuple `(images, labels)`, where `images` has shape `(batch_size, image_size[1], image_size[2], num_channels)` and `labels` follows the format described below.

Rules regarding labels format:

- if `label_mode` is "int", the labels are an int32 tensor of shape `(batch_size,)`.
- if `label_mode` is "binary", the labels are a float32 tensor of 1s and 0s of shape `(batch_size, 1)`.
- if `label_mode` is "categorical", the labels are a float32 tensor of shape `(batch_size, num_classes)`, representing a one-hot encoding of the class index.

Rules regarding number of channels in the yielded images:

- if `color_mode` is "grayscale", there's 1 channel in the image tensors.
- if `color_mode` is "rgb", there are 3 channels in the image tensors.
- if `color_mode` is "rgba", there are 4 channels in the image tensors.

**See Also**

- [https://keras.io/api/data\\_loading/image#imagedatasetfromdirectory-function](https://keras.io/api/data_loading/image#imagedatasetfromdirectory-function)

Other dataset utils:

```
audio_dataset_from_directory()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
```

Other utils:

```
audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
```

```

config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()

```

Other preprocessing:

```

image_smart_resize()
text_dataset_from_directory()
timeseries_dataset_from_array()

```

---

image_from_array	<i>Converts a 3D array to a PIL Image instance.</i>
------------------	---

---

### Description

Converts a 3D array to a PIL Image instance.

### Usage

```
image_from_array(x, data_format = NULL, scale = TRUE, dtype = NULL)
```

### Arguments

x	Input data, in any form that can be converted to an array.
data_format	Image data format, can be either "channels_first" or "channels_last". Defaults to NULL, in which case the global setting <code>config_image_data_format()</code> is used (unless you changed it, it defaults to "channels_last").
scale	Whether to rescale the image such that minimum and maximum values are 0 and 255 respectively. Defaults to TRUE.
dtype	Dtype to use. NULL means the global setting <code>config_floatx()</code> is used (unless you changed it, it defaults to "float32"). Defaults to NULL.

**Value**

A PIL Image instance.

**Example**

```
img <- array(runif(30000), dim = c(100, 100, 3))
pil_img <- image_from_array(img)
pil_img

## <PIL.Image.Image image mode=RGB size=100x100>
```

**See Also**

Other image utils:

```
image_array_save()
image_load()
image_smart_resize()
image_to_array()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other utils:

```
audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
```

```

set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()

```

---

image_load	<i>Loads an image into PIL format.</i>
------------	--

---

### Description

Loads an image into PIL format.

### Usage

```

image_load(
    path,
    color_mode = "rgb",
    target_size = NULL,
    interpolation = "nearest",
    keep_aspect_ratio = FALSE
)

```

### Arguments

path	Path to image file.
color_mode	One of "grayscale", "rgb", "rgba". Default: "rgb". The desired image format.
target_size	Either NULL (default to original size) or tuple of ints (img_height, img_width).
interpolation	Interpolation method used to resample the image if the target size is different from that of the loaded image. Supported methods are "nearest", "bilinear", and "bicubic". If PIL version 1.1.3 or newer is installed, "lanczos" is also supported. If PIL version 3.4.0 or newer is installed, "box" and "hamming" are also supported. By default, "nearest" is used.
keep_aspect_ratio	Boolean, whether to resize images to a target size without aspect ratio distortion. The image is cropped in the center with target aspect ratio before resizing.

### Value

A PIL Image instance.

**Example**

```

image_path <- get_file(origin = "https://www.r-project.org/logo/Rlogo.png")
(image <- image_load(image_path))

## <PIL.Image.Image image mode=RGB size=724x561>

input_arr <- image_to_array(image)
str(input_arr)

## num [1:561, 1:724, 1:3] 0 0 0 0 0 0 0 0 0 0 ...

input_arr %<>% array_reshape(dim = c(1, dim(input_arr))) # Convert single image to a batch.

model |> predict(input_arr)

```

**See Also**

- [https://keras.io/api/data\\_loading/image#loading-function](https://keras.io/api/data_loading/image#loading-function)

Other image utils:

```

image_array_save()
image_from_array()
image_smart_resize()
image_to_array()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()

```

Other utils:

```

audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()

```

```
image_dataset_from_directory()  
image_from_array()  
image_smart_resize()  
image_to_array()  
layer_feature_space()  
normalize()  
pad_sequences()  
set_random_seed()  
split_dataset()  
text_dataset_from_directory()  
timeseries_dataset_from_array()  
to_categorical()  
zip_lists()
```

---

image\_smart\_resize      *Resize images to a target size without aspect ratio distortion.*

---

## Description

Image datasets typically yield images that have each a different size. However, these images need to be batched before they can be processed by Keras layers. To be batched, images need to share the same height and width.

You could simply do, in TF (or JAX equivalent):

```
size <- c(200, 200)  
ds <- ds$map(\(img) tf$image$resize(img, size))
```

However, if you do this, you distort the aspect ratio of your images, since in general they do not all have the same aspect ratio as size. This is fine in many cases, but not always (e.g. for image generation models this can be a problem).

Note that passing the argument `preserve_aspect_ratio = TRUE` to `tf$image$resize()` will preserve the aspect ratio, but at the cost of no longer respecting the provided target size.

This calls for:

```
size <- c(200, 200)  
ds <- ds$map(\(img) image_smart_resize(img, size))
```

Your output images will actually be `(200, 200)`, and will not be distorted. Instead, the parts of the image that do not fit within the target size get cropped out.

The resizing process is:

1. Take the largest centered crop of the image that has the same aspect ratio as the target size. For instance, if `size = c(200, 200)` and the input image has size `(340, 500)`, we take a crop of `(340, 340)` centered along the width.
2. Resize the cropped image to the target size. In the example above, we resize the `(340, 340)` crop to `(200, 200)`.

**Usage**

```
image_smart_resize(
    x,
    size,
    interpolation = "bilinear",
    data_format = "channels_last",
    backend_module = NULL
)
```

**Arguments**

**x** Input image or batch of images (as a tensor or array). Must be in format (height, width, channels) or (batch\_size, height, width, channels).

**size** Tuple of (height, width) integer. Target size.

**interpolation** String, interpolation to use for resizing. Defaults to 'bilinear'. Supports bilinear, nearest, bicubic, lanczos3, lanczos5.

**data\_format** "channels\_last" or "channels\_first".

**backend\_module** Backend module to use (if different from the default backend).

**Value**

Array with shape (size[1], size[2], channels). If the input image was an array, the output is an array, and if it was a backend-native tensor, the output is a backend-native tensor.

**See Also**

Other image utils:

```
image_array_save()
image_from_array()
image_load()
image_to_array()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other utils:

```
audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
```



```

config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()

```

Other preprocessing:

```

image_dataset_from_directory()
text_dataset_from_directory()
timeseries_dataset_from_array()

```

---

image_to_array	<i>Converts a PIL Image instance to a matrix.</i>
----------------	---

---

## Description

Converts a PIL Image instance to a matrix.

## Usage

```
image_to_array(img, data_format = NULL, dtype = NULL)
```

## Arguments

img	Input PIL Image instance.
data_format	Image data format, can be either "channels_first" or "channels_last". Defaults to NULL, in which case the global setting config_image_data_format() is used (unless you changed it, it defaults to "channels_last").
dtype	Dtype to use. NULL means the global setting config_floatx() is used (unless you changed it, it defaults to "float32").

**Value**

A 3D array.

**Example**

```
image_path <- get_file(origin = "https://www.r-project.org/logo/Rlogo.png")
(img <- image_load(image_path))

## <PIL.Image.Image image mode=RGB size=724x561>

array <- image_to_array(img)
str(array)

## num [1:561, 1:724, 1:3] 0 0 0 0 0 0 0 0 0 0 ...
```

**See Also**

- [https://keras.io/api/data\\_loading/image#imgtoarray-function](https://keras.io/api/data_loading/image#imgtoarray-function)

Other image utils:

```
image_array_save()
image_from_array()
image_load()
image_smart_resize()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other utils:

```
audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
```

```
image_from_array()
image_load()
image_smart_resize()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()
```

---

initializer\_constant *Initializer that generates tensors with constant values.*

---

### Description

Only scalar values are allowed. The constant value provided must be convertible to the dtype requested when calling the initializer.

### Usage

```
initializer_constant(value = 0)
```

### Arguments

value            A numeric scalar.

### Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

### Examples

```
# Standalone usage:
initializer <- initializer_constant(10)
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_constant(10)
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

**See Also**

- <https://keras.io/api/layers/initializers#constant-class>

Other constant initializers:

```
initializer_identity()  
initializer_ones()  
initializer_zeros()
```

Other initializers:

```
initializer_glorot_normal()  
initializer_glorot_uniform()  
initializer_he_normal()  
initializer_he_uniform()  
initializer_identity()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_ones()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()  
initializer_zeros()
```

---

initializer\_glorot\_normal

*The Glorot normal initializer, also called Xavier normal initializer.*

---

**Description**

Draws samples from a truncated normal distribution centered on 0 with  $\text{stddev} = \sqrt{2 / (\text{fan\_in} + \text{fan\_out})}$  where  $\text{fan\_in}$  is the number of input units in the weight tensor and  $\text{fan\_out}$  is the number of output units in the weight tensor.

**Usage**

```
initializer_glorot_normal(seed = NULL)
```

**Arguments**

seed	An integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .
------	--

**Value**

An Initializer instance that can be passed to layer or variable constructors, or called directly with a shape to return a Tensor.

**Examples**

```
# Standalone usage:
initializer <- initializer_glorot_normal()
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_glorot_normal()
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

**Reference**

- [Glorot et al., 2010](#)

**See Also**

- <https://keras.io/api/layers/initializers#glorotnormal-class>

Other random initializers:

```
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_truncated_normal()
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_identity()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_ones()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_truncated_normal()
initializer_variance_scaling()
```

```
initializer_zeros()
```

---

```
initializer_glorot_uniform
```

*The Glorot uniform initializer, also called Xavier uniform initializer.*

---

### Description

Draws samples from a uniform distribution within  $[-\text{limit}, \text{limit}]$ , where  $\text{limit} = \sqrt{6 / (\text{fan\_in} + \text{fan\_out})}$  ( $\text{fan\_in}$  is the number of input units in the weight tensor and  $\text{fan\_out}$  is the number of output units).

### Usage

```
initializer_glorot_uniform(seed = NULL)
```

### Arguments

**seed** An integer or instance of `random_seed_generator()`. Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or `NULL` (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as `seed` an instance of `random_seed_generator()`.

### Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

### Examples

```
# Standalone usage:
initializer <- initializer_glorot_uniform()
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_glorot_uniform()
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

### Reference

- [Glorot et al., 2010](#)

**See Also**

- <https://keras.io/api/layers/initializers#glorotuniform-class>

Other random initializers:

```
initializer_glorot_normal()  
initializer_he_normal()  
initializer_he_uniform()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()  
initializer_glorot_normal()  
initializer_he_normal()  
initializer_he_uniform()  
initializer_identity()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_ones()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()  
initializer_zeros()
```

---

initializer\_he\_normal *He normal initializer.*

---

**Description**

It draws samples from a truncated normal distribution centered on 0 with stddev =  $\sqrt{2 / fan\_in}$  where fan\_in is the number of input units in the weight tensor.

**Usage**

```
initializer_he_normal(seed = NULL)
```

## Arguments

**seed** An integer or instance of `random_seed_generator()`. Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of `random_seed_generator()`.

## Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

## Examples

```
# Standalone usage:
initializer <- initializer_he_normal()
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_he_normal()
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

## Reference

- [He et al., 2015](#)

## See Also

- <https://keras.io/api/layers/initializers#henormal-class>

Other random initializers:

```
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_uniform()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_truncated_normal()
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_uniform()
initializer_identity()
initializer_lecun_normal()
```



```
initializer_lecun_uniform()  
initializer_ones()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()  
initializer_zeros()
```

---

initializer\_he\_uniform

*He uniform variance scaling initializer.*

---

### Description

Draws samples from a uniform distribution within  $[-limit, limit]$ , where  $limit = \sqrt{6 / fan\_in}$  ( $fan\_in$  is the number of input units in the weight tensor).

### Usage

```
initializer_he_uniform(seed = NULL)
```

### Arguments

seed	A integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .
------	---

### Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

### Examples

```
# Standalone usage:  
initializer <- initializer_he_uniform()  
values <- initializer(shape = c(2, 2))  
  
# Usage in a Keras layer:  
initializer <- initializer_he_uniform()  
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

**Reference**

- [He et al., 2015](#)

**See Also**

- <https://keras.io/api/layers/initializers#heuniform-class>

Other random initializers:

```
initializer_glorot_normal()  
initializer_glorot_uniform()  
initializer_he_normal()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()  
initializer_glorot_normal()  
initializer_glorot_uniform()  
initializer_he_normal()  
initializer_identity()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_ones()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()  
initializer_zeros()
```

---

`initializer_identity` *Initializer that generates the identity matrix.*

---

**Description**

Only usable for generating 2D matrices.

**Usage**

```
initializer_identity(gain = 1)
```

**Arguments**

gain                    Multiplicative factor to apply to the identity matrix.

**Value**

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

**Examples**

```
# Standalone usage:
initializer <- initializer_identity()
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_identity()
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

**See Also**

Other constant initializers:

```
initializer_constant()
initializer_ones()
initializer_zeros()
```

Other initializers:

```
initializer_constant()
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_ones()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_truncated_normal()
initializer_variance_scaling()
initializer_zeros()
```

---

`initializer_lecun_normal`*Lecun normal initializer.*

---

### Description

Initializers allow you to pre-specify an initialization strategy, encoded in the `Initializer` object, without knowing the shape and dtype of the variable being initialized.

Draws samples from a truncated normal distribution centered on 0 with  $\text{stddev} = \sqrt{1 / \text{fan\_in}}$  where `fan_in` is the number of input units in the weight tensor.

### Usage

```
initializer_lecun_normal(seed = NULL)
```

### Arguments

<code>seed</code>	An integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or <code>NULL</code> (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as <code>seed</code> an instance of <code>random_seed_generator()</code> .
-------------------	--

### Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

### Examples

```
# Standalone usage:
initializer <- initializer_lecun_normal()
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_lecun_normal()
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

### Reference

- [Klambauer et al., 2017](#)

**See Also**

Other random initializers:

`initializer_glorot_normal()`  
`initializer_glorot_uniform()`  
`initializer_he_normal()`  
`initializer_he_uniform()`  
`initializer_lecun_uniform()`  
`initializer_orthogonal()`  
`initializer_random_normal()`  
`initializer_random_uniform()`  
`initializer_truncated_normal()`  
`initializer_variance_scaling()`

Other initializers:

`initializer_constant()`  
`initializer_glorot_normal()`  
`initializer_glorot_uniform()`  
`initializer_he_normal()`  
`initializer_he_uniform()`  
`initializer_identity()`  
`initializer_lecun_uniform()`  
`initializer_ones()`  
`initializer_orthogonal()`  
`initializer_random_normal()`  
`initializer_random_uniform()`  
`initializer_truncated_normal()`  
`initializer_variance_scaling()`  
`initializer_zeros()`

---

`initializer_lecun_uniform`

*Lecun uniform initializer.*

---

**Description**

Draws samples from a uniform distribution within  $[-limit, limit]$ , where  $limit = \sqrt{3 / fan\_in}$  ( $fan\_in$  is the number of input units in the weight tensor).

**Usage**

`initializer_lecun_uniform(seed = NULL)`

**Arguments**

`seed` An integer or instance of `random_seed_generator()`. Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as `seed` an instance of `random_seed_generator()`.

**Value**

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

**Examples**

```
# Standalone usage:
initializer <- initializer_lecun_uniform()
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_lecun_uniform()
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

**Reference**

- [Klambauer et al., 2017](#)

**See Also**

Other random initializers:

```
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_lecun_normal()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_truncated_normal()
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_identity()
initializer_lecun_normal()
```

```
initializer_ones()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()  
initializer_zeros()
```

---

initializer_ones	<i>Initializer that generates tensors initialized to 1.</i>
------------------	---

---

### Description

Also available via the shortcut function `ones`.

### Usage

```
initializer_ones()
```

### Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

### Examples

```
# Standalone usage:  
initializer <- initializer_ones()  
values <- initializer(shape = c(2, 2))  
  
# Usage in a Keras layer:  
initializer <- initializer_ones()  
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

### See Also

- <https://keras.io/api/layers/initializers#ones-class>

Other constant initializers:

```
initializer_constant()  
initializer_identity()  
initializer_zeros()
```

Other initializers:

```
initializer_constant()  
initializer_glorot_normal()  
initializer_glorot_uniform()
```

```
initializer_he_normal()  
initializer_he_uniform()  
initializer_identity()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()  
initializer_zeros()
```

---

initializer\_orthogonal

*Initializer that generates an orthogonal matrix.*

---

### Description

If the shape of the tensor to initialize is two-dimensional, it is initialized with an orthogonal matrix obtained from the QR decomposition of a matrix of random numbers drawn from a normal distribution. If the matrix has fewer rows than columns then the output will have orthogonal rows. Otherwise, the output will have orthogonal columns.

If the shape of the tensor to initialize is more than two-dimensional, a matrix of shape  $(\text{shape}[1] * \dots * \text{shape}[n - 1], \text{shape}[0])$  is initialized, where  $n$  is the length of the shape vector. The matrix is subsequently reshaped to give a tensor of the desired shape.

### Usage

```
initializer_orthogonal(gain = 1, seed = NULL)
```

### Arguments

gain	Multiplicative factor to apply to the orthogonal matrix.
seed	An integer. Used to make the behavior of the initializer deterministic.

### Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

### Examples

```
# Standalone usage:  
initializer <- initializer_orthogonal()  
values <- initializer(shape = c(2, 2))
```



```
# Usage in a Keras layer:  
initializer <- initializer_orthogonal()  
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

## Reference

- [Saxe et al., 2014](#)

## See Also

Other random initializers:

```
initializer_glorot_normal()  
initializer_glorot_uniform()  
initializer_he_normal()  
initializer_he_uniform()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()  
initializer_glorot_normal()  
initializer_glorot_uniform()  
initializer_he_normal()  
initializer_he_uniform()  
initializer_identity()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_ones()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()  
initializer_zeros()
```

---

initializer\_random\_normal

*Random normal initializer.*

---

## Description

Draws samples from a normal distribution for given parameters.

**Usage**

```
initializer_random_normal(mean = 0, stddev = 0.05, seed = NULL)
```

**Arguments**

mean	A numeric scalar. Mean of the random values to generate.
stddev	A numeric scalar. Standard deviation of the random values to generate.
seed	An integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .

**Value**

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

**Examples**

```
# Standalone usage:
initializer <- initializer_random_normal(mean = 0.0, stddev = 1.0)
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_random_normal(mean = 0.0, stddev = 1.0)
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

**See Also**

- <https://keras.io/api/layers/initializers#randomnormal-class>

Other random initializers:

```
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_orthogonal()
initializer_random_uniform()
initializer_truncated_normal()
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()
initializer_glorot_normal()
initializer_glorot_uniform()
```

```
initializer_he_normal()  
initializer_he_uniform()  
initializer_identity()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_ones()  
initializer_orthogonal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_variance_scaling()  
initializer_zeros()
```

---

initializer\_random\_uniform

*Random uniform initializer.*

---

### Description

Draws samples from a uniform distribution for given parameters.

### Usage

```
initializer_random_uniform(minval = -0.05, maxval = 0.05, seed = NULL)
```

### Arguments

minval	A numeric scalar or a scalar keras tensor. Lower bound of the range of random values to generate (inclusive).
maxval	A numeric scalar or a scalar keras tensor. Upper bound of the range of random values to generate (exclusive).
seed	An integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .

### Value

An Initializer instance that can be passed to layer or variable constructors, or called directly with a shape to return a Tensor.

### Examples

```
# Standalone usage:
initializer <- initializer_random_uniform(minval = 0.0, maxval = 1.0)
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_random_uniform(minval = 0.0, maxval = 1.0)
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

### See Also

- <https://keras.io/api/layers/initializers#randomuniform-class>

Other random initializers:

```
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_orthogonal()
initializer_random_normal()
initializer_truncated_normal()
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_identity()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_ones()
initializer_orthogonal()
initializer_random_normal()
initializer_truncated_normal()
initializer_variance_scaling()
initializer_zeros()
```

---

initializer\_truncated\_normal

*Initializer that generates a truncated normal distribution.*

---

## Description

The values generated are similar to values from a `RandomNormal` initializer, except that values more than two standard deviations from the mean are discarded and re-drawn.

## Usage

```
initializer_truncated_normal(mean = 0, stddev = 0.05, seed = NULL)
```

## Arguments

<code>mean</code>	A numeric scalar. Mean of the random values to generate.
<code>stddev</code>	A numeric scalar. Standard deviation of the random values to generate.
<code>seed</code>	An integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or <code>NULL</code> (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as <code>seed</code> an instance of <code>random_seed_generator()</code> .

## Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

## Examples

```
# Standalone usage:
initializer <- initializer_truncated_normal(mean = 0, stddev = 1)
values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_truncated_normal(mean = 0, stddev = 1)
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

## See Also

- <https://keras.io/api/layers/initializers#truncatednormal-class>

Other random initializers:

```
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_variance_scaling()
```

Other initializers:

```
initializer_constant()
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_identity()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_ones()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_variance_scaling()
initializer_zeros()
```

---

initializer\_variance\_scaling

*Initializer that adapts its scale to the shape of its input tensors.*

---

### Description

With `distribution = "truncated_normal"` or `"untruncated_normal"`, samples are drawn from a truncated/untruncated normal distribution with a mean of zero and a standard deviation (after truncation, if used)  $\text{stddev} = \sqrt{\text{scale} / n}$ , where `n` is:

- number of input units in the weight tensor, if `mode = "fan_in"`
- number of output units, if `mode = "fan_out"`
- average of the numbers of input and output units, if `mode = "fan_avg"`

With `distribution = "uniform"`, samples are drawn from a uniform distribution within `[-limit, limit]`, where `limit = \sqrt{3 * scale / n}`.

### Usage

```
initializer_variance_scaling(
    scale = 1,
    mode = "fan_in",
    distribution = "truncated_normal",
    seed = NULL
)
```

### Arguments

scale	Scaling factor (positive float).
mode	One of "fan_in", "fan_out", "fan_avg".
distribution	Random distribution to use. One of "truncated_normal", "untruncated_normal", or "uniform".
seed	An integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .

### Value

An `Initializer` instance that can be passed to layer or variable constructors, or called directly with a shape to return a `Tensor`.

### Examples

```
# Standalone usage:
initializer <- initializer_variance_scaling(scale = 0.1, mode = 'fan_in',
                                          distribution = 'uniform')

values <- initializer(shape = c(2, 2))

# Usage in a Keras layer:
initializer <- initializer_variance_scaling(scale = 0.1, mode = 'fan_in',
                                          distribution = 'uniform')

layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

### See Also

- <https://keras.io/api/layers/initializers#variancescaling-class>

Other random initializers:

```
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_truncated_normal()
```

Other initializers:

```
initializer_constant()
initializer_glorot_normal()
initializer_glorot_uniform()
```

```
initializer_he_normal()  
initializer_he_uniform()  
initializer_identity()  
initializer_lecun_normal()  
initializer_lecun_uniform()  
initializer_ones()  
initializer_orthogonal()  
initializer_random_normal()  
initializer_random_uniform()  
initializer_truncated_normal()  
initializer_zeros()
```

---

initializer\_zeros      *Initializer that generates tensors initialized to 0.*

---

### Description

Initializer that generates tensors initialized to 0.

### Usage

```
initializer_zeros()
```

### Value

An Initializer instance that can be passed to layer or variable constructors, or called directly with a shape to return a Tensor.

### Examples

```
# Standalone usage:  
initializer <- initializer_zeros()  
values <- initializer(shape = c(2, 2))  
  
# Usage in a Keras layer:  
initializer <- initializer_zeros()  
layer <- layer_dense(units = 3, kernel_initializer = initializer)
```

### See Also

- <https://keras.io/api/layers/initializers#zeros-class>

Other constant initializers:

```
initializer_constant()  
initializer_identity()  
initializer_ones()
```



Other initializers:

```

initializer_constant()
initializer_glorot_normal()
initializer_glorot_uniform()
initializer_he_normal()
initializer_he_uniform()
initializer_identity()
initializer_lecun_normal()
initializer_lecun_uniform()
initializer_ones()
initializer_orthogonal()
initializer_random_normal()
initializer_random_uniform()
initializer_truncated_normal()
initializer_variance_scaling()

```

---

install\_keras

*Install Keras*


---

### Description

This function will install Keras along with a selected backend, including all Python dependencies.

### Usage

```

install_keras(
  envname = "r-keras",
  ...,
  extra_packages = c("scipy", "pandas", "Pillow", "pydot", "ipython",
    "tensorflow_datasets"),
  python_version = ">=3.9,<=3.11",
  backend = c("tensorflow", "jax"),
  gpu = NA,
  restart_session = TRUE
)

```

### Arguments

envname	Name of or path to a Python virtual environment
...	reserved for future compatibility.
extra_packages	Additional Python packages to install alongside Keras
python_version	Passed on to <code>reticulate::virtualenv_starter()</code>
backend	Which backend(s) to install. Accepted values include "tensorflow", "jax" and "torch"
gpu	whether to install a GPU capable version of the backend.

restart\_session

Whether to restart the R session after installing (note this will only occur within RStudio).

### Value

No return value, called for side effects.

### See Also

`tensorflow::install_tensorflow()`

---

keras

*Main Keras module*

---

### Description

The keras module object is the equivalent of `reticulate::import("keras")` and provided mainly as a convenience.

### Format

An object of class `python.builtin.module`

### Value

the keras Python module

---

keras\_input

*Create a Keras tensor (Functional API input).*

---

### Description

A Keras tensor is a symbolic tensor-like object, which we augment with certain attributes that allow us to build a Keras model just by knowing the inputs and outputs of the model.

For instance, if `a`, `b` and `c` are Keras tensors, it becomes possible to do: `model <- keras_model(input = c(a, b), output = c)`

**Usage**

```
keras_input(
  shape = NULL,
  batch_size = NULL,
  dtype = NULL,
  sparse = NULL,
  batch_shape = NULL,
  name = NULL,
  tensor = NULL,
  optional = FALSE
)
```

**Arguments**

shape	A shape list (list of integers or NULL objects), not including the batch size. For instance, <code>shape = c(32)</code> indicates that the expected input will be batches of 32-dimensional vectors. Elements of this list can be NULL or NA; NULL/NA elements represent dimensions where the shape is not known and may vary (e.g. sequence length).
batch_size	Optional static batch size (integer).
dtype	The data type expected by the input, as a string (e.g. "float32", "int32"...)
sparse	A boolean specifying whether the expected input will be sparse tensors. Note that, if <code>sparse</code> is FALSE, sparse tensors can still be passed into the input - they will be densified with a default value of 0. This feature is only supported with the TensorFlow backend. Defaults to FALSE.
batch_shape	Shape, including the batch dim.
name	Optional name string for the layer. Should be unique in a model (do not reuse the same name twice). It will be autogenerated if it isn't provided.
tensor	Optional existing tensor to wrap into the Input layer. If set, the layer will use this tensor rather than creating a new placeholder tensor.
optional	Boolean, whether the input is optional or not. An optional input can accept NULL values.

**Value**

A Keras tensor, which can be passed to the `inputs` argument of ([keras\\_model\(\)](#)).

**Examples**

```
# This is a logistic regression in Keras
input <- layer_input(shape=c(32))
output <- input |> layer_dense(16, activation='softmax')
model <- keras_model(input, output)
```

**See Also**

Other model creation:

[keras\\_model\(\)](#)

[keras\\_model\\_sequential\(\)](#)

---

keras\_model

*Keras Model (Functional API)*

---

**Description**

A model is a directed acyclic graph of layers.

**Usage**

```
keras_model(inputs = NULL, outputs = NULL, ...)
```

**Arguments**

inputs	Input tensor(s) (from <a href="#">keras_input()</a> )
outputs	Output tensors (from calling layers with inputs)
...	Any additional arguments

**Value**

A Model instance.

**Examples**

```
library(keras3)

# input tensor
inputs <- keras_input(shape = c(784))

# outputs compose input + dense layers
predictions <- inputs |>
  layer_dense(units = 64, activation = 'relu') |>
  layer_dense(units = 64, activation = 'relu') |>
  layer_dense(units = 10, activation = 'softmax')

# create and compile model
model <- keras_model(inputs = inputs, outputs = predictions)
model |> compile(
  optimizer = 'rmsprop',
  loss = 'categorical_crossentropy',
  metrics = c('accuracy')
)
```

**See Also**

Other model functions:

```
get_config()
get_layer()
keras_model_sequential()
pop_layer()
summary.keras.src.models.model.Model()
```

Other model creation:

```
keras_input()
keras_model_sequential()
```

---

keras\_model\_sequential

*Keras Model composed of a linear stack of layers*

---

**Description**

Keras Model composed of a linear stack of layers

**Usage**

```
keras_model_sequential(
    input_shape = NULL,
    name = NULL,
    ...,
    input_dtype = NULL,
    input_batch_size = NULL,
    input_sparse = NULL,
    input_batch_shape = NULL,
    input_name = NULL,
    input_tensor = NULL,
    input_optional = FALSE,
    trainable = TRUE,
    layers = list()
)
```

**Arguments**

input_shape	A shape integer vector, not including the batch size. For instance, shape=c(32) indicates that the expected input will be batches of 32-dimensional vectors. Elements of this shape can be NA; NA elements represent dimensions where the shape is not known and may vary (e.g. sequence length).
name	Name of model
...	additional arguments passed on to keras.layers.InputLayer.

input_dtype	The data type expected by the input, as a string (e.g. "float32", "int32"...)
input_batch_size	Optional static batch size (integer).
input_sparse	A boolean specifying whether the expected input will be sparse tensors. Note that, if sparse is FALSE, sparse tensors can still be passed into the input - they will be densified with a default value of 0. This feature is only supported with the TensorFlow backend. Defaults to FALSE.
input_batch_shape	An optional way to specify batch_size and input_shape as one argument.
input_name	Optional name string for the input layer. Should be unique in a model (do not reuse the same name twice). It will be autogenerated if it isn't provided.
input_tensor	Optional existing tensor to wrap into the InputLayer. If set, the layer will use this tensor rather than creating a new placeholder tensor.
input_optional	Boolean, whether the input is optional or not. An optional input can accept NULL values.
trainable	Boolean, whether the model's variables should be trainable. You can also change the trainable status of a model/layer with <code>freeze_weights()</code> and <code>unfreeze_weights()</code> .
layers	List of layers to add to the model.

**Value**

A Sequential model instance.

**Examples**

```
model <- keras_model_sequential(input_shape = c(784))
model |>
  layer_dense(units = 32) |>
  layer_activation('relu') |>
  layer_dense(units = 10) |>
  layer_activation('softmax')

model |> compile(
  optimizer = 'rmsprop',
  loss = 'categorical_crossentropy',
  metrics = c('accuracy')
)

model
```

```
## Model: "sequential"
## +-----+-----+-----+
## | Layer (type)          | Output Shape          | Param # |
## +-----+-----+-----+
## | dense (Dense)         | (None, 32)           | 25,120 |
## +-----+-----+-----+
## | activation (Activation) | (None, 32)           | 0 |
```

```
## +-----+-----+-----+
## | dense_1 (Dense)          | (None, 10)          |          330 |
## +-----+-----+-----+
## | activation_1 (Activation) | (None, 10)          |           0 |
## +-----+-----+-----+
## Total params: 25,450 (99.41 KB)
## Trainable params: 25,450 (99.41 KB)
## Non-trainable params: 0 (0.00 B)
```

**Note**

If `input_shape` is omitted, then the model layer shapes, including the final model output shape, will not be known until the model is built, either by calling the model with an input tensor/array like `model(input)`, (possibly via `fit()/evaluate()/predict()`), or by explicitly calling `model$build(input_shape)`.

**See Also**

Other model functions:

```
get_config()
get_layer()
keras_model()
pop_layer()
summary.keras.src.models.model.Model()
```

Other model creation:

```
keras_input()
keras_model()
```

---

Layer

*Define a custom Layer class.*


---

**Description**

A layer is a callable object that takes as input one or more tensors and that outputs one or more tensors. It involves *computation*, defined in the `call()` method, and a *state* (weight variables). State can be created:

- in `initialize()`, for instance via `self$add_weight()`;
- in the optional `build()` method, which is invoked by the first `call()` to the layer, and supplies the shape(s) of the input(s), which may not have been known at initialization time.

Layers are recursively composable: If you assign a Layer instance as an attribute of another Layer, the outer layer will start tracking the weights created by the inner layer. Nested layers should be instantiated in the `initialize()` method or `build()` method.

Users will just instantiate a layer and then treat it as a callable.

**Usage**

```

Layer(
  classname,
  initialize = NULL,
  call = NULL,
  build = NULL,
  get_config = NULL,
  ...,
  public = list(),
  private = list(),
  inherit = NULL,
  parent_env = parent.frame()
)

```

**Arguments**

<code>classname</code>	String, the name of the custom class. (Conventionally, CamelCase).
<code>initialize</code> , <code>call</code> , <code>build</code> , <code>get_config</code>	Recommended methods to implement. See description and details sections.
<code>...</code> , <code>public</code>	Additional methods or public members of the custom class.
<code>private</code>	Named list of R objects (typically, functions) to include in instance private environments. <code>private</code> methods will have all the same symbols in scope as <code>public</code> methods (See section "Symbols in Scope"). Each instance will have it's own private environment. Any objects in <code>private</code> will be invisible from the Keras framework and the Python runtime.
<code>inherit</code>	What the custom class will subclass. By default, the base keras class.
<code>parent_env</code>	The R environment that all class methods will have as a grandparent.

**Value**

A composing layer constructor, with similar behavior to other layer functions like `layer_dense()`. The first argument of the returned function will be `object`, enabling `initialize()`ing and `call()` the layer in one step while composing the layer with the pipe, like

```

layer_foo <- Layer("Foo", ...)
output <- inputs |> layer_foo()

```

To only `initialize()` a layer instance and not `call()` it, pass a missing or `NULL` value to `object`, or pass all arguments to `initialize()` by name.

```

layer <- layer_dense(units = 2, activation = "relu")
layer <- layer_dense(NULL, 2, activation = "relu")
layer <- layer_dense(, 2, activation = "relu")

```

```

# then you can call() the layer in a separate step
outputs <- inputs |> layer()

```



**Symbols in scope**

All R function custom methods (public and private) will have the following symbols in scope:

- `self`: The custom class instance.
- `super`: The custom class superclass.
- `private`: An R environment specific to the class instance. Any objects assigned here are invisible to the Keras framework.
- `__class__` and `as.symbol(classname)`: the custom class type object.

**Attributes**

- `name`: The name of the layer (string).
- `dtype`: Dtype of the layer's weights. Alias of `layer$variable_dtype`.
- `variable_dtype`: Dtype of the layer's weights.
- `compute_dtype`: The dtype of the layer's computations. Layers automatically cast inputs to this dtype, which causes the computations and output to also be in this dtype. When mixed precision is used with a `keras$mixed_precision$DTypePolicy`, this will be different than `variable_dtype`.
- `trainable_weights`: List of variables to be included in backprop.
- `non_trainable_weights`: List of variables that should not be included in backprop.
- `weights`: The concatenation of the lists `trainable_weights` and `non_trainable_weights` (in this order).
- `trainable`: Whether the layer should be trained (boolean), i.e. whether its potentially-trainable weights should be returned as part of `layer$trainable_weights`.
- `input_spec`: Optional (list of) `InputSpec` object(s) specifying the constraints on inputs that can be accepted by the layer.

We recommend that custom Layers implement the following methods:

- `initialize()`: Defines custom layer attributes, and creates layer weights that do not depend on input shapes, using `add_weight()`, or other state.
- `build(input_shape)`: This method can be used to create weights that depend on the shape(s) of the input(s), using `add_weight()`, or other state. Calling `call()` will automatically build the layer (if it has not been built yet) by calling `build()`.
- `call(...)`: Method called after making sure `build()` has been called. `call()` performs the logic of applying the layer to the input arguments. Two reserved arguments you can optionally use in `call()` are:

1. `training` (boolean, whether the call is in inference mode or training mode).
2. `mask` (boolean tensor encoding masked timesteps in the input, used e.g. in RNN layers).

A typical signature for this method is `call(inputs)`, and user could optionally add `training` and `mask` if the layer need them.

- `get_config()`: Returns a named list containing the configuration used to initialize this layer. If the list names differ from the arguments in `initialize()`, then override `from_config()` as well. This method is used when saving the layer or a model that contains this layer.

## Examples

Here's a basic example: a layer with two variables,  $w$  and  $b$ , that returns  $y <- (w \%*\% x) + b$ . It shows how to implement `build()` and `call()`. Variables set as attributes of a layer are tracked as weights of the layers (in `layer$weights`).

```
layer_simple_dense <- Layer(
  "SimpleDense",
  initialize = function(units = 32) {
    super$initialize()
    self$units <- units
  },

  # Create the state of the layer (weights)
  build = function(input_shape) {
    self$kernel <- self$add_weight(
      shape = shape(tail(input_shape, 1), self$units),
      initializer = "glorot_uniform",
      trainable = TRUE,
      name = "kernel"
    )
    self$bias = self$add_weight(
      shape = shape(self$units),
      initializer = "zeros",
      trainable = TRUE,
      name = "bias"
    )
  },

  # Defines the computation
  call = function(self, inputs) {
    op_matmul(inputs, self$kernel) + self$bias
  }
)

# Instantiates the layer.
# Supply missing `object` arg to skip invoking `call()` and instead return
# the Layer instance
linear_layer <- layer_simple_dense(, 4)

# This will call `build(input_shape)` and create the weights,
# and then invoke `call()`.
y <- linear_layer(op_ones(c(2, 2)))
stopifnot(length(linear_layer$weights) == 2)

# These weights are trainable, so they're listed in `trainable_weights`:
stopifnot(length(linear_layer$trainable_weights) == 2)
```

Besides trainable weights, updated via backpropagation during training, layers can also have non-

trainable weights. These weights are meant to be updated manually during `call()`. Here's an example layer that computes the running sum of its inputs:

```
layer_compute_sum <- Layer(
  classname = "ComputeSum",

  initialize = function(input_dim) {
    super$initialize()

    # Create a non-trainable weight.
    self$total <- self$add_weight(
      shape = shape(),
      initializer = "zeros",
      trainable = FALSE,
      name = "total"
    )
  },

  call = function(inputs) {
    self$total$assign(self$total + op_sum(inputs))
    self$total
  }
)

my_sum <- layer_compute_sum(, 2)
x <- op_ones(c(2, 2))
y <- my_sum(x)

stopifnot(exprs = {
  all.equal(my_sum$weights,          list(my_sum$total))
  all.equal(my_sum$non_trainable_weights, list(my_sum$total))
  all.equal(my_sum$trainable_weights, list())
})
```

### Methods available

- `initialize(..., activity_regularizer = NULL, trainable = TRUE, dtype = NULL, autocast = TRUE, name = NULL)`

Initialize self. This method is typically called from a custom `initialize()` method. Example:

```
layer_my_layer <- Layer("MyLayer",
  initialize = function(units, ..., dtype = NULL, name = NULL) {
    super$initialize(..., dtype = dtype, name = name)
    # .... finish initializing `self` instance
```

```
    }
  )
```

Args:

- trainable: Boolean, whether the layer's variables should be trainable.
- name: String name of the layer.
- dtype: The dtype of the layer's computations and weights. Can also be a `keras$DTypePolicy`, which allows the computation and weight dtype to differ. Defaults to `NULL`. `NULL` means to use `config_dtype_policy()`, which is a "float32" policy unless set to different value (via `config_set_dtype_policy()`).

- `add_loss(loss)`

Can be called inside of the `call()` method to add a scalar loss.

Example:

```
Layer("MyLayer",
  ...
  call = function(x) {
    self$add_loss(op_sum(x))
    x
  }
)
```

- `add_metric()`

- `add_variable(...)`

Add a weight variable to the layer.

Alias of `add_weight()`.

- `add_weight(shape = NULL,
 initializer = NULL,
 dtype = NULL,
 trainable = TRUE,
 autocast = TRUE,
 regularizer = NULL,
 constraint = NULL,
 aggregation = 'mean',
 name = NULL)`

Add a weight variable to the layer.

Args:

- shape: shape for the variable (as defined by `shape()`) Must be fully-defined (no `NA/NULL/-1` entries). Defaults to `()` (scalar) if unspecified.
- initializer: Initializer object to use to populate the initial variable value, or string name of a built-in initializer (e.g. "random\_normal"). If unspecified, defaults to "glorot\_uniform" for floating-point variables and to "zeros" for all other types (e.g. int, bool).
- dtype: Dtype of the variable to create, e.g. "float32". If unspecified, defaults to the layer's variable dtype (which itself defaults to "float32" if unspecified).
- trainable: Boolean, whether the variable should be trainable via backprop or whether its updates are managed manually. Defaults to `TRUE`.
- autocast: Boolean, whether to autocast layers variables when accessing them. Defaults to `TRUE`.

- `regularizer`: Regularizer object to call to apply penalty on the weight. These penalties are summed into the loss function during optimization. Defaults to `NULL`.
- `constraint`: Constraint object to call on the variable after any optimizer update, or string name of a built-in constraint. Defaults to `NULL`.
- `aggregation`: String, one of `'mean'`, `'sum'`, `'only_first_replica'`. Annotates the variable with the type of multi-replica aggregation to be used for this variable when writing custom data parallel training loops.
- `name`: String name of the variable. Useful for debugging purposes.

Returns:

A backend tensor, wrapped in a `KerasVariable` class. The `KerasVariable` class has

Methods:

- `assign(value)`
- `assign_add(value)`
- `assign_sub(value)`
- `numpy()` (calling `as.array(<variable>)` is preferred)

Properties/Attributes:

- `value`
- `dtype`
- `ndim`
- `shape` (calling `shape(<variable>)` is preferred)
- `trainable`

- `build(input_shape)`

- `build_from_config(config)`

Builds the layer's states with the supplied config (named list of args).

By default, this method calls the `do.call(build, config$input_shape)` method, which creates weights based on the layer's input shape in the supplied config. If your config contains other information needed to load the layer's state, you should override this method.

Args:

- `config`: Named list containing the input shape associated with this layer.

- `call(...)`

See description above

- `compute_mask(inputs, previous_mask)`

- `compute_output_shape(...)`

- `compute_output_spec(...)`

- `count_params()`

Count the total number of scalars composing the weights.

Returns: An integer count.

- `get_build_config()`

Returns a named list with the layer's input shape.

This method returns a config (named list) that can be used by `build_from_config(config)` to create all states (e.g. Variables and Lookup tables) needed by the layer.

By default, the config only contains the input shape that the layer was built with. If you're writing a custom layer that creates state in an unusual way, you should override this method to make sure this state is already created when Keras attempts to load its value upon model loading.

Returns: A named list containing the input shape associated with the layer.

- `get_config()`  
Returns the config of the object.  
An object config is a named list (serializable) containing the information needed to re-instantiate it. The config is expected to be serializable to JSON, and is expected to consist of a (potentially complex, nested) structure of names lists consisting of simple objects like strings, ints.
- `get_weights()`  
Return the values of `layer$weights` as a list of R or NumPy arrays.
- `quantize(mode)`  
Currently, only the Dense and EinsumDense layers support in-place quantization via this `quantize()` method.  
Example:  

```
model$quantize("int8") # quantize model in-place
model |> predict(data) # faster inference
```
- `quantized_call(...)`
- `load_own_variables(store)`  
Loads the state of the layer.  
You can override this method to take full control of how the state of the layer is loaded upon calling `load_model()`.  
Args:
  - `store`: Named list from which the state of the model will be loaded.
- `save_own_variables(store)`  
Saves the state of the layer.  
You can override this method to take full control of how the state of the layer is saved upon calling `save_model()`.  
Args:
  - `store`: Named list where the state of the model will be saved.
- `set_weights(weights)`  
Sets the values of `weights` from a list of R or NumPy arrays.
- `stateless_call(trainable_variables, non_trainable_variables, ..., return_losses = FALSE)`  
Call the layer without any side effects.  
Args:
  - `trainable_variables`: List of trainable variables of the model.
  - `non_trainable_variables`: List of non-trainable variables of the model.
  - `...`: Positional and named arguments to be passed to `call()`.
  - `return_losses`: If TRUE, `stateless_call()` will return the list of losses created during `call()` as part of its return values.

Returns: An unnamed list. By default, returns `list(outputs, non_trainable_variables)`. If `return_losses = TRUE`, then returns `list(outputs, non_trainable_variables, losses)`.

Note: `non_trainable_variables` include not only non-trainable weights such as `BatchNormalization` statistics, but also RNG seed state (if there are any random operations part of the layer, such as `dropout`), and `Metric` state (if there are any metrics attached to the layer). These are all elements of state of the layer.

Example:

```
model <- ...
data <- ...
trainable_variables <- model$trainable_variables
non_trainable_variables <- model$non_trainable_variables
# Call the model with zero side effects
c(outputs, non_trainable_variables) %<-% model$stateless_call(
  trainable_variables,
  non_trainable_variables,
  data
)
# Attach the updated state to the model
# (until you do this, the model is still in its pre-call state).
purrr::walk2(
  model$non_trainable_variables, non_trainable_variables,
  \(variable, value) variable$assign(value))
```

- `symbolic_call(...)`
- `from_config(config)`

Creates a layer from its config.

This is a class method, meaning, the R function will not have a `self` symbol (a class instance) in scope. Use `__class__` or the `classname` symbol provided when the `Layer()` was constructed) to resolve the class definition. The default implementation is:

```
from_config = function(config) {
  do.call(`__class__`, config)
}
```

This method is the reverse of `get_config()`, capable of instantiating the same layer from the config named list. It does not handle layer connectivity (handled by `Network`), nor weights (handled by `set_weights()`).

Args:

- `config`: A named list, typically the output of `get_config()`.

Returns: A layer instance.

### Readonly properties:

- `compute_dtype` The dtype of the computations performed by the layer.
- `dtype` Alias of `layer$variable_dtype`.
- `input_dtype` The dtype layer inputs should be converted to.
- `losses` List of scalar losses from `add_loss()`, regularizers and sublayers.

- `metrics` List of all metrics.
- `metrics_variables` List of all metric variables.
- `non_trainable_variables` List of all non-trainable layer state.  
This extends `layer$non_trainable_weights` to include all state used by the layer including state for metrics and `SeedGenerators`.
- `non_trainable_weights` List of all non-trainable weight variables of the layer.  
These are the weights that should not be updated by the optimizer during training. Unlike, `layer$non_trainable_variables` this excludes metric state and random seeds.
- `trainable_variables` List of all trainable layer state.  
This is equivalent to `layer$trainable_weights`.
- `trainable_weights` List of all trainable weight variables of the layer.  
These are the weights that get updated by the optimizer during training.
- `path` The path of the layer.  
If the layer has not been built yet, it will be `NULL`.
- `quantization_mode` The quantization mode of this layer, `NULL` if not quantized.
- `variable_dtype` The dtype of the state (weights) of the layer.
- `variables` List of all layer state, including random seeds.  
This extends `layer$weights` to include all state used by the layer including `SeedGenerators`.  
Note that metrics variables are not included here, use `metrics_variables` to visit all the metric variables.
- `weights` List of all weight variables of the layer.  
Unlike, `layer$variables` this excludes metric state and random seeds.
- `input` Retrieves the input tensor(s) of a symbolic operation.  
Only returns the tensor(s) corresponding to the *first time* the operation was called.  
Returns: Input tensor or list of input tensors.
- `output` Retrieves the output tensor(s) of a layer.  
Only returns the tensor(s) corresponding to the *first time* the operation was called.  
Returns: Output tensor or list of output tensors.

#### Data descriptors (Attributes):

- `dtype_policy`
- `input_spec`
- `supports_masking` Whether this layer supports computing a mask using `compute_mask`.
- `trainable` Settable boolean, whether this layer should be trainable or not.

#### See Also

- [https://keras.io/api/layers/base\\_layer#layer-class](https://keras.io/api/layers/base_layer#layer-class)

Other layers:

[layer\\_activation\(\)](#)  
[layer\\_activation\\_elu\(\)](#)



```
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
```

```
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()
```

```
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_activation	<i>Applies an activation function to an output.</i>
------------------	---

---

### Description

Applies an activation function to an output.

### Usage

```
layer_activation(object, activation, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
activation	Activation function. It could be a callable, or the name of an activation from the <code>keras3::activation_*</code> namespace.
...	Base layer keyword arguments, such as name and dtype.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Examples

```
x <- array(c(-3, -1, 0, 2))  
layer <- layer_activation(activation = 'relu')  
layer(x)
```

```
## tf.Tensor([0. 0. 0. 2.], shape=(4), dtype=float32)

layer <- layer_activation(activation = activation_relu)
layer(x)

## tf.Tensor([0. 0. 0. 2.], shape=(4), dtype=float32)

layer <- layer_activation(activation = op_relu)
layer(x)

## tf.Tensor([0. 0. 0. 2.], shape=(4), dtype=float32)
```

### See Also

- [https://keras.io/api/layers/core\\_layers/activation#activation-class](https://keras.io/api/layers/core_layers/activation#activation-class)

Other activation layers:

```
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
```

Other layers:

```
Layer()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
```

```
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()
```

```
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_activation\_elu *Applies an Exponential Linear Unit function to an output.*

---

### Description

Formula:

$$f(x) = \alpha * (\exp(x) - 1.) \text{ for } x < 0$$

$$f(x) = x \text{ for } x \geq 0$$

**Usage**

```
layer_activation_elu(object, alpha = 1, ...)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
alpha	float, slope of negative section. Defaults to 1.0.
...	Base layer keyword arguments, such as name and dtype.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `Layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**See Also**

- [https://keras.io/api/layers/activation\\_layers/elu#elu-class](https://keras.io/api/layers/activation_layers/elu#elu-class)

Other activation layers:

```
layer_activation()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
```

```
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()
```



```
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

`layer_activation_leaky_relu`*Leaky version of a Rectified Linear Unit activation layer.*

---

### Description

This layer allows a small gradient when the unit is not active.

Formula:

```
f <- function(x) ifelse(x >= 0, x, alpha * x)
```

### Usage

```
layer_activation_leaky_relu(object, negative_slope = 0.3, ...)
```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>negative_slope</code>	Float $\geq 0.0$ . Negative slope coefficient. Defaults to 0.3.
<code>...</code>	Base layer keyword arguments, such as name and dtype.

### Value

The return value depends on the value provided for the first argument. If `object` is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Examples

```
leaky_relu_layer <- layer_activation_leaky_relu(negative_slope=0.5)
input <- array(c(-10, -5, 0.0, 5, 10))
result <- leaky_relu_layer(input)
as.array(result)
```

```
## [1] -5.0 -2.5 0.0 5.0 10.0
```

**See Also**

- [https://keras.io/api/layers/activation\\_layers/leaky\\_relu#leakyrelu-class](https://keras.io/api/layers/activation_layers/leaky_relu#leakyrelu-class)

Other activation layers:

```
layer_activation()  
layer_activation_elu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()
```

```
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
```

```
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_activation\_parametric\_relu

*Parametric Rectified Linear Unit activation layer.*

---

### Description

Formula:

```
f <- function(x) ifelse(x >= 0, x, alpha * x)
```

where alpha is a learned array with the same shape as x.

### Usage

```
layer_activation_parametric_relu(  
  object,  
  alpha_initializer = "Zeros",  
  alpha_regularizer = NULL,  
  alpha_constraint = NULL,  
  shared_axes = NULL,  
  ...  
)
```

**Arguments**

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>alpha_initializer</code>	Initializer function for the weights.
<code>alpha_regularizer</code>	Regularizer for the weights.
<code>alpha_constraint</code>	Constraint for the weights.
<code>shared_axes</code>	The axes along which to share learnable parameters for the activation function. For example, if the incoming feature maps are from a 2D convolution with output shape (batch, height, width, channels), and you wish to share parameters across space so that each filter only has one set of parameters, set <code>shared_axes=[1, 2]</code> .
<code>...</code>	Base layer keyword arguments, such as name and dtype.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**See Also**

- [https://keras.io/api/layers/activation\\_layers/prelu#prelu-class](https://keras.io/api/layers/activation_layers/prelu#prelu-class)

Other activation layers:

```
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_relu()
layer_activation_softmax()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
```

```
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()
```

```
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()
```



```
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_activation\_relu *Rectified Linear Unit activation function layer.*

---

## Description

Formula:

```
f <- function(x, max_value = Inf, negative_slope = 0, threshold = 0) {
  x <- max(x,0)
  if (x >= max_value)
    max_value
  else if (threshold <= x && x < max_value)
    x
  else
    negative_slope * (x - threshold)
}
```

## Usage

```
layer_activation_relu(
  object,
  max_value = NULL,
  negative_slope = 0,
  threshold = 0,
  ...
)
```

## Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
max_value	Float $\geq 0$ . Maximum activation value. NULL means unlimited. Defaults to NULL.
negative_slope	Float $\geq 0$ . Negative slope coefficient. Defaults to 0.0.
threshold	Float $\geq 0$ . Threshold value for thresholded activation. Defaults to 0.0.
...	Base layer keyword arguments, such as name and dtype.

## Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Examples**

```
relu_layer <- layer_activation_relu(max_value = 10,  
                                   negative_slope = 0.5,  
                                   threshold = 0)  
  
input <- array(c(-10, -5, 0.0, 5, 10))  
result <- relu_layer(input)  
as.array(result)  
  
## [1] -5.0 -2.5 0.0 5.0 10.0
```

**See Also**

- [https://keras.io/api/layers/activation\\_layers/relu#relu-class](https://keras.io/api/layers/activation_layers/relu#relu-class)

Other activation layers:

```
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_softmax()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()
```

```
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()
```

```
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_activation\_softmax

*Softmax activation layer.*

---

### Description

Formula:

$$\text{exp\_x} = \exp(x - \max(x))$$

$$f(x) = \text{exp\_x} / \text{sum}(\text{exp\_x})$$

**Usage**

```
layer_activation_softmax(object, axis = -1L, ...)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
axis	Integer, or list of Integers, axis along which the softmax normalization is applied.
...	Base layer keyword arguments, such as name and dtype.

**Value**

Softmaxed output with the same shape as inputs.

**Examples**

```
softmax_layer <- layer_activation_softmax()
input <- op_array(c(1, 2, 1))
softmax_layer(input)

## tf.Tensor([0.21194157 0.5761169 0.21194157], shape=(3), dtype=float32)
```

**Call Arguments**

- inputs: The inputs (logits) to the softmax layer.
- mask: A boolean mask of the same shape as inputs. The mask specifies 1 to keep and 0 to mask. Defaults to NULL.

**See Also**

- [https://keras.io/api/layers/activation\\_layers/softmax#softmax-class](https://keras.io/api/layers/activation_layers/softmax#softmax-class)

Other activation layers:

```
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activity_regularization()
```

```
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()
```

```
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
```

```
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_activity\_regularization

*Layer that applies an update to the cost function based input activity.*

---

### Description

Layer that applies an update to the cost function based input activity.

### Usage

```
layer_activity_regularization(object, l1 = 0, l2 = 0, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
l1	L1 regularization factor (positive float).
l2	L2 regularization factor (positive float).
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Input Shape

Arbitrary. Use the keyword argument `input_shape` (tuple of integers, does not include the samples axis) when using this layer as the first layer in a model.

### Output Shape

Same shape as input.



**See Also**

- [https://keras.io/api/layers/regularization\\_layers/activity\\_regularization#activityregularization](https://keras.io/api/layers/regularization_layers/activity_regularization#activityregularization)

Other regularization layers:

```
layer_alpha_dropout()  
layer_dropout()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()
```

```
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
```

```
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_add

*Performs elementwise addition operation.*

---

### Description

It takes as input a list of tensors, all of the same shape, and returns a single tensor (also of the same shape).

### Usage

```
layer_add(inputs, ...)
```

### Arguments

inputs	layers to combine
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Examples**

```
input_shape <- c(1, 2, 3)
x1 <- op_ones(input_shape)
x2 <- op_ones(input_shape)
layer_add(x1, x2)

## tf.Tensor(
## [[ [2. 2. 2.]
##  [2. 2. 2.]]], shape=(1, 2, 3), dtype=float32)
```

Usage in a Keras model:

```
input1 <- layer_input(shape = c(16))
x1 <- input1 |> layer_dense(8, activation = 'relu')

input2 <- layer_input(shape = c(32))
x2 <- input2 |> layer_dense(8, activation = 'relu')

# equivalent to `added = layer_add([x1, x2])`
added <- layer_add(x1, x2)
output <- added |> layer_dense(4)

model <- keras_model(inputs = c(input1, input2), outputs = output)
```

**See Also**

- [https://keras.io/api/layers/merging\\_layers/add#add-class](https://keras.io/api/layers/merging_layers/add#add-class)

Other merging layers:

```
layer_average()
layer_concatenate()
layer_dot()
layer_maximum()
layer_minimum()
layer_multiply()
layer_subtract()
```

Other layers:

```
Layer()
```

```
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()
```

```
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()
```

```
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_additive\_attention

*Additive attention layer, a.k.a. Bahdanau-style attention.*

---

## Description

Inputs are a list with 2 or 3 elements:

1. A query tensor of shape (batch\_size, Tq, dim).
2. A value tensor of shape (batch\_size, Tv, dim).
3. A optional key tensor of shape (batch\_size, Tv, dim). If none supplied, value will be used as key.

The calculation follows the steps:

1. Calculate attention scores using query and key with shape (batch\_size, Tq, Tv) as a non-linear sum scores = reduce\_sum(tanh(query + key), axis=-1).
2. Use scores to calculate a softmax distribution with shape (batch\_size, Tq, Tv).
3. Use the softmax distribution to create a linear combination of value with shape (batch\_size, Tq, dim).

## Usage

```
layer_additive_attention(object, use_scale = TRUE, dropout = 0, ...)
```

## Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
use_scale	If TRUE, will create a scalar variable to scale the attention scores.
dropout	Float between 0 and 1. Fraction of the units to drop for the attention scores. Defaults to 0.0.
...	For forward/backward compatability.

## Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

## Call Arguments

- `inputs`: List of the following tensors:
  - `query`: Query tensor of shape `(batch_size, Tq, dim)`.
  - `value`: Value tensor of shape `(batch_size, Tv, dim)`.
  - `key`: Optional key tensor of shape `(batch_size, Tv, dim)`. If not given, will use `value` for both key and value, which is the most common case.
- `mask`: List of the following tensors:
  - `query_mask`: A boolean mask tensor of shape `(batch_size, Tq)`. If given, the output will be zero at the positions where `mask==FALSE`.
  - `value_mask`: A boolean mask tensor of shape `(batch_size, Tv)`. If given, will apply the mask such that values at positions where `mask==FALSE` do not contribute to the result.
- `return_attention_scores`: bool, if TRUE, returns the attention scores (after masking and softmax) as an additional output argument.
- `training`: Python boolean indicating whether the layer should behave in training mode (adding dropout) or in inference mode (no dropout).
- `use_causal_mask`: Boolean. Set to TRUE for decoder self-attention. Adds a mask such that position `i` cannot attend to positions `j > i`. This prevents the flow of information from the future towards the past. Defaults to FALSE.

## Output

Attention outputs of shape `(batch_size, Tq, dim)`. (Optional) Attention scores after masking and softmax with shape `(batch_size, Tq, Tv)`.

## See Also

- [https://keras.io/api/layers/attention\\_layers/additive\\_attention#additiveattention-class](https://keras.io/api/layers/attention_layers/additive_attention#additiveattention-class)

Other attention layers:

```
layer_attention()  
layer_group_query_attention()  
layer_multi_head_attention()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()
```



```
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()
```

```
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
```

```

layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_alpha\_dropout    *Applies Alpha Dropout to the input.*

---

### Description

Alpha Dropout is a Dropout that keeps mean and variance of inputs to their original values, in order to ensure the self-normalizing property even after this dropout. Alpha Dropout fits well to Scaled Exponential Linear Units (SELU) by randomly setting activations to the negative saturation value.

### Usage

```
layer_alpha_dropout(object, rate, noise_shape = NULL, seed = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
rate	Float between 0 and 1. The multiplicative noise will have standard deviation $\sqrt{\text{rate} / (1 - \text{rate})}$ .
noise_shape	1D integer tensor representing the shape of the binary alpha dropout mask that will be multiplied with the input. For instance, if your inputs have shape (batch_size, timesteps, features) and you want the alpha dropout mask to be the same for all timesteps, you can use noise_shape = (batch_size, 1, features).
seed	An integer to use as random seed.
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

**Call Arguments**

- inputs: Input tensor (of any rank).
- training: R boolean indicating whether the layer should behave in training mode (adding alpha dropout) or in inference mode (doing nothing).

**See Also**

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/layers/AlphaDropout](https://www.tensorflow.org/api_docs/python/tf/keras/layers/AlphaDropout)

Other regularization layers:

```
layer_activity_regularization()  
layer_dropout()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()
```

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()
```

```
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_attention

*Dot-product attention layer, a.k.a. Luong-style attention.*

---

### Description

Inputs are a list with 2 or 3 elements:

1. A query tensor of shape (batch\_size, T<sub>q</sub>, dim).
2. A value tensor of shape (batch\_size, T<sub>v</sub>, dim).
3. A optional key tensor of shape (batch\_size, T<sub>v</sub>, dim). If none supplied, value will be used as a key.

The calculation follows the steps:

1. Calculate attention scores using query and key with shape (batch\_size, Tq, Tv).
2. Use scores to calculate a softmax distribution with shape (batch\_size, Tq, Tv).
3. Use the softmax distribution to create a linear combination of value with shape (batch\_size, Tq, dim).

### Usage

```
layer_attention(
    object,
    use_scale = FALSE,
    score_mode = "dot",
    dropout = 0,
    seed = NULL,
    ...
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
use_scale	If TRUE, will create a scalar variable to scale the attention scores.
score_mode	Function to use to compute attention scores, one of {"dot", "concat"}. "dot" refers to the dot product between the query and key vectors. "concat" refers to the hyperbolic tangent of the concatenation of the query and key vectors.
dropout	Float between 0 and 1. Fraction of the units to drop for the attention scores. Defaults to 0.0.
seed	An integer to use as random seed incase of dropout.
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Call Arguments

- inputs: List of the following tensors:
  - query: Query tensor of shape (batch\_size, Tq, dim).
  - value: Value tensor of shape (batch\_size, Tv, dim).
  - key: Optional key tensor of shape (batch\_size, Tv, dim). If not given, will use value for both key and value, which is the most common case.
- mask: List of the following tensors:
  - query\_mask: A boolean mask tensor of shape (batch\_size, Tq). If given, the output will be zero at the positions where `mask==FALSE`.

- value\_mask: A boolean mask tensor of shape (batch\_size, Tv). If given, will apply the mask such that values at positions where mask==FALSE do not contribute to the result.
- return\_attention\_scores: bool, if TRUE, returns the attention scores (after masking and softmax) as an additional output argument.
- training: Python boolean indicating whether the layer should behave in training mode (adding dropout) or in inference mode (no dropout).
- use\_causal\_mask: Boolean. Set to TRUE for decoder self-attention. Adds a mask such that position i cannot attend to positions j > i. This prevents the flow of information from the future towards the past. Defaults to FALSE.

## Output

Attention outputs of shape (batch\_size, Tq, dim). (Optional) Attention scores after masking and softmax with shape (batch\_size, Tq, Tv).

## See Also

- [https://keras.io/api/layers/attention\\_layers/attention#attention-class](https://keras.io/api/layers/attention_layers/attention#attention-class)

Other attention layers:

```
layer_additive_attention()
layer_group_query_attention()
layer_multi_head_attention()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
```



```
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()
```

```
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_average

*Averages a list of inputs element-wise..*

---

### **Description**

It takes as input a list of tensors, all of the same shape, and returns a single tensor (also of the same shape).

**Usage**

```
layer_average(inputs, ...)
```

**Arguments**

```
inputs      layers to combine  
...        For forward/backward compatability.
```

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Examples**

```
input_shape <- c(1, 2, 3)  
x1 <- op_ones(input_shape)  
x2 <- op_zeros(input_shape)  
layer_average(x1, x2)  
  
## tf.Tensor(  
## [[0.5 0.5 0.5]  
## [0.5 0.5 0.5]]], shape=(1, 2, 3), dtype=float32)
```

Usage in a Keras model:

```
input1 <- layer_input(shape = c(16))  
x1 <- input1 |> layer_dense(8, activation = 'relu')  
  
input2 <- layer_input(shape = c(32))  
x2 <- input2 |> layer_dense(8, activation = 'relu')  
  
added <- layer_average(x1, x2)  
output <- added |> layer_dense(4)  
  
model <- keras_model(inputs = c(input1, input2), outputs = output)
```

**See Also**

- [https://keras.io/api/layers/merging\\_layers/average#average-class](https://keras.io/api/layers/merging_layers/average#average-class)

Other merging layers:

```
layer_add()  
layer_concatenate()
```

```
layer_dot()
layer_maximum()
layer_minimum()
layer_multiply()
layer_subtract()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
```

```
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
```

```
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_average\_pooling\_1d

*Average pooling for temporal data.*

---

### Description

Downsamples the input representation by taking the average value over the window defined by `pool_size`. The window is shifted by `strides`. The resulting output when using "valid" padding option has a shape of: `output_shape = (input_shape - pool_size + 1) / strides`

The resulting output shape when using the "same" padding option is: `output_shape = input_shape / strides`

### Usage

```
layer_average_pooling_1d(  
    object,  
    pool_size,  
    strides = NULL,  
    padding = "valid",  
    data_format = NULL,  
    name = NULL,  
    ...  
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
pool_size	int, size of the max pooling window.
strides	int or NULL. Specifies how much the pooling window moves for each pooling step. If NULL, it will default to pool_size.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
name	String, name for the object
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Input Shape**

- If `data_format="channels_last"`: 3D tensor with shape (batch\_size, steps, features).
- If `data_format="channels_first"`: 3D tensor with shape (batch\_size, features, steps).

**Output Shape**

- If `data_format="channels_last"`: 3D tensor with shape (batch\_size, downsampled\_steps, features).
- If `data_format="channels_first"`: 3D tensor with shape (batch\_size, features, downsampled\_steps).

**Examples**

strides=1 and padding="valid":

```
x <- op_array(c(1., 2., 3., 4., 5.)) |> op_reshape(c(1, 5, 1))
output <- x |>
  layer_average_pooling_1d(pool_size = 2,
                           strides = 1,
                           padding = "valid")
output
```

```

## tf.Tensor(
## [[1.5]
##  [2.5]
##  [3.5]
##  [4.5]]], shape=(1, 4, 1), dtype=float32)

strides=2 and padding="valid":

x <- op_array(c(1., 2., 3., 4., 5.)) |> op_reshape(c(1, 5, 1))
output <- x |>
  layer_average_pooling_1d(pool_size = 2,
                           strides = 2,
                           padding = "valid")

output

## tf.Tensor(
## [[1.5]
##  [3.5]]], shape=(1, 2, 1), dtype=float32)

strides=1 and padding="same":

x <- op_array(c(1., 2., 3., 4., 5.)) |> op_reshape(c(1, 5, 1))
output <- x |>
  layer_average_pooling_1d(pool_size = 2,
                           strides = 1,
                           padding = "same")

output

## tf.Tensor(
## [[1.5]
##  [2.5]
##  [3.5]
##  [4.5]
##  [5. ]]], shape=(1, 5, 1), dtype=float32)

```

### See Also

- [https://keras.io/api/layers/pooling\\_layers/average\\_pooling1d#averagepooling1d-class](https://keras.io/api/layers/pooling_layers/average_pooling1d#averagepooling1d-class)

Other pooling layers:

```

layer_average_pooling_2d()
layer_average_pooling_3d()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()

```



```
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()
```

**Other layers:**

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()
```

```
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
```

```
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_average\_pooling\_2d

*Average pooling operation for 2D spatial data.*

---

### Description

Downsamples the input along its spatial dimensions (height and width) by taking the average value over an input window (of size defined by `pool_size`) for each channel of the input. The window is shifted by `strides` along each dimension.

The resulting output when using the "valid" padding option has a spatial shape (number of rows or columns) of:  $\text{output\_shape} = \text{math.floor}((\text{input\_shape} - \text{pool\_size}) / \text{strides}) + 1$  (when  $\text{input\_shape} \geq \text{pool\_size}$ )

The resulting output shape when using the "same" padding option is:  $\text{output\_shape} = \text{math.floor}((\text{input\_shape} - 1) / \text{strides}) + 1$

### Usage

```
layer_average_pooling_2d(  
    object,  
    pool_size,  
    strides = NULL,  
    padding = "valid",  
    data_format = NULL,  
    name = NULL,  
    ...  
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
pool_size	int or list of 2 integers, factors by which to downscale (dim1, dim2). If only one integer is specified, the same window length will be used for all dimensions.
strides	int or list of 2 integers, or NULL. Strides values. If NULL, it will default to pool_size. If only one int is specified, the same stride size will be used for all dimensions.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, channels, height, width). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
name	String, name for the object
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Input Shape**

- If `data_format="channels_last"`: 4D tensor with shape (batch\_size, height, width, channels).
- If `data_format="channels_first"`: 4D tensor with shape (batch\_size, channels, height, width).

**Output Shape**

- If `data_format="channels_last"`: 4D tensor with shape (batch\_size, pooled\_height, pooled\_width, channel).
- If `data_format="channels_first"`: 4D tensor with shape (batch\_size, channels, pooled\_height, pooled\_width).

**Examples**

```
strides=(1, 1) and padding="valid":

x <- op_array(1:9, "float32") |> op_reshape(c(1, 3, 3, 1))
output <- x |>
  layer_average_pooling_2d(pool_size = c(2, 2),
                           strides = c(1, 1),
                           padding = "valid")

output
```

```

## tf.Tensor(
## [[[[3.]
##    [4.]]
##
##    [[6.]
##    [7.]]]], shape=(1, 2, 2, 1), dtype=float32)

strides=(2, 2) and padding="valid":

x <- op_array(1:12, "float32") |> op_reshape(c(1, 3, 4, 1))
output <- x |>
  layer_average_pooling_2d(pool_size = c(2, 2),
                           strides = c(2, 2),
                           padding = "valid")

output

## tf.Tensor(
## [[[[3.5]
##    [5.5]]]], shape=(1, 1, 2, 1), dtype=float32)

stride=(1, 1) and padding="same":

x <- op_array(1:9, "float32") |> op_reshape(c(1, 3, 3, 1))
output <- x |>
  layer_average_pooling_2d(pool_size = c(2, 2),
                           strides = c(1, 1),
                           padding = "same")

output

## tf.Tensor(
## [[[[3. ]
##    [4. ]
##    [4.5]]
##
##    [[6. ]
##    [7. ]
##    [7.5]]
##
##    [[7.5]
##    [8.5]
##    [9. ]]]], shape=(1, 3, 3, 1), dtype=float32)

```

**See Also**

- [https://keras.io/api/layers/pooling\\_layers/average\\_pooling2d#averagepooling2d-class](https://keras.io/api/layers/pooling_layers/average_pooling2d#averagepooling2d-class)

## Other pooling layers:

```
layer_average_pooling_1d()  
layer_average_pooling_3d()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()
```

## Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()
```

```
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()
```

```
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_average\_pooling\_3d

*Average pooling operation for 3D data (spatial or spatio-temporal).*

---

### Description

Downsamples the input along its spatial dimensions (depth, height, and width) by taking the average value over an input window (of size defined by `pool_size`) for each channel of the input. The window is shifted by `strides` along each dimension.

### Usage

```
layer_average_pooling_3d(  
    object,  
    pool_size,  
    strides = NULL,  
    padding = "valid",  
    data_format = NULL,
```



```

    name = NULL,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
pool_size	int or list of 3 integers, factors by which to downscale (dim1, dim2, dim3). If only one integer is specified, the same window length will be used for all dimensions.
strides	int or list of 3 integers, or NULL. Strides values. If NULL, it will default to pool_size. If only one int is specified, the same stride size will be used for all dimensions.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch, channels, spatial_dim1, spatial_dim2, spatial_dim3). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
name	String, name for the object
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Input Shape

- If `data_format="channels_last"`: 5D tensor with shape: (batch\_size, spatial\_dim1, spatial\_dim2, spatial\_dim3, channels)
- If `data_format="channels_first"`: 5D tensor with shape: (batch\_size, channels, spatial\_dim1, spatial\_dim2, spatial\_dim3)

### Output Shape

- If `data_format="channels_last"`: 5D tensor with shape: (batch\_size, pooled\_dim1, pooled\_dim2, pooled\_dim3, channels)
- If `data_format="channels_first"`: 5D tensor with shape: (batch\_size, channels, pooled\_dim1, pooled\_dim2, pooled\_dim3)

**Examples**

```

depth <- height <- width <- 30
channels <- 3

inputs <- layer_input(shape = c(depth, height, width, channels))
outputs <- inputs |> layer_average_pooling_3d(pool_size = 3)
outputs # Shape: (batch_size, 10, 10, 10, 3)

## <KerasTensor shape=(None, 10, 10, 10, 3), dtype=float32, sparse=False, name=keras_tensor_1>

```

**See Also**

- [https://keras.io/api/layers/pooling\\_layers/average\\_pooling3d#averagepooling3d-class](https://keras.io/api/layers/pooling_layers/average_pooling3d#averagepooling3d-class)

Other pooling layers:

```

layer_average_pooling_1d()
layer_average_pooling_2d()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()

```

Other layers:

```

Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()

```

```
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()
```

```
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_t fsm()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_batch\_normalization

*Layer that normalizes its inputs.*

---

## Description

Batch normalization applies a transformation that maintains the mean output close to 0 and the output standard deviation close to 1.

Importantly, batch normalization works differently during training and during inference.

**During training** (i.e. when using `fit()` or when calling the layer/model with the argument `training = TRUE`), the layer normalizes its output using the mean and standard deviation of the current batch of inputs. That is to say, for each channel being normalized, the layer returns  $\gamma * (\text{batch} - \text{mean}(\text{batch})) / \sqrt{\text{var}(\text{batch}) + \text{epsilon}} + \text{beta}$ , where:

- `epsilon` is small constant (configurable as part of the constructor arguments)
- `gamma` is a learned scaling factor (initialized as 1), which can be disabled by passing `scale = FALSE` to the constructor.
- `beta` is a learned offset factor (initialized as 0), which can be disabled by passing `center = FALSE` to the constructor.

**During inference** (i.e. when using `evaluate()` or `predict()` or when calling the layer/model with the argument `training = FALSE` (which is the default), the layer normalizes its output using a moving average of the mean and standard deviation of the batches it has seen during training. That is to say, it returns  $\gamma * (\text{batch} - \text{self}\$\text{moving\_mean}) / \sqrt{\text{self}\$\text{moving\_var} + \text{epsilon}} + \text{beta}$ .

`self$moving_mean` and `self$moving_var` are non-trainable variables that are updated each time the layer is called in training mode, as such:

- `moving_mean = moving_mean * momentum + mean(batch) * (1 - momentum)`
- `moving_var = moving_var * momentum + var(batch) * (1 - momentum)`

As such, the layer will only normalize its inputs during inference *after having been trained on data that has similar statistics as the inference data*.

### About setting `layer$trainable <- FALSE` on a BatchNormalization layer:

The meaning of setting `layer$trainable <- FALSE` is to freeze the layer, i.e. its internal state will not change during training: its trainable weights will not be updated during `fit()` or `train_on_batch()`, and its state updates will not be run.

Usually, this does not necessarily mean that the layer is run in inference mode (which is normally controlled by the `training` argument that can be passed when calling a layer). "Frozen state" and "inference mode" are two separate concepts.

However, in the case of the BatchNormalization layer, **setting `trainable <- FALSE` on the layer means that the layer will be subsequently run in inference mode** (meaning that it will use the moving mean and the moving variance to normalize the current batch, rather than using the mean and variance of the current batch).

Note that:

- Setting `trainable` on a model containing other layers will recursively set the trainable value of all inner layers.
- If the value of the `trainable` attribute is changed after calling `compile()` on a model, the new value doesn't take effect for this model until `compile()` is called again.

**Usage**

```

layer_batch_normalization(
    object,
    axis = -1L,
    momentum = 0.99,
    epsilon = 0.001,
    center = TRUE,
    scale = TRUE,
    beta_initializer = "zeros",
    gamma_initializer = "ones",
    moving_mean_initializer = "zeros",
    moving_variance_initializer = "ones",
    beta_regularizer = NULL,
    gamma_regularizer = NULL,
    beta_constraint = NULL,
    gamma_constraint = NULL,
    synchronized = FALSE,
    ...
)

```

**Arguments**

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>axis</code>	Integer, the axis that should be normalized (typically the features axis). For instance, after a Conv2D layer with <code>data_format = "channels_first"</code> , use <code>axis = 2</code> .
<code>momentum</code>	Momentum for the moving average.
<code>epsilon</code>	Small float added to variance to avoid dividing by zero.
<code>center</code>	If TRUE, add offset of beta to normalized tensor. If FALSE, beta is ignored.
<code>scale</code>	If TRUE, multiply by gamma. If FALSE, gamma is not used. When the next layer is linear this can be disabled since the scaling will be done by the next layer.
<code>beta_initializer</code>	Initializer for the beta weight.
<code>gamma_initializer</code>	Initializer for the gamma weight.
<code>moving_mean_initializer</code>	Initializer for the moving mean.
<code>moving_variance_initializer</code>	Initializer for the moving variance.
<code>beta_regularizer</code>	Optional regularizer for the beta weight.
<code>gamma_regularizer</code>	Optional regularizer for the gamma weight.
<code>beta_constraint</code>	Optional constraint for the beta weight.

<code>gamma_constraint</code>	Optional constraint for the gamma weight.
<code>synchronized</code>	Only applicable with the TensorFlow backend. If <code>TRUE</code> , synchronizes the global batch statistics (mean and variance) for the layer across all devices at each training step in a distributed training strategy. If <code>FALSE</code> , each replica uses its own local batch statistics.
<code>...</code>	Base layer keyword arguments (e.g. <code>name</code> and <code>dtype</code> ).

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

### Call Arguments

- `inputs`: Input tensor (of any rank).
- `training`: R boolean indicating whether the layer should behave in training mode or in inference mode.
  - `training = TRUE`: The layer will normalize its inputs using the mean and variance of the current batch of inputs.
  - `training = FALSE`: The layer will normalize its inputs using the mean and variance of its moving statistics, learned during training.
- `mask`: Binary tensor of shape broadcastable to `inputs` tensor, with `TRUE` values indicating the positions for which mean and variance should be computed. Masked elements of the current inputs are not taken into account for mean and variance computation during training. Any prior unmasked element values will be taken into account until their momentum expires.

### Reference

- [Ioffe and Szegedy, 2015.](#)

### See Also

- [https://keras.io/api/layers/normalization\\_layers/batch\\_normalization#batchnormalization-class](https://keras.io/api/layers/normalization_layers/batch_normalization#batchnormalization-class)

Other normalization layers:

```
layer_group_normalization()
layer_layer_normalization()
layer_spectral_normalization()
layer_unit_normalization()
```

Other layers:

```
Layer()
layer_activation()
```

```
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
```



```
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()
```

```

layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_bidirectional    *Bidirectional wrapper for RNNs.*

---

### Description

Bidirectional wrapper for RNNs.

### Usage

```

layer_bidirectional(
    object,
    layer,
    merge_mode = "concat",
    weights = NULL,
    backward_layer = NULL,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
layer	RNN instance, such as <code>layer_lstm()</code> or <code>layer_gru()</code> . It could also be a <code>Layer()</code> instance that meets the following criteria: <ol style="list-style-type: none"> <li>1. Be a sequence-processing layer (accepts 3D+ inputs).</li> <li>2. Have a <code>go_backwards</code>, <code>return_sequences</code> and <code>return_state</code> attribute (with the same semantics as for the RNN class).</li> <li>3. Have an <code>input_spec</code> attribute.</li> <li>4. Implement serialization via <code>get_config()</code> and <code>from_config()</code>. Note that the recommended way to create new RNN layers is to write a custom RNN cell and use it with <code>layer_rnn()</code>, instead of subclassing with <code>Layer()</code> directly. When <code>return_sequences</code> is <code>TRUE</code>, the output of the masked timestep will be zero regardless of the layer's original <code>zero_output_for_mask</code> value.</li> </ol>

merge_mode	Mode by which outputs of the forward and backward RNNs will be combined. One of {"sum", "mul", "concat", "ave", NULL}. If NULL, the outputs will not be combined, they will be returned as a list. Defaults to "concat".
weights	see description
backward_layer	Optional RNN, or Layer() instance to be used to handle backwards input processing. If backward_layer is not provided, the layer instance passed as the layer argument will be used to generate the backward layer automatically. Note that the provided backward_layer layer should have properties matching those of the layer argument, in particular it should have the same values for stateful, return_states, return_sequences, etc. In addition, backward_layer and layer should have different go_backwards argument values. A ValueError will be raised if these requirements are not met.
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

### Call Arguments

The call arguments for this layer are the same as those of the wrapped RNN layer. Beware that when passing the initial\_state argument during the call of this layer, the first half in the list of elements in the initial\_state list will be passed to the forward RNN call and the last half in the list of elements will be passed to the backward RNN call.

### Note

instantiating a Bidirectional layer from an existing RNN layer instance will not reuse the weights state of the RNN layer instance – the Bidirectional layer will have freshly initialized weights.

### Examples

```
model <- keras_model_sequential(input_shape = c(5, 10)) %>%
  layer_bidirectional(layer_lstm(units = 10, return_sequences = TRUE)) %>%
  layer_bidirectional(layer_lstm(units = 10)) %>%
  layer_dense(5, activation = "softmax")

model %>% compile(loss = "categorical_crossentropy",
  optimizer = "rmsprop")

# With custom backward layer
forward_layer <- layer_lstm(units = 10, return_sequences = TRUE)
backward_layer <- layer_lstm(units = 10, activation = "relu",
```

```

return_sequences = TRUE, go_backwards = TRUE)

model <- keras_model_sequential(input_shape = c(5, 10)) %>%
  bidirectional(forward_layer, backward_layer = backward_layer) %>%
  layer_dense(5, activation = "softmax")

model %>% compile(loss = "categorical_crossentropy",
  optimizer = "rmsprop")

```

### States

A Bidirectional layer instance has property states, which you can access with `layer$states`. You can also reset states using `reset_state()`

### See Also

- [https://keras.io/api/layers/recurrent\\_layers/bidirectional#bidirectional-class](https://keras.io/api/layers/recurrent_layers/bidirectional#bidirectional-class)

Other rnn layers:

```

layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_gru()
layer_lstm()
layer_rnn()
layer_simple_rnn()
layer_time_distributed()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

Other layers:

```

Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()

```

```
layer_batch_normalization()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()
```

```
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

 layer\_category\_encoding

*A preprocessing layer which encodes integer features.*


---

## Description

This layer provides options for condensing data into a categorical encoding when the total number of tokens are known in advance. It accepts integer values as inputs, and it outputs a dense or sparse representation of those inputs. For integer inputs where the total number of tokens is not known, use `layer_integer_lookup()` instead.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

## Usage

```
layer_category_encoding(
    object,
    num_tokens = NULL,
    output_mode = "multi_hot",
    sparse = FALSE,
    ...
)
```

## Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>num_tokens</code>	The total number of tokens the layer should support. All inputs to the layer must integers in the range $0 \leq \text{value} < \text{num\_tokens}$ , or an error will be thrown.
<code>output_mode</code>	Specification for the output of the layer. Values can be "one_hot", "multi_hot" or "count", configuring the layer as follows: - "one_hot": Encodes each individual element in the input into an array of <code>num_tokens</code> size, containing a 1 at the element index. If the last dimension is size 1, will encode on that dimension. If the last dimension is not size 1, will append a new dimension for the encoded output. - "multi_hot": Encodes each sample in the input into a single array of <code>num_tokens</code> size, containing a 1 for each vocabulary term present in the sample. Treats the last dimension as the sample dimension, if input shape is <code>(..., sample_length)</code> , output shape will be <code>(..., num_tokens)</code> . - "count": Like "multi_hot", but the int array contains a count of the number of times the token at that index appeared in the sample. For all output modes, currently only output up to rank 2 is supported. Defaults to "multi_hot".
<code>sparse</code>	Whether to return a sparse tensor; for backends that support sparse tensors.
<code>...</code>	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Examples****One-hot encoding data**

```
layer <- layer_category_encoding(num_tokens = 4, output_mode = "one_hot")
x <- op_array(c(3, 2, 0, 1), "int32")
layer(x)

## tf.Tensor(
## [[0. 0. 0. 1.]
## [0. 0. 1. 0.]
## [1. 0. 0. 0.]
## [0. 1. 0. 0.]], shape=(4, 4), dtype=float32)
```

**Multi-hot encoding data**

```
layer <- layer_category_encoding(num_tokens = 4, output_mode = "multi_hot")
x <- op_array(rbind(c(0, 1),
                   c(0, 0),
                   c(1, 2),
                   c(3, 1)), "int32")
layer(x)

## tf.Tensor(
## [[1. 1. 0. 0.]
## [1. 0. 0. 0.]
## [0. 1. 1. 0.]
## [0. 1. 0. 1.]], shape=(4, 4), dtype=float32)
```

**Using weighted inputs in "count" mode**

```
layer <- layer_category_encoding(num_tokens = 4, output_mode = "count")
count_weights <- op_array(rbind(c(.1, .2),
                                c(.1, .1),
                                c(.2, .3),
                                c(.4, .2)))
x <- op_array(rbind(c(0, 1),
```



```

                c(0, 0),
                c(1, 2),
                c(3, 1)), "int32")
layer(x, count_weights = count_weights)
# array([[01, 02, 0. , 0. ],
#        [02, 0. , 0. , 0. ],
#        [0. , 02, 03, 0. ],
#        [0. , 02, 0. , 04]])>

```

### Call Arguments

- inputs: A 1D or 2D tensor of integer inputs.
- count\_weights: A tensor in the same shape as inputs indicating the weight for each sample value when summing up in count mode. Not used in "multi\_hot" or "one\_hot" modes.

### See Also

- [https://keras.io/api/layers/preprocessing\\_layers/categorical/category\\_encoding#categoryencoding-class](https://keras.io/api/layers/preprocessing_layers/categorical/category_encoding#categoryencoding-class)

Other categorical features preprocessing layers:

```

layer_hashed_crossing()
layer_hashing()
layer_integer_lookup()
layer_string_lookup()

```

Other preprocessing layers:

```

layer_center_crop()
layer_discretization()
layer_feature_space()
layer_hashed_crossing()
layer_hashing()
layer_integer_lookup()
layer_mel_spectrogram()
layer_normalization()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_rescaling()
layer_resizing()
layer_string_lookup()
layer_text_vectorization()

```

Other layers:

```

Layer()

```

```
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()
```

```
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()
```

```

layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer_center_crop	<i>A preprocessing layer which crops images.</i>
-------------------	--

---

### Description

This layers crops the central portion of the images to a target size. If an image is smaller than the target size, it will be resized and cropped so as to return the largest possible window in the image that matches the target aspect ratio.

Input pixel values can be of any range (e.g. [0., 1.) or [0, 255]).

### Usage

```
layer_center_crop(object, height, width, data_format = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
height	Integer, the height of the output shape.
width	Integer, the width of the output shape.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, channels, height, width). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

**Input Shape**

3D (unbatched) or 4D (batched) tensor with shape: `(..., height, width, channels)`, in "channels\_last" format, or `(..., channels, height, width)`, in "channels\_first" format.

**Output Shape**

3D (unbatched) or 4D (batched) tensor with shape: `(..., target_height, target_width, channels)`, or `(..., channels, target_height, target_width)`, in "channels\_first" format.

If the input height/width is even and the target height/width is odd (or inversely), the input image is left-padded by 1 pixel.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_preprocessing/center\\_crop#centercrop-class](https://keras.io/api/layers/preprocessing_layers/image_preprocessing/center_crop#centercrop-class)

Other image preprocessing layers:

[layer\\_rescaling\(\)](#)

[layer\\_resizing\(\)](#)

Other preprocessing layers:

[layer\\_category\\_encoding\(\)](#)

[layer\\_discretization\(\)](#)

[layer\\_feature\\_space\(\)](#)

[layer\\_hashed\\_crossing\(\)](#)

[layer\\_hashing\(\)](#)

[layer\\_integer\\_lookup\(\)](#)

[layer\\_mel\\_spectrogram\(\)](#)

[layer\\_normalization\(\)](#)

[layer\\_random\\_brightness\(\)](#)

[layer\\_random\\_contrast\(\)](#)

[layer\\_random\\_crop\(\)](#)

[layer\\_random\\_flip\(\)](#)

[layer\\_random\\_rotation\(\)](#)

[layer\\_random\\_translation\(\)](#)

[layer\\_random\\_zoom\(\)](#)

```
layer_rescaling()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()
```

```
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()
```

```
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_concatenate	<i>Concatenates a list of inputs.</i>
-------------------	---------------------------------------

---

### Description

It takes as input a list of tensors, all of the same shape except for the concatenation axis, and returns a single tensor that is the concatenation of all inputs.

### Usage

```
layer_concatenate(inputs, ..., axis = -1L)
```

### Arguments

inputs	layers to combine
...	Standard layer keyword arguments.
axis	Axis along which to concatenate.

### Value

A tensor, the concatenation of the inputs alongside axis axis.



**Examples**

```
x <- op_arange(20) |> op_reshape(c(2, 2, 5))
y <- op_arange(20, 40) |> op_reshape(c(2, 2, 5))
layer_concatenate(x, y, axis = 2)

## tf.Tensor(
## [[ [ 0.  1.  2.  3.  4.]
##    [ 5.  6.  7.  8.  9.]
##    [20. 21. 22. 23. 24.]
##    [25. 26. 27. 28. 29.]]
##
##    [[10. 11. 12. 13. 14.]
##     [15. 16. 17. 18. 19.]
##     [30. 31. 32. 33. 34.]
##     [35. 36. 37. 38. 39.]]], shape=(2, 4, 5), dtype=float32)
```

Usage in a Keras model:

```
x1 <- op_arange(10) |> op_reshape(c(5, 2)) |> layer_dense(8)
x2 <- op_arange(10, 20) |> op_reshape(c(5, 2)) |> layer_dense(8)
y <- layer_concatenate(x1, x2)
```

**See Also**

- [https://keras.io/api/layers/merging\\_layers/concatenate#concatenate-class](https://keras.io/api/layers/merging_layers/concatenate#concatenate-class)

Other merging layers:

```
layer_add()
layer_average()
layer_dot()
layer_maximum()
layer_minimum()
layer_multiply()
layer_subtract()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
```

```
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()
```

```
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()
```

```
rnn_cell_simple()
rnn_cells_stack()
```

---

layer_conv_1d	<i>1D convolution layer (e.g. temporal convolution).</i>
---------------	--

---

### Description

This layer creates a convolution kernel that is convolved with the layer input over a single spatial (or temporal) dimension to produce a tensor of outputs. If `use_bias` is `TRUE`, a bias vector is created and added to the outputs. Finally, if `activation` is not `NULL`, it is applied to the outputs as well.

### Usage

```
layer_conv_1d(
  object,
  filters,
  kernel_size,
  strides = 1L,
  padding = "valid",
  data_format = NULL,
  dilation_rate = 1L,
  groups = 1L,
  activation = NULL,
  use_bias = TRUE,
  kernel_initializer = "glorot_uniform",
  bias_initializer = "zeros",
  kernel_regularizer = NULL,
  bias_regularizer = NULL,
  activity_regularizer = NULL,
  kernel_constraint = NULL,
  bias_constraint = NULL,
  ...
)
```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>filters</code>	int, the dimension of the output space (the number of filters in the convolution).
<code>kernel_size</code>	int or list of 1 integer, specifying the size of the convolution window.
<code>strides</code>	int or list of 1 integer, specifying the stride length of the convolution. <code>strides &gt; 1</code> is incompatible with <code>dilation_rate &gt; 1</code> .
<code>padding</code>	string, "valid", "same" or "causal"(case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When <code>padding="same"</code> and <code>strides=1</code> , the output has the same size as

	the input. "causal" results in causal (dilated) convolutions, e.g. output[t] does not depend on tail(input, t+1). Useful when modeling temporal data where the model should not violate the temporal order. See <a href="#">WaveNet: A Generative Model for Raw Audio, section 2.1</a> .
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
dilation_rate	int or list of 1 integers, specifying the dilation rate to use for dilated convolution.
groups	A positive int specifying the number of groups in which the input is split along the channel axis. Each group is convolved separately with filters // groups filters. The output is the concatenation of all the groups results along the channel axis. Input channels and filters must both be divisible by groups.
activation	Activation function. If NULL, no activation is applied.
use_bias	bool, if TRUE, bias will be added to the output.
kernel_initializer	Initializer for the convolution kernel. If NULL, the default initializer ("glorot_uniform") will be used.
bias_initializer	Initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
kernel_regularizer	Optional regularizer for the convolution kernel.
bias_regularizer	Optional regularizer for the bias vector.
activity_regularizer	Optional regularizer function for the output.
kernel_constraint	Optional projection function to be applied to the kernel after being updated by an Optimizer (e.g. used to implement norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape). Constraints are not safe to use when doing asynchronous distributed training.
bias_constraint	Optional projection function to be applied to the bias after being updated by an Optimizer.
...	For forward/backward compatibility.

**Value**

A 3D tensor representing  $\text{activation}(\text{conv1d}(\text{inputs}, \text{kernel}) + \text{bias})$ .

**Input Shape**

- If data\_format="channels\_last": A 3D tensor with shape: (batch\_shape, steps, channels)
- If data\_format="channels\_first": A 3D tensor with shape: (batch\_shape, channels, steps)

**Output Shape**

- If data\_format="channels\_last": A 3D tensor with shape: (batch\_shape, new\_steps, filters)
- If data\_format="channels\_first": A 3D tensor with shape: (batch\_shape, filters, new\_steps)

**Raises**

ValueError: when both strides > 1 and dilation\_rate > 1.

**Example**

```
# The inputs are 128-length vectors with 10 timesteps, and the
# batch size is 4.
x <- random_uniform(c(4, 10, 128))
y <- x |> layer_conv_1d(32, 3, activation='relu')
shape(y)

## shape(4, 8, 32)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/convolution1d#conv1d-class](https://keras.io/api/layers/convolution_layers/convolution1d#conv1d-class)

Other convolutional layers:

```
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_separable_conv_1d()
layer_separable_conv_2d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
```

```
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()
```

```
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```



---

 layer\_conv\_1d\_transpose

*1D transposed convolution layer.*


---

### Description

The need for transposed convolutions generally arise from the desire to use a transformation going in the opposite direction of a normal convolution, i.e., from something that has the shape of the output of some convolution to something that has the shape of its input while maintaining a connectivity pattern that is compatible with said convolution.

### Usage

```
layer_conv_1d_transpose(
    object,
    filters,
    kernel_size,
    strides = 1L,
    padding = "valid",
    data_format = NULL,
    dilation_rate = 1L,
    activation = NULL,
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    bias_constraint = NULL,
    ...
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
filters	int, the dimension of the output space (the number of filters in the transpose convolution).
kernel_size	int or list of 1 integer, specifying the size of the transposed convolution window.
strides	int or list of 1 integer, specifying the stride length of the transposed convolution. strides > 1 is incompatible with dilation_rate > 1.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.

<code>data_format</code>	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the <code>image_data_format</code> value found in your Keras config file at <code>~/.keras/keras.json</code> . If you never set it, then it will be "channels_last".
<code>dilation_rate</code>	int or list of 1 integers, specifying the dilation rate to use for dilated transposed convolution.
<code>activation</code>	Activation function. If NULL, no activation is applied.
<code>use_bias</code>	bool, if TRUE, bias will be added to the output.
<code>kernel_initializer</code>	Initializer for the convolution kernel. If NULL, the default initializer ("glorot_uniform") will be used.
<code>bias_initializer</code>	Initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
<code>kernel_regularizer</code>	Optional regularizer for the convolution kernel.
<code>bias_regularizer</code>	Optional regularizer for the bias vector.
<code>activity_regularizer</code>	Optional regularizer function for the output.
<code>kernel_constraint</code>	Optional projection function to be applied to the kernel after being updated by an Optimizer (e.g. used to implement norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape). Constraints are not safe to use when doing asynchronous distributed training.
<code>bias_constraint</code>	Optional projection function to be applied to the bias after being updated by an Optimizer.
<code>...</code>	For forward/backward compatibility.

**Value**

A 3D tensor representing `activation(conv1d_transpose(inputs, kernel) + bias)`.

**Input Shape**

- If `data_format="channels_last"`: A 3D tensor with shape: (batch\_shape, steps, channels)
- If `data_format="channels_first"`: A 3D tensor with shape: (batch\_shape, channels, steps)

**Output Shape**

- If `data_format="channels_last"`: A 3D tensor with shape: (batch\_shape, new\_steps, filters)
- If `data_format="channels_first"`: A 3D tensor with shape: (batch\_shape, filters, new\_steps)

**Raises**

ValueError: when both strides > 1 and dilation\_rate > 1.

**References**

- [A guide to convolution arithmetic for deep learning](#)
- [Deconvolutional Networks](#)

**Example**

```
x <- random_uniform(c(4, 10, 128))
y <- x |> layer_conv_1d_transpose(32, 3, 2, activation='relu')
shape(y)

## shape(4, 21, 32)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/convolution1d\\_transpose#conv1dtranspose-class](https://keras.io/api/layers/convolution_layers/convolution1d_transpose#conv1dtranspose-class)

Other convolutional layers:

```
layer_conv_1d()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_separable_conv_1d()
layer_separable_conv_2d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
```

```
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()
```

```
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_conv_2d	<i>2D convolution layer.</i>
---------------	------------------------------

---

### Description

This layer creates a convolution kernel that is convolved with the layer input over a single spatial (or temporal) dimension to produce a tensor of outputs. If `use_bias` is `TRUE`, a bias vector is created and added to the outputs. Finally, if `activation` is not `NULL`, it is applied to the outputs as well.

### Usage

```
layer_conv_2d(
  object,
  filters,
  kernel_size,
  strides = list(1L, 1L),
  padding = "valid",
  data_format = NULL,
  dilation_rate = list(1L, 1L),
  groups = 1L,
  activation = NULL,
  use_bias = TRUE,
  kernel_initializer = "glorot_uniform",
  bias_initializer = "zeros",
  kernel_regularizer = NULL,
  bias_regularizer = NULL,
  activity_regularizer = NULL,
  kernel_constraint = NULL,
  bias_constraint = NULL,
  ...
)
```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>filters</code>	int, the dimension of the output space (the number of filters in the convolution).
<code>kernel_size</code>	int or list of 2 integer, specifying the size of the convolution window.
<code>strides</code>	int or list of 2 integer, specifying the stride length of the convolution. <code>strides &gt; 1</code> is incompatible with <code>dilation_rate &gt; 1</code> .
<code>padding</code>	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When <code>padding="same"</code> and <code>strides=1</code> , the output has the same size as the input.
<code>data_format</code>	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, height, width, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, height, width).

	It defaults to the <code>image_data_format</code> value found in your Keras config file at <code>~/.keras/keras.json</code> . If you never set it, then it will be <code>"channels_last"</code> .
<code>dilation_rate</code>	int or list of 2 integers, specifying the dilation rate to use for dilated convolution.
<code>groups</code>	A positive int specifying the number of groups in which the input is split along the channel axis. Each group is convolved separately with <code>filters // groups</code> filters. The output is the concatenation of all the groups results along the channel axis. Input channels and <code>filters</code> must both be divisible by <code>groups</code> .
<code>activation</code>	Activation function. If NULL, no activation is applied.
<code>use_bias</code>	bool, if TRUE, bias will be added to the output.
<code>kernel_initializer</code>	Initializer for the convolution kernel. If NULL, the default initializer ( <code>"glorot_uniform"</code> ) will be used.
<code>bias_initializer</code>	Initializer for the bias vector. If NULL, the default initializer ( <code>"zeros"</code> ) will be used.
<code>kernel_regularizer</code>	Optional regularizer for the convolution kernel.
<code>bias_regularizer</code>	Optional regularizer for the bias vector.
<code>activity_regularizer</code>	Optional regularizer function for the output.
<code>kernel_constraint</code>	Optional projection function to be applied to the kernel after being updated by an Optimizer (e.g. used to implement norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape). Constraints are not safe to use when doing asynchronous distributed training.
<code>bias_constraint</code>	Optional projection function to be applied to the bias after being updated by an Optimizer.
<code>...</code>	For forward/backward compatibility.

**Value**

A 4D tensor representing `activation(conv2d(inputs, kernel) + bias)`.

**Input Shape**

- If `data_format="channels_last"`: A 4D tensor with shape: (batch\_size, height, width, channels)
- If `data_format="channels_first"`: A 4D tensor with shape: (batch\_size, channels, height, width)

**Output Shape**

- If `data_format="channels_last"`: A 4D tensor with shape: (batch\_size, new\_height, new\_width, filters)
- If `data_format="channels_first"`: A 4D tensor with shape: (batch\_size, filters, new\_height, new\_width)

**Raises**

ValueError: when both strides > 1 and dilation\_rate > 1.

**Example**

```
x <- random_uniform(c(4, 10, 10, 128))
y <- x |> layer_conv_2d(32, 3, activation='relu')
shape(y)

## shape(4, 8, 8, 32)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/convolution2d#conv2d-class](https://keras.io/api/layers/convolution_layers/convolution2d#conv2d-class)

Other convolutional layers:

```
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_separable_conv_1d()
layer_separable_conv_2d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
```



```
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()
```

```
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_conv\_2d\_transpose

*2D transposed convolution layer.*

---

**Description**

The need for transposed convolutions generally arise from the desire to use a transformation going in the opposite direction of a normal convolution, i.e., from something that has the shape of the output of some convolution to something that has the shape of its input while maintaining a connectivity pattern that is compatible with said convolution.

**Usage**

```
layer_conv_2d_transpose(
    object,
    filters,
    kernel_size,
    strides = list(1L, 1L),
    padding = "valid",
    data_format = NULL,
    dilation_rate = list(1L, 1L),
    activation = NULL,
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    bias_constraint = NULL,
    ...
)
```

**Arguments**

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>filters</code>	int, the dimension of the output space (the number of filters in the transposed convolution).
<code>kernel_size</code>	int or list of 1 integer, specifying the size of the transposed convolution window.
<code>strides</code>	int or list of 1 integer, specifying the stride length of the transposed convolution. <code>strides &gt; 1</code> is incompatible with <code>dilation_rate &gt; 1</code> .
<code>padding</code>	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When <code>padding="same"</code> and <code>strides=1</code> , the output has the same size as the input.
<code>data_format</code>	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, height, width, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, height, width). It defaults to the <code>image_data_format</code> value found in your Keras config file at <code>~/.keras/keras.json</code> . If you never set it, then it will be "channels_last".
<code>dilation_rate</code>	int or list of 1 integers, specifying the dilation rate to use for dilated transposed convolution.

activation	Activation function. If NULL, no activation is applied.
use_bias	bool, if TRUE, bias will be added to the output.
kernel_initializer	Initializer for the convolution kernel. If NULL, the default initializer ("glorot_uniform") will be used.
bias_initializer	Initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
kernel_regularizer	Optional regularizer for the convolution kernel.
bias_regularizer	Optional regularizer for the bias vector.
activity_regularizer	Optional regularizer function for the output.
kernel_constraint	Optional projection function to be applied to the kernel after being updated by an Optimizer (e.g. used to implement norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape). Constraints are not safe to use when doing asynchronous distributed training.
bias_constraint	Optional projection function to be applied to the bias after being updated by an Optimizer.
...	For forward/backward compatibility.

**Value**

A 4D tensor representing `activation(conv2d_transpose(inputs, kernel) + bias)`.

**Input Shape**

- If `data_format="channels_last"`: A 4D tensor with shape: (batch\_size, height, width, channels)
- If `data_format="channels_first"`: A 4D tensor with shape: (batch\_size, channels, height, width)

**Output Shape**

- If `data_format="channels_last"`: A 4D tensor with shape: (batch\_size, new\_height, new\_width, filters)
- If `data_format="channels_first"`: A 4D tensor with shape: (batch\_size, filters, new\_height, new\_width)

**Raises**

`ValueError`: when both `strides > 1` and `dilation_rate > 1`.

**References**

- [A guide to convolution arithmetic for deep learning](#)
- [Deconvolutional Networks](#)

**Example**

```
x <- random_uniform(c(4, 10, 8, 128))
y <- x |> layer_conv_2d_transpose(32, 2, 2, activation='relu')
shape(y)

## shape(4, 20, 16, 32)

# (4, 20, 16, 32)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/convolution2d\\_transpose#conv2dtranspose-class](https://keras.io/api/layers/convolution_layers/convolution2d_transpose#conv2dtranspose-class)

Other convolutional layers:

```
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_3d()
layer_conv_3d_transpose()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_separable_conv_1d()
layer_separable_conv_2d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
```

```
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()
```

```
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_conv\_3d

*3D convolution layer.*

---

### **Description**

This layer creates a convolution kernel that is convolved with the layer input over a single spatial (or temporal) dimension to produce a tensor of outputs. If `use_bias` is `TRUE`, a bias vector is created

and added to the outputs. Finally, if activation is not NULL, it is applied to the outputs as well.

### Usage

```
layer_conv_3d(
    object,
    filters,
    kernel_size,
    strides = list(1L, 1L, 1L),
    padding = "valid",
    data_format = NULL,
    dilation_rate = list(1L, 1L, 1L),
    groups = 1L,
    activation = NULL,
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    bias_constraint = NULL,
    ...
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
filters	int, the dimension of the output space (the number of filters in the convolution).
kernel_size	int or list of 3 integer, specifying the size of the convolution window.
strides	int or list of 3 integer, specifying the stride length of the convolution. <code>strides &gt; 1</code> is incompatible with <code>dilation_rate &gt; 1</code> .
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When <code>padding="same"</code> and <code>strides=1</code> , the output has the same size as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, spatial_dim1, spatial_dim2, spatial_dim3). It defaults to the <code>image_data_format</code> value found in your Keras config file at <code>~/.keras/keras.json</code> . If you never set it, then it will be "channels_last".
dilation_rate	int or list of 3 integers, specifying the dilation rate to use for dilated convolution.
groups	A positive int specifying the number of groups in which the input is split along the channel axis. Each group is convolved separately with <code>filters %% groups</code> filters. The output is the concatenation of all the groups results along the channel axis. Input channels and filters must both be divisible by groups.
activation	Activation function. If NULL, no activation is applied.



<code>use_bias</code>	bool, if TRUE, bias will be added to the output.
<code>kernel_initializer</code>	Initializer for the convolution kernel. If NULL, the default initializer ("glorot_uniform") will be used.
<code>bias_initializer</code>	Initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
<code>kernel_regularizer</code>	Optional regularizer for the convolution kernel.
<code>bias_regularizer</code>	Optional regularizer for the bias vector.
<code>activity_regularizer</code>	Optional regularizer function for the output.
<code>kernel_constraint</code>	Optional projection function to be applied to the kernel after being updated by an Optimizer (e.g. used to implement norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape). Constraints are not safe to use when doing asynchronous distributed training.
<code>bias_constraint</code>	Optional projection function to be applied to the bias after being updated by an Optimizer.
<code>...</code>	For forward/backward compatibility.

**Value**

A 5D tensor representing  $\text{activation}(\text{conv3d}(\text{inputs}, \text{kernel}) + \text{bias})$ .

**Input Shape**

- If `data_format="channels_last"`: 5D tensor with shape: (batch\_size, spatial\_dim1, spatial\_dim2, spatial\_dim3, channels)
- If `data_format="channels_first"`: 5D tensor with shape: (batch\_size, channels, spatial\_dim1, spatial\_dim2, spatial\_dim3)

**Output Shape**

- If `data_format="channels_last"`: 5D tensor with shape: (batch\_size, new\_spatial\_dim1, new\_spatial\_dim2, new\_spatial\_dim3, filters)
- If `data_format="channels_first"`: 5D tensor with shape: (batch\_size, filters, new\_spatial\_dim1, new\_spatial\_dim2, new\_spatial\_dim3)

**Raises**

`ValueError`: when both `strides > 1` and `dilation_rate > 1`.

**Example**

```
x <- random_uniform(c(4, 10, 10, 10, 128))
y <- x |> layer_conv_3d(32, 3, activation = 'relu')
shape(y)
## shape(4, 8, 8, 8, 32)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/convolution3d#conv3d-class](https://keras.io/api/layers/convolution_layers/convolution3d#conv3d-class)

Other convolutional layers:

```
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d_transpose()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_separable_conv_1d()  
layer_separable_conv_2d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()
```

```
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()
```

```
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_conv\_3d\_transpose

*3D transposed convolution layer.*

---

### Description

The need for transposed convolutions generally arise from the desire to use a transformation going in the opposite direction of a normal convolution, i.e., from something that has the shape of the output of some convolution to something that has the shape of its input while maintaining a connectivity pattern that is compatible with said convolution.

### Usage

```
layer_conv_3d_transpose(  
    object,  
    filters,  
    kernel_size,
```

```

    strides = list(1L, 1L, 1L),
    padding = "valid",
    data_format = NULL,
    dilation_rate = list(1L, 1L, 1L),
    activation = NULL,
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    bias_constraint = NULL,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
filters	int, the dimension of the output space (the number of filters in the transposed convolution).
kernel_size	int or list of 1 integer, specifying the size of the transposed convolution window.
strides	int or list of 1 integer, specifying the stride length of the transposed convolution. strides > 1 is incompatible with dilation_rate > 1.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When padding="same" and strides=1, the output has the same size as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, spatial_dim1, spatial_dim2, spatial_dim3). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
dilation_rate	int or list of 1 integers, specifying the dilation rate to use for dilated transposed convolution.
activation	Activation function. If NULL, no activation is applied.
use_bias	bool, if TRUE, bias will be added to the output.
kernel_initializer	Initializer for the convolution kernel. If NULL, the default initializer ("glorot_uniform") will be used.
bias_initializer	Initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
kernel_regularizer	Optional regularizer for the convolution kernel.

bias_regularizer	Optional regularizer for the bias vector.
activity_regularizer	Optional regularizer function for the output.
kernel_constraint	Optional projection function to be applied to the kernel after being updated by an <code>Optimizer</code> (e.g. used to implement norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape). Constraints are not safe to use when doing asynchronous distributed training.
bias_constraint	Optional projection function to be applied to the bias after being updated by an <code>Optimizer</code> .
...	For forward/backward compatibility.

**Value**

A 5D tensor representing `activation(conv3d(inputs, kernel) + bias)`.

**Input Shape**

- If `data_format="channels_last"`: 5D tensor with shape: `(batch_size, spatial_dim1, spatial_dim2, spatial_dim3, channels)`.
- If `data_format="channels_first"`: 5D tensor with shape: `(batch_size, channels, spatial_dim1, spatial_dim2, spatial_dim3)`.

**Output Shape**

- If `data_format="channels_last"`: 5D tensor with shape: `(batch_size, new_spatial_dim1, new_spatial_dim2, new_spatial_dim3, filters)`.
- If `data_format="channels_first"`: 5D tensor with shape: `(batch_size, filters, new_spatial_dim1, new_spatial_dim2, new_spatial_dim3)`.

**Raises**

`ValueError`: when both `strides > 1` and `dilation_rate > 1`.

**References**

- [A guide to convolution arithmetic for deep learning](#)
- [Deconvolutional Networks](#)

**Example**

```
x <- random_uniform(c(4, 10, 8, 12, 128))
y <- x |> layer_conv_3d_transpose(32, 2, 2, activation = 'relu')
shape(y)

## shape(4, 20, 16, 24, 32)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/convolution3d\\_transpose#conv3dtranspose-class](https://keras.io/api/layers/convolution_layers/convolution3d_transpose#conv3dtranspose-class)

Other convolutional layers:

```
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_separable_conv_1d()  
layer_separable_conv_2d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()
```

```
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()
```



```
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_conv\_lstm\_1d     *1D Convolutional LSTM.*

---

### Description

Similar to an LSTM layer, but the input transformations and recurrent transformations are both convolutional.

### Usage

```
layer_conv_lstm_1d(  
    object,  
    filters,  
    kernel_size,  
    strides = 1L,  
    padding = "valid",  
    data_format = NULL,
```

```

dilation_rate = 1L,
activation = "tanh",
recurrent_activation = "sigmoid",
use_bias = TRUE,
kernel_initializer = "glorot_uniform",
recurrent_initializer = "orthogonal",
bias_initializer = "zeros",
unit_forget_bias = TRUE,
kernel_regularizer = NULL,
recurrent_regularizer = NULL,
bias_regularizer = NULL,
activity_regularizer = NULL,
kernel_constraint = NULL,
recurrent_constraint = NULL,
bias_constraint = NULL,
dropout = 0,
recurrent_dropout = 0,
seed = NULL,
return_sequences = FALSE,
return_state = FALSE,
go_backwards = FALSE,
stateful = FALSE,
...,
unroll = NULL
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
filters	int, the dimension of the output space (the number of filters in the convolution).
kernel_size	int or tuple/list of 1 integer, specifying the size of the convolution window.
strides	int or tuple/list of 1 integer, specifying the stride length of the convolution. strides > 1 is incompatible with dilation_rate > 1.
padding	string, "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
dilation_rate	int or tuple/list of 1 integers, specifying the dilation rate to use for dilated convolution.
activation	Activation function to use. By default hyperbolic tangent activation function is applied (tanh(x)).

recurrent_activation	Activation function to use for the recurrent step.
use_bias	Boolean, whether the layer uses a bias vector.
kernel_initializer	Initializer for the kernel weights matrix, used for the linear transformation of the inputs.
recurrent_initializer	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state.
bias_initializer	Initializer for the bias vector.
unit_forget_bias	Boolean. If TRUE, add 1 to the bias of the forget gate at initialization. Use in combination with bias_initializer="zeros". This is recommended in <a href="#">Jozefowicz et al., 2015</a>
kernel_regularizer	Regularizer function applied to the kernel weights matrix.
recurrent_regularizer	Regularizer function applied to the recurrent_kernel weights matrix.
bias_regularizer	Regularizer function applied to the bias vector.
activity_regularizer	Regularizer function applied to.
kernel_constraint	Constraint function applied to the kernel weights matrix.
recurrent_constraint	Constraint function applied to the recurrent_kernel weights matrix.
bias_constraint	Constraint function applied to the bias vector.
dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs.
recurrent_dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state.
seed	Random seed for dropout.
return_sequences	Boolean. Whether to return the last output in the output sequence, or the full sequence. Default: FALSE.
return_state	Boolean. Whether to return the last state in addition to the output. Default: FALSE.
go_backwards	Boolean (default: FALSE). If TRUE, process the input sequence backwards and return the reversed sequence.
stateful	Boolean (default FALSE). If TRUE, the last state for each sample at index i in a batch will be used as initial state for the sample of index i in the following batch.

...	For forward/backward compatibility.
unroll	Boolean (default: FALSE). If TRUE, the network will be unrolled, else a symbolic loop will be used. Unrolling can speed-up a RNN, although it tends to be more memory-intensive. Unrolling is only suitable for short sequences.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Call Arguments

- `inputs`: A 4D tensor.
- `initial_state`: List of initial state tensors to be passed to the first call of the cell.
- `mask`: Binary tensor of shape `(samples, timesteps)` indicating whether a given timestep should be masked.
- `training`: Python boolean indicating whether the layer should behave in training mode or in inference mode. This is only relevant if `dropout` or `recurrent_dropout` are set.

### Input Shape

- If `data_format="channels_first"`: 4D tensor with shape: `(samples, time, channels, rows)`
- If `data_format="channels_last"`: 4D tensor with shape: `(samples, time, rows, channels)`

### Output Shape

- If `return_state`: a list of tensors. The first tensor is the output. The remaining tensors are the last states, each 3D tensor with shape: `(samples, filters, new_rows)` if `data_format='channels_first'` or shape: `(samples, new_rows, filters)` if `data_format='channels_last'`. rows values might have changed due to padding.
- If `return_sequences`: 4D tensor with shape: `(samples, timesteps, filters, new_rows)` if `data_format='channels_first'` or shape: `(samples, timesteps, new_rows, filters)` if `data_format='channels_last'`.
- Else, 3D tensor with shape: `(samples, filters, new_rows)` if `data_format='channels_first'` or shape: `(samples, new_rows, filters)` if `data_format='channels_last'`.

### References

- [Shi et al., 2015](#) (the current implementation does not include the feedback loop on the cells output).

**See Also**

- [https://keras.io/api/layers/recurrent\\_layers/conv\\_lstm1d#convlstm1d-class](https://keras.io/api/layers/recurrent_layers/conv_lstm1d#convlstm1d-class)

Other rnn layers:

```
layer_bidirectional()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_gru()  
layer_lstm()  
layer_rnn()  
layer_simple_rnn()  
layer_time_distributed()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()
```

```
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()
```

```
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_t fsm()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_conv\_lstm\_2d      *2D Convolutional LSTM.*

---

### **Description**

Similar to an LSTM layer, but the input transformations and recurrent transformations are both convolutional.

### **Usage**

```
layer_conv_lstm_2d(  
    object,  
    filters,  
    kernel_size,
```

```

    strides = 1L,
    padding = "valid",
    data_format = NULL,
    dilation_rate = 1L,
    activation = "tanh",
    recurrent_activation = "sigmoid",
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    recurrent_initializer = "orthogonal",
    bias_initializer = "zeros",
    unit_forget_bias = TRUE,
    kernel_regularizer = NULL,
    recurrent_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    recurrent_constraint = NULL,
    bias_constraint = NULL,
    dropout = 0,
    recurrent_dropout = 0,
    seed = NULL,
    return_sequences = FALSE,
    return_state = FALSE,
    go_backwards = FALSE,
    stateful = FALSE,
    ...,
    unroll = NULL
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
filters	int, the dimension of the output space (the number of filters in the convolution).
kernel_size	int or tuple/list of 2 integers, specifying the size of the convolution window.
strides	int or tuple/list of 2 integers, specifying the stride length of the convolution. strides > 1 is incompatible with dilation_rate > 1.
padding	string, "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
dilation_rate	int or tuple/list of 2 integers, specifying the dilation rate to use for dilated convolution.



activation	Activation function to use. By default hyperbolic tangent activation function is applied ( $\tanh(x)$ ).
recurrent_activation	Activation function to use for the recurrent step.
use_bias	Boolean, whether the layer uses a bias vector.
kernel_initializer	Initializer for the kernel weights matrix, used for the linear transformation of the inputs.
recurrent_initializer	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state.
bias_initializer	Initializer for the bias vector.
unit_forget_bias	Boolean. If TRUE, add 1 to the bias of the forget gate at initialization. Use in combination with <code>bias_initializer="zeros"</code> . This is recommended in <a href="#">Jozefowicz et al., 2015</a>
kernel_regularizer	Regularizer function applied to the kernel weights matrix.
recurrent_regularizer	Regularizer function applied to the recurrent_kernel weights matrix.
bias_regularizer	Regularizer function applied to the bias vector.
activity_regularizer	Regularizer function applied to.
kernel_constraint	Constraint function applied to the kernel weights matrix.
recurrent_constraint	Constraint function applied to the recurrent_kernel weights matrix.
bias_constraint	Constraint function applied to the bias vector.
dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs.
recurrent_dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state.
seed	Random seed for dropout.
return_sequences	Boolean. Whether to return the last output in the output sequence, or the full sequence. Default: FALSE.
return_state	Boolean. Whether to return the last state in addition to the output. Default: FALSE.
go_backwards	Boolean (default: FALSE). If TRUE, process the input sequence backwards and return the reversed sequence.

stateful	Boolean (default FALSE). If TRUE, the last state for each sample at index <i>i</i> in a batch will be used as initial state for the sample of index <i>i</i> in the following batch.
...	For forward/backward compatibility.
unroll	Boolean (default: FALSE). If TRUE, the network will be unrolled, else a symbolic loop will be used. Unrolling can speed-up a RNN, although it tends to be more memory-intensive. Unrolling is only suitable for short sequences.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Call Arguments

- `inputs`: A 5D tensor.
- `mask`: Binary tensor of shape `(samples, timesteps)` indicating whether a given timestep should be masked.
- `training`: Python boolean indicating whether the layer should behave in training mode or in inference mode. This is only relevant if `dropout` or `recurrent_dropout` are set.
- `initial_state`: List of initial state tensors to be passed to the first call of the cell.

### Input Shape

- If `data_format='channels_first'`: 5D tensor with shape: `(samples, time, channels, rows, cols)`
- If `data_format='channels_last'`: 5D tensor with shape: `(samples, time, rows, cols, channels)`

### Output Shape

- If `return_state`: a list of tensors. The first tensor is the output. The remaining tensors are the last states, each 4D tensor with shape: `(samples, filters, new_rows, new_cols)` if `data_format='channels_first'` or shape: `(samples, new_rows, new_cols, filters)` if `data_format='channels_last'`. `rows` and `cols` values might have changed due to padding.
- If `return_sequences`: 5D tensor with shape: `(samples, timesteps, filters, new_rows, new_cols)` if `data_format='channels_first'` or shape: `(samples, timesteps, new_rows, new_cols, filters)` if `data_format='channels_last'`.
- Else, 4D tensor with shape: `(samples, filters, new_rows, new_cols)` if `data_format='channels_first'` or shape: `(samples, new_rows, new_cols, filters)` if `data_format='channels_last'`.

### References

- [Shi et al., 2015](#) (the current implementation does not include the feedback loop on the cells output).

**See Also**

- [https://keras.io/api/layers/recurrent\\_layers/conv\\_lstm2d#convlstm2d-class](https://keras.io/api/layers/recurrent_layers/conv_lstm2d#convlstm2d-class)

Other rnn layers:

```
layer_bidirectional()  
layer_conv_lstm_1d()  
layer_conv_lstm_3d()  
layer_gru()  
layer_lstm()  
layer_rnn()  
layer_simple_rnn()  
layer_time_distributed()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_3d()  
layer_cropping_1d()
```

```
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
```

```
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_conv\_lstm\_3d      *3D Convolutional LSTM.*

---

### **Description**

Similar to an LSTM layer, but the input transformations and recurrent transformations are both convolutional.

### **Usage**

```
layer_conv_lstm_3d(  
    object,  
    filters,  
    kernel_size,
```

```

    strides = 1L,
    padding = "valid",
    data_format = NULL,
    dilation_rate = 1L,
    activation = "tanh",
    recurrent_activation = "sigmoid",
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    recurrent_initializer = "orthogonal",
    bias_initializer = "zeros",
    unit_forget_bias = TRUE,
    kernel_regularizer = NULL,
    recurrent_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    recurrent_constraint = NULL,
    bias_constraint = NULL,
    dropout = 0,
    recurrent_dropout = 0,
    seed = NULL,
    return_sequences = FALSE,
    return_state = FALSE,
    go_backwards = FALSE,
    stateful = FALSE,
    ...,
    unroll = NULL
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
filters	int, the dimension of the output space (the number of filters in the convolution).
kernel_size	int or tuple/list of 3 integers, specifying the size of the convolution window.
strides	int or tuple/list of 3 integers, specifying the stride length of the convolution. <code>strides &gt; 1</code> is incompatible with <code>dilation_rate &gt; 1</code> .
padding	string, "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the <code>image_data_format</code> value found in your Keras config file at <code>~/keras/keras.json</code> . If you never set it, then it will be "channels_last".
dilation_rate	int or tuple/list of 3 integers, specifying the dilation rate to use for dilated convolution.

activation	Activation function to use. By default hyperbolic tangent activation function is applied ( $\tanh(x)$ ).
recurrent_activation	Activation function to use for the recurrent step.
use_bias	Boolean, whether the layer uses a bias vector.
kernel_initializer	Initializer for the kernel weights matrix, used for the linear transformation of the inputs.
recurrent_initializer	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state.
bias_initializer	Initializer for the bias vector.
unit_forget_bias	Boolean. If TRUE, add 1 to the bias of the forget gate at initialization. Use in combination with <code>bias_initializer="zeros"</code> . This is recommended in <a href="#">Jozefowicz et al., 2015</a>
kernel_regularizer	Regularizer function applied to the kernel weights matrix.
recurrent_regularizer	Regularizer function applied to the recurrent_kernel weights matrix.
bias_regularizer	Regularizer function applied to the bias vector.
activity_regularizer	Regularizer function applied to.
kernel_constraint	Constraint function applied to the kernel weights matrix.
recurrent_constraint	Constraint function applied to the recurrent_kernel weights matrix.
bias_constraint	Constraint function applied to the bias vector.
dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs.
recurrent_dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state.
seed	Random seed for dropout.
return_sequences	Boolean. Whether to return the last output in the output sequence, or the full sequence. Default: FALSE.
return_state	Boolean. Whether to return the last state in addition to the output. Default: FALSE.
go_backwards	Boolean (default: FALSE). If TRUE, process the input sequence backwards and return the reversed sequence.

stateful	Boolean (default FALSE). If TRUE, the last state for each sample at index <i>i</i> in a batch will be used as initial state for the sample of index <i>i</i> in the following batch.
...	For forward/backward compatibility.
unroll	Boolean (default: FALSE). If TRUE, the network will be unrolled, else a symbolic loop will be used. Unrolling can speed-up a RNN, although it tends to be more memory-intensive. Unrolling is only suitable for short sequences.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Call Arguments

- `inputs`: A 6D tensor.
- `mask`: Binary tensor of shape `(samples, timesteps)` indicating whether a given timestep should be masked.
- `training`: Python boolean indicating whether the layer should behave in training mode or in inference mode. This is only relevant if `dropout` or `recurrent_dropout` are set.
- `initial_state`: List of initial state tensors to be passed to the first call of the cell.

### Input Shape

- If `data_format='channels_first'`: 5D tensor with shape: `(samples, time, channels, *spatial_dims)`
- If `data_format='channels_last'`: 5D tensor with shape: `(samples, time, *spatial_dims, channels)`

### Output Shape

- If `return_state`: a list of tensors. The first tensor is the output. The remaining tensors are the last states, each 4D tensor with shape: `(samples, filters, *spatial_dims)` if `data_format='channels_first'` or shape: `(samples, *spatial_dims, filters)` if `data_format='channels_last'`.
- If `return_sequences`: 5D tensor with shape: `(samples, timesteps, filters, *spatial_dims)` if `data_format='channels_first'` or shape: `(samples, timesteps, *spatial_dims, filters)` if `data_format='channels_last'`.
- Else, 4D tensor with shape: `(samples, filters, *spatial_dims)` if `data_format='channels_first'` or shape: `(samples, *spatial_dims, filters)` if `data_format='channels_last'`.

### References

- [Shi et al., 2015](#) (the current implementation does not include the feedback loop on the cells output).



**See Also**

- [https://keras.io/api/layers/recurrent\\_layers/conv\\_lstm3d#convlstm3d-class](https://keras.io/api/layers/recurrent_layers/conv_lstm3d#convlstm3d-class)

Other rnn layers:

```
layer_bidirectional()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_gru()  
layer_lstm()  
layer_rnn()  
layer_simple_rnn()  
layer_time_distributed()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_cropping_1d()
```

```
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()
```

```
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_cropping_1d	<i>Cropping layer for 1D input (e.g. temporal sequence).</i>
-------------------	--

---

**Description**

It crops along the time dimension (axis 2).

**Usage**

```
layer_cropping_1d(object, cropping = list(1L, 1L), ...)
```

**Arguments**

object            Object to compose the layer with. A tensor, array, or sequential model.

cropping            Int, or list of int (length 2).

- If int: how many units should be trimmed off at the beginning and end of the cropping dimension (axis 1).
- If list of 2 ints: how many units should be trimmed off at the beginning and end of the cropping dimension ((left\_crop, right\_crop)).

...                    For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Example**

```
input_shape <- c(2, 3, 2)
x <- op_arange(prod(input_shape)) |> op_reshape(input_shape)
x

## tf.Tensor(
## [[ [ 0.  1.]
##    [ 2.  3.]
##    [ 4.  5.]]
##
##    [[ [ 6.  7.]
##       [ 8.  9.]
##       [10. 11.]]], shape=(2, 3, 2), dtype=float32)

y <- x |> layer_cropping_1d(cropping = 1)
y

## tf.Tensor(
## [[ [2.  3.]
##
##    [[ [8.  9.]]], shape=(2, 1, 2), dtype=float32)
```

**Input Shape**

3D tensor with shape (batch\_size, axis\_to\_crop, features)

**Output Shape**

3D tensor with shape (batch\_size, cropped\_axis, features)

**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/cropping1d#cropping1d-class](https://keras.io/api/layers/reshaping_layers/cropping1d#cropping1d-class)

Other reshaping layers:

```
layer_cropping_2d()  
layer_cropping_3d()  
layer_flatten()  
layer_permute()  
layer_repeat_vector()  
layer_reshape()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()
```

```
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()
```

```
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_cropping\_2d      *Cropping layer for 2D input (e.g. picture).*

---

### Description

It crops along spatial dimensions, i.e. height and width.

### Usage

```
layer_cropping_2d(
  object,
  cropping = list(list(0L, 0L), list(0L, 0L)),
  data_format = NULL,
  ...
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
cropping	Int, or list of 2 ints, or list of 2 lists of 2 ints. <ul style="list-style-type: none"> <li>• If int: the same symmetric cropping is applied to height and width.</li> <li>• If list of 2 ints: interpreted as two different symmetric cropping values for height and width: (symmetric_height_crop, symmetric_width_crop).</li> <li>• If list of 2 lists of 2 ints: interpreted as ((top_crop, bottom_crop), (left_crop, right_crop)).</li> </ul>
data_format	A string, one of "channels_last" (default) or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, height, width, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, height, width). When unspecified, uses image_data_format value found in your Keras config file at ~/.keras/keras.json (if exists). Defaults to "channels_last".
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

**Example**

```
input_shape <- c(2, 28, 28, 3)
x <- op_arange(prod(input_shape), dtype='int32') |> op_reshape(input_shape)
y <- x |> layer_cropping_2d(cropping=list(c(2, 2), c(4, 4)))
shape(y)

## shape(2, 24, 20, 3)
```

**Input Shape**

4D tensor with shape:

- If data\_format is "channels\_last": (batch\_size, height, width, channels)
- If data\_format is "channels\_first": (batch\_size, channels, height, width)

**Output Shape**

4D tensor with shape:

- If data\_format is "channels\_last": (batch\_size, cropped\_height, cropped\_width, channels)
- If data\_format is "channels\_first": (batch\_size, channels, cropped\_height, cropped\_width)



**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/cropping2d#cropping2d-class](https://keras.io/api/layers/reshaping_layers/cropping2d#cropping2d-class)

Other reshaping layers:

```
layer_cropping_1d()  
layer_cropping_3d()  
layer_flatten()  
layer_permute()  
layer_repeat_vector()  
layer_reshape()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()
```

```
layer_cropping_1d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()
```

```
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_cropping\_3d      *Cropping layer for 3D data (e.g. spatial or spatio-temporal).*

---

### Description

Cropping layer for 3D data (e.g. spatial or spatio-temporal).

### Usage

```
layer_cropping_3d(
  object,
  cropping = list(list(1L, 1L), list(1L, 1L), list(1L, 1L)),
  data_format = NULL,
  ...
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
cropping	Int, or list of 3 ints, or list of 3 lists of 2 ints. <ul style="list-style-type: none"> <li>• If int: the same symmetric cropping is applied to depth, height, and width.</li> <li>• If list of 3 ints: interpreted as three different symmetric cropping values for depth, height, and width: (symmetric_dim1_crop, symmetric_dim2_crop, symmetric_dim3_crop)</li> <li>• If list of 3 lists of 2 ints: interpreted as ((left_dim1_crop, right_dim1_crop), (left_dim2_crop, right_dim2_crop), (left_dim3_crop, right_dim3_crop))</li> </ul>
data_format	A string, one of "channels_last" (default) or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, spatial_dim1, spatial_dim2, spatial_dim3). When unspecified, uses image_data_format value found in your Keras config file at ~/.keras/keras.json (if exists). Defaults to "channels_last".
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

**Example**

```
input_shape <- c(2, 28, 28, 10, 3)
x <- input_shape %>% { op_reshape(seq(prod(.)), .) }
y <- x |> layer_cropping_3d(cropping = c(2, 4, 2))
shape(y)

## shape(2, 24, 20, 6, 3)
```

**Input Shape**

5D tensor with shape:

- If data\_format is "channels\_last": (batch\_size, first\_axis\_to\_crop, second\_axis\_to\_crop, third\_axis\_to\_crop, channels)
- If data\_format is "channels\_first": (batch\_size, channels, first\_axis\_to\_crop, second\_axis\_to\_crop, third\_axis\_to\_crop)

**Output Shape**

5D tensor with shape:

- If data\_format is "channels\_last": (batch\_size, first\_cropped\_axis, second\_cropped\_axis, third\_cropped\_axis, channels)
- If data\_format is "channels\_first": (batch\_size, channels, first\_cropped\_axis, second\_cropped\_axis, third\_cropped\_axis)

**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/cropping3d#cropping3d-class](https://keras.io/api/layers/reshaping_layers/cropping3d#cropping3d-class)

Other reshaping layers:

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_flatten()  
layer_permute()  
layer_repeat_vector()  
layer_reshape()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()
```

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()
```

```
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_dense

*Just your regular densely-connected NN layer.*

---

### Description

Dense implements the operation:  $\text{output} = \text{activation}(\text{dot}(\text{input}, \text{kernel}) + \text{bias})$  where activation is the element-wise activation function passed as the activation argument, kernel is a weights matrix created by the layer, and bias is a bias vector created by the layer (only applicable if use\_bias is TRUE).

### Usage

```
layer_dense(  
  object,
```

```

    units,
    activation = NULL,
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    bias_constraint = NULL,
    lora_rank = NULL,
    ...
)

```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>units</code>	Positive integer, dimensionality of the output space.
<code>activation</code>	Activation function to use. If you don't specify anything, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
<code>use_bias</code>	Boolean, whether the layer uses a bias vector.
<code>kernel_initializer</code>	Initializer for the kernel weights matrix.
<code>bias_initializer</code>	Initializer for the bias vector.
<code>kernel_regularizer</code>	Regularizer function applied to the kernel weights matrix.
<code>bias_regularizer</code>	Regularizer function applied to the bias vector.
<code>activity_regularizer</code>	Regularizer function applied to the output of the layer (its "activation").
<code>kernel_constraint</code>	Constraint function applied to the kernel weights matrix.
<code>bias_constraint</code>	Constraint function applied to the bias vector.
<code>lora_rank</code>	Optional integer. If set, the layer's forward pass will implement LoRA (Low-Rank Adaptation) with the provided rank. LoRA sets the layer's kernel to non-trainable and replaces it with a delta over the original kernel, obtained via multiplying two lower-rank trainable matrices. This can be useful to reduce the computation cost of fine-tuning large dense layers. You can also enable LoRA on an existing Dense layer by calling <code>layer\$enable_lora(rank)</code> .
<code>...</code>	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If `object` is:



- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

### Note

If the input to the layer has a rank greater than 2, `Dense` computes the dot product between the inputs and the kernel along the last axis of the inputs and axis 0 of the kernel (using `tf.tensordot`). For example, if input has dimensions `(batch_size, d0, d1)`, then we create a kernel with shape `(d1, units)`, and the kernel operates along axis 2 of the input, on every sub-tensor of shape `(1, 1, d1)` (there are `batch_size * d0` such sub-tensors). The output in this case will have shape `(batch_size, d0, units)`.

### Input Shape

N-D tensor with shape: `(batch_size, ..., input_dim)`. The most common situation would be a 2D input with shape `(batch_size, input_dim)`.

### Output Shape

N-D tensor with shape: `(batch_size, ..., units)`. For instance, for a 2D input with shape `(batch_size, input_dim)`, the output would have shape `(batch_size, units)`.

### Methods

- `enable_lora(`  
`rank,`  
`a_initializer = 'he_uniform',`  
`b_initializer = 'zeros'`  
`)`

### Readonly properties:

- `kernel`

### See Also

- [https://keras.io/api/layers/core\\_layers/dense#dense-class](https://keras.io/api/layers/core_layers/dense#dense-class)

Other core layers:

[layer\\_einsum\\_dense\(\)](#)  
[layer\\_embedding\(\)](#)  
[layer\\_identity\(\)](#)  
[layer\\_lambda\(\)](#)  
[layer\\_masking\(\)](#)

Other layers:

[Layer\(\)](#)  
[layer\\_activation\(\)](#)

```
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
```

```
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()
```

```
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_depthwise\_conv\_1d

*1D depthwise convolution layer.*

---

## Description

Depthwise convolution is a type of convolution in which each input channel is convolved with a different kernel (called a depthwise kernel). You can understand depthwise convolution as the first step in a depthwise separable convolution.

It is implemented via the following steps:

- Split the input into individual channels.
- Convolve each channel with an individual depthwise kernel with `depth_multiplier` output channels.
- Concatenate the convolved outputs along the channels axis.

Unlike a regular 1D convolution, depthwise convolution does not mix information across different input channels.

The `depth_multiplier` argument determines how many filters are applied to one input channel. As such, it controls the amount of output channels that are generated per input channel in the depthwise step.

## Usage

```
layer_depthwise_conv_1d(  
    object,  
    kernel_size,  
    strides = 1L,  
    padding = "valid",  
    depth_multiplier = 1L,  
    data_format = NULL,  
    dilation_rate = 1L,  
    activation = NULL,
```

```

    use_bias = TRUE,
    depthwise_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    depthwise_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    depthwise_constraint = NULL,
    bias_constraint = NULL,
    ...
)

```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>kernel_size</code>	int or list of 1 integer, specifying the size of the depthwise convolution window.
<code>strides</code>	int or list of 1 integer, specifying the stride length of the convolution. <code>strides &gt; 1</code> is incompatible with <code>dilation_rate &gt; 1</code> .
<code>padding</code>	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When <code>padding="same"</code> and <code>strides=1</code> , the output has the same size as the input.
<code>depth_multiplier</code>	The number of depthwise convolution output channels for each input channel. The total number of depthwise convolution output channels will be equal to <code>input_channel * depth_multiplier</code> .
<code>data_format</code>	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the <code>image_data_format</code> value found in your Keras config file at <code>~/keras/keras.json</code> . If you never set it, then it will be "channels_last".
<code>dilation_rate</code>	int or list of 1 integers, specifying the dilation rate to use for dilated convolution.
<code>activation</code>	Activation function. If NULL, no activation is applied.
<code>use_bias</code>	bool, if TRUE, bias will be added to the output.
<code>depthwise_initializer</code>	Initializer for the convolution kernel. If NULL, the default initializer ("glorot_uniform") will be used.
<code>bias_initializer</code>	Initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
<code>depthwise_regularizer</code>	Optional regularizer for the convolution kernel.
<code>bias_regularizer</code>	Optional regularizer for the bias vector.
<code>activity_regularizer</code>	Optional regularizer function for the output.

**depthwise\_constraint**

Optional projection function to be applied to the kernel after being updated by an Optimizer (e.g. used to implement norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape). Constraints are not safe to use when doing asynchronous distributed training.

**bias\_constraint**

Optional projection function to be applied to the bias after being updated by an Optimizer.

...

For forward/backward compatibility.

**Value**

A 3D tensor representing `activation(depthwise_conv1d(inputs, kernel) + bias)`.

**Input Shape**

- If `data_format="channels_last"`: A 3D tensor with shape: `(batch_shape, steps, channels)`
- If `data_format="channels_first"`: A 3D tensor with shape: `(batch_shape, channels, steps)`

**Output Shape**

- If `data_format="channels_last"`: A 3D tensor with shape: `(batch_shape, new_steps, channels * depth_multiplier)`
- If `data_format="channels_first"`: A 3D tensor with shape: `(batch_shape, channels * depth_multiplier, new_steps)`

**Raises**

`ValueError`: when both `strides > 1` and `dilation_rate > 1`.

**Example**

```
x <- random_uniform(c(4, 10, 12))
y <- x |> layer_depthwise_conv_1d(
  kernel_size = 3,
  depth_multiplier = 3,
  activation = 'relu'
)
shape(y)

## shape(4, 8, 36)
```

**See Also**

Other convolutional layers:

[layer\\_conv\\_1d\(\)](#)  
[layer\\_conv\\_1d\\_transpose\(\)](#)  
[layer\\_conv\\_2d\(\)](#)  
[layer\\_conv\\_2d\\_transpose\(\)](#)

```
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_depthwise_conv_2d()  
layer_separable_conv_1d()  
layer_separable_conv_2d()
```

**Other layers:**

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()
```

```
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
```



```
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_depthwise\_conv\_2d

*2D depthwise convolution layer.*

---

## Description

Depthwise convolution is a type of convolution in which each input channel is convolved with a different kernel (called a depthwise kernel). You can understand depthwise convolution as the first step in a depthwise separable convolution.

It is implemented via the following steps:

- Split the input into individual channels.
- Convolve each channel with an individual depthwise kernel with `depth_multiplier` output channels.
- Concatenate the convolved outputs along the channels axis.

Unlike a regular 2D convolution, depthwise convolution does not mix information across different input channels.

The `depth_multiplier` argument determines how many filters are applied to one input channel. As such, it controls the amount of output channels that are generated per input channel in the depthwise step.

**Usage**

```

layer_depthwise_conv_2d(
    object,
    kernel_size,
    strides = list(1L, 1L),
    padding = "valid",
    depth_multiplier = 1L,
    data_format = NULL,
    dilation_rate = list(1L, 1L),
    activation = NULL,
    use_bias = TRUE,
    depthwise_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    depthwise_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    depthwise_constraint = NULL,
    bias_constraint = NULL,
    ...
)

```

**Arguments**

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>kernel_size</code>	int or list of 2 integer, specifying the size of the depthwise convolution window.
<code>strides</code>	int or list of 2 integer, specifying the stride length of the depthwise convolution. <code>strides &gt; 1</code> is incompatible with <code>dilation_rate &gt; 1</code> .
<code>padding</code>	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When <code>padding="same"</code> and <code>strides=1</code> , the output has the same size as the input.
<code>depth_multiplier</code>	The number of depthwise convolution output channels for each input channel. The total number of depthwise convolution output channels will be equal to <code>input_channel * depth_multiplier</code> .
<code>data_format</code>	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, channels, height, width). It defaults to the <code>image_data_format</code> value found in your Keras config file at <code>~/keras/keras.json</code> . If you never set it, then it will be "channels_last".
<code>dilation_rate</code>	int or list of 2 integers, specifying the dilation rate to use for dilated convolution.
<code>activation</code>	Activation function. If NULL, no activation is applied.
<code>use_bias</code>	bool, if TRUE, bias will be added to the output.
<code>depthwise_initializer</code>	Initializer for the convolution kernel. If NULL, the default initializer ("glorot_uniform") will be used.

bias_initializer	Initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
depthwise_regularizer	Optional regularizer for the convolution kernel.
bias_regularizer	Optional regularizer for the bias vector.
activity_regularizer	Optional regularizer function for the output.
depthwise_constraint	Optional projection function to be applied to the kernel after being updated by an Optimizer (e.g. used to implement norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape). Constraints are not safe to use when doing asynchronous distributed training.
bias_constraint	Optional projection function to be applied to the bias after being updated by an Optimizer.
...	For forward/backward compatibility.

**Value**

A 4D tensor representing  $\text{activation}(\text{depthwise\_conv2d}(\text{inputs}, \text{kernel}) + \text{bias})$ .

**Input Shape**

- If `data_format="channels_last"`: A 4D tensor with shape: (batch\_size, height, width, channels)
- If `data_format="channels_first"`: A 4D tensor with shape: (batch\_size, channels, height, width)

**Output Shape**

- If `data_format="channels_last"`: A 4D tensor with shape: (batch\_size, new\_height, new\_width, channels \* depth\_multiplier)
- If `data_format="channels_first"`: A 4D tensor with shape: (batch\_size, channels \* depth\_multiplier, new\_height, new\_width)

**Raises**

`ValueError`: when both `strides > 1` and `dilation_rate > 1`.

**Example**

```
x <- random_uniform(c(4, 10, 10, 12))
y <- x |> layer_depthwise_conv_2d(3, 3, activation = 'relu')
shape(y)

## shape(4, 3, 3, 12)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/depthwise\\_convolution2d#depthwiseconv2d-class](https://keras.io/api/layers/convolution_layers/depthwise_convolution2d#depthwiseconv2d-class)

Other convolutional layers:

```
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_depthwise_conv_1d()  
layer_separable_conv_1d()  
layer_separable_conv_2d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()
```

```
layer_dense()  
layer_depthwise_conv_1d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()
```

```
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_discretization *A preprocessing layer which buckets continuous features by ranges.*

---

### Description

This layer will place each element of its input data into one of several contiguous ranges and output an integer index indicating which range each element was placed in.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### Usage

```
layer_discretization(  
    object,  
    bin_boundaries = NULL,  
    num_bins = NULL,  
    epsilon = 0.01,
```

```

    output_mode = "int",
    sparse = FALSE,
    dtype = NULL,
    name = NULL
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
bin_boundaries	A list of bin boundaries. The leftmost and rightmost bins will always extend to $-\text{Inf}$ and $\text{Inf}$ , so <code>bin_boundaries = c(0, 1, 2)</code> generates bins $(-\text{Inf}, 0)$ , $[0, 1)$ , $[1, 2)$ , and $[2, +\text{Inf})$ . If this option is set, <code>adapt()</code> should not be called.
num_bins	The integer number of bins to compute. If this option is set, <code>adapt()</code> should be called to learn the bin boundaries.
epsilon	Error tolerance, typically a small fraction close to zero (e.g. 0.01). Higher values of epsilon increase the quantile approximation, and hence result in more unequal buckets, but could improve performance and resource consumption.
output_mode	Specification for the output of the layer. Values can be "int", "one_hot", "multi_hot", or "count" configuring the layer as follows: <ul style="list-style-type: none"> <li>• "int": Return the discretized bin indices directly.</li> <li>• "one_hot": Encodes each individual element in the input into an array the same size as <code>num_bins</code>, containing a 1 at the input's bin index. If the last dimension is size 1, will encode on that dimension. If the last dimension is not size 1, will append a new dimension for the encoded output.</li> <li>• "multi_hot": Encodes each sample in the input into a single array the same size as <code>num_bins</code>, containing a 1 for each bin index present in the sample. Treats the last dimension as the sample dimension, if input shape is <math>(\dots, \text{sample\_length})</math>, output shape will be <math>(\dots, \text{num\_tokens})</math>.</li> <li>• "count": As "multi_hot", but the int array contains a count of the number of times the bin index appeared in the sample. Defaults to "int".</li> </ul>
sparse	Boolean. Only applicable to "one_hot", "multi_hot", and "count" output modes. Only supported with TensorFlow backend. If TRUE, returns a SparseTensor instead of a dense Tensor. Defaults to FALSE.
dtype	datatype (e.g., "float32").
name	String, name for the object

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Input Shape**

Any array of dimension 2 or higher.

**Output Shape**

Same as input shape.

**Examples**

Discretize float values based on provided buckets.

```
input <- op_array(rbind(c(-1.5, 1, 3.4, 0.5),
                        c(0, 3, 1.3, 0),
                        c(-.5, 0, .5, 1),
                        c(1.5, 2, 2.5, 3)))
output <- input |> layer_discretization(bin_boundaries = c(0, 1, 2))
output

## tf.Tensor(
## [[0 2 3 1]
## [1 3 2 1]
## [0 1 1 2]
## [2 3 3 3]], shape=(4, 4), dtype=int64)
```

Discretize float values based on a number of buckets to compute.

```
layer <- layer_discretization(num_bins = 4, epsilon = 0.01)
layer |> adapt(input)
layer(input)

## tf.Tensor(
## [[0 2 3 1]
## [1 3 2 1]
## [0 1 1 2]
## [2 3 3 3]], shape=(4, 4), dtype=int64)
```

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/numerical/discretization#discretization-class](https://keras.io/api/layers/preprocessing_layers/numerical/discretization#discretization-class)

Other numerical features preprocessing layers:

[layer\\_normalization\(\)](#)

Other preprocessing layers:

[layer\\_category\\_encoding\(\)](#)

[layer\\_center\\_crop\(\)](#)



```
layer_feature_space()
layer_hashed_crossing()
layer_hashing()
layer_integer_lookup()
layer_mel_spectrogram()
layer_normalization()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_rescaling()
layer_resizing()
layer_string_lookup()
layer_text_vectorization()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
```

```
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()
```

```
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_dot

*Computes element-wise dot product of two tensors.*

---

### Description

It takes a list of inputs of size 2, and the axes corresponding to each input along with the dot product is to be performed.

Let's say  $x$  and  $y$  are the two input tensors with shapes  $(2, 3, 5)$  and  $(2, 10, 3)$ . The batch dimension should be of same size for both the inputs, and axes should correspond to the dimensions that have the same size in the corresponding inputs. e.g. with  $axes = c(1, 2)$ , the dot product of  $x$ , and  $y$  will result in a tensor with shape  $(2, 5, 10)$

**Usage**

```
layer_dot(inputs, ..., axes, normalize = FALSE)
```

**Arguments**

inputs	layers to combine
...	Standard layer keyword arguments.
axes	Integer or list of integers, axis or axes along which to take the dot product. If a list, should be two integers corresponding to the desired axis from the first input and the desired axis from the second input, respectively. Note that the size of the two selected axes must match.
normalize	Whether to L2-normalize samples along the dot product axis before taking the dot product. If set to TRUE, then the output of the dot product is the cosine proximity between the two samples.

**Value**

A tensor, the dot product of the samples from the inputs.

**Examples**

```
x <- op_reshape(0:9, c(1, 5, 2))
y <- op_reshape(10:19, c(1, 2, 5))
layer_dot(x, y, axes=c(2, 3))

## tf.Tensor(
## [[ [260 360]
## [320 445] ]], shape=(1, 2, 2), dtype=int32)
```

Usage in a Keras model:

```
x1 <- op_reshape(0:9, c(5, 2)) |> layer_dense(8)
x2 <- op_reshape(10:19, c(5, 2)) |> layer_dense(8)
shape(x1)

## shape(5, 8)

shape(x2)

## shape(5, 8)

y <- layer_dot(x1, x2, axes=2)
shape(y)

## shape(5, 1)
```

**See Also**

- [https://keras.io/api/layers/merging\\_layers/dot#dot-class](https://keras.io/api/layers/merging_layers/dot#dot-class)

Other merging layers:

```
layer_add()  
layer_average()  
layer_concatenate()  
layer_maximum()  
layer_minimum()  
layer_multiply()  
layer_subtract()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()
```

```
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()
```

```
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_dropout

*Applies dropout to the input.*

---

### Description

The Dropout layer randomly sets input units to 0 with a frequency of rate at each step during training time, which helps prevent overfitting. Inputs not set to 0 are scaled up by  $1 / (1 - \text{rate})$  such that the sum over all inputs is unchanged.

Note that the Dropout layer only applies when training is set to TRUE in `call()`, such that no values are dropped during inference. When using `model.fit`, training will be appropriately set to TRUE automatically. In other contexts, you can set the argument explicitly to TRUE when calling the layer.

(This is in contrast to setting `trainable=False` for a Dropout layer. `trainable` does not affect the layer's behavior, as Dropout does not have any variables/weights that can be frozen during training.)

### Usage

```
layer_dropout(object, rate, noise_shape = NULL, seed = NULL, ...)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
rate	Float between 0 and 1. Fraction of the input units to drop.
noise_shape	1D integer tensor representing the shape of the binary dropout mask that will be multiplied with the input. For instance, if your inputs have shape (batch_size, timesteps, features) and you want the dropout mask to be the same for all timesteps, you can use noise_shape=(batch_size, 1, features).
seed	An R integer to use as random seed.
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Call Arguments**

- `inputs`: Input tensor (of any rank).
- `training`: Python boolean indicating whether the layer should behave in training mode (adding dropout) or in inference mode (doing nothing).

**See Also**

- [https://keras.io/api/layers/regularization\\_layers/dropout#dropout-class](https://keras.io/api/layers/regularization_layers/dropout#dropout-class)

Other regularization layers:

```
layer_activity_regularization()
layer_alpha_dropout()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
```



```
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()
```

```
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
```

```

layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_einsum\_dense      *A layer that uses einsum as the backing computation.*

---

### Description

This layer can perform einsum calculations of arbitrary dimensionality.

### Usage

```

layer_einsum_dense(
    object,
    equation,
    output_shape,
    activation = NULL,
    bias_axes = NULL,
    kernel_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    bias_regularizer = NULL,
    kernel_constraint = NULL,
    bias_constraint = NULL,
    lora_rank = NULL,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
equation	An equation describing the einsum to perform. This equation must be a valid einsum string of the form <code>ab, bc-&gt;ac, ... ab, bc-&gt;... ac</code> , or <code>ab..., bc-&gt;ac...</code> where 'ab', 'bc', and 'ac' can be any valid einsum axis expression sequence.
output_shape	The expected shape of the output tensor (excluding the batch dimension and any dimensions represented by ellipses). You can specify NA or NULL for any dimension that is unknown or can be inferred from the input shape.
activation	Activation function to use. If you don't specify anything, no activation is applied (that is, a "linear" activation: $a(x) = x$ ).
bias_axes	A string containing the output dimension(s) to apply a bias to. Each character in the <code>bias_axes</code> string should correspond to a character in the output portion of the equation string.

kernel_initializer	Initializer for the kernel weights matrix.
bias_initializer	Initializer for the bias vector.
kernel_regularizer	Regularizer function applied to the kernel weights matrix.
bias_regularizer	Regularizer function applied to the bias vector.
kernel_constraint	Constraint function applied to the kernel weights matrix.
bias_constraint	Constraint function applied to the bias vector.
lora_rank	Optional integer. If set, the layer's forward pass will implement LoRA (Low-Rank Adaptation) with the provided rank. LoRA sets the layer's kernel to non-trainable and replaces it with a delta over the original kernel, obtained via multiplying two lower-rank trainable matrices (the factorization happens on the last dimension). This can be useful to reduce the computation cost of fine-tuning large dense layers. You can also enable LoRA on an existing EinsumDense layer by calling <code>layer\$enable_lora(rank)</code> .
...	Base layer keyword arguments, such as name and dtype.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Examples

#### Biased dense layer with einsums

This example shows how to instantiate a standard Keras dense layer using einsum operations. This example is equivalent to `layer_Dense(64, use_bias=TRUE)`.

```
input <- layer_input(shape = c(32))
output <- input |>
  layer_einsum_dense("ab, bc->ac",
                    output_shape = 64,
                    bias_axes = "c")
output # shape(NA, 64)

## <KerasTensor shape=(None, 64), dtype=float32, sparse=False, name=keras_tensor_1>
```

**Applying a dense layer to a sequence**

This example shows how to instantiate a layer that applies the same dense operation to every element in a sequence. Here, the `output_shape` has two values (since there are two non-batch dimensions in the output); the first dimension in the `output_shape` is `NA`, because the sequence dimension `b` has an unknown shape.

```
input <- layer_input(shape = c(32, 128))
output <- input |>
  layer_einsum_dense("abc,cd->abd",
                    output_shape = c(NA, 64),
                    bias_axes = "d")
output # shape(NA, 32, 64)

## <KerasTensor shape=(None, None, 64), dtype=float32, sparse=False, name=keras_tensor_3>
```

**Applying a dense layer to a sequence using ellipses**

This example shows how to instantiate a layer that applies the same dense operation to every element in a sequence, but uses the ellipsis notation instead of specifying the batch and sequence dimensions.

Because we are using ellipsis notation and have specified only one axis, the `output_shape` arg is a single value. When instantiated in this way, the layer can handle any number of sequence dimensions - including the case where no sequence dimension exists.

```
input <- layer_input(shape = c(32, 128))
output <- input |>
  layer_einsum_dense("...x,xy->...y",
                    output_shape = 64,
                    bias_axes = "y")

output # shape(NA, 32, 64)

## <KerasTensor shape=(None, 32, 64), dtype=float32, sparse=False, name=keras_tensor_5>
```

**Methods**

- `enable_lora(`  
   `rank,`  
   `a_initializer = 'he_uniform',`  
   `b_initializer = 'zeros'`  
   `)`
- `quantize(mode)`

**Readonly properties:**

- `kernel`

**See Also**

Other core layers:

`layer_dense()`  
`layer_embedding()`  
`layer_identity()`  
`layer_lambda()`  
`layer_masking()`

Other layers:

`Layer()`  
`layer_activation()`  
`layer_activation_elu()`  
`layer_activation_leaky_relu()`  
`layer_activation_parametric_relu()`  
`layer_activation_relu()`  
`layer_activation_softmax()`  
`layer_activity_regularization()`  
`layer_add()`  
`layer_additive_attention()`  
`layer_alpha_dropout()`  
`layer_attention()`  
`layer_average()`  
`layer_average_pooling_1d()`  
`layer_average_pooling_2d()`  
`layer_average_pooling_3d()`  
`layer_batch_normalization()`  
`layer_bidirectional()`  
`layer_category_encoding()`  
`layer_center_crop()`  
`layer_concatenate()`  
`layer_conv_1d()`  
`layer_conv_1d_transpose()`  
`layer_conv_2d()`  
`layer_conv_2d_transpose()`  
`layer_conv_3d()`  
`layer_conv_3d_transpose()`  
`layer_conv_lstm_1d()`  
`layer_conv_lstm_2d()`  
`layer_conv_lstm_3d()`  
`layer_cropping_1d()`  
`layer_cropping_2d()`  
`layer_cropping_3d()`  
`layer_dense()`  
`layer_depthwise_conv_1d()`  
`layer_depthwise_conv_2d()`  
`layer_discretization()`  
`layer_dot()`  
`layer_dropout()`

```
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()
```

```
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer_embedding	<i>Turns positive integers (indexes) into dense vectors of fixed size.</i>
-----------------	--

---

### Description

e.g. `rbind(4L, 20L) → rbind(c(0.25, 0.1), c(0.6, -0.2))`

This layer can only be used on positive integer inputs of a fixed range.

### Usage

```
layer_embedding(  
  object,  
  input_dim,  
  output_dim,  
  embeddings_initializer = "uniform",  
  embeddings_regularizer = NULL,  
  embeddings_constraint = NULL,  
  mask_zero = FALSE,  
  weights = NULL,  
  lora_rank = NULL,  
  ...  
)
```



**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
input_dim	Integer. Size of the vocabulary, i.e. maximum integer index + 1.
output_dim	Integer. Dimension of the dense embedding.
embeddings_initializer	Initializer for the embeddings matrix (see <code>keras3::initializer_*</code> ).
embeddings_regularizer	Regularizer function applied to the embeddings matrix (see <code>keras3::regularizer_*</code> ).
embeddings_constraint	Constraint function applied to the embeddings matrix (see <code>keras3::constraint_*</code> ).
mask_zero	Boolean, whether or not the input value 0 is a special "padding" value that should be masked out. This is useful when using recurrent layers which may take variable length input. If this is TRUE, then all subsequent layers in the model need to support masking or an exception will be raised. If mask_zero is set to TRUE, as a consequence, index 0 cannot be used in the vocabulary (input_dim should equal size of vocabulary + 1).
weights	Optional floating-point matrix of size (input_dim, output_dim). The initial embeddings values to use.
lora_rank	Optional integer. If set, the layer's forward pass will implement LoRA (Low-Rank Adaptation) with the provided rank. LoRA sets the layer's embeddings matrix to non-trainable and replaces it with a delta over the original matrix, obtained via multiplying two lower-rank trainable matrices. This can be useful to reduce the computation cost of fine-tuning large embedding layers. You can also enable LoRA on an existing Embedding layer instance by calling <code>layer\$enable_lora(rank)</code> .
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Example**

```
model <- keras_model_sequential() |>
  layer_embedding(1000, 64)

# The model will take as input an integer matrix of size (batch,input_length),
# and the largest integer (i.e. word index) in the input
# should be no larger than 999 (vocabulary size).
# Now model$output_shape is (NA, 10, 64), where `NA` is the batch
# dimension.
```

```
input_array <- random_integer(shape = c(32, 10), minval = 0, maxval = 1000)
model |> compile('rmsprop', 'mse')
output_array <- model |> predict(input_array, verbose = 0)
dim(output_array)    # (32, 10, 64)

## [1] 32 10 64
```

### Input Shape

2D tensor with shape: (batch\_size, input\_length).

### Output Shape

3D tensor with shape: (batch\_size, input\_length, output\_dim).

### Methods

- `enable_lora(rank, a_initializer = 'he_uniform', b_initializer = 'zeros')`
- `quantize(mode)`
- `quantized_build(input_shape, mode)`
- `quantized_call(inputs)`

### Readonly properties:

- `embeddings`

### See Also

- [https://keras.io/api/layers/core\\_layers/embedding#embedding-class](https://keras.io/api/layers/core_layers/embedding#embedding-class)

Other core layers:

```
layer_dense()
layer_einsum_dense()
layer_identity()
layer_lambda()
layer_masking()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
```

```
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()
```

```
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
```

```
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_feature\_space    *One-stop utility for preprocessing and encoding structured data.*

---

## Description

### Available feature types:

Note that all features can be referred to by their string name, e.g. "integer\_categorical". When using the string name, the default argument values are used.

```
# Plain float values.
```

```
feature_float(name = NULL)
```

```
# Float values to be preprocessed via featurewise standardization  
# (i.e. via a `layer_normalization()` layer).
```

```
feature_float_normalized(name = NULL)
```

```
# Float values to be preprocessed via linear rescaling  
# (i.e. via a `layer_rescaling` layer).
```

```
feature_float_rescaled(scale = 1., offset = 0., name = NULL)
```

```
# Float values to be discretized. By default, the discrete  
# representation will then be one-hot encoded.
```

```
feature_float_discretized(  
  num_bins,  
  bin_boundaries = NULL,  
  output_mode = "one_hot",  
  name = NULL  
)
```

```
# Integer values to be indexed. By default, the discrete  
# representation will then be one-hot encoded.
```

```
feature_integer_categorical(  
  max_tokens = NULL,  
  num_oov_indices = 1,  
  output_mode = "one_hot",  
  name = NULL  
)
```

```
# String values to be indexed. By default, the discrete
# representation will then be one-hot encoded.
feature_string_categorical(
    max_tokens = NULL,
    num_oov_indices = 1,
    output_mode = "one_hot",
    name = NULL
)

# Integer values to be hashed into a fixed number of bins.
# By default, the discrete representation will then be one-hot encoded.
feature_integer_hashed(num_bins, output_mode = "one_hot", name = NULL)

# String values to be hashed into a fixed number of bins.
# By default, the discrete representation will then be one-hot encoded.
feature_string_hashed(num_bins, output_mode = "one_hot", name = NULL)
```

### Usage

```
layer_feature_space(
    object,
    features,
    output_mode = "concat",
    crosses = NULL,
    crossing_dim = 32L,
    hashing_dim = 32L,
    num_discretization_bins = 32L,
    name = NULL,
    feature_names = NULL
)

feature_cross(feature_names, crossing_dim, output_mode = "one_hot")

feature_custom(dtype, preprocessor, output_mode)

feature_float(name = NULL)

feature_float_rescaled(scale = 1, offset = 0, name = NULL)

feature_float_normalized(name = NULL)

feature_float_discretized(
    num_bins,
    bin_boundaries = NULL,
    output_mode = "one_hot",
    name = NULL
)
```

```

feature_integer_categorical(
    max_tokens = NULL,
    num_oov_indices = 1,
    output_mode = "one_hot",
    name = NULL
)

feature_string_categorical(
    max_tokens = NULL,
    num_oov_indices = 1,
    output_mode = "one_hot",
    name = NULL
)

feature_string_hashed(num_bins, output_mode = "one_hot", name = NULL)

feature_integer_hashed(num_bins, output_mode = "one_hot", name = NULL)

```

### Arguments

object	see description
features	see description
output_mode	A string. <ul style="list-style-type: none"> <li>• For <code>layer_feature_space()</code>, one of "concat" or "dict". In concat mode, all features get concatenated together into a single vector. In dict mode, the <code>FeatureSpace</code> returns a named list of individually encoded features (with the same names as the input list names).</li> <li>• For the <code>feature_*</code> functions, one of: "int" "one_hot" or "float".</li> </ul>
crosses	List of features to be crossed together, e.g. <code>crosses=list(c("feature_1", "feature_2"))</code> . The features will be "crossed" by hashing their combined value into a fixed-length vector.
crossing_dim	Default vector size for hashing crossed features. Defaults to 32.
hashing_dim	Default vector size for hashing features of type "integer_hashed" and "string_hashed". Defaults to 32.
num_discretization_bins	Default number of bins to be used for discretizing features of type "float_discretized". Defaults to 32.
name	String, name for the object
feature_names	Named list mapping the names of your features to their type specification, e.g. <code>list(my_feature = "integer_categorical")</code> or <code>list(my_feature = feature_integer_categorical)</code> . For a complete list of all supported types, see "Available feature types" paragraph below.
dtype	string, the output dtype of the feature. E.g., "float32".
preprocessor	A callable.
scale, offset	Passed on to <code>layer_rescaling()</code>

```

num_bins, bin_boundaries
    Passed on to layer_discretization()
max_tokens, num_oov_indices
    Passed on to layer_integer_lookup() by feature_integer_categorical()
    or to layer_string_lookup() by feature_string_categorical().

```

## Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

## Examples

### Basic usage with a named list of input data:

```

raw_data <- list(
  float_values = c(0.0, 0.1, 0.2, 0.3),
  string_values = c("zero", "one", "two", "three"),
  int_values = as.integer(c(0, 1, 2, 3))
)

dataset <- tfdatasets::tensor_slices_dataset(raw_data)

feature_space <- layer_feature_space(
  features = list(
    float_values = "float_normalized",
    string_values = "string_categorical",
    int_values = "integer_categorical"
  ),
  crosses = list(c("string_values", "int_values")),
  output_mode = "concat"
)

# Before you start using the feature_space(),
# you must `adapt()` it on some data.
feature_space |> adapt(dataset)

# You can call the feature_space() on a named list of
# data (batched or unbatched).
output_vector <- feature_space(raw_data)

```

### Basic usage with `tf.data`:

```

library(tfdatasets)

```



```
# Unlabeled data
preprocessed_ds <- unlabeled_dataset |>
  dataset_map(feature_space)

# Labeled data
preprocessed_ds <- labeled_dataset |>
  dataset_map(function(x, y) tuple(feature_space(x), y))
```

### Basic usage with the Keras Functional API:

```
# Retrieve a named list of Keras layer_input() objects
(inputs <- feature_space$get_inputs())

## $float_values
## <KerasTensor shape=(None, 1), dtype=float32, sparse=None, name=float_values>
##
## $string_values
## <KerasTensor shape=(None, 1), dtype=string, sparse=None, name=string_values>
##
## $int_values
## <KerasTensor shape=(None, 1), dtype=int32, sparse=None, name=int_values>

# Retrieve the corresponding encoded Keras tensors
(encoded_features <- feature_space$get_encoded_features())

## <KerasTensor shape=(None, 43), dtype=float32, sparse=False, name=keras_tensor_7>

# Build a Functional model
outputs <- encoded_features |> layer_dense(1, activation = "sigmoid")
model <- keras_model(inputs, outputs)
```

### Customizing each feature or feature cross:

```
feature_space <- layer_feature_space(
  features = list(
    float_values = feature_float_normalized(),
    string_values = feature_string_categorical(max_tokens = 10),
    int_values = feature_integer_categorical(max_tokens = 10)
  ),
  crosses = list(
    feature_cross(c("string_values", "int_values"), crossing_dim = 32)
  ),
  output_mode = "concat"
)
```

### Returning a dict (a named list) of integer-encoded features:

```
feature_space <- layer_feature_space(
  features = list(
    "string_values" = feature_string_categorical(output_mode = "int"),
    "int_values" = feature_integer_categorical(output_mode = "int")
  ),
  crosses = list(
    feature_cross(
      feature_names = c("string_values", "int_values"),
      crossing_dim = 32,
      output_mode = "int"
    )
  ),
  output_mode = "dict"
)
```

### Specifying your own Keras preprocessing layer:

```
# Let's say that one of the features is a short text paragraph that
# we want to encode as a vector (one vector per paragraph) via TF-IDF.
data <- list(text = c("1st string", "2nd string", "3rd string"))

# There's a Keras layer for this: layer_text_vectorization()
custom_layer <- layer_text_vectorization(output_mode = "tf_idf")

# We can use feature_custom() to create a custom feature
# that will use our preprocessing layer.
feature_space <- layer_feature_space(
  features = list(
    text = feature_custom(preprocessor = custom_layer,
      dtype = "string",
      output_mode = "float"
    )
  ),
  output_mode = "concat"
)
feature_space |> adapt(tfdatasets::tensor_slices_dataset(data))
output_vector <- feature_space(data)
```

### Retrieving the underlying Keras preprocessing layers:

```
# The preprocessing layer of each feature is available in `preprocessors`.
preprocessing_layer <- feature_space$preprocessors$feature1

# The crossing layer of each feature cross is available in `crossers`.
# It's an instance of layer_hashed_crossing()
crossing_layer <- feature_space$crossers[["feature1_X_feature2"]]
```

### Saving and reloading a FeatureSpace:

```
feature_space$save("featurespace.keras")
reloaded_feature_space <- keras$models$load_model("featurespace.keras")
```

**See Also**

- [https://keras.io/api/utils/feature\\_space#featurespace-class](https://keras.io/api/utils/feature_space#featurespace-class)

Other preprocessing layers:

```
layer_category_encoding()
layer_center_crop()
layer_discretization()
layer_hashed_crossing()
layer_hashing()
layer_integer_lookup()
layer_mel_spectrogram()
layer_normalization()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_rescaling()
layer_resizing()
layer_string_lookup()
layer_text_vectorization()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
```

```
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()
```

```
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

**Other utils:**

```
audio_dataset_from_directory()  
clear_session()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()
```

```

config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()

```

---

layer_flatten	<i>Flattens the input. Does not affect the batch size.</i>
---------------	--

---

### Description

Flattens the input. Does not affect the batch size.

### Usage

```
layer_flatten(object, data_format = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
data_format	A string, one of "channels_last" (default) or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, ..., channels) while "channels_first" corresponds to inputs with shape (batch, channels, ...). When unspecified, uses image_data_format value found in your Keras config file at ~/.keras/keras.json (if exists). Defaults to "channels_last".
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Note**

If inputs are shaped (batch) without a feature axis, then flattening adds an extra channel dimension and output shape is (batch, 1).

**Example**

```
x <- layer_input(shape=c(10, 64))
y <- x |> layer_flatten()
shape(y)

## shape(NA, 640)
```

**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/flatten#flatten-class](https://keras.io/api/layers/reshaping_layers/flatten#flatten-class)

Other reshaping layers:

```
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_permute()
layer_repeat_vector()
layer_reshape()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
```

```
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()
```



```
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()
```

```

layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

```
layer_flax_module_wrapper
```

*Keras Layer that wraps a [Flax module](https://flax.readthedocs.io).*

---

## Description

This layer enables the use of Flax components in the form of `flax.linen.Module` instances within Keras when using JAX as the backend for Keras.

The module method to use for the forward pass can be specified via the `method` argument and is `__call__` by default. This method must take the following arguments with these exact names:

- `self` if the method is bound to the module, which is the case for the default of `__call__`, and `module` otherwise to pass the module.
- `inputs`: the inputs to the model, a JAX array or a PyTree of arrays.
- `training` (*optional*): an argument specifying if we're in training mode or inference mode, `TRUE` is passed in training mode.

FlaxLayer handles the non-trainable state of your model and required RNGs automatically. Note that the `mutable` parameter of `flax.linen.Module.apply()` is set to `DenyList(["params"])`, therefore making the assumption that all the variables outside of the "params" collection are non-trainable weights.

This example shows how to create a FlaxLayer from a Flax Module with the default `__call__` method and no training argument:

```

# keras3::use_backend("jax")
# py_install("flax", "r-keras")

if(config_backend() == "jax" &&
  reticulate::py_module_available("flax")) {

flax <- import("flax")

MyFlaxModule(flax$linen$Module) %py_class% {
  `__call__` <- flax$linen$compact(\(self, inputs) {
    inputs |>
      (flax$linen$Conv(features = 32L, kernel_size = tuple(3L, 3L)))( |>
        flax$linen$relu() |>
          flax$linen$avg_pool(window_shape = tuple(2L, 2L),

```

```

        strides = tuple(2L, 2L)) |>
# flatten all except batch_size axis
(\(x) x$reshape(tuple(x$shape[[1]], -1L)))( ) |>
(flax$linen$Dense(features = 200L))( ) |>
flax$linen$relu( ) |>
(flax$linen$Dense(features = 10L))( ) |>
flax$linen$softmax( )
    })
}

# typical usage:
input <- keras_input(c(28, 28, 3))
output <- input |>
  layer_flax_module_wrapper(MyFlaxModule())

model <- keras_model(input, output)

# to instantiate the layer before composing:
flax_module <- MyFlaxModule()
keras_layer <- layer_flax_module_wrapper(module = flax_module)

input <- keras_input(c(28, 28, 3))
output <- input |>
  keras_layer()

model <- keras_model(input, output)

}

```

This example shows how to wrap the module method to conform to the required signature. This allows having multiple input arguments and a training argument that has a different name and values. This additionally shows how to use a function that is not bound to the module.

```

flax <- import("flax")

MyFlaxModule(flax$linen$Module) \%py_class\% {
  forward <-
    flax$linen$compact(\(self, inputs1, input2, deterministic) {
      # do work ....
      outputs # return
    })
}

my_flax_module_wrapper <- function(module, inputs, training) {
  c(input1, input2) \%<-\% inputs
  module$forward(input1, input2,!training)
}

flax_module <- MyFlaxModule()

```

```
keras_layer <- layer_flax_module_wrapper(module = flax_module,
                                         method = my_flax_module_wrapper)
```

### Usage

```
layer_flax_module_wrapper(object, module, method = NULL, variables = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
module	An instance of <code>flax.linen.Module</code> or subclass.
method	The method to call the model. This is generally a method in the Module. If not provided, the <code>__call__</code> method is used. <code>method</code> can also be a function not defined in the Module, in which case it must take the Module as the first argument. It is used for both <code>Module.init</code> and <code>Module.apply</code> . Details are documented in the <code>method</code> argument of <code>flax.linen.Module.apply()</code> .
variables	A dict (named R list) containing all the variables of the module in the same format as what is returned by <code>flax.linen.Module.init()</code> . It should contain a "params" key and, if applicable, other keys for collections of variables for non-trainable state. This allows passing trained parameters and learned non-trainable state or controlling the initialization. If <code>NULL</code> is passed, the module's <code>init</code> function is called at build time to initialize the variables of the model.
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If `object` is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

### See Also

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/layers/FlaxLayer](https://www.tensorflow.org/api_docs/python/tf/keras/layers/FlaxLayer)

Other wrapping layers:

```
layer_jax_model_wrapper()
layer_torch_module_wrapper()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
```

```
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()
```

```
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
```

```
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_gaussian\_dropout

*Apply multiplicative 1-centered Gaussian noise.*

---

### Description

As it is a regularization layer, it is only active at training time.

### Usage

```
layer_gaussian_dropout(object, rate, seed = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
rate	Float, drop probability (as with Dropout). The multiplicative noise will have standard deviation $\sqrt{\text{rate} / (1 - \text{rate})}$ .
seed	Integer, optional random seed to enable deterministic behavior.
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Call Arguments

- `inputs`: Input tensor (of any rank).
- `training`: Python boolean indicating whether the layer should behave in training mode (adding dropout) or in inference mode (doing nothing).

**See Also**

- [https://keras.io/api/layers/regularization\\_layers/gaussian\\_dropout#gaussiandropout-class](https://keras.io/api/layers/regularization_layers/gaussian_dropout#gaussiandropout-class)

Other regularization layers:

```
layer_activity_regularization()  
layer_alpha_dropout()  
layer_dropout()  
layer_gaussian_noise()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()
```



```
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()
```

```
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_gaussian\_noise *Apply additive zero-centered Gaussian noise.*

---

### Description

This is useful to mitigate overfitting (you could see it as a form of random data augmentation). Gaussian Noise (GS) is a natural choice as corruption process for real valued inputs.

As it is a regularization layer, it is only active at training time.

### Usage

```
layer_gaussian_noise(object, stddev, seed = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
stddev	Float, standard deviation of the noise distribution.
seed	Integer, optional random seed to enable deterministic behavior.
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Call Arguments**

- `inputs`: Input tensor (of any rank).
- `training`: Python boolean indicating whether the layer should behave in training mode (adding noise) or in inference mode (doing nothing).

**See Also**

- [https://keras.io/api/layers/regularization\\_layers/gaussian\\_noise#gaussiannoise-class](https://keras.io/api/layers/regularization_layers/gaussian_noise#gaussiannoise-class)

Other regularization layers:

```
layer_activity_regularization()  
layer_alpha_dropout()  
layer_dropout()  
layer_gaussian_dropout()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()
```

```
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()
```

```
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_global\_average\_pooling\_1d

*Global average pooling operation for temporal data.*

---

**Description**

Global average pooling operation for temporal data.

**Usage**

```
layer_global_average_pooling_1d(
    object,
    data_format = NULL,
    keepdims = FALSE,
    ...
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
keepdims	A boolean, whether to keep the temporal dimension or not. If keepdims is FALSE (default), the rank of the tensor is reduced for spatial dimensions. If keepdims is TRUE, the temporal dimension are retained with length 1. The behavior is the same as for <code>tf\$reduce_mean()</code> or <code>op_mean()</code> .
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Call Arguments**

- inputs: A 3D tensor.
- mask: Binary tensor of shape (batch\_size, steps) indicating whether a given step should be masked (excluded from the average).

**Input Shape**

- If `data_format='channels_last'`: 3D tensor with shape: (batch\_size, steps, features)
- If `data_format='channels_first'`: 3D tensor with shape: (batch\_size, features, steps)

### Output Shape

- If keepdims=FALSE: 2D tensor with shape (batch\_size, features).
- If keepdims=TRUE:
  - If data\_format="channels\_last": 3D tensor with shape (batch\_size, 1, features)
  - If data\_format="channels\_first": 3D tensor with shape (batch\_size, features, 1)

### Examples

```
x <- random_uniform(c(2, 3, 4))
y <- x |> layer_global_average_pooling_1d()
shape(y)

## shape(2, 4)
```

### See Also

- [https://keras.io/api/layers/pooling\\_layers/global\\_average\\_pooling1d#globalaveragepooling1d-class](https://keras.io/api/layers/pooling_layers/global_average_pooling1d#globalaveragepooling1d-class)

Other pooling layers:

```
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
```

```
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()
```



```
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_global\_average\_pooling\_2d

*Global average pooling operation for 2D data.*

---

### Description

Global average pooling operation for 2D data.

### Usage

```
layer_global_average_pooling_2d(
    object,
    data_format = NULL,
    keepdims = FALSE,
    ...
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, features, height, weight). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
keepdims	A boolean, whether to keep the temporal dimension or not. If keepdims is FALSE (default), the rank of the tensor is reduced for spatial dimensions. If keepdims is TRUE, the spatial dimension are retained with length 1. The behavior is the same as for tf\$reduce_mean() or op_mean().
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

### Input Shape

- If data\_format='channels\_last': 4D tensor with shape: (batch\_size, height, width, channels)
- If data\_format='channels\_first': 4D tensor with shape: (batch\_size, channels, height, width)

### Output Shape

- If keepdims=FALSE: 2D tensor with shape (batch\_size, channels).
- If keepdims=TRUE:
  - If data\_format="channels\_last": 4D tensor with shape (batch\_size, 1, 1, channels)
  - If data\_format="channels\_first": 4D tensor with shape (batch\_size, channels, 1, 1)

### Examples

```
x <- random_uniform(c(2, 4, 5, 3))
y <- x |> layer_global_average_pooling_2d()
shape(y)

## shape(2, 3)
```

### See Also

- [https://keras.io/api/layers/pooling\\_layers/global\\_average\\_pooling2d#globalaveragepooling2d-class](https://keras.io/api/layers/pooling_layers/global_average_pooling2d#globalaveragepooling2d-class)

Other pooling layers:

```
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_global_average_pooling_1d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
```

```
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()
```

```
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_global\_average\_pooling\_3d

*Global average pooling operation for 3D data.*

---

### Description

Global average pooling operation for 3D data.

### Usage

```
layer_global_average_pooling_3d(
    object,
    data_format = NULL,
    keepdims = FALSE,
    ...
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch, channels, spatial_dim1, spatial_dim2, spatial_dim3). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
keepdims	A boolean, whether to keep the temporal dimension or not. If keepdims is FALSE (default), the rank of the tensor is reduced for spatial dimensions. If keepdims is TRUE, the spatial dimension are retained with length 1. The behavior is the same as for tf\$reduce_mean() or op_mean().
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

### Input Shape

- If data\_format='channels\_last': 5D tensor with shape: (batch\_size, spatial\_dim1, spatial\_dim2, spatial\_dim3, channels)
- If data\_format='channels\_first': 5D tensor with shape: (batch\_size, channels, spatial\_dim1, spatial\_dim2, spatial\_dim3)

**Output Shape**

- If keepdims=FALSE: 2D tensor with shape (batch\_size, channels).
- If keepdims=TRUE:
  - If data\_format="channels\_last": 5D tensor with shape (batch\_size, 1, 1, 1, channels)
  - If data\_format="channels\_first": 5D tensor with shape (batch\_size, channels, 1, 1, 1)

**Examples**

```
x <- random_uniform(c(2, 4, 5, 4, 3))
y <- x |> layer_global_average_pooling_3d()
shape(y)

## shape(2, 3)
```

**See Also**

- [https://keras.io/api/layers/pooling\\_layers/global\\_average\\_pooling3d#globalaveragepooling3d-class](https://keras.io/api/layers/pooling_layers/global_average_pooling3d#globalaveragepooling3d-class)

Other pooling layers:

```
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
```

```
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()
```



```
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

 layer\_global\_max\_pooling\_1d

*Global max pooling operation for temporal data.*


---

### Description

Global max pooling operation for temporal data.

### Usage

```
layer_global_max_pooling_1d(object, data_format = NULL, keepdims = FALSE, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
keepdims	A boolean, whether to keep the temporal dimension or not. If keepdims is FALSE (default), the rank of the tensor is reduced for spatial dimensions. If keepdims is TRUE, the temporal dimension are retained with length 1. The behavior is the same as for tf\$reduce_mean() or op_mean().
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

### Input Shape

- If data\_format='channels\_last': 3D tensor with shape: (batch\_size, steps, features)
- If data\_format='channels\_first': 3D tensor with shape: (batch\_size, features, steps)

### Output Shape

- If keepdims=FALSE: 2D tensor with shape (batch\_size, features).
- If keepdims=TRUE:
  - If data\_format="channels\_last": 3D tensor with shape (batch\_size, 1, features)
  - If data\_format="channels\_first": 3D tensor with shape (batch\_size, features, 1)

**Examples**

```
x <- random_uniform(c(2, 3, 4))
y <- x |> layer_global_max_pooling_1d()
shape(y)

## shape(2, 4)
```

**See Also**

- [https://keras.io/api/layers/pooling\\_layers/global\\_max\\_pooling1d#globalmaxpooling1d-class](https://keras.io/api/layers/pooling_layers/global_max_pooling1d#globalmaxpooling1d-class)

Other pooling layers:

```
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
```

```
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()
```

```
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_global\_max\_pooling\_2d

*Global max pooling operation for 2D data.*

---

### **Description**

Global max pooling operation for 2D data.

**Usage**

```
layer_global_max_pooling_2d(object, data_format = NULL, keepdims = FALSE, ...)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, features, height, weight). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
keepdims	A boolean, whether to keep the temporal dimension or not. If keepdims is FALSE (default), the rank of the tensor is reduced for spatial dimensions. If keepdims is TRUE, the spatial dimension are retained with length 1. The behavior is the same as for tf\$reduce_mean() or op_mean().
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

**Input Shape**

- If data\_format='channels\_last': 4D tensor with shape: (batch\_size, height, width, channels)
- If data\_format='channels\_first': 4D tensor with shape: (batch\_size, channels, height, width)

**Output Shape**

- If keepdims=FALSE: 2D tensor with shape (batch\_size, channels).
- If keepdims=TRUE:
  - If data\_format="channels\_last": 4D tensor with shape (batch\_size, 1, 1, channels)
  - If data\_format="channels\_first": 4D tensor with shape (batch\_size, channels, 1, 1)

**Examples**

```
x <- random_uniform(c(2, 4, 5, 3))
y <- x |> layer_global_max_pooling_2d()
shape(y)

## shape(2, 3)
```

**See Also**

- [https://keras.io/api/layers/pooling\\_layers/global\\_max\\_pooling2d#globalmaxpooling2d-class](https://keras.io/api/layers/pooling_layers/global_max_pooling2d#globalmaxpooling2d-class)

Other pooling layers:

layer\_average\_pooling\_1d()  
layer\_average\_pooling\_2d()  
layer\_average\_pooling\_3d()  
layer\_global\_average\_pooling\_1d()  
layer\_global\_average\_pooling\_2d()  
layer\_global\_average\_pooling\_3d()  
layer\_global\_max\_pooling\_1d()  
layer\_global\_max\_pooling\_3d()  
layer\_max\_pooling\_1d()  
layer\_max\_pooling\_2d()  
layer\_max\_pooling\_3d()

Other layers:

Layer()  
layer\_activation()  
layer\_activation\_elu()  
layer\_activation\_leaky\_relu()  
layer\_activation\_parametric\_relu()  
layer\_activation\_relu()  
layer\_activation\_softmax()  
layer\_activity\_regularization()  
layer\_add()  
layer\_additive\_attention()  
layer\_alpha\_dropout()  
layer\_attention()  
layer\_average()  
layer\_average\_pooling\_1d()  
layer\_average\_pooling\_2d()  
layer\_average\_pooling\_3d()  
layer\_batch\_normalization()  
layer\_bidirectional()  
layer\_category\_encoding()  
layer\_center\_crop()  
layer\_concatenate()  
layer\_conv\_1d()  
layer\_conv\_1d\_transpose()  
layer\_conv\_2d()  
layer\_conv\_2d\_transpose()  
layer\_conv\_3d()  
layer\_conv\_3d\_transpose()  
layer\_conv\_lstm\_1d()  
layer\_conv\_lstm\_2d()  
layer\_conv\_lstm\_3d()  
layer\_cropping\_1d()

```
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()
```



```
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_global\_max\_pooling\_3d

*Global max pooling operation for 3D data.*

---

### **Description**

Global max pooling operation for 3D data.

### **Usage**

```
layer_global_max_pooling_3d(object, data_format = NULL, keepdims = FALSE, ...)
```

### **Arguments**

**object**            Object to compose the layer with. A tensor, array, or sequential model.

data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch, channels, spatial_dim1, spatial_dim2, spatial_dim3). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
keepdims	A boolean, whether to keep the temporal dimension or not. If keepdims is FALSE (default), the rank of the tensor is reduced for spatial dimensions. If keepdims is TRUE, the spatial dimension are retained with length 1. The behavior is the same as for tf\$reduce_mean() or op_mean().
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

### Input Shape

- If data\_format='channels\_last': 5D tensor with shape: (batch\_size, spatial\_dim1, spatial\_dim2, spatial\_dim3, channels)
- If data\_format='channels\_first': 5D tensor with shape: (batch\_size, channels, spatial\_dim1, spatial\_dim2, spatial\_dim3)

### Output Shape

- If keepdims=FALSE: 2D tensor with shape (batch\_size, channels).
- If keepdims=TRUE:
  - If data\_format="channels\_last": 5D tensor with shape (batch\_size, 1, 1, 1, channels)
  - If data\_format="channels\_first": 5D tensor with shape (batch\_size, channels, 1, 1, 1)

### Examples

```
x <- random_uniform(c(2, 4, 5, 4, 3))
y <- x |> layer_global_max_pooling_3d()
shape(y)

## shape(2, 3)
```

**See Also**

- [https://keras.io/api/layers/pooling\\_layers/global\\_max\\_pooling3d#globalmaxpooling3d-class](https://keras.io/api/layers/pooling_layers/global_max_pooling3d#globalmaxpooling3d-class)

**Other pooling layers:**

```
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()
```

**Other layers:**

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()
```

```
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
```

```
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_group\_normalization

*Group normalization layer.*

---

### **Description**

Group Normalization divides the channels into groups and computes within each group the mean and variance for normalization. Empirically, its accuracy is more stable than batch norm in a wide range of small batch sizes, if learning rate is adjusted linearly with batch sizes.

Relation to Layer Normalization: If the number of groups is set to 1, then this operation becomes nearly identical to Layer Normalization (see Layer Normalization docs for details).

Relation to Instance Normalization: If the number of groups is set to the input dimension (number of groups is equal to number of channels), then this operation becomes identical to Instance Normalization. You can achieve this via `groups=-1`.

**Usage**

```

layer_group_normalization(
    object,
    groups = 32L,
    axis = -1L,
    epsilon = 0.001,
    center = TRUE,
    scale = TRUE,
    beta_initializer = "zeros",
    gamma_initializer = "ones",
    beta_regularizer = NULL,
    gamma_regularizer = NULL,
    beta_constraint = NULL,
    gamma_constraint = NULL,
    ...
)

```

**Arguments**

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>groups</code>	Integer, the number of groups for Group Normalization. Can be in the range [1, N] where N is the input dimension. The input dimension must be divisible by the number of groups. Defaults to 32.
<code>axis</code>	Integer or List/Tuple. The axis or axes to normalize across. Typically, this is the features axis/axes. The left-out axes are typically the batch axis/axes. -1 is the last dimension in the input. Defaults to -1.
<code>epsilon</code>	Small float added to variance to avoid dividing by zero. Defaults to 1e-3.
<code>center</code>	If TRUE, add offset of beta to normalized tensor. If FALSE, beta is ignored. Defaults to TRUE.
<code>scale</code>	If TRUE, multiply by gamma. If FALSE, gamma is not used. When the next layer is linear (also e.g. relu), this can be disabled since the scaling will be done by the next layer. Defaults to TRUE.
<code>beta_initializer</code>	Initializer for the beta weight. Defaults to zeros.
<code>gamma_initializer</code>	Initializer for the gamma weight. Defaults to ones.
<code>beta_regularizer</code>	Optional regularizer for the beta weight. NULL by default.
<code>gamma_regularizer</code>	Optional regularizer for the gamma weight. NULL by default.
<code>beta_constraint</code>	Optional constraint for the beta weight. NULL by default.
<code>gamma_constraint</code>	Optional constraint for the gamma weight. NULL by default.
<code>...</code>	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Input Shape**

Arbitrary. Use the keyword argument `input_shape` (tuple of integers, does not include the samples axis) when using this layer as the first layer in a model.

**Output Shape**

Same shape as input. `**kwargs`: Base layer keyword arguments (e.g. name and dtype).

**Reference**

- [Yuxin Wu & Kaiming He, 2018](#)

**See Also**

- [https://keras.io/api/layers/normalization\\_layers/group\\_normalization#groupnormalization-class](https://keras.io/api/layers/normalization_layers/group_normalization#groupnormalization-class)

Other normalization layers:

```
layer_batch_normalization()  
layer_layer_normalization()  
layer_spectral_normalization()  
layer_unit_normalization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()
```

```
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()
```



```
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_group\_query\_attention

*Grouped Query Attention layer.*

### Description

This is an implementation of grouped-query attention introduced by [Ainslie et al., 2023](#). Here `num_key_value_heads` denotes number of groups, setting `num_key_value_heads` to 1 is equivalent to multi-query attention, and when `num_key_value_heads` is equal to `num_query_heads` it is equivalent to multi-head attention.

This layer first projects query, key, and value tensors. Then, key and value are repeated to match the number of heads of query.

Then, the query is scaled and dot-producted with key tensors. These are softmaxed to obtain attention probabilities. The value tensors are then interpolated by these probabilities and concatenated back to a single tensor.

### Usage

```
layer_group_query_attention(
    object,
    head_dim,
    num_query_heads,
    num_key_value_heads,
    dropout = 0,
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    bias_constraint = NULL,
    ...
)
```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>head_dim</code>	Size of each attention head.
<code>num_query_heads</code>	Number of query attention heads.
<code>num_key_value_heads</code>	Number of key and value attention heads.
<code>dropout</code>	Dropout probability.
<code>use_bias</code>	Boolean, whether the dense layers use bias vectors/matrices.
<code>kernel_initializer</code>	Initializer for dense layer kernels.

bias_initializer	Initializer for dense layer biases.
kernel_regularizer	Regularizer for dense layer kernels.
bias_regularizer	Regularizer for dense layer biases.
activity_regularizer	Regularizer for dense layer activity.
kernel_constraint	Constraint for dense layer kernels.
bias_constraint	Constraint for dense layer kernels.
...	For forward/backward compatibility.

**Value**

attention\_output: Result of the computation, of shape (batch\_dim, target\_seq\_len, feature\_dim), where target\_seq\_len is for target sequence length and feature\_dim is the query input last dim.

attention\_scores: (Optional) attention coefficients of shape (batch\_dim, num\_query\_heads, target\_seq\_len, source\_seq\_len).

**Call Arguments**

- query: Query tensor of shape (batch\_dim, target\_seq\_len, feature\_dim), where batch\_dim is batch size, target\_seq\_len is the length of target sequence, and feature\_dim is dimension of feature.
- value: Value tensor of shape (batch\_dim, source\_seq\_len, feature\_dim), where batch\_dim is batch size, source\_seq\_len is the length of source sequence, and feature\_dim is dimension of feature.
- key: Optional key tensor of shape (batch\_dim, source\_seq\_len, feature\_dim). If not given, will use value for both key and value, which is most common case.
- attention\_mask: A boolean mask of shape (batch\_dim, target\_seq\_len, source\_seq\_len), that prevents attention to certain positions. The boolean mask specifies which query elements can attend to which key elements, where 1 indicates attention and 0 indicates no attention. Broadcasting can happen for the missing batch dimensions and the head dimension.
- return\_attention\_scores: A boolean to indicate whether the output should be (attention\_output, attention\_scores) if TRUE, or attention\_output if FALSE. Defaults to FALSE.
- training: Python boolean indicating whether the layer should behave in training mode (adding dropout) or in inference mode (no dropout). Will go with either using the training mode of the parent layer/model or FALSE (inference) if there is no parent layer.
- use\_causal\_mask: A boolean to indicate whether to apply a causal mask to prevent tokens from attending to future tokens (e.g., used in a decoder Transformer).

**See Also**

Other attention layers:

[layer\\_additive\\_attention\(\)](#)

```
layer_attention()  
layer_multi_head_attention()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()
```

```
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()
```

```
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_gru

*Gated Recurrent Unit - Cho et al. 2014.*

---

## Description

Based on available runtime hardware and constraints, this layer will choose different implementations (cuDNN-based or backend-native) to maximize the performance. If a GPU is available and all the arguments to the layer meet the requirement of the cuDNN kernel (see below for details), the layer will use a fast cuDNN implementation when using the TensorFlow backend.

The requirements to use the cuDNN implementation are:

1. `activation == tanh`
2. `recurrent_activation == sigmoid`
3. `dropout == 0` and `recurrent_dropout == 0`
4. `unroll` is `FALSE`
5. `use_bias` is `TRUE`
6. `reset_after` is `TRUE`
7. Inputs, if use masking, are strictly right-padded.
8. Eager execution is enabled in the outermost context.

There are two variants of the GRU implementation. The default one is based on `v3` and has reset gate applied to hidden state before matrix multiplication. The other one is based on `original` and has the order reversed.

The second variant is compatible with CuDNNGRU (GPU-only) and allows inference on CPU. Thus it has separate biases for kernel and `recurrent_kernel`. To use this variant, set `reset_after=TRUE` and `recurrent_activation='sigmoid'`.

For example:

```
inputs <- random_uniform(c(32, 10, 8))
outputs <- inputs |> layer_gru(4)
shape(outputs)

## shape(32, 4)

# (32, 4)
gru <- layer_gru(, 4, return_sequences = TRUE, return_state = TRUE)
c(whole_sequence_output, final_state) %<-% gru(inputs)
shape(whole_sequence_output)

## shape(32, 10, 4)

shape(final_state)

## shape(32, 4)
```

### Usage

```
layer_gru(
  object,
  units,
  activation = "tanh",
  recurrent_activation = "sigmoid",
  use_bias = TRUE,
  kernel_initializer = "glorot_uniform",
  recurrent_initializer = "orthogonal",
  bias_initializer = "zeros",
  kernel_regularizer = NULL,
  recurrent_regularizer = NULL,
  bias_regularizer = NULL,
  activity_regularizer = NULL,
  kernel_constraint = NULL,
  recurrent_constraint = NULL,
  bias_constraint = NULL,
  dropout = 0,
  recurrent_dropout = 0,
  seed = NULL,
  return_sequences = FALSE,
  return_state = FALSE,
  go_backwards = FALSE,
  stateful = FALSE,
  unroll = FALSE,
  reset_after = TRUE,
  use_cudnn = "auto",
  ...
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
units	Positive integer, dimensionality of the output space.
activation	Activation function to use. Default: hyperbolic tangent (tanh). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
recurrent_activation	Activation function to use for the recurrent step. Default: sigmoid (sigmoid). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
use_bias	Boolean, (default TRUE), whether the layer should use a bias vector.
kernel_initializer	Initializer for the kernel weights matrix, used for the linear transformation of the inputs. Default: "glorot_uniform".
recurrent_initializer	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state. Default: "orthogonal".
bias_initializer	Initializer for the bias vector. Default: "zeros".
kernel_regularizer	Regularizer function applied to the kernel weights matrix. Default: NULL.
recurrent_regularizer	Regularizer function applied to the recurrent_kernel weights matrix. Default: NULL.
bias_regularizer	Regularizer function applied to the bias vector. Default: NULL.
activity_regularizer	Regularizer function applied to the output of the layer (its "activation"). Default: NULL.
kernel_constraint	Constraint function applied to the kernel weights matrix. Default: NULL.
recurrent_constraint	Constraint function applied to the recurrent_kernel weights matrix. Default: NULL.
bias_constraint	Constraint function applied to the bias vector. Default: NULL.
dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs. Default: 0.
recurrent_dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state. Default: 0.
seed	Random seed for dropout.
return_sequences	Boolean. Whether to return the last output in the output sequence, or the full sequence. Default: FALSE.
return_state	Boolean. Whether to return the last state in addition to the output. Default: FALSE.



<code>go_backwards</code>	Boolean (default <code>FALSE</code> ). If <code>TRUE</code> , process the input sequence backwards and return the reversed sequence.
<code>stateful</code>	Boolean (default: <code>FALSE</code> ). If <code>TRUE</code> , the last state for each sample at index <code>i</code> in a batch will be used as initial state for the sample of index <code>i</code> in the following batch.
<code>unroll</code>	Boolean (default: <code>FALSE</code> ). If <code>TRUE</code> , the network will be unrolled, else a symbolic loop will be used. Unrolling can speed-up a RNN, although it tends to be more memory-intensive. Unrolling is only suitable for short sequences.
<code>reset_after</code>	GRU convention (whether to apply reset gate after or before matrix multiplication). <code>FALSE</code> is "before", <code>TRUE</code> is "after" (default and cuDNN compatible).
<code>use_cudnn</code>	Whether to use a cuDNN-backed implementation. "auto" will attempt to use cuDNN when feasible, and will fallback to the default implementation if not.
<code>...</code>	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

### Call Arguments

- `inputs`: A 3D tensor, with shape (batch, timesteps, feature).
- `mask`: Binary tensor of shape (samples, timesteps) indicating whether a given timestep should be masked (optional). An individual `TRUE` entry indicates that the corresponding timestep should be utilized, while a `FALSE` entry indicates that the corresponding timestep should be ignored. Defaults to `NULL`.
- `training`: Python boolean indicating whether the layer should behave in training mode or in inference mode. This argument is passed to the cell when calling it. This is only relevant if dropout or `recurrent_dropout` is used (optional). Defaults to `NULL`.
- `initial_state`: List of initial state tensors to be passed to the first call of the cell (optional, `NULL` causes creation of zero-filled initial state tensors). Defaults to `NULL`.

### See Also

- [https://keras.io/api/layers/recurrent\\_layers/gru#gru-class](https://keras.io/api/layers/recurrent_layers/gru#gru-class)

Other gru rnn layers:

`rnn_cell_gru()`

Other rnn layers:

`layer_bidirectional()`

`layer_conv_lstm_1d()`

`layer_conv_lstm_2d()`

`layer_conv_lstm_3d()`

```
layer_lstm()  
layer_rnn()  
layer_simple_rnn()  
layer_time_distributed()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()
```

```
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
```

```
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_hashed\_crossing *A preprocessing layer which crosses features using the "hashing trick".*

---

### Description

This layer performs crosses of categorical features using the "hashing trick". Conceptually, the transformation can be thought of as: `hash(concatenate(features)) %% num_bins`.

This layer currently only performs crosses of scalar inputs and batches of scalar inputs. Valid input shapes are `(batch_size, 1)`, `(batch_size)` and `()`.

**Note:** This layer wraps `tf.keras.layers.HashedCrossing`. It cannot be used as part of the compiled computation graph of a model with any backend other than TensorFlow. It can however be used with any backend when running eagerly. It can also always be used as part of an input preprocessing pipeline with any backend (outside the model itself), which is how we recommend to use this layer.

**Note:** This layer is safe to use inside a `tfdatasets` pipeline (independently of which backend you're using).

### Usage

```
layer_hashed_crossing(  
    object,
```

```

    num_bins,
    output_mode = "int",
    sparse = FALSE,
    name = NULL,
    dtype = NULL,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
num_bins	Number of hash bins.
output_mode	Specification for the output of the layer. Values can be "int", or "one_hot" configuring the layer as follows: <ul style="list-style-type: none"> <li>"int": Return the integer bin indices directly.</li> <li>"one_hot": Encodes each individual element in the input into an array the same size as num_bins, containing a 1 at the input's bin index. Defaults to "int".</li> </ul>
sparse	Boolean. Only applicable to "one_hot" mode and only valid when using the TensorFlow backend. If TRUE, returns a SparseTensor instead of a dense Tensor. Defaults to FALSE.
name	String, name for the object
dtype	datatype (e.g., "float32").
...	Keyword arguments to construct a layer.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Examples

```

feat1 <- c('A', 'B', 'A', 'B', 'A') |> as.array()
feat2 <- c(101, 101, 101, 102, 102) |> as.integer() |> as.array()

```

#### Crossing two scalar features.

```

layer <- layer_hashed_crossing(num_bins = 5)
layer(list(feat1, feat2))

## tf.Tensor([1 4 1 1 3], shape=(5), dtype=int64)

```

**Crossing and one-hotting two scalar features.**

```
layer <- layer_hashed_crossing(num_bins = 5, output_mode = 'one_hot')
layer(list(feats1, feats2))

## tf.Tensor(
## [[0. 1. 0. 0. 0.]
## [0. 0. 0. 0. 1.]
## [0. 1. 0. 0. 0.]
## [0. 1. 0. 0. 0.]
## [0. 0. 0. 1. 0.]], shape=(5, 5), dtype=float32)
```

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/categorical/hashed\\_crossing/#hashedcrossing-class](https://keras.io/api/layers/preprocessing_layers/categorical/hashed_crossing/#hashedcrossing-class)

Other categorical features preprocessing layers:

```
layer_category_encoding()
layer_hashing()
layer_integer_lookup()
layer_string_lookup()
```

Other preprocessing layers:

```
layer_category_encoding()
layer_center_crop()
layer_discretization()
layer_feature_space()
layer_hashing()
layer_integer_lookup()
layer_mel_spectrogram()
layer_normalization()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_rescaling()
layer_resizing()
layer_string_lookup()
layer_text_vectorization()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
```

```
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
```

```
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()
```



```

layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_hashing

*A preprocessing layer which hashes and bins categorical features.*


---

### Description

This layer transforms categorical inputs to hashed output. It element-wise converts a ints or strings to ints in a fixed range. The stable hash function uses `tensorflow::ops::Fingerprint` to produce the same output consistently across all platforms.

This layer uses **FarmHash64** by default, which provides a consistent hashed output across different platforms and is stable across invocations, regardless of device and context, by mixing the input bits thoroughly.

If you want to obfuscate the hashed output, you can also pass a random `salt` argument in the constructor. In that case, the layer will use the **SipHash64** hash function, with the `salt` value serving as additional input to the hash function.

**Note:** This layer internally uses TensorFlow. It cannot be used as part of the compiled computation graph of a model with any backend other than TensorFlow. It can however be used with any backend when running eagerly. It can also always be used as part of an input preprocessing pipeline with any backend (outside the model itself), which is how we recommend to use this layer.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

#### Example (FarmHash64)

```

layer <- layer_hashing(num_bins = 3)
inp <- c('A', 'B', 'C', 'D', 'E') |> array(dim = c(5, 1))
layer(inp)

## tf.Tensor(
## [[1]
## [0]
## [1]
## [1]
## [2]], shape=(5, 1), dtype=int64)

```

**Example (FarmHash64) with a mask value**

```

layer <- layer_hashing(num_bins=3, mask_value='')
inp <- c('A', 'B', '', 'C', 'D') |> array(dim = c(5, 1))
layer(inp)

## tf.Tensor(
## [[1]
## [1]
## [0]
## [2]
## [2]], shape=(5, 1), dtype=int64)

```

**Example (SipHash64)**

```

layer <- layer_hashing(num_bins=3, salt=c(133, 137))
inp <- c('A', 'B', 'C', 'D', 'E') |> array(dim = c(5, 1))
layer(inp)

## tf.Tensor(
## [[1]
## [2]
## [1]
## [0]
## [2]], shape=(5, 1), dtype=int64)

```

**Example (Siphash64 with a single integer, same as salt=[133, 133])**

```

layer <- layer_hashing(num_bins=3, salt=133)
inp <- c('A', 'B', 'C', 'D', 'E') |> array(dim = c(5, 1))
layer(inp)

## tf.Tensor(
## [[0]
## [0]
## [2]
## [1]
## [0]], shape=(5, 1), dtype=int64)

```

**Usage**

```

layer_hashing(
  object,
  num_bins,
  mask_value = NULL,

```

```

    salt = NULL,
    output_mode = "int",
    sparse = FALSE,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
num_bins	Number of hash bins. Note that this includes the mask_value bin, so the effective number of bins is (num_bins - 1) if mask_value is set.
mask_value	A value that represents masked inputs, which are mapped to index 0. NULL means no mask term will be added and the hashing will start at index 0. Defaults to NULL.
salt	A single unsigned integer or NULL. If passed, the hash function used will be SipHash64, with these values used as an additional input (known as a "salt" in cryptography). These should be non-zero. If NULL, uses the FarmHash64 hash function. It also supports list of 2 unsigned integer numbers, see reference paper for details. Defaults to NULL.
output_mode	Specification for the output of the layer. Values can be "int", "one_hot", "multi_hot", or "count" configuring the layer as follows: <ul style="list-style-type: none"> <li>"int": Return the integer bin indices directly.</li> <li>"one_hot": Encodes each individual element in the input into an array the same size as num_bins, containing a 1 at the input's bin index. If the last dimension is size 1, will encode on that dimension. If the last dimension is not size 1, will append a new dimension for the encoded output.</li> <li>"multi_hot": Encodes each sample in the input into a single array the same size as num_bins, containing a 1 for each bin index present in the sample. Treats the last dimension as the sample dimension, if input shape is (... , sample_length), output shape will be (... , num_tokens).</li> <li>"count": As "multi_hot", but the int array contains a count of the number of times the bin index appeared in the sample. Defaults to "int".</li> </ul>
sparse	Boolean. Only applicable to "one_hot", "multi_hot", and "count" output modes. Only supported with TensorFlow backend. If TRUE, returns a SparseTensor instead of a dense Tensor. Defaults to FALSE.
...	Keyword arguments to construct a layer.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Input Shape**

A single string, a list of strings, or an int32 or int64 tensor of shape (batch\_size, ...).

**Output Shape**

An int32 tensor of shape (batch\_size, ...).

**Reference**

- [SipHash with salt](#)

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/categorical/hashing#hashing-class](https://keras.io/api/layers/preprocessing_layers/categorical/hashing#hashing-class)

Other categorical features preprocessing layers:

```
layer_category_encoding()  
layer_hashed_crossing()  
layer_integer_lookup()  
layer_string_lookup()
```

Other preprocessing layers:

```
layer_category_encoding()  
layer_center_crop()  
layer_discretization()  
layer_feature_space()  
layer_hashed_crossing()  
layer_integer_lookup()  
layer_mel_spectrogram()  
layer_normalization()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_rescaling()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()
```

```
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
```

```
layer_gru()
layer_hashed_crossing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
```

```
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_identity	<i>Identity layer.</i>
----------------	------------------------

---

### Description

This layer should be used as a placeholder when no operation is to be performed. The layer just returns its inputs argument as output.

### Usage

```
layer_identity(object, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### See Also

Other core layers:

```
layer_dense()  
layer_einsum_dense()  
layer_embedding()  
layer_lambda()  
layer_masking()
```

Other layers:

```
Layer()  
layer_activation()
```

```
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
```



```
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()
```

```
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_integer\_lookup *A preprocessing layer that maps integers to (possibly encoded) indices.*

---

### Description

This layer maps a set of arbitrary integer input tokens into indexed integer output via a table-based vocabulary lookup. The layer's output indices will be contiguously arranged up to the maximum vocab size, even if the input tokens are non-contiguous or unbounded. The layer supports multiple options for encoding the output via `output_mode`, and has optional support for out-of-vocabulary (OOV) tokens and masking.

The vocabulary for the layer must be either supplied on construction or learned via `adapt()`. During `adapt()`, the layer will analyze a data set, determine the frequency of individual integer tokens, and create a vocabulary from them. If the vocabulary is capped in size, the most frequent tokens will be used to create the vocabulary and all others will be treated as OOV.

There are two possible output modes for the layer. When `output_mode` is "int", input integers are converted to their index in the vocabulary (an integer). When `output_mode` is "multi\_hot", "count", or "tf\_idf", input integers are encoded into an array where each dimension corresponds to an element in the vocabulary.

The vocabulary can optionally contain a mask token as well as an OOV token (which can optionally occupy multiple indices in the vocabulary, as set by `num_oov_indices`). The position of these tokens in the vocabulary is fixed. When `output_mode` is "int", the vocabulary will begin with the mask token at index 0, followed by OOV indices, followed by the rest of the vocabulary. When `output_mode` is "multi\_hot", "count", or "tf\_idf" the vocabulary will begin with OOV indices and instances of the mask token will be dropped.

**Note:** This layer uses TensorFlow internally. It cannot be used as part of the compiled computation graph of a model with any backend other than TensorFlow. It can however be used with any backend when running eagerly. It can also always be used as part of an input preprocessing pipeline with any backend (outside the model itself), which is how we recommend to use this layer.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

**Usage**

```

layer_integer_lookup(
    object,
    max_tokens = NULL,
    num_oov_indices = 1L,
    mask_token = NULL,
    oov_token = -1L,
    vocabulary = NULL,
    vocabulary_dtype = "int64",
    idf_weights = NULL,
    invert = FALSE,
    output_mode = "int",
    sparse = FALSE,
    pad_to_max_tokens = FALSE,
    name = NULL,
    ...
)

```

**Arguments**

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>max_tokens</code>	Maximum size of the vocabulary for this layer. This should only be specified when adapting the vocabulary or when setting <code>pad_to_max_tokens=TRUE</code> . If <code>NULL</code> , there is no cap on the size of the vocabulary. Note that this size includes the OOV and mask tokens. Defaults to <code>NULL</code> .
<code>num_oov_indices</code>	The number of out-of-vocabulary tokens to use. If this value is more than 1, OOV inputs are modulated to determine their OOV value. If this value is 0, OOV inputs will cause an error when calling the layer. Defaults to 1.
<code>mask_token</code>	An integer token that represents masked inputs. When <code>output_mode</code> is "int", the token is included in vocabulary and mapped to index 0. In other output modes, the token will not appear in the vocabulary and instances of the mask token in the input will be dropped. If set to <code>NULL</code> , no mask term will be added. Defaults to <code>NULL</code> .
<code>oov_token</code>	Only used when <code>invert</code> is <code>TRUE</code> . The token to return for OOV indices. Defaults to -1.
<code>vocabulary</code>	Optional. Either an array of integers or a string path to a text file. If passing an array, can pass a list, list, 1D NumPy array, or 1D tensor containing the integer vocabulary terms. If passing a file path, the file should contain one line per term in the vocabulary. If this argument is set, there is no need to <code>adapt()</code> the layer.
<code>vocabulary_dtype</code>	The dtype of the vocabulary terms, for example "int64" or "int32". Defaults to "int64".
<code>idf_weights</code>	Only valid when <code>output_mode</code> is "tf_idf". A list, list, 1D NumPy array, or 1D tensor or the same length as the vocabulary, containing the floating point inverse document frequency weights, which will be multiplied by per sample

	term counts for the final TF-IDF weight. If the vocabulary argument is set, and output_mode is "tf_idf", this argument must be supplied.
invert	Only valid when output_mode is "int". If TRUE, this layer will map indices to vocabulary items instead of mapping vocabulary items to indices. Defaults to FALSE.
output_mode	Specification for the output of the layer. Values can be "int", "one_hot", "multi_hot", "count", or "tf_idf" configuring the layer as follows: <ul style="list-style-type: none"> <li>• "int": Return the vocabulary indices of the input tokens.</li> <li>• "one_hot": Encodes each individual element in the input into an array the same size as the vocabulary, containing a 1 at the element index. If the last dimension is size 1, will encode on that dimension. If the last dimension is not size 1, will append a new dimension for the encoded output.</li> <li>• "multi_hot": Encodes each sample in the input into a single array the same size as the vocabulary, containing a 1 for each vocabulary term present in the sample. Treats the last dimension as the sample dimension, if input shape is (... , sample_length), output shape will be (... , num_tokens).</li> <li>• "count": As "multi_hot", but the int array contains a count of the number of times the token at that index appeared in the sample.</li> <li>• "tf_idf": As "multi_hot", but the TF-IDF algorithm is applied to find the value in each token slot. For "int" output, any shape of input and output is supported. For all other output modes, currently only output up to rank 2 is supported. Defaults to "int".</li> </ul>
sparse	Boolean. Only applicable to "multi_hot", "count", and "tf_idf" output modes. Only supported with TensorFlow backend. If TRUE, returns a SparseTensor instead of a dense Tensor. Defaults to FALSE.
pad_to_max_tokens	Only applicable when output_mode is "multi_hot", "count", or "tf_idf". If TRUE, the output will have its feature axis padded to max_tokens even if the number of unique tokens in the vocabulary is less than max_tokens, resulting in a tensor of shape (batch_size, max_tokens) regardless of vocabulary size. Defaults to FALSE.
name	String, name for the object
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Examples

#### Creating a lookup layer with a known vocabulary

This example creates a lookup layer with a pre-existing vocabulary.



```

out <- data |>
  layer_integer_lookup(vocabulary = vocab,
                      num_oov_indices = 2)
out

## tf.Tensor(
## [[2 4 5]
## [1 0 3]], shape=(2, 3), dtype=int64)

```

Note that the output for OOV token 37 is 1, while the output for OOV token 1000 is 0. The in-vocab terms have their output index increased by 1 from earlier examples (12 maps to 2, etc) in order to make space for the extra OOV token.

### One-hot output

Configure the layer with `output_mode='one_hot'`. Note that the first `num_oov_indices` dimensions in the `one_hot` encoding represent OOV values.

```

vocab <- c(12, 36, 1138, 42) |> as.integer()
data <- op_array(c(12, 36, 1138, 42, 7), 'int32') # Note OOV tokens
layer <- layer_integer_lookup(vocabulary = vocab,
                             output_mode = 'one_hot')
layer(data)

## tf.Tensor(
## [[0 1 0 0 0]
## [0 0 1 0 0]
## [0 0 0 1 0]
## [0 0 0 0 1]
## [1 0 0 0 0]], shape=(5, 5), dtype=int64)

```

### Multi-hot output

Configure the layer with `output_mode='multi_hot'`. Note that the first `num_oov_indices` dimensions in the `multi_hot` encoding represent OOV tokens

```

vocab <- c(12, 36, 1138, 42) |> as.integer()
data <- op_array(rbind(c(12, 1138, 42, 42),
                      c(42, 7, 36, 7)), "int64") # Note OOV tokens
layer <- layer_integer_lookup(vocabulary = vocab,
                             output_mode = 'multi_hot')
layer(data)

## tf.Tensor(
## [[0 1 0 1 1]
## [1 0 1 0 1]], shape=(2, 5), dtype=int64)

```

**Token count output**

Configure the layer with `output_mode='count'`. As with `multi_hot` output, the first `num_oov_indices` dimensions in the output represent OOV tokens.

```
vocab <- c(12, 36, 1138, 42) |> as.integer()
data <- rbind(c(12, 1138, 42, 42),
             c(42, 7, 36, 7)) |> op_array("int64")
layer <- layer_integer_lookup(vocabulary = vocab,
                             output_mode = 'count')

layer(data)

## tf.Tensor(
## [[0 1 0 1 2]
## [2 0 1 0 1]], shape=(2, 5), dtype=int64)
```

**TF-IDF output**

Configure the layer with `output_mode='tf_idf'`. As with `multi_hot` output, the first `num_oov_indices` dimensions in the output represent OOV tokens.

Each token bin will output `token_count * idf_weight`, where the idf weights are the inverse document frequency weights per token. These should be provided along with the vocabulary. Note that the `idf_weight` for OOV tokens will default to the average of all idf weights passed in.

```
vocab <- c(12, 36, 1138, 42) |> as.integer()
idf_weights <- c(0.25, 0.75, 0.6, 0.4)
data <- rbind(c(12, 1138, 42, 42),
             c(42, 7, 36, 7)) |> op_array("int64")
layer <- layer_integer_lookup(output_mode = 'tf_idf',
                             vocabulary = vocab,
                             idf_weights = idf_weights)

layer(data)

## tf.Tensor(
## [[0.  0.25 0.  0.6 0.8 ]
## [1.  0.  0.75 0.  0.4 ]], shape=(2, 5), dtype=float32)
```

To specify the idf weights for oov tokens, you will need to pass the entire vocabulary including the leading oov token.

```
vocab <- c(-1, 12, 36, 1138, 42) |> as.integer()
idf_weights <- c(0.9, 0.25, 0.75, 0.6, 0.4)
data <- rbind(c(12, 1138, 42, 42),
             c(42, 7, 36, 7)) |> op_array("int64")
layer <- layer_integer_lookup(output_mode = 'tf_idf',
                             vocabulary = vocab,
                             idf_weights = idf_weights)

layer(data)
```

```
## tf.Tensor(
## [[0.  0.25 0.  0.6 0.8 ]
## [1.8 0.  0.75 0.  0.4 ]], shape=(2, 5), dtype=float32)
```

When adapting the layer in "tf\_idf" mode, each input sample will be considered a document, and IDF weight per token will be calculated as:  $\log(1 + \text{num\_documents} / (1 + \text{token\_document\_count}))$ .

### Inverse lookup

This example demonstrates how to map indices to tokens using this layer. (You can also use `adapt()` with `inverse = TRUE`, but for simplicity we'll pass the vocab in this example.)

```
vocab <- c(12, 36, 1138, 42) |> as.integer()
data <- op_array(c(1, 3, 4,
                  4, 0, 2)) |> op_reshape(c(2,-1)) |> op_cast("int32")
layer <- layer_integer_lookup(vocabulary = vocab, invert = TRUE)
layer(data)
```

```
## tf.Tensor(
## [[ 12 1138  42]
## [ 42  -1  36]], shape=(2, 3), dtype=int64)
```

Note that the first index correspond to the oov token by default.

### Forward and inverse lookup pairs

This example demonstrates how to use the vocabulary of a standard lookup layer to create an inverse lookup layer.

```
vocab <- c(12, 36, 1138, 42) |> as.integer()
data <- op_array(rbind(c(12, 1138, 42), c(42, 1000, 36)), "int32")
layer <- layer_integer_lookup(vocabulary = vocab)
i_layer <- layer_integer_lookup(vocabulary = get_vocabulary(layer),
                              invert = TRUE)
int_data <- layer(data)
i_layer(int_data)
```

```
## tf.Tensor(
## [[ 12 1138  42]
## [ 42  -1  36]], shape=(2, 3), dtype=int64)
```

In this example, the input token 1000 resulted in an output of -1, since 1000 was not in the vocabulary - it got represented as an OOV, and all OOV tokens are returned as -1 in the inverse layer. Also, note that for the inverse to work, you must have already set the forward layer vocabulary either directly or via `adapt()` before calling `get_vocabulary()`.



**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/categorical/integer\\_lookup#integerlookup-class](https://keras.io/api/layers/preprocessing_layers/categorical/integer_lookup#integerlookup-class)

Other categorical features preprocessing layers:

```
layer_category_encoding()  
layer_hashed_crossing()  
layer_hashing()  
layer_string_lookup()
```

Other preprocessing layers:

```
layer_category_encoding()  
layer_center_crop()  
layer_discretization()  
layer_feature_space()  
layer_hashed_crossing()  
layer_hashing()  
layer_mel_spectrogram()  
layer_normalization()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_rescaling()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()
```

```
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()
```

```
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

 layer\_jax\_model\_wrapper

*Keras Layer that wraps a JAX model.*


---

### Description

This layer enables the use of JAX components within Keras when using JAX as the backend for Keras.

### Usage

```
layer_jax_model_wrapper(
    object,
    call_fn,
    init_fn = NULL,
    params = NULL,
    state = NULL,
    seed = NULL,
    ...
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
call_fn	The function to call the model. See description above for the list of arguments it takes and the outputs it returns.
init_fn	the function to call to initialize the model. See description above for the list of arguments it takes and the outputs it returns. If NULL, then params and/or state must be provided.
params	A PyTree containing all the model trainable parameters. This allows passing trained parameters or controlling the initialization. If both params and state are NULL, <code>init_fn()</code> is called at build time to initialize the trainable parameters of the model.
state	A PyTree containing all the model non-trainable state. This allows passing learned state or controlling the initialization. If both params and state are NULL, and <code>call_fn()</code> takes a state argument, then <code>init_fn()</code> is called at build time to initialize the non-trainable state of the model.
seed	Seed for random number generator. Optional.
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.

- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

### Model function

This layer accepts JAX models in the form of a function, `call_fn()`, which must take the following arguments with these exact names:

- `params`: trainable parameters of the model.
- `state` (*optional*): non-trainable state of the model. Can be omitted if the model has no non-trainable state.
- `rng` (*optional*): a `jax.random.PRNGKey` instance. Can be omitted if the model does not need RNGs, neither during training nor during inference.
- `inputs`: inputs to the model, a JAX array or a `PyTree` of arrays.
- `training` (*optional*): an argument specifying if we're in training mode or inference mode, `TRUE` is passed in training mode. Can be omitted if the model behaves the same in training mode and inference mode.

The `inputs` argument is mandatory. Inputs to the model must be provided via a single argument. If the JAX model takes multiple inputs as separate arguments, they must be combined into a single structure, for instance in a `tuple()` or a `dict()`.

#### Model weights initialization:

The initialization of the `params` and `state` of the model can be handled by this layer, in which case the `init_fn()` argument must be provided. This allows the model to be initialized dynamically with the right shape. Alternatively, and if the shape is known, the `params` argument and optionally the `state` argument can be used to create an already initialized model.

The `init_fn()` function, if provided, must take the following arguments with these exact names:

- `rng`: a `jax.random.PRNGKey` instance.
- `inputs`: a JAX array or a `PyTree` of arrays with placeholder values to provide the shape of the inputs.
- `training` (*optional*): an argument specifying if we're in training mode or inference mode. `True` is always passed to `init_fn`. Can be omitted regardless of whether `call_fn` has a `training` argument.

#### Models with non-trainable state:

For JAX models that have non-trainable state:

- `call_fn()` must have a `state` argument
- `call_fn()` must return a `tuple()` containing the outputs of the model and the new non-trainable state of the model
- `init_fn()` must return a `tuple()` containing the initial trainable `params` of the model and the initial non-trainable state of the model.

This code shows a possible combination of `call_fn()` and `init_fn()` signatures for a model with non-trainable state. In this example, the model has a `training` argument and an `rng` argument in `call_fn()`.

```

stateful_call <- function(params, state, rng, inputs, training) {
  outputs <- ....
  new_state <- ....
  tuple(outputs, new_state)
}

stateful_init <- function(rng, inputs) {
  initial_params <- ....
  initial_state <- ....
  tuple(initial_params, initial_state)
}

```

#### Models without non-trainable state:

For JAX models with no non-trainable state:

- `call_fn()` must not have a `state` argument
- `call_fn()` must return only the outputs of the model
- `init_fn()` must return only the initial trainable params of the model.

This code shows a possible combination of `call_fn()` and `init_fn()` signatures for a model without non-trainable state. In this example, the model does not have a `training` argument and does not have an `rng` argument in `call_fn()`.

```

stateful_call <- function(pparams, inputs) {
  outputs <- ....
  outputs
}

stateful_init <- function(rng, inputs) {
  initial_params <- ....
  initial_params
}

```

#### Conforming to the required signature:

If a model has a different signature than the one required by `JaxLayer`, one can easily write a wrapper method to adapt the arguments. This example shows a model that has multiple inputs as separate arguments, expects multiple RNGs in a dict, and has a `deterministic` argument with the opposite meaning of `training`. To conform, the inputs are combined in a single structure using a `tuple`, the RNG is split and used to populate the expected dict, and the Boolean flag is negated:

```

jax <- import("jax")
my_model_fn <- function(params, rngs, input1, input2, deterministic) {
  ....
  if (!deterministic) {
    dropout_rng <- rngs$dropout
    keep <- jax$random$bernoulli(dropout_rng, dropout_rate, x$shape)
    x <- jax$numpy$where(keep, x / dropout_rate, 0)
    ....
  }
}

```

```

    ....
    return(outputs)
  }

my_model_wrapper_fn <- function(params, rng, inputs, training) {
  c(input1, input2) %<-% inputs
  c(rng1, rng2) %<-% jax$random$split(rng)
  rngs <- list(dropout = rng1, preprocessing = rng2)
  deterministic <- !training
  my_model_fn(params, rngs, input1, input2, deterministic)
}

keras_layer <- layer_jax_model_wrapper(call_fn = my_model_wrapper_fn,
                                       params = initial_params)

```

### Usage with Haiku modules:

JaxLayer enables the use of **Haiku** components in the form of `haiku.Module`. This is achieved by transforming the module per the Haiku pattern and then passing `module.apply` in the `call_fn` parameter and `module.init` in the `init_fn` parameter if needed.

If the model has non-trainable state, it should be transformed with `haiku.transform_with_state`. If the model has no non-trainable state, it should be transformed with `haiku.transform`. Additionally, and optionally, if the module does not use RNGs in "apply", it can be transformed with `haiku.without_apply_rng`.

The following example shows how to create a JaxLayer from a Haiku module that uses random number generators via `hk.next_rng_key()` and takes a training positional argument:

```

# reticulate::py_install("haiku", "r-keras")
hk <- import("haiku")
MyHaikuModule(hk$Module) \%py_class\% {

  `__call__` <- \(self, x, training) {
    x <- hk$Conv2D(32L, tuple(3L, 3L))(x)
    x <- jax$nn$relu(x)
    x <- hk$AvgPool(tuple(1L, 2L, 2L, 1L),
                  tuple(1L, 2L, 2L, 1L), "VALID")(x)
    x <- hk$Flatten()(x)
    x <- hk$Linear(200L)(x)
    if (training)
      x <- hk$dropout(rng = hk$next_rng_key(), rate = 0.3, x = x)
    x <- jax$nn$relu(x)
    x <- hk$Linear(10L)(x)
    x <- jax$nn$softmax(x)
    x
  }
}

my_haiku_module_fn <- function(inputs, training) {
  module <- MyHaikuModule()

```

```
    module(inputs, training)
  }

  transformed_module <- hk$transform(my_haiku_module_fn)

  keras_layer <-
    layer_jax_model_wrapper(call_fn = transformed_module$apply,
                           init_fn = transformed_module$init)
```

### See Also

Other wrapping layers:

```
layer_flax_module_wrapper()
layer_torch_module_wrapper()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
```



```
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()
```

```
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_lambda

*Wraps arbitrary expressions as a Layer object.*

---

### Description

The `layer_lambda()` layer exists so that arbitrary expressions can be used as a Layer when constructing Sequential and Functional API models. Lambda layers are best suited for simple operations or quick experimentation. For more advanced use cases, prefer writing new subclasses of Layer using `new_layer_class()`.

### Usage

```
layer_lambda(  
    object,  
    f,  
    output_shape = NULL,
```

```

    mask = NULL,
    arguments = NULL,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
f	The function to be evaluated. Takes input tensor as first argument.
output_shape	Expected output shape from function. This argument can usually be inferred if not explicitly provided. Can be a list or function. If a list, it only specifies the first dimension onward; sample dimension is assumed either the same as the input: <code>output_shape = c(input_shape[1], output_shape)</code> or, the input is NULL and the sample dimension is also NULL: <code>output_shape = c(NA, output_shape)</code> . If a function, it specifies the entire shape as a function of the input shape: <code>output_shape = f(input_shape)</code> .
mask	Either NULL (indicating no masking) or a callable with the same signature as the <code>compute_mask</code> layer method, or a tensor that will be returned as output mask regardless of what the input is.
arguments	Optional named list of arguments to be passed to the function.
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Examples

```

# add a x -> x^2 layer
model <- keras_model_sequential()
model |> layer_lambda(\(x) x^2)

```

### See Also

- [https://keras.io/api/layers/core\\_layers/lambda#lambda-class](https://keras.io/api/layers/core_layers/lambda#lambda-class)

Other core layers:

```

layer_dense()
layer_einsum_dense()
layer_embedding()
layer_identity()
layer_masking()

```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()
```

```
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()
```

```

layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

```
layer_layer_normalization
```

*Layer normalization layer (Ba et al., 2016).*

---

## Description

Normalize the activations of the previous layer for each given example in a batch independently, rather than across a batch like Batch Normalization. i.e. applies a transformation that maintains the mean activation within each example close to 0 and the activation standard deviation close to 1.

If scale or center are enabled, the layer will scale the normalized outputs by broadcasting them with a trainable variable gamma, and center the outputs by broadcasting with a trainable variable beta. gamma will default to a ones tensor and beta will default to a zeros tensor, so that centering and scaling are no-ops before training has begun.

So, with scaling and centering enabled the normalization equations are as follows:

Let the intermediate activations for a mini-batch to be the inputs.

For each sample  $x$  in a batch of inputs, we compute the mean and variance of the sample, normalize each value in the sample (including a small factor epsilon for numerical stability), and finally, transform the normalized output by gamma and beta, which are learned parameters:

```

outputs <- inputs |> apply(1, function(x) {
  x_normalized <- (x - mean(x)) /
    sqrt(var(x) + epsilon)
  x_normalized * gamma + beta
})

```

gamma and beta will span the axes of inputs specified in axis, and this part of the inputs' shape must be fully defined.

For example:

```

layer <- layer_layer_normalization(axis = c(2, 3, 4))

layer(op_ones(c(5, 20, 30, 40))) |> invisible() # build()
shape(layer$beta)

## shape(20, 30, 40)

shape(layer$gamma)

## shape(20, 30, 40)

```

Note that other implementations of layer normalization may choose to define gamma and beta over a separate set of axes from the axes being normalized across. For example, Group Normalization (Wu et al. 2018) with group size of 1 corresponds to a `layer_layer_normalization()` that normalizes across height, width, and channel and has gamma and beta span only the channel dimension. So, this `layer_layer_normalization()` implementation will not match a `layer_group_normalization()` layer with group size set to 1.

### Usage

```

layer_layer_normalization(
  object,
  axis = -1L,
  epsilon = 0.001,
  center = TRUE,
  scale = TRUE,
  rms_scaling = FALSE,
  beta_initializer = "zeros",
  gamma_initializer = "ones",
  beta_regularizer = NULL,
  gamma_regularizer = NULL,
  beta_constraint = NULL,
  gamma_constraint = NULL,
  ...
)

```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>axis</code>	Integer or list. The axis or axes to normalize across. Typically, this is the features axis/axes. The left-out axes are typically the batch axis/axes. <code>-1</code> is the last dimension in the input. Defaults to <code>-1</code> .
<code>epsilon</code>	Small float added to variance to avoid dividing by zero. Defaults to <code>1e-3</code> .
<code>center</code>	If <code>TRUE</code> , add offset of beta to normalized tensor. If <code>FALSE</code> , beta is ignored. Defaults to <code>TRUE</code> .

scale	If TRUE, multiply by gamma. If FALSE, gamma is not used. When the next layer is linear (also e.g. <code>layer_activation_relu()</code> ), this can be disabled since the scaling will be done by the next layer. Defaults to TRUE.
rms_scaling	If TRUE, center and scale are ignored, and the inputs are scaled by gamma and the inverse square root of the square of all inputs. This is an approximate and faster approach that avoids ever computing the mean of the input.
beta_initializer	Initializer for the beta weight. Defaults to zeros.
gamma_initializer	Initializer for the gamma weight. Defaults to ones.
beta_regularizer	Optional regularizer for the beta weight. NULL by default.
gamma_regularizer	Optional regularizer for the gamma weight. NULL by default.
beta_constraint	Optional constraint for the beta weight. NULL by default.
gamma_constraint	Optional constraint for the gamma weight. NULL by default.
...	Base layer keyword arguments (e.g. name and dtype).

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Reference

- [Lei Ba et al., 2016.](#)

### See Also

- [https://keras.io/api/layers/normalization\\_layers/layer\\_normalization#layernormalization-class](https://keras.io/api/layers/normalization_layers/layer_normalization#layernormalization-class)

Other normalization layers:

```
layer_batch_normalization()
layer_group_normalization()
layer_spectral_normalization()
layer_unit_normalization()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
```



```
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
```

```
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()
```

```
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_lstm

*Long Short-Term Memory layer - Hochreiter 1997.*

---

### Description

Based on available runtime hardware and constraints, this layer will choose different implementations (cuDNN-based or backend-native) to maximize the performance. If a GPU is available and all the arguments to the layer meet the requirement of the cuDNN kernel (see below for details), the layer will use a fast cuDNN implementation when using the TensorFlow backend. The requirements to use the cuDNN implementation are:

1. activation == tanh
2. recurrent\_activation == sigmoid
3. dropout == 0 and recurrent\_dropout == 0
4. unroll is FALSE
5. use\_bias is TRUE
6. Inputs, if use masking, are strictly right-padded.
7. Eager execution is enabled in the outermost context.

For example:

```
input <- random_uniform(c(32, 10, 8))  
output <- input |> layer_lstm(4)  
shape(output)  
  
## shape(32, 4)  
  
lstm <- layer_lstm(units = 4, return_sequences = TRUE, return_state = TRUE)  
c(whole_seq_output, final_memory_state, final_carry_state) %<-% lstm(input)  
shape(whole_seq_output)  
  
## shape(32, 10, 4)
```

```
shape(final_memory_state)

## shape(32, 4)

shape(final_carry_state)

## shape(32, 4)
```

## Usage

```
layer_lstm(
  object,
  units,
  activation = "tanh",
  recurrent_activation = "sigmoid",
  use_bias = TRUE,
  kernel_initializer = "glorot_uniform",
  recurrent_initializer = "orthogonal",
  bias_initializer = "zeros",
  unit_forget_bias = TRUE,
  kernel_regularizer = NULL,
  recurrent_regularizer = NULL,
  bias_regularizer = NULL,
  activity_regularizer = NULL,
  kernel_constraint = NULL,
  recurrent_constraint = NULL,
  bias_constraint = NULL,
  dropout = 0,
  recurrent_dropout = 0,
  seed = NULL,
  return_sequences = FALSE,
  return_state = FALSE,
  go_backwards = FALSE,
  stateful = FALSE,
  unroll = FALSE,
  use_cudnn = "auto",
  ...
)
```

## Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
units	Positive integer, dimensionality of the output space.
activation	Activation function to use. Default: hyperbolic tangent (tanh). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).

recurrent_activation	Activation function to use for the recurrent step. Default: sigmoid (sigmoid). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
use_bias	Boolean, (default TRUE), whether the layer should use a bias vector.
kernel_initializer	Initializer for the kernel weights matrix, used for the linear transformation of the inputs. Default: "glorot_uniform".
recurrent_initializer	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state. Default: "orthogonal".
bias_initializer	Initializer for the bias vector. Default: "zeros".
unit_forget_bias	Boolean (default TRUE). If TRUE, add 1 to the bias of the forget gate at initialization. Setting it to TRUE will also force bias_initializer="zeros". This is recommended in <a href="#">Jozefowicz et al.</a>
kernel_regularizer	Regularizer function applied to the kernel weights matrix. Default: NULL.
recurrent_regularizer	Regularizer function applied to the recurrent_kernel weights matrix. Default: NULL.
bias_regularizer	Regularizer function applied to the bias vector. Default: NULL.
activity_regularizer	Regularizer function applied to the output of the layer (its "activation"). Default: NULL.
kernel_constraint	Constraint function applied to the kernel weights matrix. Default: NULL.
recurrent_constraint	Constraint function applied to the recurrent_kernel weights matrix. Default: NULL.
bias_constraint	Constraint function applied to the bias vector. Default: NULL.
dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs. Default: 0.
recurrent_dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state. Default: 0.
seed	Random seed for dropout.
return_sequences	Boolean. Whether to return the last output in the output sequence, or the full sequence. Default: FALSE.
return_state	Boolean. Whether to return the last state in addition to the output. Default: FALSE.
go_backwards	Boolean (default: FALSE). If TRUE, process the input sequence backwards and return the reversed sequence.

<code>stateful</code>	Boolean (default: <code>FALSE</code> ). If <code>TRUE</code> , the last state for each sample at index <code>i</code> in a batch will be used as initial state for the sample of index <code>i</code> in the following batch.
<code>unroll</code>	Boolean (default <code>FALSE</code> ). If <code>TRUE</code> , the network will be unrolled, else a symbolic loop will be used. Unrolling can speed-up a RNN, although it tends to be more memory-intensive. Unrolling is only suitable for short sequences.
<code>use_cudnn</code>	Whether to use a cuDNN-backed implementation. "auto" will attempt to use cuDNN when feasible, and will fallback to the default implementation if not.
<code>...</code>	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

### Call Arguments

- `inputs`: A 3D tensor, with shape (`batch`, `timesteps`, `feature`).
- `mask`: Binary tensor of shape (`samples`, `timesteps`) indicating whether a given timestep should be masked (optional). An individual `TRUE` entry indicates that the corresponding timestep should be utilized, while a `FALSE` entry indicates that the corresponding timestep should be ignored. Defaults to `NULL`.
- `training`: Boolean indicating whether the layer should behave in training mode or in inference mode. This argument is passed to the cell when calling it. This is only relevant if dropout or `recurrent_dropout` is used (optional). Defaults to `NULL`.
- `initial_state`: List of initial state tensors to be passed to the first call of the cell (optional, `NULL` causes creation of zero-filled initial state tensors). Defaults to `NULL`.

### See Also

- [https://keras.io/api/layers/recurrent\\_layers/lstm#lstm-class](https://keras.io/api/layers/recurrent_layers/lstm#lstm-class)

Other lstm rnn layers:

`rnn_cell_lstm()`

Other rnn layers:

`layer_bidirectional()`

`layer_conv_lstm_1d()`

`layer_conv_lstm_2d()`

`layer_conv_lstm_3d()`

`layer_gru()`

`layer_rnn()`

`layer_simple_rnn()`

`layer_time_distributed()`

```
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()
```

```
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
```



```
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_masking	<i>Masks a sequence by using a mask value to skip timesteps.</i>
---------------	--

---

### Description

For each timestep in the input tensor (the second dimension in the tensor), if all values in the input tensor at that timestep are equal to `mask_value`, then the timestep will be masked (skipped) in all downstream layers (as long as they support masking).

If any downstream layer does not support masking yet receives such an input mask, an exception will be raised.

### Usage

```
layer_masking(object, mask_value = 0, ...)
```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>mask_value</code>	see description
<code>...</code>	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Examples**

Consider an array `x` of shape `c(samples, timesteps, features)`, to be fed to an LSTM layer. You want to mask timestep #3 and #5 because you lack data for these timesteps. You can:

- Set `x[, 3, ] <- 0.` and `x[, 5, ] <- 0.`
- Insert a `layer_masking()` layer with `mask_value = 0.` before the LSTM layer:

```
c(samples, timesteps, features) %<-% c(32, 10, 8)
inputs <- c(samples, timesteps, features) %>% { array(runif(prod(.)), dim = .) }
inputs[, 3, ] <- 0
inputs[, 5, ] <- 0
```

```
model <- keras_model_sequential() %>%
  layer_masking(mask_value = 0) %>%
  layer_lstm(32)
```

```
output <- model(inputs)
# The time step 3 and 5 will be skipped from LSTM calculation.
```

**Note**

in the Keras masking convention, a masked timestep is denoted by a mask value of FALSE, while a non-masked (i.e. usable) timestep is denoted by a mask value of TRUE.

**See Also**

- [https://keras.io/api/layers/core\\_layers/masking#masking-class](https://keras.io/api/layers/core_layers/masking#masking-class)

Other core layers:

```
layer_dense()
layer_einsum_dense()
layer_embedding()
layer_identity()
layer_lambda()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
```

```
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()
```

```
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
```

```
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_maximum	<i>Computes element-wise maximum on a list of inputs.</i>
---------------	---

---

### Description

It takes as input a list of tensors, all of the same shape, and returns a single tensor (also of the same shape).

### Usage

```
layer_maximum(inputs, ...)
```

### Arguments

inputs	layers to combine
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Examples

```
input_shape <- c(2, 3, 4)  
x1 <- random_uniform(input_shape)  
x2 <- random_uniform(input_shape)  
y <- layer_maximum(x1, x2)
```

Usage in a Keras model:

```
input1 <- layer_input(shape = c(16))
x1 <- input1 |> layer_dense(8, activation = 'relu')
input2 <- layer_input(shape = c(32))
x2 <- input2 |> layer_dense(8, activation = 'relu')
# equivalent to `y <- layer_maximum(x1, x2)`
y <- layer_maximum(x1, x2)
out <- y |> layer_dense(4)
model <- keras_model(inputs = c(input1, input2), outputs = out)
```

### See Also

- [https://keras.io/api/layers/merging\\_layers/maximum#maximum-class](https://keras.io/api/layers/merging_layers/maximum#maximum-class)

Other merging layers:

```
layer_add()
layer_average()
layer_concatenate()
layer_dot()
layer_minimum()
layer_multiply()
layer_subtract()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
```

```
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()
```

```

layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_max\_pooling\_1d *Max pooling operation for 1D temporal data.*

---

### Description

Downsamples the input representation by taking the maximum value over a spatial window of size `pool_size`. The window is shifted by `strides`.

The resulting output when using the "valid" padding option has a shape of: `output_shape = (input_shape - pool_size + 1, ...)`

The resulting output shape when using the "same" padding option is: `output_shape = input_shape / strides`



**Usage**

```
layer_max_pooling_1d(
    object,
    pool_size = 2L,
    strides = NULL,
    padding = "valid",
    data_format = NULL,
    name = NULL,
    ...
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
pool_size	int, size of the max pooling window.
strides	int or NULL. Specifies how much the pooling window moves for each pooling step. If NULL, it will default to pool_size.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
name	String, name for the object
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Input Shape**

- If `data_format="channels_last"`: 3D tensor with shape (batch\_size, steps, features).
- If `data_format="channels_first"`: 3D tensor with shape (batch\_size, features, steps).

**Output Shape**

- If `data_format="channels_last"`: 3D tensor with shape (batch\_size, downsampled\_steps, features).
- If `data_format="channels_first"`: 3D tensor with shape (batch\_size, features, downsampled\_steps).

**Examples**

strides=1 and padding="valid":

```
x <- op_reshape(c(1, 2, 3, 4, 5),
               c(1, 5, 1))
max_pool_1d <- layer_max_pooling_1d(pool_size = 2,
                                   strides = 1,
                                   padding = "valid")
```

```
max_pool_1d(x)
```

```
## tf.Tensor(
## [[ [2.]
##    [3.]
##    [4.]
##    [5.]]], shape=(1, 4, 1), dtype=float32)
```

strides=2 and padding="valid":

```
x <- op_reshape(c(1, 2, 3, 4, 5),
               c(1, 5, 1))
max_pool_1d <- layer_max_pooling_1d(pool_size = 2,
                                   strides = 2,
                                   padding = "valid")
```

```
max_pool_1d(x)
```

```
## tf.Tensor(
## [[ [2.]
##    [4.]]], shape=(1, 2, 1), dtype=float32)
```

strides=1 and padding="same":

```
x <- op_reshape(c(1, 2, 3, 4, 5),
               c(1, 5, 1))
max_pool_1d <- layer_max_pooling_1d(pool_size = 2,
                                   strides = 1,
                                   padding = "same")
```

```
max_pool_1d(x)
```

```
## tf.Tensor(
## [[ [2.]
##    [3.]
##    [4.]
##    [5.]]], shape=(1, 5, 1), dtype=float32)
```

**See Also**

- [https://keras.io/api/layers/pooling\\_layers/max\\_pooling1d#maxpooling1d-class](https://keras.io/api/layers/pooling_layers/max_pooling1d#maxpooling1d-class)

Other pooling layers:

layer\_average\_pooling\_1d()  
layer\_average\_pooling\_2d()  
layer\_average\_pooling\_3d()  
layer\_global\_average\_pooling\_1d()  
layer\_global\_average\_pooling\_2d()  
layer\_global\_average\_pooling\_3d()  
layer\_global\_max\_pooling\_1d()  
layer\_global\_max\_pooling\_2d()  
layer\_global\_max\_pooling\_3d()  
layer\_max\_pooling\_2d()  
layer\_max\_pooling\_3d()

Other layers:

Layer()  
layer\_activation()  
layer\_activation\_elu()  
layer\_activation\_leaky\_relu()  
layer\_activation\_parametric\_relu()  
layer\_activation\_relu()  
layer\_activation\_softmax()  
layer\_activity\_regularization()  
layer\_add()  
layer\_additive\_attention()  
layer\_alpha\_dropout()  
layer\_attention()  
layer\_average()  
layer\_average\_pooling\_1d()  
layer\_average\_pooling\_2d()  
layer\_average\_pooling\_3d()  
layer\_batch\_normalization()  
layer\_bidirectional()  
layer\_category\_encoding()  
layer\_center\_crop()  
layer\_concatenate()  
layer\_conv\_1d()  
layer\_conv\_1d\_transpose()  
layer\_conv\_2d()  
layer\_conv\_2d\_transpose()  
layer\_conv\_3d()  
layer\_conv\_3d\_transpose()  
layer\_conv\_lstm\_1d()  
layer\_conv\_lstm\_2d()  
layer\_conv\_lstm\_3d()  
layer\_cropping\_1d()

```
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()
```

```
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_max\_pooling\_2d *Max pooling operation for 2D spatial data.*

---

### Description

Downsamples the input along its spatial dimensions (height and width) by taking the maximum value over an input window (of size defined by `pool_size`) for each channel of the input. The window is shifted by `strides` along each dimension.

The resulting output when using the "valid" padding option has a spatial shape (number of rows or columns) of:  $\text{output\_shape} = \text{floor}((\text{input\_shape} - \text{pool\_size}) / \text{strides}) + 1$  (when  $\text{input\_shape} \geq \text{pool\_size}$ )

The resulting output shape when using the "same" padding option is:  $\text{output\_shape} = \text{floor}((\text{input\_shape} - 1) / \text{strides}) + 1$

**Usage**

```
layer_max_pooling_2d(
    object,
    pool_size = list(2L, 2L),
    strides = NULL,
    padding = "valid",
    data_format = NULL,
    name = NULL,
    ...
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
pool_size	int or list of 2 integers, factors by which to downscale (dim1, dim2). If only one integer is specified, the same window length will be used for all dimensions.
strides	int or list of 2 integers, or NULL. Strides values. If NULL, it will default to pool_size. If only one int is specified, the same stride size will be used for all dimensions.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, channels, height, width). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
name	String, name for the object
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Input Shape**

- If `data_format="channels_last"`: 4D tensor with shape (batch\_size, height, width, channels).
- If `data_format="channels_first"`: 4D tensor with shape (batch\_size, channels, height, width).

**Output Shape**

- If data\_format="channels\_last": 4D tensor with shape (batch\_size, pooled\_height, pooled\_width, channel)
- If data\_format="channels\_first": 4D tensor with shape (batch\_size, channels, pooled\_height, pooled\_width)

**Examples**

strides = (1, 1) and padding = "valid":

```
x <- rbind(c(1., 2., 3.),
           c(4., 5., 6.),
           c(7., 8., 9.)) |> op_reshape(c(1, 3, 3, 1))
max_pool_2d <- layer_max_pooling_2d(pool_size = c(2, 2),
                                   strides = c(1, 1),
                                   padding = "valid")
```

```
max_pool_2d(x)
```

```
## tf.Tensor(
## [[[[5.]
##    [6.]]
##
##    [[8.]
##    [9.]]]], shape=(1, 2, 2, 1), dtype=float32)
```

strides = c(2, 2) and padding = "valid":

```
x <- rbind(c(1., 2., 3., 4.),
           c(5., 6., 7., 8.),
           c(9., 10., 11., 12.)) |> op_reshape(c(1, 3, 4, 1))
max_pool_2d <- layer_max_pooling_2d(pool_size = c(2, 2),
                                   strides = c(2, 2),
                                   padding = "valid")
```

```
max_pool_2d(x)
```

```
## tf.Tensor(
## [[[[6.]
##    [8.]]]], shape=(1, 1, 2, 1), dtype=float32)
```

stride = (1, 1) and padding = "same":

```
x <- rbind(c(1., 2., 3.),
           c(4., 5., 6.),
           c(7., 8., 9.)) |> op_reshape(c(1, 3, 3, 1))
max_pool_2d <- layer_max_pooling_2d(pool_size = c(2, 2),
                                   strides = c(1, 1),
                                   padding = "same")
```

```
max_pool_2d(x)
```

```

## tf.Tensor(
## [[[[5.]
##      [6.]
##      [6.]]
##      [[8.]
##      [9.]
##      [9.]]
##      [[8.]
##      [9.]
##      [9.]]]], shape=(1, 3, 3, 1), dtype=float32)

```

### See Also

- [https://keras.io/api/layers/pooling\\_layers/max\\_pooling2d#maxpooling2d-class](https://keras.io/api/layers/pooling_layers/max_pooling2d#maxpooling2d-class)

Other pooling layers:

```

layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_max_pooling_1d()
layer_max_pooling_3d()

```

Other layers:

```

Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()

```



```
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()
```

```
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_max\_pooling\_3d    *Max pooling operation for 3D data (spatial or spatio-temporal).*

---

**Description**

Downsamples the input along its spatial dimensions (depth, height, and width) by taking the maximum value over an input window (of size defined by `pool_size`) for each channel of the input. The window is shifted by `strides` along each dimension.

**Usage**

```
layer_max_pooling_3d(
    object,
    pool_size = list(2L, 2L, 2L),
    strides = NULL,
    padding = "valid",
    data_format = NULL,
    name = NULL,
    ...
)
```

**Arguments**

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>pool_size</code>	int or list of 3 integers, factors by which to downscale (dim1, dim2, dim3). If only one integer is specified, the same window length will be used for all dimensions.
<code>strides</code>	int or list of 3 integers, or NULL. Strides values. If NULL, it will default to <code>pool_size</code> . If only one int is specified, the same stride size will be used for all dimensions.
<code>padding</code>	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input.
<code>data_format</code>	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch, channels, spatial_dim1, spatial_dim2, spatial_dim3). It defaults to the <code>image_data_format</code> value found in your Keras config file at <code>~/.keras/keras.json</code> . If you never set it, then it will be "channels_last".
<code>name</code>	String, name for the object
<code>...</code>	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If `object` is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Input Shape**

- If data\_format="channels\_last": 5D tensor with shape: (batch\_size, spatial\_dim1, spatial\_dim2, spatial\_dim3, channels)
- If data\_format="channels\_first": 5D tensor with shape: (batch\_size, channels, spatial\_dim1, spatial\_dim2, spatial\_dim3)

**Output Shape**

- If data\_format="channels\_last": 5D tensor with shape: (batch\_size, pooled\_dim1, pooled\_dim2, pooled\_dim3, channels)
- If data\_format="channels\_first": 5D tensor with shape: (batch\_size, channels, pooled\_dim1, pooled\_dim2, pooled\_dim3)

**Examples**

```
depth <- 30
height <- 30
width <- 30
channels <- 3
```

```
inputs <- layer_input(shape=c(depth, height, width, channels))
layer <- layer_max_pooling_3d(pool_size=3)
outputs <- inputs |> layer()
outputs
```

```
## <KerasTensor shape=(None, 10, 10, 10, 3), dtype=float32, sparse=False, name=keras_tensor_1>
```

**See Also**

- [https://keras.io/api/layers/pooling\\_layers/max\\_pooling3d#maxpooling3d-class](https://keras.io/api/layers/pooling_layers/max_pooling3d#maxpooling3d-class)

Other pooling layers:

```
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_max_pooling_1d()
layer_max_pooling_2d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
```

```
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()
```

```
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()
```

```
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_mel\_spectrogram *A preprocessing layer to convert raw audio signals to Mel spectrograms.*

---

### Description

This layer takes float32/float64 single or batched audio signal as inputs and computes the Mel spectrogram using Short-Time Fourier Transform and Mel scaling. The input should be a 1D (unbatched) or 2D (batched) tensor representing audio signals. The output will be a 2D or 3D tensor representing Mel spectrograms.

A spectrogram is an image-like representation that shows the frequency spectrum of a signal over time. It uses x-axis to represent time, y-axis to represent frequency, and each pixel to represent intensity. Mel spectrograms are a special type of spectrogram that use the mel scale, which approximates how humans perceive sound. They are commonly used in speech and music processing tasks like speech recognition, speaker identification, and music genre classification.

### Usage

```
layer_mel_spectrogram(  
    object,  
    fft_length = 2048L,  
    sequence_stride = 512L,  
    sequence_length = NULL,  
    window = "hann",  
    sampling_rate = 16000L,  
    num_mel_bins = 128L,  
    min_freq = 20,  
    max_freq = NULL,  
    power_to_db = TRUE,  
    top_db = 80,  
    mag_exp = 2,  
    min_power = 1e-10,  
    ref_power = 1,  
    ...  
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
fft_length	Integer, size of the FFT window.
sequence_stride	Integer, number of samples between successive STFT columns.
sequence_length	Integer, size of the window used for applying window to each audio frame. If NULL, defaults to fft_length.
window	String, name of the window function to use. Available values are "hann" and "hamming". If window is a tensor, it will be used directly as the window and its length must be sequence_length. If window is NULL, no windowing is used. Defaults to "hann".
sampling_rate	Integer, sample rate of the input signal.
num_mel_bins	Integer, number of mel bins to generate.
min_freq	Float, minimum frequency of the mel bins.
max_freq	Float, maximum frequency of the mel bins. If NULL, defaults to sampling_rate / 2.
power_to_db	If TRUE, convert the power spectrogram to decibels.
top_db	Float, minimum negative cut-off $\max(10 * \log_{10}(S)) - \text{top\_db}$ .
mag_exp	Float, exponent for the magnitude spectrogram. 1 for magnitude, 2 for power, etc. Default is 2.
min_power	Float, minimum value for power and ref_power.
ref_power	Float, the power is scaled relative to it $10 * \log_{10}(S / \text{ref\_power})$ .
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**References**

- [Spectrogram](#),
- [Mel scale](#).



## Examples

### Unbatched audio signal

```
layer <- layer_mel_spectrogram(  
  num_mel_bins = 64,  
  sampling_rate = 8000,  
  sequence_stride = 256,  
  fft_length = 2048  
)  
layer(random_uniform(shape = c(16000))) |> shape()
```

### Batched audio signal

```
layer <- layer_mel_spectrogram(  
  num_mel_bins = 80,  
  sampling_rate = 8000,  
  sequence_stride = 128,  
  fft_length = 2048  
)  
layer(random_uniform(shape = c(2, 16000))) |> shape()
```

## Input Shape

1D (unbatched) or 2D (batched) tensor with shape:(..., samples).

## Output Shape

2D (unbatched) or 3D (batched) tensor with shape:(..., num\_mel\_bins, time).

## See Also

Other preprocessing layers:

- [layer\\_category\\_encoding\(\)](#)
- [layer\\_center\\_crop\(\)](#)
- [layer\\_discretization\(\)](#)
- [layer\\_feature\\_space\(\)](#)
- [layer\\_hashed\\_crossing\(\)](#)
- [layer\\_hashing\(\)](#)
- [layer\\_integer\\_lookup\(\)](#)
- [layer\\_normalization\(\)](#)
- [layer\\_random\\_brightness\(\)](#)
- [layer\\_random\\_contrast\(\)](#)
- [layer\\_random\\_crop\(\)](#)
- [layer\\_random\\_flip\(\)](#)
- [layer\\_random\\_rotation\(\)](#)
- [layer\\_random\\_translation\(\)](#)
- [layer\\_random\\_zoom\(\)](#)
- [layer\\_rescaling\(\)](#)

```
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()
```

```
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()
```

```

layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_minimum

*Computes elementwise minimum on a list of inputs.*


---

### Description

It takes as input a list of tensors, all of the same shape, and returns a single tensor (also of the same shape).

### Usage

```
layer_minimum(inputs, ...)
```

### Arguments

inputs	layers to combine
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Examples**

```
input_shape <- c(2, 3, 4)
x1 <- random_uniform(input_shape)
x2 <- random_uniform(input_shape)
y <- layer_minimum(x1, x2)
```

Usage in a Keras model:

```
input1 <- layer_input(shape = c(16))
x1 <- input1 |> layer_dense(8, activation = 'relu')
input2 <- layer_input(shape = c(32))
x2 <- input2 |> layer_dense(8, activation = 'relu')
# equivalent to `y <- layer_minimum(x1, x2)`
y <- layer_minimum(x1, x2)
out <- y |> layer_dense(4)
model <- keras_model(inputs = c(input1, input2), outputs = out)
```

**See Also**

- [https://keras.io/api/layers/merging\\_layers/minimum#minimum-class](https://keras.io/api/layers/merging_layers/minimum#minimum-class)

Other merging layers:

```
layer_add()
layer_average()
layer_concatenate()
layer_dot()
layer_maximum()
layer_multiply()
layer_subtract()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
```

```
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()
```

```
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_multiply

*Performs elementwise multiplication.*

---

**Description**

It takes as input a list of tensors, all of the same shape, and returns a single tensor (also of the same shape).

**Usage**

```
layer_multiply(inputs, ...)
```

**Arguments**

inputs	layers to combine
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Examples**

```
input_shape <- c(2, 3, 4)
x1 <- random_uniform(input_shape)
x2 <- random_uniform(input_shape)
y <- layer_multiply(x1, x2)
```

Usage in a Keras model:

```
input1 <- layer_input(shape = c(16))
x1 <- input1 |> layer_dense(8, activation = 'relu')
input2 <- layer_input(shape = c(32))
x2 <- input2 |> layer_dense(8, activation = 'relu')
# equivalent to `y <- layer_multiply(x1, x2)`
y <- layer_multiply(x1, x2)
out <- y |> layer_dense(4)
model <- keras_model(inputs = c(input1, input2), outputs = out)
```

**See Also**

- [https://keras.io/api/layers/merging\\_layers/multiply#multiply-class](https://keras.io/api/layers/merging_layers/multiply#multiply-class)

Other merging layers:

```
layer_add()
layer_average()
layer_concatenate()
layer_dot()
layer_maximum()
```



```
layer_minimum()  
layer_subtract()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()
```

```
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()
```

```
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_multi\_head\_attention

*Multi Head Attention layer.*

---

### Description

This is an implementation of multi-headed attention as described in the paper "Attention is all you Need" [Vaswani et al., 2017](#). If query, key, value are the same, then this is self-attention. Each timestep in query attends to the corresponding sequence in key, and returns a fixed-width vector.

This layer first projects query, key and value. These are (effectively) a list of tensors of length num\_attention\_heads, where the corresponding shapes are (batch\_size, <query dimensions>, key\_dim), (batch\_size, <key/value dimensions>, key\_dim), (batch\_size, <key/value dimensions>, value\_dim).

Then, the query and key tensors are dot-producted and scaled. These are softmaxed to obtain attention probabilities. The value tensors are then interpolated by these probabilities, then concatenated back to a single tensor.

Finally, the result tensor with the last dimension as value\_dim can take a linear projection and return.

### Usage

```
layer_multi_head_attention(
    inputs,
    num_heads,
    key_dim,
    value_dim = NULL,
    dropout = 0,
    use_bias = TRUE,
```

```

    output_shape = NULL,
    attention_axes = NULL,
    kernel_initializer = "glorot_uniform",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    bias_regularizer = NULL,
    activity_regularizer = NULL,
    kernel_constraint = NULL,
    bias_constraint = NULL,
    seed = NULL,
    ...
)

```

### Arguments

inputs	see description
num_heads	Number of attention heads.
key_dim	Size of each attention head for query and key.
value_dim	Size of each attention head for value.
dropout	Dropout probability.
use_bias	Boolean, whether the dense layers use bias vectors/matrices.
output_shape	The expected shape of an output tensor, besides the batch and sequence dims. If not specified, projects back to the query feature dim (the query input's last dimension).
attention_axes	axes over which the attention is applied. NULL means attention over all axes, but batch, heads, and features.
kernel_initializer	Initializer for dense layer kernels.
bias_initializer	Initializer for dense layer biases.
kernel_regularizer	Regularizer for dense layer kernels.
bias_regularizer	Regularizer for dense layer biases.
activity_regularizer	Regularizer for dense layer activity.
kernel_constraint	Constraint for dense layer kernels.
bias_constraint	Constraint for dense layer kernels.
seed	Optional integer to seed the dropout layer.
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Call Arguments**

- `query`: Query tensor of shape  $(B, T, \text{dim})$ , where  $B$  is the batch size,  $T$  is the target sequence length, and  $\text{dim}$  is the feature dimension.
- `value`: Value tensor of shape  $(B, S, \text{dim})$ , where  $B$  is the batch size,  $S$  is the source sequence length, and  $\text{dim}$  is the feature dimension.
- `key`: Optional key tensor of shape  $(B, S, \text{dim})$ . If not given, will use `value` for both key and value, which is the most common case.
- `attention_mask`: a boolean mask of shape  $(B, T, S)$ , that prevents attention to certain positions. The boolean mask specifies which query elements can attend to which key elements, 1 indicates attention and 0 indicates no attention. Broadcasting can happen for the missing batch dimensions and the head dimension.
- `return_attention_scores`: A boolean to indicate whether the output should be  $(\text{attention\_output}, \text{attention\_scores})$  if TRUE, or `attention_output` if FALSE. Defaults to FALSE.
- `training`: Python boolean indicating whether the layer should behave in training mode (adding dropout) or in inference mode (no dropout). Will go with either using the training mode of the parent layer/model, or FALSE (inference) if there is no parent layer.
- `use_causal_mask`: A boolean to indicate whether to apply a causal mask to prevent tokens from attending to future tokens (e.g., used in a decoder Transformer).

**Call return**

- `attention_output`: The result of the computation, of shape  $(B, T, E)$ , where  $T$  is for target sequence shapes and  $E$  is the query input last dimension if `output_shape` is NULL. Otherwise, the multi-head outputs are projected to the shape specified by `output_shape`.
- `attention_scores`: (Optional) multi-head attention coefficients over attention axes.

**Properties**

A `MultiHeadAttention` Layer instance has the following additional read-only properties:

- `attention_axes`
- `dropout`
- `key_dense`
- `key_dim`
- `num_heads`
- `output_dense`

- output\_shape
- query\_dense
- use\_bias
- value\_dense
- value\_dim

**See Also**

- [https://keras.io/api/layers/attention\\_layers/multi\\_head\\_attention#multiheadattention-class](https://keras.io/api/layers/attention_layers/multi_head_attention#multiheadattention-class)

Other attention layers:

`layer_additive_attention()`  
`layer_attention()`  
`layer_group_query_attention()`

Other layers:

`Layer()`  
`layer_activation()`  
`layer_activation_elu()`  
`layer_activation_leaky_relu()`  
`layer_activation_parametric_relu()`  
`layer_activation_relu()`  
`layer_activation_softmax()`  
`layer_activity_regularization()`  
`layer_add()`  
`layer_additive_attention()`  
`layer_alpha_dropout()`  
`layer_attention()`  
`layer_average()`  
`layer_average_pooling_1d()`  
`layer_average_pooling_2d()`  
`layer_average_pooling_3d()`  
`layer_batch_normalization()`  
`layer_bidirectional()`  
`layer_category_encoding()`  
`layer_center_crop()`  
`layer_concatenate()`  
`layer_conv_1d()`  
`layer_conv_1d_transpose()`  
`layer_conv_2d()`  
`layer_conv_2d_transpose()`  
`layer_conv_3d()`  
`layer_conv_3d_transpose()`  
`layer_conv_lstm_1d()`  
`layer_conv_lstm_2d()`  
`layer_conv_lstm_3d()`  
`layer_cropping_1d()`  
`layer_cropping_2d()`

```
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()
```

```
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_normalization    *A preprocessing layer that normalizes continuous features.*

---

### Description

This layer will shift and scale inputs into a distribution centered around 0 with standard deviation 1. It accomplishes this by precomputing the mean and variance of the data, and calling  $(input - mean) / \sqrt{var}$  at runtime.

The mean and variance values for the layer must be either supplied on construction or learned via `adapt()`. `adapt()` will compute the mean and variance of the data and store them as the layer's weights. `adapt()` should be called before `fit()`, `evaluate()`, or `predict()`.

### Usage

```
layer_normalization(  
    object,
```



```

    axis = -1L,
    mean = NULL,
    variance = NULL,
    invert = FALSE,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
axis	Integer, list of integers, or NULL. The axis or axes that should have a separate mean and variance for each index in the shape. For example, if shape is (NULL, 5) and axis=1, the layer will track 5 separate mean and variance values for the last axis. If axis is set to NULL, the layer will normalize all elements in the input by a scalar mean and variance. When -1, the last axis of the input is assumed to be a feature dimension and is normalized per index. Note that in the specific case of batched scalar inputs where the only axis is the batch axis, the default will normalize each index in the batch separately. In this case, consider passing axis=NULL. Defaults to -1.
mean	The mean value(s) to use during normalization. The passed value(s) will be broadcast to the shape of the kept axes above; if the value(s) cannot be broadcast, an error will be raised when this layer's build() method is called.
variance	The variance value(s) to use during normalization. The passed value(s) will be broadcast to the shape of the kept axes above; if the value(s) cannot be broadcast, an error will be raised when this layer's build() method is called.
invert	If TRUE, this layer will apply the inverse transformation to its inputs: it would turn a normalized input back into its original form.
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Examples

Calculate a global mean and variance by analyzing the dataset in `adapt()`.

```

adapt_data <- op_array(c(1., 2., 3., 4., 5.), dtype='float32')
input_data <- op_array(c(1., 2., 3.), dtype='float32')
layer <- layer_normalization(axis = NULL)
layer %>% adapt(adapt_data)
layer(input_data)

```

```
## tf.Tensor([[-1.4142135 -0.70710677 0.          ]], shape=(3), dtype=float32)
```

Calculate a mean and variance for each index on the last axis.

```
adapt_data <- op_array(rbind(c(0., 7., 4.),
                             c(2., 9., 6.),
                             c(0., 7., 4.),
                             c(2., 9., 6.)), dtype='float32')
input_data <- op_array(matrix(c(0., 7., 4.), nrow = 1), dtype='float32')
layer <- layer_normalization(axis=-1)
layer %>% adapt(adapt_data)
layer(input_data)
```

```
## tf.Tensor([[[-1. -1. -1.]]], shape=(1, 3), dtype=float32)
```

Pass the mean and variance directly.

```
input_data <- op_array(rbind(1, 2, 3), dtype='float32')
layer <- layer_normalization(mean=3., variance=2.)
layer(input_data)
```

```
## tf.Tensor(
## [[-1.4142135 ]
## [-0.70710677]
## [ 0.          ]], shape=(3, 1), dtype=float32)
```

Use the layer to de-normalize inputs (after adapting the layer).

```
adapt_data <- op_array(rbind(c(0., 7., 4.),
                             c(2., 9., 6.),
                             c(0., 7., 4.),
                             c(2., 9., 6.)), dtype='float32')
input_data <- op_array(c(1., 2., 3.), dtype='float32')
layer <- layer_normalization(axis=-1, invert=TRUE)
layer %>% adapt(adapt_data)
layer(input_data)
```

```
## tf.Tensor([[ 2. 10.  8.]], shape=(1, 3), dtype=float32)
```

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/numerical/normalization#normalization-class](https://keras.io/api/layers/preprocessing_layers/numerical/normalization#normalization-class)

Other numerical features preprocessing layers:

`layer_discretization()`

Other preprocessing layers:

`layer_category_encoding()`  
`layer_center_crop()`  
`layer_discretization()`  
`layer_feature_space()`  
`layer_hashed_crossing()`  
`layer_hashing()`  
`layer_integer_lookup()`  
`layer_mel_spectrogram()`  
`layer_random_brightness()`  
`layer_random_contrast()`  
`layer_random_crop()`  
`layer_random_flip()`  
`layer_random_rotation()`  
`layer_random_translation()`  
`layer_random_zoom()`  
`layer_rescaling()`  
`layer_resizing()`  
`layer_string_lookup()`  
`layer_text_vectorization()`

Other layers:

`Layer()`  
`layer_activation()`  
`layer_activation_elu()`  
`layer_activation_leaky_relu()`  
`layer_activation_parametric_relu()`  
`layer_activation_relu()`  
`layer_activation_softmax()`  
`layer_activity_regularization()`  
`layer_add()`  
`layer_additive_attention()`  
`layer_alpha_dropout()`  
`layer_attention()`  
`layer_average()`  
`layer_average_pooling_1d()`  
`layer_average_pooling_2d()`  
`layer_average_pooling_3d()`  
`layer_batch_normalization()`  
`layer_bidirectional()`  
`layer_category_encoding()`  
`layer_center_crop()`

```
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()
```

```
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

**Description**

Useful e.g. connecting RNNs and convnets.

**Usage**

```
layer_permute(object, dims, ...)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
dims	List of integers. Permutation pattern does not include the batch dimension. Indexing starts at 1. For instance, (1, 3, 2) permutes the second and third dimensions of the input.
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Input Shape**

Arbitrary.

**Output Shape**

Same as the input shape, but with the dimensions re-ordered according to the specified pattern.

**Example**

```
x <- layer_input(shape=c(10, 64))
y <- layer_permute(x, c(2, 1))
shape(y)

## shape(NA, 64, 10)
```

**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/permute#permute-class](https://keras.io/api/layers/reshaping_layers/permute#permute-class)

Other reshaping layers:

```
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
```

```
layer_flatten()  
layer_repeat_vector()  
layer_reshape()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()
```

```
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
```



```
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_random\_brightness

*A preprocessing layer which randomly adjusts brightness during training.*

---

### Description

This layer will randomly increase/reduce the brightness for the input RGB images. At inference time, the output will be identical to the input. Call the layer with `training=TRUE` to adjust the brightness of the input.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### Usage

```
layer_random_brightness(  
  object,  
  factor,  
  value_range = list(0L, 255L),  
  seed = NULL,  
  ...  
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
factor	Float or a list of 2 floats between -1.0 and 1.0. The factor is used to determine the lower bound and upper bound of the brightness adjustment. A float value will be chosen randomly between the limits. When -1.0 is chosen, the output image will be black, and when 1.0 is chosen, the image will be fully white. When only one float is provided, eg, 0.2, then -0.2 will be used for lower bound and 0.2 will be used for upper bound.
value_range	Optional list of 2 floats for the lower and upper limit of the values of the input data. To make no change, use <code>c(0.0, 1.0)</code> , e.g., if the image input has been scaled before this layer. Defaults to <code>c(0.0, 255.0)</code> . The brightness adjustment will be scaled to this range, and the output values will be clipped to this range.
seed	optional integer, for fixed RNG behavior.
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Inputs**

3D (HWC) or 4D (NHWC) tensor, with float or int dtype. Input pixel values can be of any range (e.g. `[0., 1.)` or `[0, 255]`)

**Output**

3D (HWC) or 4D (NHWC) tensor with brightness adjusted based on the factor. By default, the layer will output floats. The output value will be clipped to the range `[0, 255]`, the valid range of RGB colors, and rescaled based on the `value_range` if needed.

**Example**

```
random_bright <- layer_random_brightness(factor=0.2, seed = 1)

# An image with shape [2, 2, 3]
image <- array(1:12, dim=c(2, 2, 3))

# Assume we randomly select the factor to be 0.1, then it will apply
# 0.1 * 255 to all the channel
output <- random_bright(image, training=TRUE)
output
```

```
## tf.Tensor(  
## [[39.605797 43.605797 47.605797]  
##  [41.605797 45.605797 49.605797]]  
##  
## [[40.605797 44.605797 48.605797]  
##  [42.605797 46.605797 50.605797]]], shape=(2, 2, 3), dtype=float32)
```

### See Also

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_augmentation/random\\_brightness#randombrightness-class](https://keras.io/api/layers/preprocessing_layers/image_augmentation/random_brightness#randombrightness-class)

Other image augmentation layers:

```
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()
```

Other preprocessing layers:

```
layer_category_encoding()  
layer_center_crop()  
layer_discretization()  
layer_feature_space()  
layer_hashed_crossing()  
layer_hashing()  
layer_integer_lookup()  
layer_mel_spectrogram()  
layer_normalization()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_rescaling()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()
```

```
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()
```

```
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()
```

```

layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_random\_contrast *A preprocessing layer which randomly adjusts contrast during training.*

---

### Description

This layer will randomly adjust the contrast of an image or images by a random factor. Contrast is adjusted independently for each channel of each image during training.

For each channel, this layer computes the mean of the image pixels in the channel and then adjusts each component  $x$  of each pixel to  $(x - \text{mean}) * \text{contrast\_factor} + \text{mean}$ .

Input pixel values can be of any range (e.g.  $[0., 1.]$  or  $[0, 255]$ ) and in integer or floating point dtype. By default, the layer will output floats.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### Usage

```
layer_random_contrast(object, factor, seed = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
factor	a positive float represented as fraction of value, or a tuple of size 2 representing lower and upper bound. When represented as a single float, lower = upper. The contrast factor will be randomly picked between $[1.0 - \text{lower}, 1.0 + \text{upper}]$ . For any pixel $x$ in the channel, the output will be $(x - \text{mean}) * \text{factor} + \text{mean}$ where mean is the mean value of the channel.
seed	Integer. Used to create a random seed.
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Input Shape**

3D (unbatched) or 4D (batched) tensor with shape: (... , height, width, channels), in "channels\_last" format.

**Output Shape**

3D (unbatched) or 4D (batched) tensor with shape: (... , height, width, channels), in "channels\_last" format.

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_augmentation/random\\_contrast#randomcontrast-class](https://keras.io/api/layers/preprocessing_layers/image_augmentation/random_contrast#randomcontrast-class)

Other image augmentation layers:

[layer\\_random\\_brightness\(\)](#)  
[layer\\_random\\_crop\(\)](#)  
[layer\\_random\\_flip\(\)](#)  
[layer\\_random\\_rotation\(\)](#)  
[layer\\_random\\_translation\(\)](#)  
[layer\\_random\\_zoom\(\)](#)

Other preprocessing layers:

[layer\\_category\\_encoding\(\)](#)  
[layer\\_center\\_crop\(\)](#)  
[layer\\_discretization\(\)](#)  
[layer\\_feature\\_space\(\)](#)  
[layer\\_hashed\\_crossing\(\)](#)  
[layer\\_hashing\(\)](#)  
[layer\\_integer\\_lookup\(\)](#)  
[layer\\_mel\\_spectrogram\(\)](#)  
[layer\\_normalization\(\)](#)  
[layer\\_random\\_brightness\(\)](#)  
[layer\\_random\\_crop\(\)](#)  
[layer\\_random\\_flip\(\)](#)  
[layer\\_random\\_rotation\(\)](#)  
[layer\\_random\\_translation\(\)](#)  
[layer\\_random\\_zoom\(\)](#)  
[layer\\_rescaling\(\)](#)  
[layer\\_resizing\(\)](#)  
[layer\\_string\\_lookup\(\)](#)  
[layer\\_text\\_vectorization\(\)](#)

Other layers:

[Layer\(\)](#)  
[layer\\_activation\(\)](#)  
[layer\\_activation\\_elu\(\)](#)  
[layer\\_activation\\_leaky\\_relu\(\)](#)

```
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()
```



```
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
```

```
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_random\_crop      *A preprocessing layer which randomly crops images during training.*

---

### Description

During training, this layer will randomly choose a location to crop images down to a target size. The layer will crop all the images in the same batch to the same cropping location.

At inference time, and during training if an input image is smaller than the target size, the input will be resized and cropped so as to return the largest possible window in the image that matches the target aspect ratio. If you need to apply random cropping at inference time, set `training` to `TRUE` when calling the layer.

Input pixel values can be of any range (e.g. `[0., 1.)` or `[0, 255]`) and of integer or floating point dtype. By default, the layer will output floats.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### Usage

```
layer_random_crop(  
  object,  
  height,  
  width,  
  seed = NULL,  
  data_format = NULL,  
  name = NULL,  
  ...  
)
```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>height</code>	Integer, the height of the output shape.
<code>width</code>	Integer, the width of the output shape.
<code>seed</code>	Integer. Used to create a random seed.

data_format	see description
name	String, name for the object
...	Base layer keyword arguments, such as name and dtype.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Input Shape**

3D (unbatched) or 4D (batched) tensor with shape: `(..., height, width, channels)`, in "channels\_last" format.

**Output Shape**

3D (unbatched) or 4D (batched) tensor with shape: `(..., target_height, target_width, channels)`.

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_augmentation/random\\_crop/#randomcrop-class](https://keras.io/api/layers/preprocessing_layers/image_augmentation/random_crop/#randomcrop-class)

Other image augmentation layers:

`layer_random_brightness()`  
`layer_random_contrast()`  
`layer_random_flip()`  
`layer_random_rotation()`  
`layer_random_translation()`  
`layer_random_zoom()`

Other preprocessing layers:

`layer_category_encoding()`  
`layer_center_crop()`  
`layer_discretization()`  
`layer_feature_space()`  
`layer_hashed_crossing()`  
`layer_hashing()`  
`layer_integer_lookup()`  
`layer_mel_spectrogram()`  
`layer_normalization()`  
`layer_random_brightness()`  
`layer_random_contrast()`  
`layer_random_flip()`  
`layer_random_rotation()`

```
layer_random_translation()  
layer_random_zoom()  
layer_rescaling()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()
```

```
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()
```

```

layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer_random_flip	<i>A preprocessing layer which randomly flips images during training.</i>
-------------------	---

---

### Description

This layer will flip the images horizontally and or vertically based on the mode attribute. During inference time, the output will be identical to input. Call the layer with `training=TRUE` to flip the input. Input pixel values can be of any range (e.g. `[0., 1.)` or `[0, 255]`) and of integer or floating point dtype. By default, the layer will output floats.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### Usage

```
layer_random_flip(object, mode = "horizontal_and_vertical", seed = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
mode	String indicating which flip mode to use. Can be "horizontal", "vertical", or "horizontal_and_vertical". "horizontal" is a left-right flip and "vertical" is a top-bottom flip. Defaults to "horizontal_and_vertical"
seed	Integer. Used to create a random seed.
...	Base layer keyword arguments, such as name and dtype.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

**Input Shape**

3D (unbatched) or 4D (batched) tensor with shape: `(..., height, width, channels)`, in "channels\_last" format.

**Output Shape**

3D (unbatched) or 4D (batched) tensor with shape: `(..., height, width, channels)`, in "channels\_last" format.

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_augmentation/random\\_flip#randomflip-class](https://keras.io/api/layers/preprocessing_layers/image_augmentation/random_flip#randomflip-class)

Other image augmentation layers:

`layer_random_brightness()`  
`layer_random_contrast()`  
`layer_random_crop()`  
`layer_random_rotation()`  
`layer_random_translation()`  
`layer_random_zoom()`

Other preprocessing layers:

`layer_category_encoding()`  
`layer_center_crop()`  
`layer_discretization()`  
`layer_feature_space()`  
`layer_hashed_crossing()`  
`layer_hashing()`  
`layer_integer_lookup()`  
`layer_mel_spectrogram()`  
`layer_normalization()`  
`layer_random_brightness()`  
`layer_random_contrast()`  
`layer_random_crop()`  
`layer_random_rotation()`  
`layer_random_translation()`  
`layer_random_zoom()`  
`layer_rescaling()`  
`layer_resizing()`

```
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()
```



```
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()
```

```
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_t fsm()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_random\_rotation *A preprocessing layer which randomly rotates images during training.*

---

### Description

This layer will apply random rotations to each image, filling empty space according to `fill_mode`. By default, random rotations are only applied during training. At inference time, the layer does nothing. If you need to apply random rotations at inference time, pass `training = True` when calling the layer.

Input pixel values can be of any range (e.g. `[0., 1.)` or `[0, 255]`) and of integer or floating point dtype. By default, the layer will output floats.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### Usage

```
layer_random_rotation(
    object,
    factor,
    fill_mode = "reflect",
    interpolation = "bilinear",
    seed = NULL,
    fill_value = 0,
    value_range = list(0L, 255L),
    data_format = NULL,
    ...
)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
factor	a float represented as fraction of 2 Pi, or a tuple of size 2 representing lower and upper bound for rotating clockwise and counter-clockwise. A positive values means rotating counter clock-wise, while a negative value means clock-wise. When represented as a single float, this value is used for both the upper and lower bound. For instance, factor= $(-0.2, 0.3)$ results in an output rotation by a random amount in the range $[-20\% * 2\pi, 30\% * 2\pi]$ . factor=0.2 results in an output rotating by a random amount in the range $[-20\% * 2\pi, 20\% * 2\pi]$ .
fill_mode	Points outside the boundaries of the input are filled according to the given mode (one of {"constant", "reflect", "wrap", "nearest"}). <ul style="list-style-type: none"> <li>• <i>reflect</i>: (d c b a   a b c d   d c b a) The input is extended by reflecting about the edge of the last pixel.</li> <li>• <i>constant</i>: (k k k k   a b c d   k k k k) The input is extended by filling all values beyond the edge with the same constant value k = 0.</li> <li>• <i>wrap</i>: (a b c d   a b c d   a b c d) The input is extended by wrapping around to the opposite edge.</li> <li>• <i>nearest</i>: (a a a a   a b c d   d d d d) The input is extended by the nearest pixel.</li> </ul>
interpolation	Interpolation mode. Supported values: "nearest", "bilinear".
seed	Integer. Used to create a random seed.
fill_value	a float represents the value to be filled outside the boundaries when fill_mode="constant".
value_range	see description
data_format	see description
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Input Shape**

3D (unbatched) or 4D (batched) tensor with shape: (... , height, width, channels), in "channels\_last" format

**Output Shape**

3D (unbatched) or 4D (batched) tensor with shape: (... , height, width, channels), in "channels\_last" format

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_augmentation/random\\_rotation#randomrotation-class](https://keras.io/api/layers/preprocessing_layers/image_augmentation/random_rotation#randomrotation-class)

Other image augmentation layers:

```
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_translation()  
layer_random_zoom()
```

Other preprocessing layers:

```
layer_category_encoding()  
layer_center_crop()  
layer_discretization()  
layer_feature_space()  
layer_hashed_crossing()  
layer_hashing()  
layer_integer_lookup()  
layer_mel_spectrogram()  
layer_normalization()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_translation()  
layer_random_zoom()  
layer_rescaling()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()
```

```
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()
```

```
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

 layer\_random\_translation

*A preprocessing layer which randomly translates images during training.*

---

### Description

This layer will apply random translations to each image during training, filling empty space according to `fill_mode`.

Input pixel values can be of any range (e.g. `[0., 1.)` or `[0, 255]`) and of integer or floating point dtype. By default, the layer will output floats.

### Usage

```
layer_random_translation(
    object,
    height_factor,
    width_factor,
    fill_mode = "reflect",
    interpolation = "bilinear",
    seed = NULL,
    fill_value = 0,
    data_format = NULL,
    ...
)
```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>height_factor</code>	a float represented as fraction of value, or a tuple of size 2 representing lower and upper bound for shifting vertically. A negative value means shifting image up, while a positive value means shifting image down. When represented as a single positive float, this value is used for both the upper and lower bound. For instance, <code>height_factor=(-0.2, 0.3)</code> results in an output shifted by a random amount in the range <code>[-20%, +30%]</code> . <code>height_factor=0.2</code> results in an output height shifted by a random amount in the range <code>[-20%, +20%]</code> .
<code>width_factor</code>	a float represented as fraction of value, or a tuple of size 2 representing lower and upper bound for shifting horizontally. A negative value means shifting image left, while a positive value means shifting image right. When represented as a single positive float, this value is used for both the upper and lower bound. For instance, <code>width_factor=(-0.2, 0.3)</code> results in an output shifted left by 20%, and shifted right by 30%. <code>width_factor=0.2</code> results in an output height shifted left or right by 20%.
<code>fill_mode</code>	Points outside the boundaries of the input are filled according to the given mode. Available methods are "constant", "nearest", "wrap" and "reflect". Defaults to "constant".

- "reflect": (d c b a | a b c d | d c b a) The input is extended by reflecting about the edge of the last pixel.
- "constant": (k k k k | a b c d | k k k k) The input is extended by filling all values beyond the edge with the same constant value k specified by fill\_value.
- "wrap": (a b c d | a b c d | a b c d) The input is extended by wrapping around to the opposite edge.
- "nearest": (a a a a | a b c d | d d d d) The input is extended by the nearest pixel. Note that when using torch backend, "reflect" is redirected to "mirror" (c d c b | a b c d | c b a b) because torch does not support "reflect". Note that torch backend does not support "wrap".

interpolation	Interpolation mode. Supported values: "nearest", "bilinear".
seed	Integer. Used to create a random seed.
fill_value	a float represents the value to be filled outside the boundaries when fill_mode="constant".
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, channels, height, width). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
...	Base layer keyword arguments, such as name and dtype.

## Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

## Input Shape

3D (unbatched) or 4D (batched) tensor with shape: (... , height, width, channels), in "channels\_last" format, or (... , channels, height, width), in "channels\_first" format.

## Output Shape

3D (unbatched) or 4D (batched) tensor with shape: (... , target\_height, target\_width, channels), or (... , channels, target\_height, target\_width), in "channels\_first" format.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).



**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_augmentation/random\\_translation#randomtranslation-class](https://keras.io/api/layers/preprocessing_layers/image_augmentation/random_translation#randomtranslation-class)

Other image augmentation layers:

```
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_zoom()
```

Other preprocessing layers:

```
layer_category_encoding()  
layer_center_crop()  
layer_discretization()  
layer_feature_space()  
layer_hashed_crossing()  
layer_hashing()  
layer_integer_lookup()  
layer_mel_spectrogram()  
layer_normalization()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_zoom()  
layer_rescaling()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()
```

```
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()
```

```
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_random\_zoom      *A preprocessing layer which randomly zooms images during training.*

---

### Description

This layer will randomly zoom in or out on each axis of an image independently, filling empty space according to `fill_mode`.

Input pixel values can be of any range (e.g. `[0., 1.)` or `[0, 255]`) and of integer or floating point dtype. By default, the layer will output floats.

### Usage

```
layer_random_zoom(
    object,
    height_factor,
    width_factor = NULL,
    fill_mode = "reflect",
    interpolation = "bilinear",
    seed = NULL,
    fill_value = 0,
    data_format = NULL,
    ...
)
```

### Arguments

- |               |   |
|---------------|---|
| object        | Object to compose the layer with. A tensor, array, or sequential model.   |
| height_factor | a float represented as fraction of value, or a list of size 2 representing lower and upper bound for zooming vertically. When represented as a single float, this value is used for both the upper and lower bound. A positive value means zooming out, while a negative value means zooming in. For instance, <code>height_factor=c(0.2, 0.3)</code> result in an output zoomed out by a random amount in the range <code>[+20%, +30%]</code> . <code>height_factor=c(-0.3, -0.2)</code> result in an output zoomed in by a random amount in the range <code>[+20%, +30%]</code> . |
| width_factor  | a float represented as fraction of value, or a list of size 2 representing lower and upper bound for zooming horizontally. When represented as a single float, this value is used for both the upper and lower bound. For instance, <code>width_factor=c(0.2, 0.3)</code> result in an output zooming out between 20% to 30%. <code>width_factor=c(-0.3, -0.2)</code> result in an output zooming in between 20% to 30%. NULL means i.e., zooming vertical and horizontal directions by preserving the aspect ratio. Defaults to NULL.  |
| fill_mode     | Points outside the boundaries of the input are filled according to the given mode. Available methods are "constant", "nearest", "wrap" and "reflect". Defaults to "constant". <ul style="list-style-type: none"> <li>• "reflect": (d c b a   a b c d   d c b a) The input is extended by reflecting about the edge of the last pixel.</li> </ul>  |

	<ul style="list-style-type: none"> <li>• "constant": (k k k k   a b c d   k k k k) The input is extended by filling all values beyond the edge with the same constant value k specified by fill_value.</li> <li>• "wrap": (a b c d   a b c d   a b c d) The input is extended by wrapping around to the opposite edge.</li> <li>• "nearest": (a a a a   a b c d   d d d d) The input is extended by the nearest pixel. Note that when using torch backend, "reflect" is redirected to "mirror" (c d c b   a b c d   c b a b) because torch does not support "reflect". Note that torch backend does not support "wrap".</li> </ul>
interpolation	Interpolation mode. Supported values: "nearest", "bilinear".
seed	Integer. Used to create a random seed.
fill_value	a float that represents the value to be filled outside the boundaries when fill_mode="constant".
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, channels, height, width). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
...	Base layer keyword arguments, such as name and dtype.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Input Shape

3D (unbatched) or 4D (batched) tensor with shape: (... , height, width, channels), in "channels\_last" format, or (... , channels, height, width), in "channels\_first" format.

### Output Shape

3D (unbatched) or 4D (batched) tensor with shape: (... , target\_height, target\_width, channels), or (... , channels, target\_height, target\_width), in "channels\_first" format.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### Examples

```
input_img <- random_uniform(c(32, 224, 224, 3))
layer <- layer_random_zoom(height_factor = .5, width_factor = .2)
out_img <- layer(input_img)
```

**See Also**

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_augmentation/random\\_zoom/#randomzoom-class](https://keras.io/api/layers/preprocessing_layers/image_augmentation/random_zoom/#randomzoom-class)

Other image augmentation layers:

```
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()
```

Other preprocessing layers:

```
layer_category_encoding()  
layer_center_crop()  
layer_discretization()  
layer_feature_space()  
layer_hashed_crossing()  
layer_hashing()  
layer_integer_lookup()  
layer_mel_spectrogram()  
layer_normalization()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_rescaling()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()
```

```
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()
```

```
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```



---

layer\_repeat\_vector    *Repeats the input n times.*

---

### Description

Repeats the input n times.

### Usage

```
layer_repeat_vector(object, n, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
n	Integer, repetition factor.
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Example

```
x <- layer_input(shape = 32)
y <- layer_repeat_vector(x, n = 3)
shape(y)

## shape(NA, 3, 32)
```

### Input Shape

2D tensor with shape (batch\_size, features).

### Output Shape

3D tensor with shape (batch\_size, n, features).

**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/repeat\\_vector#repeatvector-class](https://keras.io/api/layers/reshaping_layers/repeat_vector#repeatvector-class)

Other reshaping layers:

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_flatten()  
layer_permute()  
layer_reshape()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()
```

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()
```

```
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_rescaling

*A preprocessing layer which rescales input values to a new range.*

---

### Description

This layer rescales every value of an input (often an image) by multiplying by `scale` and adding `offset`.

For instance:

1. To rescale an input in the `[0, 255]` range to be in the `[0, 1]` range, you would pass `scale=1./255`.
2. To rescale an input in the `[0, 255]` range to be in the `[-1, 1]` range, you would pass `scale=1./127.5, offset=-1`.

The rescaling is applied both during training and inference. Inputs can be of integer or floating point dtype, and by default the layer will output floats.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### Usage

```
layer_rescaling(object, scale, offset = 0, ...)
```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>scale</code>	Float, the scale to apply to the inputs.
<code>offset</code>	Float, the offset to apply to the inputs.
<code>...</code>	Base layer keyword arguments, such as name and dtype.

### Value

The return value depends on the value provided for the first argument. If `object` is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### See Also

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_preprocessing/rescaling/#rescaling-class](https://keras.io/api/layers/preprocessing_layers/image_preprocessing/rescaling/#rescaling-class)

Other image preprocessing layers:

```
layer_center_crop()  
layer_resizing()
```

Other preprocessing layers:

```
layer_category_encoding()  
layer_center_crop()  
layer_discretization()  
layer_feature_space()  
layer_hashed_crossing()  
layer_hashing()  
layer_integer_lookup()  
layer_mel_spectrogram()  
layer_normalization()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()
```

```
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_resizing()  
layer_string_lookup()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()
```

```
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()
```

```

layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsfsm()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_reshape

*Layer that reshapes inputs into the given shape.*


---

### Description

Layer that reshapes inputs into the given shape.

### Usage

```
layer_reshape(object, target_shape, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
target_shape	Target shape. List of integers, does not include the samples dimension (batch size).
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.



### Input Shape

Arbitrary, although all dimensions in the input shape must be known/fixed. Use the keyword argument `input_shape` (list of integers, does not include the samples/batch size axis) when using this layer as the first layer in a model.

### Output Shape

(batch\_size, \*target\_shape)

### Examples

```
x <- layer_input(shape = 12)
y <- layer_reshape(x, c(3, 4))
shape(y)

## shape(NA, 3, 4)

# also supports shape inference using `-1` as dimension
y <- layer_reshape(x, c(-1, 2, 2))
shape(y)

## shape(NA, 3, 2, 2)
```

### See Also

- [https://keras.io/api/layers/reshaping\\_layers/reshape#reshape-class](https://keras.io/api/layers/reshaping_layers/reshape#reshape-class)

Other reshaping layers:

```
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_flatten()
layer_permute()
layer_repeat_vector()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
```

```
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()
```

```
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()
```

```

layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer_resizing	<i>A preprocessing layer which resizes images.</i>
----------------	--

---

### Description

This layer resizes an image input to a target height and width. The input should be a 4D (batched) or 3D (unbatched) tensor in "channels\_last" format. Input pixel values can be of any range (e.g. [0., 1.) or [0, 255]).

### Usage

```

layer_resizing(
    object,
    height,
    width,
    interpolation = "bilinear",
    crop_to_aspect_ratio = FALSE,
    pad_to_aspect_ratio = FALSE,
    fill_mode = "constant",
    fill_value = 0,
    data_format = NULL,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
height	Integer, the height of the output shape.
width	Integer, the width of the output shape.
interpolation	String, the interpolation method. Supports "bilinear", "nearest", "bicubic", "lanczos3", "lanczos5". Defaults to "bilinear".
crop_to_aspect_ratio	If TRUE, resize the images without aspect ratio distortion. When the original aspect ratio differs from the target aspect ratio, the output image will be cropped so as to return the largest possible window in the image (of size (height, width)) that matches the target aspect ratio. By default (crop_to_aspect_ratio=FALSE), aspect ratio may not be preserved.

pad_to_aspect_ratio	If TRUE, pad the images without aspect ratio distortion. When the original aspect ratio differs from the target aspect ratio, the output image will be evenly padded on the short side.
fill_mode	When using pad_to_aspect_ratio=TRUE, padded areas are filled according to the given mode. Only "constant" is supported at this time (fill with constant value, equal to fill_value).
fill_value	Float. Padding value to use when pad_to_aspect_ratio=TRUE.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, channels, height, width). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
...	Base layer keyword arguments, such as name and dtype.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Input Shape

3D (unbatched) or 4D (batched) tensor with shape: (... , height, width, channels), in "channels\_last" format, or (... , channels, height, width), in "channels\_first" format.

### Output Shape

3D (unbatched) or 4D (batched) tensor with shape: (... , target\_height, target\_width, channels), or (... , channels, target\_height, target\_width), in "channels\_first" format.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

### See Also

- [https://keras.io/api/layers/preprocessing\\_layers/image\\_preprocessing/resizing#resizing-class](https://keras.io/api/layers/preprocessing_layers/image_preprocessing/resizing#resizing-class)

Other image preprocessing layers:

[layer\\_center\\_crop\(\)](#)  
[layer\\_rescaling\(\)](#)

## Other preprocessing layers:

```
layer_category_encoding()  
layer_center_crop()  
layer_discretization()  
layer_feature_space()  
layer_hashed_crossing()  
layer_hashing()  
layer_integer_lookup()  
layer_mel_spectrogram()  
layer_normalization()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_rescaling()  
layer_string_lookup()  
layer_text_vectorization()
```

## Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()
```

```
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()
```

```
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_rnn

*Base class for recurrent layers*

---

### **Description**

Base class for recurrent layers

### **Usage**

```
layer_rnn(  

```



```

    object,
    cell,
    return_sequences = FALSE,
    return_state = FALSE,
    go_backwards = FALSE,
    stateful = FALSE,
    unroll = FALSE,
    zero_output_for_mask = FALSE,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
cell	A RNN cell instance or a list of RNN cell instances. A RNN cell is a class that has: <ul style="list-style-type: none"> <li>• A call(input_at_t, states_at_t) method, returning (output_at_t, states_at_t_plus_1). The call method of the cell can also take the optional argument constants, see section "Note on passing external constants" below.</li> <li>• A state_size attribute. This can be a single integer (single state) in which case it is the size of the recurrent state. This can also be a list of integers (one size per state).</li> <li>• A output_size attribute, a single integer.</li> <li>• A get_initial_state(batch_size=NULL) method that creates a tensor meant to be fed to call() as the initial state, if the user didn't specify any initial state via other means. The returned initial state should have shape (batch_size, cell.state_size). The cell might choose to create a tensor full of zeros, or other values based on the cell's implementation. inputs is the input tensor to the RNN layer, with shape (batch_size, timesteps, features). If this method is not implemented by the cell, the RNN layer will create a zero filled tensor with shape (batch_size, cell\$state_size). In the case that cell is a list of RNN cell instances, the cells will be stacked on top of each other in the RNN, resulting in an efficient stacked RNN.</li> </ul>
return_sequences	Boolean (default FALSE). Whether to return the last output in the output sequence, or the full sequence.
return_state	Boolean (default FALSE). Whether to return the last state in addition to the output.
go_backwards	Boolean (default FALSE). If TRUE, process the input sequence backwards and return the reversed sequence.
stateful	Boolean (default FALSE). If TRUE, the last state for each sample at index i in a batch will be used as initial state for the sample of index i in the following batch.
unroll	Boolean (default FALSE). If TRUE, the network will be unrolled, else a symbolic loop will be used. Unrolling can speed-up a RNN, although it tends to be more memory-intensive. Unrolling is only suitable for short sequences.

<code>zero_output_for_mask</code>	Boolean (default <code>FALSE</code> ). Whether the output should use zeros for the masked timesteps. Note that this field is only used when <code>return_sequences</code> is <code>TRUE</code> and <code>mask</code> is provided. It can useful if you want to reuse the raw output sequence of the RNN without interference from the masked timesteps, e.g., merging bidirectional RNNs.
<code>...</code>	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

**Call Arguments**

- `inputs`: Input tensor.
- `initial_state`: List of initial state tensors to be passed to the first call of the cell.
- `mask`: Binary tensor of shape `[batch_size, timesteps]` indicating whether a given timestep should be masked. An individual `TRUE` entry indicates that the corresponding timestep should be utilized, while a `FALSE` entry indicates that the corresponding timestep should be ignored.
- `training`: Python boolean indicating whether the layer should behave in training mode or in inference mode. This argument is passed to the cell when calling it. This is for use with cells that use dropout.

**Input Shape**

3-D tensor with shape `(batch_size, timesteps, features)`.

**Output Shape**

- If `return_state`: a list of tensors. The first tensor is the output. The remaining tensors are the last states, each with shape `(batch_size, state_size)`, where `state_size` could be a high dimension tensor shape.
- If `return_sequences`: 3D tensor with shape `(batch_size, timesteps, output_size)`.

**Masking:**

This layer supports masking for input data with a variable number of timesteps. To introduce masks to your data, use a `layer_embedding()` layer with the `mask_zero` parameter set to `TRUE`.

Note on using statefulness in RNNs:

You can set RNN layers to be 'stateful', which means that the states computed for the samples in one batch will be reused as initial states for the samples in the next batch. This assumes a one-to-one mapping between samples in different successive batches.

To enable statefulness:

- Specify `stateful = TRUE` in the layer constructor.
- Specify a fixed batch size for your model, by passing
  - If sequential model: `input_batch_shape = c(...)` to the `keras_model_sequential()` call.
  - Else for functional model with 1 or more input layers: `batch_shape = c(...)` to the `layer_input()` call(s).

This is the expected shape of your inputs *including the batch size*. It should be a list of integers, e.g. `c(32, 10, 100)`.

- Specify `shuffle = FALSE` when calling `fit()`.

To reset the states of your model, call `reset_state()` on either a specific layer, or on your entire model.

Note on specifying the initial state of RNNs:

You can specify the initial state of RNN layers symbolically by calling them with the keyword argument `initial_state`. The value of `initial_state` should be a tensor or list of tensors representing the initial state of the RNN layer.

## Examples

First, let's define a RNN Cell, as a layer subclass.

```
rnn_cell_minimal <- Layer(
  "MinimalRNNCell",

  initialize = function(units, ...) {
    super$initialize(...)
    self$units <- as.integer(units)
    self$state_size <- as.integer(units)
  },

  build = function(input_shape) {
    self$kernel <- self$add_weight(
      shape = shape(tail(input_shape, 1), self$units),
      initializer = 'uniform',
      name = 'kernel'
    )
    self$recurrent_kernel <- self$add_weight(
      shape = shape(self$units, self$units),
      initializer = 'uniform',
      name = 'recurrent_kernel'
    )
    self$built <- TRUE
  },

  call = function(inputs, states) {
    prev_output <- states[[1]]
    h <- op_matmul(inputs, self$kernel)
```

```

        output <- h + op_matmul(prev_output, self$recurrent_kernel)
        list(output, list(output))
    }
)

```

Let's use this cell in a RNN layer:

```

cell <- rnn_cell_minimal(units = 32)
x <- layer_input(shape = shape(NULL, 5))
layer <- layer_rnn(cell = cell)
y <- layer(x)

```

```

cells <- list(rnn_cell_minimal(units = 32), rnn_cell_minimal(units = 4))
x <- layer_input(shape = shape(NULL, 5))
layer <- layer_rnn(cell = cells)
y <- layer(x)

```

### See Also

- [https://keras.io/api/layers/recurrent\\_layers/rnn#rnn-class](https://keras.io/api/layers/recurrent_layers/rnn#rnn-class)

Other rnn cells:

```

rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()

```

Other rnn layers:

```

layer_bidirectional()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_gru()
layer_lstm()
layer_simple_rnn()
layer_time_distributed()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

Other layers:

```

Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()

```

```
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()
```

```
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsfm()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
```

```
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_separable\_conv\_1d

*1D separable convolution layer.*

---

### Description

This layer performs a depthwise convolution that acts separately on channels, followed by a pointwise convolution that mixes channels. If `use_bias` is `TRUE` and a bias initializer is provided, it adds a bias vector to the output. It then optionally applies an activation function to produce the final output.

### Usage

```
layer_separable_conv_1d(  
  object,  
  filters,  
  kernel_size,  
  strides = 1L,  
  padding = "valid",  
  data_format = NULL,  
  dilation_rate = 1L,  
  depth_multiplier = 1L,  
  activation = NULL,  
  use_bias = TRUE,  
  depthwise_initializer = "glorot_uniform",  
  pointwise_initializer = "glorot_uniform",  
  bias_initializer = "zeros",  
  depthwise_regularizer = NULL,  
  pointwise_regularizer = NULL,  
  bias_regularizer = NULL,  
  activity_regularizer = NULL,  
  depthwise_constraint = NULL,  
  pointwise_constraint = NULL,  
  bias_constraint = NULL,  
  ...  
)
```

### Arguments

`object`            Object to compose the layer with. A tensor, array, or sequential model.

filters	int, the dimensionality of the output space (i.e. the number of filters in the pointwise convolution).
kernel_size	int or list of 1 integers, specifying the size of the depthwise convolution window.
strides	int or list of 1 integers, specifying the stride length of the depthwise convolution. If only one int is specified, the same stride size will be used for all dimensions. strides > 1 is incompatible with dilation_rate > 1.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When padding="same" and strides=1, the output has the same size as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, steps, features) while "channels_first" corresponds to inputs with shape (batch, features, steps). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
dilation_rate	int or list of 1 integers, specifying the dilation rate to use for dilated convolution. If only one int is specified, the same dilation rate will be used for all dimensions.
depth_multiplier	The number of depthwise convolution output channels for each input channel. The total number of depthwise convolution output channels will be equal to input_channel * depth_multiplier.
activation	Activation function. If NULL, no activation is applied.
use_bias	bool, if TRUE, bias will be added to the output.
depthwise_initializer	An initializer for the depthwise convolution kernel. If NULL, then the default initializer ("glorot_uniform") will be used.
pointwise_initializer	An initializer for the pointwise convolution kernel. If NULL, then the default initializer ("glorot_uniform") will be used.
bias_initializer	An initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
depthwise_regularizer	Optional regularizer for the depthwise convolution kernel.
pointwise_regularizer	Optional regularizer for the pointwise convolution kernel.
bias_regularizer	Optional regularizer for the bias vector.
activity_regularizer	Optional regularizer function for the output.
depthwise_constraint	Optional projection function to be applied to the depthwise kernel after being updated by an Optimizer (e.g. used for norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape).



pointwise_constraint	Optional projection function to be applied to the pointwise kernel after being updated by an Optimizer.
bias_constraint	Optional projection function to be applied to the bias after being updated by an Optimizer.
...	For forward/backward compatibility.

**Value**

A 3D tensor representing `activation(separable_conv1d(inputs, kernel) + bias)`.

**Input Shape**

- If `data_format="channels_last"`: A 3D tensor with shape: (batch\_shape, steps, channels)
- If `data_format="channels_first"`: A 3D tensor with shape: (batch\_shape, channels, steps)

**Output Shape**

- If `data_format="channels_last"`: A 3D tensor with shape: (batch\_shape, new\_steps, filters)
- If `data_format="channels_first"`: A 3D tensor with shape: (batch\_shape, filters, new\_steps)

**Example**

```
x <- random_uniform(c(4, 10, 12))
y <- layer_separable_conv_1d(x, 3, 2, 2, activation='relu')
shape(y)

## shape(4, 5, 3)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/separable\\_convolution1d#separableconv1d-class](https://keras.io/api/layers/convolution_layers/separable_convolution1d#separableconv1d-class)

Other convolutional layers:

```
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_separable_conv_2d()
```

Other layers:

```
Layer()
layer_activation()
```

```
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
layer_center_crop()
layer_concatenate()
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
layer_conv_lstm_1d()
layer_conv_lstm_2d()
layer_conv_lstm_3d()
layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_dense()
layer_depthwise_conv_1d()
layer_depthwise_conv_2d()
layer_discretization()
layer_dot()
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
```

```
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()
```

```
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_separable\_conv\_2d

*2D separable convolution layer.*

---

### Description

This layer performs a depthwise convolution that acts separately on channels, followed by a pointwise convolution that mixes channels. If `use_bias` is `TRUE` and a bias initializer is provided, it adds a bias vector to the output. It then optionally applies an activation function to produce the final output.

### Usage

```
layer_separable_conv_2d(  
  object,  
  filters,  
  kernel_size,  
  strides = list(1L, 1L),  
  padding = "valid",  
  data_format = NULL,  
  dilation_rate = list(1L, 1L),  
  depth_multiplier = 1L,  
  activation = NULL,  
  use_bias = TRUE,  
  depthwise_initializer = "glorot_uniform",  
  pointwise_initializer = "glorot_uniform",  
  bias_initializer = "zeros",  
  depthwise_regularizer = NULL,  
  pointwise_regularizer = NULL,  
  bias_regularizer = NULL,  
  activity_regularizer = NULL,  
  depthwise_constraint = NULL,  
  pointwise_constraint = NULL,  
  bias_constraint = NULL,
```

```
    ...
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
filters	int, the dimensionality of the output space (i.e. the number of filters in the pointwise convolution).
kernel_size	int or list of 2 integers, specifying the size of the depthwise convolution window.
strides	int or list of 2 integers, specifying the stride length of the depthwise convolution. If only one int is specified, the same stride size will be used for all dimensions. strides > 1 is incompatible with dilation_rate > 1.
padding	string, either "valid" or "same" (case-insensitive). "valid" means no padding. "same" results in padding evenly to the left/right or up/down of the input. When padding="same" and strides=1, the output has the same size as the input.
data_format	string, either "channels_last" or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch, height, width, channels) while "channels_first" corresponds to inputs with shape (batch, channels, height, width). It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
dilation_rate	int or list of 2 integers, specifying the dilation rate to use for dilated convolution. If only one int is specified, the same dilation rate will be used for all dimensions.
depth_multiplier	The number of depthwise convolution output channels for each input channel. The total number of depthwise convolution output channels will be equal to input_channel * depth_multiplier.
activation	Activation function. If NULL, no activation is applied.
use_bias	bool, if TRUE, bias will be added to the output.
depthwise_initializer	An initializer for the depthwise convolution kernel. If NULL, then the default initializer ("glorot_uniform") will be used.
pointwise_initializer	An initializer for the pointwise convolution kernel. If NULL, then the default initializer ("glorot_uniform") will be used.
bias_initializer	An initializer for the bias vector. If NULL, the default initializer ("zeros") will be used.
depthwise_regularizer	Optional regularizer for the depthwise convolution kernel.
pointwise_regularizer	Optional regularizer for the pointwise convolution kernel.
bias_regularizer	Optional regularizer for the bias vector.

activity_regularizer	Optional regularizer function for the output.
depthwise_constraint	Optional projection function to be applied to the depthwise kernel after being updated by an Optimizer (e.g. used for norm constraints or value constraints for layer weights). The function must take as input the unprojected variable and must return the projected variable (which must have the same shape).
pointwise_constraint	Optional projection function to be applied to the pointwise kernel after being updated by an Optimizer.
bias_constraint	Optional projection function to be applied to the bias after being updated by an Optimizer.
...	For forward/backward compatibility.

**Value**

A 4D tensor representing `activation(separable_conv2d(inputs, kernel) + bias)`.

**Input Shape**

- If `data_format="channels_last"`: A 4D tensor with shape: (batch\_size, height, width, channels)
- If `data_format="channels_first"`: A 4D tensor with shape: (batch\_size, channels, height, width)

**Output Shape**

- If `data_format="channels_last"`: A 4D tensor with shape: (batch\_size, new\_height, new\_width, filters)
- If `data_format="channels_first"`: A 4D tensor with shape: (batch\_size, filters, new\_height, new\_width)

**Example**

```
x <- random_uniform(c(4, 10, 10, 12))
y <- layer_separable_conv_2d(x, 3, c(4, 3), 2, activation='relu')
shape(y)

## shape(4, 4, 4, 3)
```

**See Also**

- [https://keras.io/api/layers/convolution\\_layers/separable\\_convolution2d#separableconv2d-class](https://keras.io/api/layers/convolution_layers/separable_convolution2d#separableconv2d-class)

Other convolutional layers:

```
layer_conv_1d()
layer_conv_1d_transpose()
layer_conv_2d()
layer_conv_2d_transpose()
layer_conv_3d()
layer_conv_3d_transpose()
```

```
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_separable_conv_1d()
```

**Other layers:**

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()
```

```
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
```



```
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_simple_rnn	<i>Fully-connected RNN where the output is to be fed back as the new input.</i>
------------------	---

---

### Description

Fully-connected RNN where the output is to be fed back as the new input.

### Usage

```
layer_simple_rnn(  
    object,  
    units,  
    activation = "tanh",  
    use_bias = TRUE,  
    kernel_initializer = "glorot_uniform",  
    recurrent_initializer = "orthogonal",  
    bias_initializer = "zeros",  
    kernel_regularizer = NULL,  
    recurrent_regularizer = NULL,  
    bias_regularizer = NULL,  
    activity_regularizer = NULL,  
    kernel_constraint = NULL,  
    recurrent_constraint = NULL,  
    bias_constraint = NULL,  
    dropout = 0,  
    recurrent_dropout = 0,
```

```

return_sequences = FALSE,
return_state = FALSE,
go_backwards = FALSE,
stateful = FALSE,
unroll = FALSE,
seed = NULL,
...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
units	Positive integer, dimensionality of the output space.
activation	Activation function to use. Default: hyperbolic tangent (tanh). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
use_bias	Boolean, (default TRUE), whether the layer uses a bias vector.
kernel_initializer	Initializer for the kernel weights matrix, used for the linear transformation of the inputs. Default: "glorot_uniform".
recurrent_initializer	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state. Default: "orthogonal".
bias_initializer	Initializer for the bias vector. Default: "zeros".
kernel_regularizer	Regularizer function applied to the kernel weights matrix. Default: NULL.
recurrent_regularizer	Regularizer function applied to the recurrent_kernel weights matrix. Default: NULL.
bias_regularizer	Regularizer function applied to the bias vector. Default: NULL.
activity_regularizer	Regularizer function applied to the output of the layer (its "activation"). Default: NULL.
kernel_constraint	Constraint function applied to the kernel weights matrix. Default: NULL.
recurrent_constraint	Constraint function applied to the recurrent_kernel weights matrix. Default: NULL.
bias_constraint	Constraint function applied to the bias vector. Default: NULL.
dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs. Default: 0.
recurrent_dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state. Default: 0.

return_sequences	Boolean. Whether to return the last output in the output sequence, or the full sequence. Default: FALSE.
return_state	Boolean. Whether to return the last state in addition to the output. Default: FALSE.
go_backwards	Boolean (default: FALSE). If TRUE, process the input sequence backwards and return the reversed sequence.
stateful	Boolean (default: FALSE). If TRUE, the last state for each sample at index <i>i</i> in a batch will be used as initial state for the sample of index <i>i</i> in the following batch.
unroll	Boolean (default: FALSE). If TRUE, the network will be unrolled, else a symbolic loop will be used. Unrolling can speed-up a RNN, although it tends to be more memory-intensive. Unrolling is only suitable for short sequences.
seed	Initial seed for the random number generator
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Call Arguments

- `sequence`: A 3D tensor, with shape `[batch, timesteps, feature]`.
- `mask`: Binary tensor of shape `[batch, timesteps]` indicating whether a given timestep should be masked. An individual TRUE entry indicates that the corresponding timestep should be utilized, while a FALSE entry indicates that the corresponding timestep should be ignored.
- `training`: Python boolean indicating whether the layer should behave in training mode or in inference mode. This argument is passed to the cell when calling it. This is only relevant if `dropout` or `recurrent_dropout` is used.
- `initial_state`: List of initial state tensors to be passed to the first call of the cell.

### Examples

```
inputs <- random_uniform(c(32, 10, 8))
simple_rnn <- layer_simple_rnn(units = 4)
output <- simple_rnn(inputs) # The output has shape `(32, 4)`.
simple_rnn <- layer_simple_rnn(
  units = 4, return_sequences=TRUE, return_state=TRUE
)
# whole_sequence_output has shape `(32, 10, 4)`.
# final_state has shape `(32, 4)`.
c(whole_sequence_output, final_state) %<-% simple_rnn(inputs)
```

**See Also**

- [https://keras.io/api/layers/recurrent\\_layers/simple\\_rnn#simple\\_rnn-class](https://keras.io/api/layers/recurrent_layers/simple_rnn#simple_rnn-class)

Other simple rnn layers:

`rnn_cell_simple()`

Other rnn layers:

`layer_bidirectional()`

`layer_conv_lstm_1d()`

`layer_conv_lstm_2d()`

`layer_conv_lstm_3d()`

`layer_gru()`

`layer_lstm()`

`layer_rnn()`

`layer_time_distributed()`

`rnn_cell_gru()`

`rnn_cell_lstm()`

`rnn_cell_simple()`

`rnn_cells_stack()`

Other layers:

`Layer()`

`layer_activation()`

`layer_activation_elu()`

`layer_activation_leaky_relu()`

`layer_activation_parametric_relu()`

`layer_activation_relu()`

`layer_activation_softmax()`

`layer_activity_regularization()`

`layer_add()`

`layer_additive_attention()`

`layer_alpha_dropout()`

`layer_attention()`

`layer_average()`

`layer_average_pooling_1d()`

`layer_average_pooling_2d()`

`layer_average_pooling_3d()`

`layer_batch_normalization()`

`layer_bidirectional()`

`layer_category_encoding()`

`layer_center_crop()`

`layer_concatenate()`

`layer_conv_1d()`

`layer_conv_1d_transpose()`

`layer_conv_2d()`

`layer_conv_2d_transpose()`

`layer_conv_3d()`

`layer_conv_3d_transpose()`

```
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()
```

```
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_t fsm()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_spatial\_dropout\_1d

*Spatial 1D version of Dropout.*

---

### **Description**

This layer performs the same function as Dropout, however, it drops entire 1D feature maps instead of individual elements. If adjacent frames within feature maps are strongly correlated (as is normally the case in early convolution layers) then regular dropout will not regularize the activations and will otherwise just result in an effective learning rate decrease. In this case, SpatialDropout1D will help promote independence between feature maps and should be used instead.

**Usage**

```
layer_spatial_dropout_1d(object, rate, seed = NULL, name = NULL, dtype = NULL)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
rate	Float between 0 and 1. Fraction of the input units to drop.
seed	Initial seed for the random number generator
name	String, name for the object
dtype	datatype (e.g., "float32").

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Call Arguments**

- `inputs`: A 3D tensor.
- `training`: Python boolean indicating whether the layer should behave in training mode (applying dropout) or in inference mode (pass-through).

**Input Shape**

3D tensor with shape: (samples, timesteps, channels)

**Output Shape**

Same as input.

**Reference**

- [Tompson et al., 2014](#)

**See Also**

- [https://keras.io/api/layers/regularization\\_layers/spatial\\_dropout1d#spatialdropout1d-class](https://keras.io/api/layers/regularization_layers/spatial_dropout1d#spatialdropout1d-class)

Other spatial dropout regularization layers:

[layer\\_spatial\\_dropout\\_2d\(\)](#)

[layer\\_spatial\\_dropout\\_3d\(\)](#)

Other regularization layers:

[layer\\_activity\\_regularization\(\)](#)

```
layer_alpha_dropout()  
layer_dropout()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()
```



```
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()
```

```
layer_simple_rnn()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_spatial\_dropout\_2d

*Spatial 2D version of Dropout.*

---

### Description

This version performs the same function as Dropout, however, it drops entire 2D feature maps instead of individual elements. If adjacent pixels within feature maps are strongly correlated (as is normally the case in early convolution layers) then regular dropout will not regularize the activations and will otherwise just result in an effective learning rate decrease. In this case, SpatialDropout2D will help promote independence between feature maps and should be used instead.

### Usage

```
layer_spatial_dropout_2d(  
    object,  
    rate,  
    data_format = NULL,  
    seed = NULL,  
    name = NULL,  
    dtype = NULL  
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
rate	Float between 0 and 1. Fraction of the input units to drop.
data_format	"channels_first" or "channels_last". In "channels_first" mode, the channels dimension (the depth) is at index 1, in "channels_last" mode is it at index 3. It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
seed	Initial seed for the random number generator
name	String, name for the object
dtype	datatype (e.g., "float32").

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Call Arguments

- `inputs`: A 4D tensor.
- `training`: Python boolean indicating whether the layer should behave in training mode (applying dropout) or in inference mode (pass-through).

### Input Shape

4D tensor with shape: (samples, channels, rows, cols) if `data_format='channels_first'` or 4D tensor with shape: (samples, rows, cols, channels) if `data_format='channels_last'`.

### Output Shape

Same as input.

### Reference

- [Tompson et al., 2014](#)

### See Also

- [https://keras.io/api/layers/regularization\\_layers/spatial\\_dropout2d#spatialdropout2d-class](https://keras.io/api/layers/regularization_layers/spatial_dropout2d#spatialdropout2d-class)

Other spatial dropout regularization layers:

[layer\\_spatial\\_dropout\\_1d\(\)](#)  
[layer\\_spatial\\_dropout\\_3d\(\)](#)

Other regularization layers:

```
layer_activity_regularization()  
layer_alpha_dropout()  
layer_dropout()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()
```

```
layer_dropout()
layer_einsum_dense()
layer_embedding()
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
```

```
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_spatial\_dropout\_3d

*Spatial 3D version of Dropout.*

---

### Description

This version performs the same function as Dropout, however, it drops entire 3D feature maps instead of individual elements. If adjacent voxels within feature maps are strongly correlated (as is normally the case in early convolution layers) then regular dropout will not regularize the activations and will otherwise just result in an effective learning rate decrease. In this case, SpatialDropout3D will help promote independence between feature maps and should be used instead.

### Usage

```
layer_spatial_dropout_3d(  
    object,  
    rate,  
    data_format = NULL,  
    seed = NULL,  
    name = NULL,  
    dtype = NULL  
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
rate	Float between 0 and 1. Fraction of the input units to drop.
data_format	"channels_first" or "channels_last". In "channels_first" mode, the channels dimension (the depth) is at index 1, in "channels_last" mode is it at index 4. It defaults to the image_data_format value found in your Keras config file at ~/.keras/keras.json. If you never set it, then it will be "channels_last".
seed	Initial seed for the random number generator
name	String, name for the object
dtype	datatype (e.g., "float32").

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Call Arguments

- `inputs`: A 5D tensor.
- `training`: Python boolean indicating whether the layer should behave in training mode (applying dropout) or in inference mode (pass-through).

### Input Shape

5D tensor with shape: (samples, channels, dim1, dim2, dim3) if `data_format='channels_first'` or 5D tensor with shape: (samples, dim1, dim2, dim3, channels) if `data_format='channels_last'`.

### Output Shape

Same as input.

### Reference

- [Tompson et al., 2014](#)

### See Also

- [https://keras.io/api/layers/regularization\\_layers/spatial\\_dropout3d#spatialdropout3d-class](https://keras.io/api/layers/regularization_layers/spatial_dropout3d#spatialdropout3d-class)

Other spatial dropout regularization layers:

[layer\\_spatial\\_dropout\\_1d\(\)](#)  
[layer\\_spatial\\_dropout\\_2d\(\)](#)

Other regularization layers:

```
layer_activity_regularization()  
layer_alpha_dropout()  
layer_dropout()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()
```



```
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()
```

```

layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_t fsm()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_spectral\_normalization

*Performs spectral normalization on the weights of a target layer.*

---

### Description

This wrapper controls the Lipschitz constant of the weights of a layer by constraining their spectral norm, which can stabilize the training of GANs.

### Usage

```
layer_spectral_normalization(object, layer, power_iterations = 1L, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
layer	A Layer instance that has either a kernel (e.g. layer_conv_2d, layer_dense...) or an embeddings attribute (layer_embedding layer).
power_iterations	int, the number of iterations during normalization.
...	Base wrapper keyword arguments.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Examples**

Wrap `layer_conv_2d`:

```
x <- random_uniform(c(1, 10, 10, 1))
conv2d <- layer_spectral_normalization(
  layer = layer_conv_2d(filters = 2, kernel_size = 2)
)
y <- conv2d(x)
shape(y)

## shape(1, 9, 9, 2)
```

Wrap `layer_dense`:

```
x <- random_uniform(c(1, 10, 10, 1))
dense <- layer_spectral_normalization(layer = layer_dense(units = 10))
y <- dense(x)
shape(y)

## shape(1, 10, 10, 10)
```

**Reference**

- [Spectral Normalization for GAN](#).

**See Also**

Other normalization layers:

```
layer_batch_normalization()
layer_group_normalization()
layer_layer_normalization()
layer_unit_normalization()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
```

```
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()
```

```
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()
```

```
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_string\_lookup    *A preprocessing layer that maps strings to (possibly encoded) indices.*

---

## Description

This layer translates a set of arbitrary strings into integer output via a table-based vocabulary lookup. This layer will perform no splitting or transformation of input strings. For a layer that can split and tokenize natural language, see the `layer_text_vectorization` layer.

The vocabulary for the layer must be either supplied on construction or learned via `adapt()`. During `adapt()`, the layer will analyze a data set, determine the frequency of individual strings tokens, and create a vocabulary from them. If the vocabulary is capped in size, the most frequent tokens will be used to create the vocabulary and all others will be treated as out-of-vocabulary (OOV).

There are two possible output modes for the layer. When `output_mode` is "int", input strings are converted to their index in the vocabulary (an integer). When `output_mode` is "multi\_hot", "count", or "tf\_idf", input strings are encoded into an array where each dimension corresponds to an element in the vocabulary.

The vocabulary can optionally contain a mask token as well as an OOV token (which can optionally occupy multiple indices in the vocabulary, as set by `num_oov_indices`). The position of these tokens in the vocabulary is fixed. When `output_mode` is "int", the vocabulary will begin with the mask token (if set), followed by OOV indices, followed by the rest of the vocabulary. When `output_mode` is "multi\_hot", "count", or "tf\_idf" the vocabulary will begin with OOV indices and instances of the mask token will be dropped.

**Note:** This layer uses TensorFlow internally. It cannot be used as part of the compiled computation graph of a model with any backend other than TensorFlow. It can however be used with any backend when running eagerly. It can also always be used as part of an input preprocessing pipeline with any backend (outside the model itself), which is how we recommend to use this layer.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

## Usage

```
layer_string_lookup(  
    object,
```

```

    max_tokens = NULL,
    num_oov_indices = 1L,
    mask_token = NULL,
    oov_token = "[UNK]",
    vocabulary = NULL,
    idf_weights = NULL,
    invert = FALSE,
    output_mode = "int",
    pad_to_max_tokens = FALSE,
    sparse = FALSE,
    encoding = "utf-8",
    name = NULL,
    ...,
    vocabulary_dtype = NULL
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
max_tokens	Maximum size of the vocabulary for this layer. This should only be specified when adapting the vocabulary or when setting <code>pad_to_max_tokens=TRUE</code> . If <code>NULL</code> , there is no cap on the size of the vocabulary. Note that this size includes the OOV and mask tokens. Defaults to <code>NULL</code> .
num_oov_indices	The number of out-of-vocabulary tokens to use. If this value is more than 1, OOV inputs are modulated to determine their OOV value. If this value is 0, OOV inputs will cause an error when calling the layer. Defaults to 1.
mask_token	A token that represents masked inputs. When <code>output_mode</code> is "int", the token is included in vocabulary and mapped to index 0. In other output modes, the token will not appear in the vocabulary and instances of the mask token in the input will be dropped. If set to <code>NULL</code> , no mask term will be added. Defaults to <code>NULL</code> .
oov_token	Only used when <code>invert</code> is <code>TRUE</code> . The token to return for OOV indices. Defaults to "[UNK]".
vocabulary	Optional. Either an array of integers or a string path to a text file. If passing an array, can pass a list, list, 1D NumPy array, or 1D tensor containing the integer vocabulary terms. If passing a file path, the file should contain one line per term in the vocabulary. If this argument is set, there is no need to adapt() the layer.
idf_weights	Only valid when <code>output_mode</code> is "tf_idf". A list, list, 1D NumPy array, or 1D tensor or the same length as the vocabulary, containing the floating point inverse document frequency weights, which will be multiplied by per sample term counts for the final TF-IDF weight. If the vocabulary argument is set, and <code>output_mode</code> is "tf_idf", this argument must be supplied.
invert	Only valid when <code>output_mode</code> is "int". If <code>TRUE</code> , this layer will map indices to vocabulary items instead of mapping vocabulary items to indices. Defaults to <code>FALSE</code> .

output_mode	<p>Specification for the output of the layer. Values can be "int", "one_hot", "multi_hot", "count", or "tf_idf" configuring the layer as follows:</p> <ul style="list-style-type: none"> <li>• "int": Return the vocabulary indices of the input tokens.</li> <li>• "one_hot": Encodes each individual element in the input into an array the same size as the vocabulary, containing a 1 at the element index. If the last dimension is size 1, will encode on that dimension. If the last dimension is not size 1, will append a new dimension for the encoded output.</li> <li>• "multi_hot": Encodes each sample in the input into a single array the same size as the vocabulary, containing a 1 for each vocabulary term present in the sample. Treats the last dimension as the sample dimension, if input shape is (... , sample_length), output shape will be (... , num_tokens).</li> <li>• "count": As "multi_hot", but the int array contains a count of the number of times the token at that index appeared in the sample.</li> <li>• "tf_idf": As "multi_hot", but the TF-IDF algorithm is applied to find the value in each token slot. For "int" output, any shape of input and output is supported. For all other output modes, currently only output up to rank 2 is supported. Defaults to "int".</li> </ul>
pad_to_max_tokens	<p>Only applicable when output_mode is "multi_hot", "count", or "tf_idf". If TRUE, the output will have its feature axis padded to max_tokens even if the number of unique tokens in the vocabulary is less than max_tokens, resulting in a tensor of shape (batch_size, max_tokens) regardless of vocabulary size. Defaults to FALSE.</p>
sparse	<p>Boolean. Only applicable to "multi_hot", "count", and "tf_idf" output modes. Only supported with TensorFlow backend. If TRUE, returns a SparseTensor instead of a dense Tensor. Defaults to FALSE.</p>
encoding	<p>Optional. The text encoding to use to interpret the input strings. Defaults to "utf-8".</p>
name	<p>String, name for the object</p>
...	<p>For forward/backward compatability.</p>
vocabulary_dtype	<p>The dtype of the vocabulary terms, for example "int64" or "int32". Defaults to "int64".</p>

## Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

## Examples

### Creating a lookup layer with a known vocabulary

This example creates a lookup layer with a pre-existing vocabulary.



```

vocab <- c("a", "b", "c", "d")
data <- rbind(c("a", "c", "d"), c("d", "z", "b"))
layer <- layer_string_lookup(vocabulary=vocab)
layer(data)

## tf.Tensor(
## [[1 3 4]
## [4 0 2]], shape=(2, 3), dtype=int64)

```

### Creating a lookup layer with an adapted vocabulary

This example creates a lookup layer and generates the vocabulary by analyzing the dataset.

```

data <- rbind(c("a", "c", "d"), c("d", "z", "b"))
layer <- layer_string_lookup()
layer %>% adapt(data)
get_vocabulary(layer)

## [1] "[UNK]" "d"      "z"      "c"      "b"      "a"

```

Note that the OOV token "[UNK]" has been added to the vocabulary. The remaining tokens are sorted by frequency ("d", which has 2 occurrences, is first) then by inverse sort order.

```

data <- rbind(c("a", "c", "d"), c("d", "z", "b"))
layer <- layer_string_lookup()
layer %>% adapt(data)
layer(data)

## tf.Tensor(
## [[5 3 1]
## [1 2 4]], shape=(2, 3), dtype=int64)

```

### Lookups with multiple OOV indices

This example demonstrates how to use a lookup layer with multiple OOV indices. When a layer is created with more than one OOV index, any OOV values are hashed into the number of OOV buckets, distributing OOV values in a deterministic fashion across the set.

```

vocab <- c("a", "b", "c", "d")
data <- rbind(c("a", "c", "d"), c("m", "z", "b"))
layer <- layer_string_lookup(vocabulary = vocab, num_oov_indices = 2)
layer(data)

## tf.Tensor(
## [[2 4 5]
## [0 1 3]], shape=(2, 3), dtype=int64)

```

Note that the output for OOV value 'm' is 0, while the output for OOV value "z" is 1. The in-vocab terms have their output index increased by 1 from earlier examples (a maps to 2, etc) in order to make space for the extra OOV value.

### One-hot output

Configure the layer with `output_mode='one_hot'`. Note that the first `num_oov_indices` dimensions in the `one_hot` encoding represent OOV values.

```
vocab <- c("a", "b", "c", "d")
data <- c("a", "b", "c", "d", "z")
layer <- layer_string_lookup(vocabulary = vocab, output_mode = 'one_hot')
layer(data)

## tf.Tensor(
## [[0 1 0 0 0]
## [0 0 1 0 0]
## [0 0 0 1 0]
## [0 0 0 0 1]
## [1 0 0 0 0]], shape=(5, 5), dtype=int64)
```

### Multi-hot output

Configure the layer with `output_mode='multi_hot'`. Note that the first `num_oov_indices` dimensions in the `multi_hot` encoding represent OOV values.

```
vocab <- c("a", "b", "c", "d")
data <- rbind(c("a", "c", "d", "d"), c("d", "z", "b", "z"))
layer <- layer_string_lookup(vocabulary = vocab, output_mode = 'multi_hot')
layer(data)

## tf.Tensor(
## [[0 1 0 1 1]
## [1 0 1 0 1]], shape=(2, 5), dtype=int64)
```

### Token count output

Configure the layer with `output_mode='count'`. As with `multi_hot` output, the first `num_oov_indices` dimensions in the output represent OOV values.

```
vocab <- c("a", "b", "c", "d")
data <- rbind(c("a", "c", "d", "d"), c("d", "z", "b", "z"))
layer <- layer_string_lookup(vocabulary = vocab, output_mode = 'count')
layer(data)

## tf.Tensor(
## [[0 1 0 1 2]
## [2 0 1 0 1]], shape=(2, 5), dtype=int64)
```

**TF-IDF output**

Configure the layer with `output_mode="tf_idf"`. As with `multi_hot` output, the first `num_oov_indices` dimensions in the output represent OOV values.

Each token bin will output `token_count * idf_weight`, where the idf weights are the inverse document frequency weights per token. These should be provided along with the vocabulary. Note that the `idf_weight` for OOV values will default to the average of all idf weights passed in.

```
vocab <- c("a", "b", "c", "d")
idf_weights <- c(0.25, 0.75, 0.6, 0.4)
data <- rbind(c("a", "c", "d", "d"), c("d", "z", "b", "z"))
layer <- layer_string_lookup(output_mode = "tf_idf")
layer %>% set_vocabulary(vocab, idf_weights=idf_weights)
layer(data)

## tf.Tensor(
## [[0.  0.25 0.  0.6 0.8 ]
## [1.  0.  0.75 0.  0.4 ]], shape=(2, 5), dtype=float32)
```

To specify the idf weights for oov values, you will need to pass the entire vocabulary including the leading oov token.

```
vocab <- c("[UNK]", "a", "b", "c", "d")
idf_weights <- c(0.9, 0.25, 0.75, 0.6, 0.4)
data <- rbind(c("a", "c", "d", "d"), c("d", "z", "b", "z"))
layer <- layer_string_lookup(output_mode = "tf_idf")
layer %>% set_vocabulary(vocab, idf_weights=idf_weights)
layer(data)

## tf.Tensor(
## [[0.  0.25 0.  0.6 0.8 ]
## [1.8 0.  0.75 0.  0.4 ]], shape=(2, 5), dtype=float32)
```

When adapting the layer in `"tf_idf"` mode, each input sample will be considered a document, and IDF weight per token will be calculated as  $\log(1 + \text{num\_documents} / (1 + \text{token\_document\_count}))$ .

**Inverse lookup**

This example demonstrates how to map indices to strings using this layer. (You can also use `adapt()` with `inverse=TRUE`, but for simplicity we'll pass the vocab in this example.)

```
vocab <- c("a", "b", "c", "d")
data <- rbind(c(1, 3, 4), c(4, 0, 2))
layer <- layer_string_lookup(vocabulary = vocab, invert = TRUE)
layer(data)

## tf.Tensor(
## [[b'a' b'c' b'd']
## [b'd' b'[UNK]' b'b']], shape=(2, 3), dtype=string)
```

Note that the first index correspond to the oov token by default.

### Forward and inverse lookup pairs

This example demonstrates how to use the vocabulary of a standard lookup layer to create an inverse lookup layer.

```
vocab <- c("a", "b", "c", "d")
data <- rbind(c("a", "c", "d"), c("d", "z", "b"))
layer <- layer_string_lookup(vocabulary = vocab)
i_layer <- layer_string_lookup(vocabulary = vocab, invert = TRUE)
int_data <- layer(data)
i_layer(int_data)

## tf.Tensor(
## [[b'a' b'c' b'd']
## [b'd' b'[UNK]' b'b']], shape=(2, 3), dtype=string)
```

In this example, the input value "z" resulted in an output of "[UNK]", since 1000 was not in the vocabulary - it got represented as an OOV, and all OOV values are returned as "[UNK]" in the inverse layer. Also, note that for the inverse to work, you must have already set the forward layer vocabulary either directly or via `adapt()` before calling `get_vocabulary()`.

### See Also

- [https://keras.io/api/layers/preprocessing\\_layers/categorical/string\\_lookup#stringlookup-class](https://keras.io/api/layers/preprocessing_layers/categorical/string_lookup#stringlookup-class)

Other categorical features preprocessing layers:

```
layer_category_encoding()
layer_hashed_crossing()
layer_hashing()
layer_integer_lookup()
```

Other preprocessing layers:

```
layer_category_encoding()
layer_center_crop()
layer_discretization()
layer_feature_space()
layer_hashed_crossing()
layer_hashing()
layer_integer_lookup()
layer_mel_spectrogram()
layer_normalization()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
```

```
layer_random_translation()  
layer_random_zoom()  
layer_rescaling()  
layer_resizing()  
layer_text_vectorization()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()
```

```
layer_feature_space()
layer_flatten()
layer_flax_module_wrapper()
layer_gaussian_dropout()
layer_gaussian_noise()
layer_global_average_pooling_1d()
layer_global_average_pooling_2d()
layer_global_average_pooling_3d()
layer_global_max_pooling_1d()
layer_global_max_pooling_2d()
layer_global_max_pooling_3d()
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
```

```
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer_subtract	<i>Performs elementwise subtraction.</i>
----------------	--

---

### Description

It takes as input a list of tensors of size 2 both of the same shape, and returns a single tensor ( $\text{inputs}[0] - \text{inputs}[1]$ ) of same shape.

### Usage

```
layer_subtract(inputs, ...)
```

### Arguments

inputs	layers to combine
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Examples

```
input_shape <- c(2, 3, 4)
x1 <- random_uniform(input_shape)
x2 <- random_uniform(input_shape)
y <- layer_subtract(list(x1, x2))
```

Usage in a Keras model:

```
input1 <- layer_input(shape = 16)
x1 <- layer_dense(input1, units = 8, activation = 'relu')
input2 <- layer_input(shape = 32)
x2 <- layer_dense(input2, units = 8, activation = 'relu')
subtracted <- layer_subtract(list(x1, x2))
out <- layer_dense(subtracted, units = 4)
model <- keras_model(inputs = list(input1, input2), outputs = out)
```

### See Also

- [https://keras.io/api/layers/merging\\_layers/subtract#subtract-class](https://keras.io/api/layers/merging_layers/subtract#subtract-class)

Other merging layers:

```
layer_add()
layer_average()
layer_concatenate()
layer_dot()
layer_maximum()
layer_minimum()
layer_multiply()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
layer_average_pooling_3d()
layer_batch_normalization()
layer_bidirectional()
layer_category_encoding()
```



```
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()
```

```
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_text\_vectorization

*A preprocessing layer which maps text features to integer sequences.*

---

## Description

This layer has basic options for managing text in a Keras model. It transforms a batch of strings (one example = one string) into either a list of token indices (one example = 1D tensor of integer token indices) or a dense representation (one example = 1D tensor of float values representing data about the example's tokens). This layer is meant to handle natural language inputs. To handle simple string inputs (categorical strings or pre-tokenized strings) see `layer_string_lookup()`.

The vocabulary for the layer must be either supplied on construction or learned via `adapt()`. When this layer is adapted, it will analyze the dataset, determine the frequency of individual string values, and create a vocabulary from them. This vocabulary can have unlimited size or be capped, depending on the configuration options for this layer; if there are more unique values in the input than the maximum vocabulary size, the most frequent terms will be used to create the vocabulary.

The processing of each example contains the following steps:

1. Standardize each example (usually lowercasing + punctuation stripping)
2. Split each example into substrings (usually words)
3. Recombine substrings into tokens (usually ngrams)
4. Index tokens (associate a unique int value with each token)
5. Transform each example using this index, either into a vector of ints or a dense float vector.

Some notes on passing callables to customize splitting and normalization for this layer:

1. Any callable can be passed to this Layer, but if you want to serialize this object you should only pass functions that are registered Keras serializables (see [register\\_keras\\_serializable\(\)](#) for more details).
2. When using a custom callable for `standardize`, the data received by the callable will be exactly as passed to this layer. The callable should return a tensor of the same shape as the input.
3. When using a custom callable for `split`, the data received by the callable will have the 1st dimension squeezed out - instead of `list("string to split", "another string to split")`, the Callable will see `c("string to split", "another string to split")`. The callable should return a `tf.Tensor` of dtype `string` with the first dimension containing the split tokens - in this example, we should see something like `list(c("string", "to", "split"), c("another", "string", "to", "split"))`.

**Note:** This layer uses TensorFlow internally. It cannot be used as part of the compiled computation graph of a model with any backend other than TensorFlow. It can however be used with any backend when running eagerly. It can also always be used as part of an input preprocessing pipeline with any backend (outside the model itself), which is how we recommend to use this layer.

**Note:** This layer is safe to use inside a `tf.data` pipeline (independently of which backend you're using).

## Usage

```
layer_text_vectorization(  
    object,  
    max_tokens = NULL,  
    standardize = "lower_and_strip_punctuation",
```

```

split = "whitespace",
ngrams = NULL,
output_mode = "int",
output_sequence_length = NULL,
pad_to_max_tokens = FALSE,
vocabulary = NULL,
idf_weights = NULL,
sparse = FALSE,
ragged = FALSE,
encoding = "utf-8",
name = NULL,
...
)

get_vocabulary(object, include_special_tokens = TRUE)

set_vocabulary(object, vocabulary, idf_weights = NULL, ...)

```

### Arguments

<code>object</code>	Object to compose the layer with. A tensor, array, or sequential model.
<code>max_tokens</code>	Maximum size of the vocabulary for this layer. This should only be specified when adapting a vocabulary or when setting <code>pad_to_max_tokens=TRUE</code> . Note that this vocabulary contains 1 OOV token, so the effective number of tokens is $(\text{max\_tokens} - 1 - (1 \text{ if } \text{output\_mode} == \text{"int"} \text{ else } 0))$ .
<code>standardize</code>	Optional specification for standardization to apply to the input text. Values can be: <ul style="list-style-type: none"> <li>• <code>NULL</code>: No standardization.</li> <li>• <code>"lower_and_strip_punctuation"</code>: Text will be lowercased and all punctuation removed.</li> <li>• <code>"lower"</code>: Text will be lowercased.</li> <li>• <code>"strip_punctuation"</code>: All punctuation will be removed.</li> <li>• <code>Callable</code>: Inputs will passed to the callable function, which should be standardized and returned.</li> </ul>
<code>split</code>	Optional specification for splitting the input text. Values can be: <ul style="list-style-type: none"> <li>• <code>NULL</code>: No splitting.</li> <li>• <code>"whitespace"</code>: Split on whitespace.</li> <li>• <code>"character"</code>: Split on each unicode character.</li> <li>• <code>Callable</code>: Standardized inputs will passed to the callable function, which should be split and returned.</li> </ul>
<code>ngrams</code>	Optional specification for ngrams to create from the possibly-split input text. Values can be <code>NULL</code> , an integer or list of integers; passing an integer will create ngrams up to that integer, and passing a list of integers will create ngrams for the specified values in the list. Passing <code>NULL</code> means that no ngrams will be created.
<code>output_mode</code>	Optional specification for the output of the layer. Values can be <code>"int"</code> , <code>"multi_hot"</code> , <code>"count"</code> or <code>"tf_idf"</code> , configuring the layer as follows:

- "int": Outputs integer indices, one integer index per split string token. When `output_mode == "int"`, 0 is reserved for masked locations; this reduces the vocab size to `max_tokens - 2` instead of `max_tokens - 1`.
- "multi\_hot": Outputs a single int array per batch, of either `vocab_size` or `max_tokens` size, containing 1s in all elements where the token mapped to that index exists at least once in the batch item.
- "count": Like "multi\_hot", but the int array contains a count of the number of times the token at that index appeared in the batch item.
- "tf\_idf": Like "multi\_hot", but the TF-IDF algorithm is applied to find the value in each token slot. For "int" output, any shape of input and output is supported. For all other output modes, currently only rank 1 inputs (and rank 2 outputs after splitting) are supported.

<code>output_sequence_length</code>	Only valid in INT mode. If set, the output will have its time dimension padded or truncated to exactly <code>output_sequence_length</code> values, resulting in a tensor of shape <code>(batch_size, output_sequence_length)</code> regardless of how many tokens resulted from the splitting step. Defaults to NULL. If <code>ragged</code> is TRUE then <code>output_sequence_length</code> may still truncate the output.
<code>pad_to_max_tokens</code>	Only valid in "multi_hot", "count", and "tf_idf" modes. If TRUE, the output will have its feature axis padded to <code>max_tokens</code> even if the number of unique tokens in the vocabulary is less than <code>max_tokens</code> , resulting in a tensor of shape <code>(batch_size, max_tokens)</code> regardless of vocabulary size. Defaults to FALSE.
<code>vocabulary</code>	Optional. Either an array of strings or a string path to a text file. If passing an array, can pass a list, list, 1D NumPy array, or 1D tensor containing the string vocabulary terms. If passing a file path, the file should contain one line per term in the vocabulary. If this argument is set, there is no need to <code>adapt()</code> the layer.
<code>idf_weights</code>	An R vector, 1D numpy array, or 1D tensor of inverse document frequency weights with equal length to <code>vocabulary</code> . Must be set if <code>output_mode</code> is "tf_idf". Should not be set otherwise.
<code>sparse</code>	Boolean. Only applicable to "multi_hot", "count", and "tf_idf" output modes. Only supported with TensorFlow backend. If TRUE, returns a SparseTensor instead of a dense Tensor. Defaults to FALSE.
<code>ragged</code>	Boolean. Only applicable to "int" output mode. Only supported with TensorFlow backend. If TRUE, returns a RaggedTensor instead of a dense Tensor, where each sequence may have a different length after string splitting. Defaults to FALSE.
<code>encoding</code>	Optional. The text encoding to use to interpret the input strings. Defaults to "utf-8".
<code>name</code>	String, name for the object
<code>...</code>	For forward/backward compatibility.
<code>include_special_tokens</code>	If TRUE, the returned vocabulary will include the padding and OOV tokens, and a term's index in the vocabulary will equal the term's index when calling the layer. If FALSE, the returned vocabulary will not include any padding or OOV tokens.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Examples**

This example instantiates a `TextVectorization` layer that lowercases text, splits on whitespace, strips punctuation, and outputs integer vocab indices.

```
max_tokens <- 5000 # Maximum vocab size.
max_len <- 4 # Sequence length to pad the outputs to.
# Create the layer.
vectorize_layer <- layer_text_vectorization(
  max_tokens = max_tokens,
  output_mode = 'int',
  output_sequence_length = max_len)

# Now that the vocab layer has been created, call `adapt` on the
# list of strings to create the vocabulary.
vectorize_layer %>% adapt(c("foo bar", "bar baz", "baz bada boom"))

# Now, the layer can map strings to integers -- you can use an
# embedding layer to map these integers to learned embeddings.
input_data <- rbind("foo qux bar", "qux baz")
vectorize_layer(input_data)

## tf.Tensor(
## [[4 1 3 0]
## [1 2 0 0]], shape=(2, 4), dtype=int64)
```

This example instantiates a `TextVectorization` layer by passing a list of vocabulary terms to the layer's `initialize()` method.

```
vocab_data <- c("earth", "wind", "and", "fire")
max_len <- 4 # Sequence length to pad the outputs to.
# Create the layer, passing the vocab directly. You can also pass the
# vocabulary arg a path to a file containing one vocabulary word per
# line.
vectorize_layer <- layer_text_vectorization(
  max_tokens = max_tokens,
  output_mode = 'int',
  output_sequence_length = max_len,
  vocabulary = vocab_data)
```

```

# Because we've passed the vocabulary directly, we don't need to adapt
# the layer - the vocabulary is already set. The vocabulary contains the
# padding token ('') and OOV token ('[UNK]')
# as well as the passed tokens.
vectorize_layer %>% get_vocabulary()

## [1] ""      "[UNK]" "earth" "wind"  "and"  "fire"

# ['', '[UNK]', 'earth', 'wind', 'and', 'fire']

```

### See Also

- [https://keras.io/api/layers/preprocessing\\_layers/text/text\\_vectorization#textvectorization-class](https://keras.io/api/layers/preprocessing_layers/text/text_vectorization#textvectorization-class)

Other preprocessing layers:

```

layer_category_encoding()
layer_center_crop()
layer_discretization()
layer_feature_space()
layer_hashed_crossing()
layer_hashing()
layer_integer_lookup()
layer_mel_spectrogram()
layer_normalization()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_rescaling()
layer_resizing()
layer_string_lookup()

```

Other layers:

```

Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()

```

```
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()
```



```
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()
```

```
rnn_cells_stack()
```

---

layer_t fsm	<i>Reload a Keras model/layer that was saved via export_savedmodel().</i>
-------------	---

---

### Description

Reload a Keras model/layer that was saved via `export_savedmodel()`.

### Usage

```
layer_t fsm(
    object,
    filepath,
    call_endpoint = "serve",
    call_training_endpoint = NULL,
    trainable = TRUE,
    name = NULL,
    dtype = NULL
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
filepath	string, the path to the SavedModel.
call_endpoint	Name of the endpoint to use as the <code>call()</code> method of the reloaded layer. If the SavedModel was created via <code>export_savedmodel()</code> , then the default endpoint name is 'serve'. In other cases it may be named 'serving_default'.
call_training_endpoint	see description
trainable	see description
name	String, name for the object
dtype	datatype (e.g., "float32").

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Examples**

```

model <- keras_model_sequential(input_shape = c(784)) |> layer_dense(10)
model |> export_savedmodel("path/to/artifact")

## Saved artifact at 'path/to/artifact'. The following endpoints are available:
##
## * Endpoint 'serve'
## args_0 (POSITIONAL_ONLY): TensorSpec(shape=(None, 784), dtype=tf.float32, name='keras_tensor')
## Output Type:
## TensorSpec(shape=(None, 10), dtype=tf.float32, name=None)
## Captures:
## 134519456779600: TensorSpec(shape=(), dtype=tf.resource, name=None)
## 134519456783648: TensorSpec(shape=(), dtype=tf.resource, name=None)

reloaded_layer <- layer_tfsm(filepath = "path/to/artifact")
input <- random_normal(c(2, 784))
output <- reloaded_layer(input)
stopifnot(all.equal(as.array(output), as.array(model(input))))

```

The reloaded object can be used like a regular Keras layer, and supports training/fine-tuning of its trainable weights. Note that the reloaded object retains none of the internal structure or custom methods of the original object – it’s a brand new layer created around the saved function.

**Limitations:**

- Only call endpoints with a single inputs tensor argument (which may optionally be a named list/list of tensors) are supported. For endpoints with multiple separate input tensor arguments, consider subclassing `layer_tfsm` and implementing a `call()` method with a custom signature.
- If you need training-time behavior to differ from inference-time behavior (i.e. if you need the reloaded object to support a `training=TRUE` argument in `__call__()`), make sure that the training-time call function is saved as a standalone endpoint in the artifact, and provide its name to the `layer_tfsm` via the `call_training_endpoint` argument.

**See Also**

Other layers:

```

Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()

```

```
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()
```

```
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
```

```
rnn_cell_simple()  
rnn_cells_stack()
```

Other saving and loading functions:

```
export_savedmodel.keras.src.models.model.Model()  
load_model()  
load_model_weights()  
register_keras_serializable()  
save_model()  
save_model_config()  
save_model_weights()  
with_custom_object_scope()
```

---

layer\_time\_distributed

*This wrapper allows to apply a layer to every temporal slice of an input.*

---

## Description

Every input should be at least 3D, and the dimension of index one of the first input will be considered to be the temporal dimension.

Consider a batch of 32 video samples, where each sample is a 128x128 RGB image with `channels_last` data format, across 10 timesteps. The batch input shape is (32, 10, 128, 128, 3).

You can then use `TimeDistributed` to apply the same `Conv2D` layer to each of the 10 timesteps, independently:

```
inputs <- keras_input(shape = c(10, 128, 128, 3), batch_size = 32)  
conv_2d_layer <- layer_conv_2d(filters = 64, kernel_size = c(3, 3))  
outputs <- layer_time_distributed(inputs, layer = conv_2d_layer)  
shape(outputs)
```

```
## shape(32, 10, 126, 126, 64)
```

Because `layer_time_distributed` applies the same instance of `layer_conv2d` to each of the timestamps, the same set of weights are used at each timestamp.

## Usage

```
layer_time_distributed(object, layer, ...)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
layer	A Layer instance.
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Call Arguments**

- `inputs`: Input tensor of shape (batch, time, ...) or nested tensors, and each of which has shape (batch, time, ...).
- `training`: Boolean indicating whether the layer should behave in training mode or in inference mode. This argument is passed to the wrapped layer (only if the layer supports this argument).
- `mask`: Binary tensor of shape (samples, timesteps) indicating whether a given timestep should be masked. This argument is passed to the wrapped layer (only if the layer supports this argument).

**See Also**

- [https://keras.io/api/layers/recurrent\\_layers/time\\_distributed#timedistributed-class](https://keras.io/api/layers/recurrent_layers/time_distributed#timedistributed-class)

Other rnn layers:

```
layer_bidirectional()
layer_conv_lstm1d()
layer_conv_lstm2d()
layer_conv_lstm3d()
layer_gru()
layer_lstm()
layer_rnn()
layer_simple_rnn()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
```

```
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()
```



```
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_torch_module_wrapper()  
layer_unit_normalization()
```

```

layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_torch\_module\_wrapper

*Torch module wrapper layer.*

---

### Description

layer\_torch\_module\_wrapper is a wrapper class that can turn any torch.nn.Module into a Keras layer, in particular by making its parameters trackable by Keras.

layer\_torch\_module\_wrapper() is only compatible with the PyTorch backend and cannot be used with the TensorFlow or JAX backends.

### Usage

```
layer_torch_module_wrapper(object, module, name = NULL, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
module	torch.nn.Module instance. If it's a LazyModule instance, then its parameters must be initialized before passing the instance to layer_torch_module_wrapper (e.g. by calling it once).
name	The name of the layer (string).
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

**Example**

Here's an example of how the `layer_torch_module_wrapper()` can be used with vanilla PyTorch modules.

```
# reticulate::py_install(
#   packages = c("torch", "torchvision", "torchaudio"),
#   envname = "r-keras",
#   pip_options = c("--index-url https://download.pytorch.org/whl/cpu")
# )
library(keras3)
use_backend("torch")
torch <- reticulate::import("torch")
nn <- reticulate::import("torch.nn")
nnf <- reticulate::import("torch.nn.functional")

Classifier(keras$Model) \%py_class\% {
  initialize <- function(...) {
    super$initialize(...)

    self$conv1 <- layer_torch_module_wrapper(module = nn$Conv2d(
      in_channels = 1L,
      out_channels = 32L,
      kernel_size = tuple(3L, 3L)
    ))
    self$conv2 <- layer_torch_module_wrapper(module = nn$Conv2d(
      in_channels = 32L,
      out_channels = 64L,
      kernel_size = tuple(3L, 3L)
    ))
    self$pool <- nn$MaxPool2d(kernel_size = tuple(2L, 2L))
    self$flatten <- nn$Flatten()
    self$dropout <- nn$Dropout(p = 0.5)
    self$fc <-
      layer_torch_module_wrapper(module = nn$Linear(1600L, 10L))
  }

  call <- function(inputs) {
    x <- nnf$relu(self$conv1(inputs))
    x <- self$pool(x)
    x <- nnf$relu(self$conv2(x))
    x <- self$pool(x)
    x <- self$flatten(x)
    x <- self$dropout(x)
    x <- self$fc(x)
    nnf$softmax(x, dim = 1L)
  }
}
model <- Classifier()
```

```
model$build(shape(1, 28, 28))
cat("Output shape:", format(shape(model(torch$ones(1L, 1L, 28L, 28L))))))

model |> compile(loss = "sparse_categorical_crossentropy",
                optimizer = "adam",
                metrics = "accuracy")

model |> fit(train_loader, epochs = 5)
```

### See Also

Other wrapping layers:

[layer\\_flax\\_module\\_wrapper\(\)](#)  
[layer\\_jax\\_model\\_wrapper\(\)](#)

Other layers:

[Layer\(\)](#)  
[layer\\_activation\(\)](#)  
[layer\\_activation\\_elu\(\)](#)  
[layer\\_activation\\_leaky\\_relu\(\)](#)  
[layer\\_activation\\_parametric\\_relu\(\)](#)  
[layer\\_activation\\_relu\(\)](#)  
[layer\\_activation\\_softmax\(\)](#)  
[layer\\_activity\\_regularization\(\)](#)  
[layer\\_add\(\)](#)  
[layer\\_additive\\_attention\(\)](#)  
[layer\\_alpha\\_dropout\(\)](#)  
[layer\\_attention\(\)](#)  
[layer\\_average\(\)](#)  
[layer\\_average\\_pooling\\_1d\(\)](#)  
[layer\\_average\\_pooling\\_2d\(\)](#)  
[layer\\_average\\_pooling\\_3d\(\)](#)  
[layer\\_batch\\_normalization\(\)](#)  
[layer\\_bidirectional\(\)](#)  
[layer\\_category\\_encoding\(\)](#)  
[layer\\_center\\_crop\(\)](#)  
[layer\\_concatenate\(\)](#)  
[layer\\_conv\\_1d\(\)](#)  
[layer\\_conv\\_1d\\_transpose\(\)](#)  
[layer\\_conv\\_2d\(\)](#)  
[layer\\_conv\\_2d\\_transpose\(\)](#)  
[layer\\_conv\\_3d\(\)](#)  
[layer\\_conv\\_3d\\_transpose\(\)](#)  
[layer\\_conv\\_lstm\\_1d\(\)](#)  
[layer\\_conv\\_lstm\\_2d\(\)](#)  
[layer\\_conv\\_lstm\\_3d\(\)](#)  
[layer\\_cropping\\_1d\(\)](#)  
[layer\\_cropping\\_2d\(\)](#)

```
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()
```

```
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_unit\_normalization

*Unit normalization layer.*

---

### Description

Normalize a batch of inputs so that each input in the batch has a L2 norm equal to 1 (across the axes specified in axis).

### Usage

```
layer_unit_normalization(object, axis = -1L, ...)
```

### Arguments

object            Object to compose the layer with. A tensor, array, or sequential model.

axis	Integer or list. The axis or axes to normalize across. Typically, this is the features axis or axes. The left-out axes are typically the batch axis or axes. -1 is the last dimension in the input. Defaults to -1.
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Examples**

```
data <- op_reshape(1:6, newshape = c(2, 3))
normalized_data <- layer_unit_normalization(data)
op_sum(normalized_data[1, ]^2)

## tf.Tensor(0.9999999, shape=(), dtype=float32)
```

**See Also**

- [https://keras.io/api/layers/normalization\\_layers/unit\\_normalization#unitnormalization-class](https://keras.io/api/layers/normalization_layers/unit_normalization#unitnormalization-class)

Other normalization layers:

```
layer_batch_normalization()
layer_group_normalization()
layer_layer_normalization()
layer_spectral_normalization()
```

Other layers:

```
Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()
layer_activation_parametric_relu()
layer_activation_relu()
layer_activation_softmax()
layer_activity_regularization()
layer_add()
layer_additive_attention()
layer_alpha_dropout()
layer_attention()
layer_average()
layer_average_pooling_1d()
layer_average_pooling_2d()
```

```
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()
```



```
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_upsampling\_1d    *Upsampling layer for 1D inputs.*

---

### Description

Repeats each temporal step size times along the time axis.

### Usage

```
layer_upsampling_1d(object, size = 2L, ...)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
size	Integer. Upsampling factor.
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

### Example

```
input_shape <- c(2, 2, 3)
x <- seq_len(prod(input_shape)) %>% op_reshape(input_shape)
x

## tf.Tensor(
## [[ [ 1  2  3]
##    [ 4  5  6]]
##
##    [[ 7  8  9]
##     [10 11 12]]], shape=(2, 2, 3), dtype=int32)

y <- layer_upsampling_1d(x, size = 2)
y
```

```
## tf.Tensor(  
## [[ [ 1  2  3]  
##    [ 1  2  3]  
##    [ 4  5  6]  
##    [ 4  5  6]]  
##  
## [[ 7  8  9]  
##    [ 7  8  9]  
##    [10 11 12]  
##    [10 11 12]]], shape=(2, 4, 3), dtype=int32)
```

### Input Shape

3D tensor with shape: (batch\_size, steps, features).

### Output Shape

3D tensor with shape: (batch\_size, upsampled\_steps, features).

### See Also

- [https://keras.io/api/layers/reshaping\\_layers/up\\_sampling1d#upsampling1d-class](https://keras.io/api/layers/reshaping_layers/up_sampling1d#upsampling1d-class)

Other reshaping layers:

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_flatten()  
layer_permute()  
layer_repeat_vector()  
layer_reshape()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()
```

```
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()
```

```
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
```

```
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_upsampling\_2d    *Upsampling layer for 2D inputs.*

---

### Description

The implementation uses interpolative resizing, given the resize method (specified by the interpolation argument). Use interpolation=nearest to repeat the rows and columns of the data.

### Usage

```
layer_upsampling_2d(
    object,
    size = list(2L, 2L),
    data_format = NULL,
    interpolation = "nearest",
    ...
)
```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
size	Int, or list of 2 integers. The upsampling factors for rows and columns.
data_format	A string, one of "channels_last" (default) or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, height, width, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, height, width). When unspecified, uses image_data_format value found in your Keras config file at ~/.keras/keras.json (if exists) else "channels_last". Defaults to "channels_last".
interpolation	A string, one of "bicubic", "bilinear", "lanczos3", "lanczos5", "nearest".
...	For forward/backward compatability.

### Value

The return value depends on the value provided for the first argument. If object is:

- a keras\_model\_sequential(), then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a keras\_input(), then the output tensor from calling layer(input) is returned.
- NULL or missing, then a Layer instance is returned.

**Example**

```

input_shape <- c(2, 2, 1, 3)
x <- op_reshape(seq_len(prod(input_shape)), input_shape)
print(x)

## tf.Tensor(
## [[[[ 1  2  3]]
##      [[ 4  5  6]]]
##      [[ [ 7  8  9]]
##         [10 11 12]]], shape=(2, 2, 1, 3), dtype=int32)

y <- layer_upsampling_2d(x, size = c(1, 2))
print(y)

## tf.Tensor(
## [[[[ 1  2  3]
##      [ 1  2  3]]
##      [[ 4  5  6]
##         [ 4  5  6]]]
##      [[ [ 7  8  9]
##         [ 7  8  9]]
##         [[10 11 12]
##          [10 11 12]]], shape=(2, 2, 2, 3), dtype=int32)

```

**Input Shape**

4D tensor with shape:

- If `data_format` is "channels\_last": (batch\_size, rows, cols, channels)
- If `data_format` is "channels\_first": (batch\_size, channels, rows, cols)

**Output Shape**

4D tensor with shape:

- If `data_format` is "channels\_last": (batch\_size, upsampled\_rows, upsampled\_cols, channels)
- If `data_format` is "channels\_first": (batch\_size, channels, upsampled\_rows, upsampled\_cols)

**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/up\\_sampling2d#upsampling2d-class](https://keras.io/api/layers/reshaping_layers/up_sampling2d#upsampling2d-class)

Other reshaping layers:

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_flatten()  
layer_permute()  
layer_repeat_vector()  
layer_reshape()  
layer_upsampling_1d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()
```



layer\_cropping\_1d()  
layer\_cropping\_2d()  
layer\_cropping\_3d()  
layer\_dense()  
layer\_depthwise\_conv\_1d()  
layer\_depthwise\_conv\_2d()  
layer\_discretization()  
layer\_dot()  
layer\_dropout()  
layer\_einsum\_dense()  
layer\_embedding()  
layer\_feature\_space()  
layer\_flatten()  
layer\_flax\_module\_wrapper()  
layer\_gaussian\_dropout()  
layer\_gaussian\_noise()  
layer\_global\_average\_pooling\_1d()  
layer\_global\_average\_pooling\_2d()  
layer\_global\_average\_pooling\_3d()  
layer\_global\_max\_pooling\_1d()  
layer\_global\_max\_pooling\_2d()  
layer\_global\_max\_pooling\_3d()  
layer\_group\_normalization()  
layer\_group\_query\_attention()  
layer\_gru()  
layer\_hashed\_crossing()  
layer\_hashing()  
layer\_identity()  
layer\_integer\_lookup()  
layer\_jax\_model\_wrapper()  
layer\_lambda()  
layer\_layer\_normalization()  
layer\_lstm()  
layer\_masking()  
layer\_max\_pooling\_1d()  
layer\_max\_pooling\_2d()  
layer\_max\_pooling\_3d()  
layer\_maximum()  
layer\_mel\_spectrogram()  
layer\_minimum()  
layer\_multi\_head\_attention()  
layer\_multiply()  
layer\_normalization()  
layer\_permute()  
layer\_random\_brightness()  
layer\_random\_contrast()  
layer\_random\_crop()  
layer\_random\_flip()

```
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

layer\_upsampling\_3d     *Upsampling layer for 3D inputs.*

---

### Description

Repeats the 1st, 2nd and 3rd dimensions of the data by size[0], size[1] and size[2] respectively.

### Usage

```
layer_upsampling_3d(object, size = list(2L, 2L, 2L), data_format = NULL, ...)
```

### Arguments

object                    Object to compose the layer with. A tensor, array, or sequential model.

size	Int, or list of 3 integers. The upsampling factors for dim1, dim2 and dim3.
data_format	A string, one of "channels_last" (default) or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, spatial_dim1, spatial_dim2, spatial_dim3). When unspecified, uses image_data_format value found in your Keras config file at ~/.keras/keras.json (if exists) else "channels_last". Defaults to "channels_last".
...	For forward/backward compatibility.

### Value

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

### Example

```
input_shape <- c(2, 1, 2, 1, 3)
x <- array(1, dim = input_shape)
y <- layer_upsampling_3d(x, size = c(2, 2, 2))
shape(y)

## shape(2, 2, 4, 2, 3)
```

### Input Shape

5D tensor with shape:

- If `data_format` is "channels\_last": (batch\_size, dim1, dim2, dim3, channels)
- If `data_format` is "channels\_first": (batch\_size, channels, dim1, dim2, dim3)

### Output Shape

5D tensor with shape:

- If `data_format` is "channels\_last": (batch\_size, upsampled\_dim1, upsampled\_dim2, upsampled\_dim3, channels)
- If `data_format` is "channels\_first": (batch\_size, channels, upsampled\_dim1, upsampled\_dim2, upsampled\_dim3)

**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/up\\_sampling3d#upsampling3d-class](https://keras.io/api/layers/reshaping_layers/up_sampling3d#upsampling3d-class)

Other reshaping layers:

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_flatten()  
layer_permute()  
layer_repeat_vector()  
layer_reshape()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()
```

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()
```

```
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_zero\_padding\_1d *Zero-padding layer for 1D input (e.g. temporal sequence).*

---

**Description**

Zero-padding layer for 1D input (e.g. temporal sequence).

**Usage**

```
layer_zero_padding_1d(object, padding = 1L, ...)
```

**Arguments**

object            Object to compose the layer with. A tensor, array, or sequential model.

padding            Int, or list of int (length 2), or named listionary.

- If int: how many zeros to add at the beginning and end of the padding dimension (axis 1).
- If list of 2 ints: how many zeros to add at the beginning and the end of the padding dimension ((left\_pad, right\_pad)).

...                For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a `Layer` instance is returned.

**Example**

```
input_shape <- c(2, 2, 3)
x <- op_reshape(seq_len(prod(input_shape)), input_shape)
x

## tf.Tensor(
## [[ 1  2  3]
##  [ 4  5  6]]
##
## [[ 7  8  9]
##  [10 11 12]]], shape=(2, 2, 3), dtype=int32)

y <- layer_zero_padding_1d(x, padding = 2)
y

## tf.Tensor(
## [[ 0  0  0]
##  [ 0  0  0]
##  [ 1  2  3]
##  [ 4  5  6]
##  [ 0  0  0]
##  [ 0  0  0]]
##
## [[ 0  0  0]
##  [ 0  0  0]
##  [ 7  8  9]
##  [10 11 12]
##  [ 0  0  0]
##  [ 0  0  0]]], shape=(2, 6, 3), dtype=int32)
```

**Input Shape**

3D tensor with shape (batch\_size, axis\_to\_pad, features)

**Output Shape**

3D tensor with shape (batch\_size, padded\_axis, features)

**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/zero\\_padding1d#zeropadding1d-class](https://keras.io/api/layers/reshaping_layers/zero_padding1d#zeropadding1d-class)

Other reshaping layers:

`layer_cropping_1d()`  
`layer_cropping_2d()`  
`layer_cropping_3d()`  
`layer_flatten()`  
`layer_permute()`  
`layer_repeat_vector()`  
`layer_reshape()`  
`layer_upsampling_1d()`  
`layer_upsampling_2d()`  
`layer_upsampling_3d()`  
`layer_zero_padding_2d()`  
`layer_zero_padding_3d()`

Other layers:

`Layer()`  
`layer_activation()`  
`layer_activation_elu()`  
`layer_activation_leaky_relu()`  
`layer_activation_parametric_relu()`  
`layer_activation_relu()`  
`layer_activation_softmax()`  
`layer_activity_regularization()`  
`layer_add()`  
`layer_additive_attention()`  
`layer_alpha_dropout()`  
`layer_attention()`  
`layer_average()`  
`layer_average_pooling_1d()`  
`layer_average_pooling_2d()`  
`layer_average_pooling_3d()`  
`layer_batch_normalization()`  
`layer_bidirectional()`  
`layer_category_encoding()`  
`layer_center_crop()`  
`layer_concatenate()`  
`layer_conv_1d()`  
`layer_conv_1d_transpose()`



```
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()
```

```
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()  
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

---

layer\_zero\_padding\_2d *Zero-padding layer for 2D input (e.g. picture).*

---

### **Description**

This layer can add rows and columns of zeros at the top, bottom, left and right side of an image tensor.

**Usage**

```
layer_zero_padding_2d(object, padding = list(1L, 1L), data_format = NULL, ...)
```

**Arguments**

object	Object to compose the layer with. A tensor, array, or sequential model.
padding	Int, or list of 2 ints, or list of 2 lists of 2 ints. <ul style="list-style-type: none"> <li>• If int: the same symmetric padding is applied to height and width.</li> <li>• If list of 2 ints: interpreted as two different symmetric padding values for height and width: (symmetric_height_pad, symmetric_width_pad).</li> <li>• If list of 2 lists of 2 ints: interpreted as ((top_pad, bottom_pad), (left_pad, right_pad)).</li> </ul>
data_format	A string, one of "channels_last" (default) or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, height, width, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, height, width). When unspecified, uses image_data_format value found in your Keras config file at ~/.keras/keras.json (if exists). Defaults to "channels_last".
...	For forward/backward compatability.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- NULL or missing, then a Layer instance is returned.

**Example**

```
input_shape <- c(1, 1, 2, 2)
x <- op_reshape(seq_len(prod(input_shape)), input_shape)
x

## tf.Tensor(
## [[[[1 2]
##      [3 4]]]], shape=(1, 1, 2, 2), dtype=int32)

y <- layer_zero_padding_2d(x, padding = 1)
y

## tf.Tensor(
## [[[[0 0]
##      [0 0]
##      [0 0]]]]
```

```

##    [[0 0]]
##
##    [[0 0]
##     [1 2]
##     [3 4]
##     [0 0]]
##
##    [[0 0]
##     [0 0]
##     [0 0]
##     [0 0]]], shape=(1, 3, 4, 2), dtype=int32)

```

### Input Shape

4D tensor with shape:

- If data\_format is "channels\_last": (batch\_size, height, width, channels)
- If data\_format is "channels\_first": (batch\_size, channels, height, width)

### Output Shape

4D tensor with shape:

- If data\_format is "channels\_last": (batch\_size, padded\_height, padded\_width, channels)
- If data\_format is "channels\_first": (batch\_size, channels, padded\_height, padded\_width)

### See Also

- [https://keras.io/api/layers/reshaping\\_layers/zero\\_padding2d#zeropadding2d-class](https://keras.io/api/layers/reshaping_layers/zero_padding2d#zeropadding2d-class)

Other reshaping layers:

```

layer_cropping_1d()
layer_cropping_2d()
layer_cropping_3d()
layer_flatten()
layer_permute()
layer_repeat_vector()
layer_reshape()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_3d()

```

Other layers:

```

Layer()
layer_activation()
layer_activation_elu()
layer_activation_leaky_relu()

```

```
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()
```

```
layer_group_normalization()
layer_group_query_attention()
layer_gru()
layer_hashed_crossing()
layer_hashing()
layer_identity()
layer_integer_lookup()
layer_jax_model_wrapper()
layer_lambda()
layer_layer_normalization()
layer_lstm()
layer_masking()
layer_max_pooling_1d()
layer_max_pooling_2d()
layer_max_pooling_3d()
layer_maximum()
layer_mel_spectrogram()
layer_minimum()
layer_multi_head_attention()
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
```

```

layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()

```

---

layer\_zero\_padding\_3d *Zero-padding layer for 3D data (spatial or spatio-temporal).*

---

### Description

Zero-padding layer for 3D data (spatial or spatio-temporal).

### Usage

```

layer_zero_padding_3d(
    object,
    padding = list(list(1L, 1L), list(1L, 1L), list(1L, 1L)),
    data_format = NULL,
    ...
)

```

### Arguments

object	Object to compose the layer with. A tensor, array, or sequential model.
padding	Int, or list of 3 ints, or list of 3 lists of 2 ints. <ul style="list-style-type: none"> <li>• If int: the same symmetric padding is applied to depth, height, and width.</li> <li>• If list of 3 ints: interpreted as three different symmetric padding values for depth, height, and width: (symmetric_dim1_pad, symmetric_dim2_pad, symmetric_dim3_pad).</li> <li>• If list of 3 lists of 2 ints: interpreted as ((left_dim1_pad, right_dim1_pad), (left_dim2_pad, right_dim2_pad), (left_dim3_pad, right_dim3_pad)).</li> </ul>
data_format	A string, one of "channels_last" (default) or "channels_first". The ordering of the dimensions in the inputs. "channels_last" corresponds to inputs with shape (batch_size, spatial_dim1, spatial_dim2, spatial_dim3, channels) while "channels_first" corresponds to inputs with shape (batch_size, channels, spatial_dim1, spatial_dim2, spatial_dim3). When unspecified, uses image_data_format value found in your Keras config file at ~/.keras/keras.json (if exists). Defaults to "channels_last".
...	For forward/backward compatibility.

**Value**

The return value depends on the value provided for the first argument. If object is:

- a `keras_model_sequential()`, then the layer is added to the sequential model (which is modified in place). To enable piping, the sequential model is also returned, invisibly.
- a `keras_input()`, then the output tensor from calling `layer(input)` is returned.
- `NULL` or missing, then a `Layer` instance is returned.

**Example**

```
input_shape <- c(1, 1, 2, 2, 3)
x <- op_reshape(seq_len(prod(input_shape)), input_shape)
x

## tf.Tensor(
## [[[[[ 1 2 3]
##      [ 4 5 6]]
##
##      [[ 7 8 9]
##      [10 11 12]]]])], shape=(1, 1, 2, 2, 3), dtype=int32)

y <- layer_zero_padding_3d(x, padding = 2)
shape(y)

## shape(1, 5, 6, 6, 3)
```

**Input Shape**

5D tensor with shape:

- If `data_format` is "channels\_last": (batch\_size, first\_axis\_to\_pad, second\_axis\_to\_pad, third\_axis\_to\_pad, depth)
- If `data_format` is "channels\_first": (batch\_size, depth, first\_axis\_to\_pad, second\_axis\_to\_pad, third\_axis\_to\_pad)

**Output Shape**

5D tensor with shape:

- If `data_format` is "channels\_last": (batch\_size, first\_padded\_axis, second\_padded\_axis, third\_padded\_axis, depth)
- If `data_format` is "channels\_first": (batch\_size, depth, first\_padded\_axis, second\_padded\_axis, third\_padded\_axis)



**See Also**

- [https://keras.io/api/layers/reshaping\\_layers/zero\\_padding3d#zeropadding3d-class](https://keras.io/api/layers/reshaping_layers/zero_padding3d#zeropadding3d-class)

Other reshaping layers:

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_flatten()  
layer_permute()  
layer_repeat_vector()  
layer_reshape()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()
```

```
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()
```

```
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

LearningRateSchedule *Define a custom LearningRateSchedule class*

---

### Description

Subclass the Keras LearningRateSchedule base class.

You can use a learning rate schedule to modulate how the learning rate of your optimizer changes over time.

Several built-in learning rate schedules are available, such as `learning_rate_schedule_exponential_decay()` or `learning_rate_schedule_piecewise_constant_decay()`:

```
lr_schedule <- learning_rate_schedule_exponential_decay(
  initial_learning_rate = 1e-2,
```

```

    decay_steps = 10000,
    decay_rate = 0.9
  )
optimizer <- optimizer_sgd(learning_rate = lr_schedule)

```

A `LearningRateSchedule()` instance can be passed in as the `learning_rate` argument of any optimizer.

To implement your own schedule object, you should implement the `call` method, which takes a step argument (a scalar integer backend tensor, the current training step count). Note that step is 0-based (i.e., the first step is 0). Like for any other Keras object, you can also optionally make your object serializable by implementing the `get_config()` and `from_config()` methods.

### Usage

```

LearningRateSchedule(
  classname,
  call = NULL,
  initialize = NULL,
  get_config = NULL,
  ...,
  public = list(),
  private = list(),
  inherit = NULL,
  parent_env = parent.frame()
)

```

### Arguments

<code>classname</code>	String, the name of the custom class. (Conventionally, CamelCase).
<code>call</code> , <code>initialize</code> , <code>get_config</code>	Recommended methods to implement. See description and details sections.
<code>...</code> , <code>public</code>	Additional methods or public members of the custom class.
<code>private</code>	Named list of R objects (typically, functions) to include in instance private environments. <code>private</code> methods will have all the same symbols in scope as <code>public</code> methods (See section "Symbols in Scope"). Each instance will have it's own private environment. Any objects in <code>private</code> will be invisible from the Keras framework and the Python runtime.
<code>inherit</code>	What the custom class will subclass. By default, the base keras class.
<code>parent_env</code>	The R environment that all class methods will have as a grandparent.

### Value

A function that returns `LearningRateSchedule` instances, similar to the built-in `learning_rate_schedule_*` family of functions.

**Example**

```

my_custom_learning_rate_schedule <- LearningRateSchedule(
  classname = "MyLRSchedule",

  initialize = function(initial_learning_rate) {
    self$initial_learning_rate <- initial_learning_rate
  },

  call = function(step) {
    # note that `step` is a tensor
    # and call() will be traced via tf_function() or similar.

    str(step) # <KerasVariable shape=(), dtype=int64, path=SGD/iteration>

    # print 'step' every 1000 steps
    op_cond((step %% 1000) == 0,
            \() {tensorflow::tf$print(step); NULL},
            \() {NULL})
    self$initial_learning_rate / (step + 1)
  }
)

optimizer <- optimizer_sgd(
  learning_rate = my_custom_learning_rate_schedule(0.1)
)

# You can also call schedule instances directly
# (e.g., for interactive testing, or if implementing a custom optimizer)
schedule <- my_custom_learning_rate_schedule(0.1)
step <- keras$Variable(initializer = op_ones,
                       shape = shape(),
                       dtype = "int64")

schedule(step)

## <KerasVariable shape=(), dtype=int64, path=variable>

## tf.Tensor(0.0, shape=(), dtype=float64)

```

**Methods available:**

- `get_config()`

**Symbols in scope**

All R function custom methods (public and private) will have the following symbols in scope:

- `self`: The custom class instance.

- `super`: The custom class superclass.
- `private`: An R environment specific to the class instance. Any objects assigned here are invisible to the Keras framework.
- `__class__` and `as.symbol(classname)`: the custom class type object.

### See Also

Other optimizer learning rate schedules:

[learning\\_rate\\_schedule\\_cosine\\_decay\(\)](#)  
[learning\\_rate\\_schedule\\_cosine\\_decay\\_restarts\(\)](#)  
[learning\\_rate\\_schedule\\_exponential\\_decay\(\)](#)  
[learning\\_rate\\_schedule\\_inverse\\_time\\_decay\(\)](#)  
[learning\\_rate\\_schedule\\_piecewise\\_constant\\_decay\(\)](#)  
[learning\\_rate\\_schedule\\_polynomial\\_decay\(\)](#)

---

learning\_rate\_schedule\_cosine\_decay

A LearningRateSchedule *that uses a cosine decay with optional warmup.*

---

### Description

See [Loshchilov & Hutter, ICLR2016](#), SGDR: Stochastic Gradient Descent with Warm Restarts.

For the idea of a linear warmup of our learning rate, see [Goyal et al.](#).

When we begin training a model, we often want an initial increase in our learning rate followed by a decay. If `warmup_target` is an int, this schedule applies a linear increase per optimizer step to our learning rate from `initial_learning_rate` to `warmup_target` for a duration of `warmup_steps`. Afterwards, it applies a cosine decay function taking our learning rate from `warmup_target` to `alpha` for a duration of `decay_steps`. If `warmup_target` is NULL we skip warmup and our decay will take our learning rate from `initial_learning_rate` to `alpha`. It requires a `step` value to compute the learning rate. You can just pass a backend variable that you increment at each training step.

The schedule is a 1-arg callable that produces a warmup followed by a decayed learning rate when passed the current optimizer step. This can be useful for changing the learning rate value across different invocations of optimizer functions.

Our warmup is computed as:

```
warmup_learning_rate <- function(step) {
  completed_fraction <- step / warmup_steps
  total_delta <- target_warmup - initial_learning_rate
  completed_fraction * total_delta
}
```

And our decay is computed as:

```

if (is.null(warmup_target)) {
  initial_decay_lr <- initial_learning_rate
} else {
  initial_decay_lr <- warmup_target
}

decayed_learning_rate <- function(step) {
  step <- min(step, decay_steps)
  cosine_decay <- 0.5 * (1 + cos(pi * step / decay_steps))
  decayed <- (1 - alpha) * cosine_decay + alpha
  initial_decay_lr * decayed
}

```

Example usage without warmup:

```

decay_steps <- 1000
initial_learning_rate <- 0.1
lr_decayed_fn <- learning_rate_schedule_cosine_decay(
  initial_learning_rate, decay_steps)

```

Example usage with warmup:

```

decay_steps <- 1000
initial_learning_rate <- 0
warmup_steps <- 1000
target_learning_rate <- 0.1
lr_warmup_decayed_fn <- learning_rate_schedule_cosine_decay(
  initial_learning_rate, decay_steps, warmup_target = target_learning_rate,
  warmup_steps = warmup_steps
)

```

You can pass this schedule directly into a optimizer as the learning rate. The learning rate schedule is also serializable and deserializable using `keras$optimizers$schedules$serialize` and `keras$optimizers$schedules$deserialize`.

### Usage

```

learning_rate_schedule_cosine_decay(
  initial_learning_rate,
  decay_steps,
  alpha = 0,
  name = "CosineDecay",
  warmup_target = NULL,
  warmup_steps = 0L
)

```

**Arguments**

<code>initial_learning_rate</code>	A float. The initial learning rate.
<code>decay_steps</code>	A int. Number of steps to decay over.
<code>alpha</code>	A float. Minimum learning rate value for decay as a fraction of <code>initial_learning_rate</code> .
<code>name</code>	String. Optional name of the operation. Defaults to "CosineDecay".
<code>warmup_target</code>	A float. The target learning rate for our warmup phase. Will cast to the <code>initial_learning_rate</code> datatype. Setting to NULL will skip warmup and begins decay phase from <code>initial_learning_rate</code> . Otherwise scheduler will warmup from <code>initial_learning_rate</code> to <code>warmup_target</code> .
<code>warmup_steps</code>	A int. Number of steps to warmup over.

**Value**

A 1-arg callable learning rate schedule that takes the current optimizer step and outputs the decayed learning rate, a scalar tensor of the same type as `initial_learning_rate`.

**See Also**

- [https://keras.io/api/optimizers/learning\\_rate\\_schedules/cosine\\_decay#cosinedecay-class](https://keras.io/api/optimizers/learning_rate_schedules/cosine_decay#cosinedecay-class)

Other optimizer learning rate schedules:

`LearningRateSchedule()`  
`learning_rate_schedule_cosine_decay_restarts()`  
`learning_rate_schedule_exponential_decay()`  
`learning_rate_schedule_inverse_time_decay()`  
`learning_rate_schedule_piecewise_constant_decay()`  
`learning_rate_schedule_polynomial_decay()`

---

`learning_rate_schedule_cosine_decay_restarts`

A `LearningRateSchedule` that uses a cosine decay schedule with restarts.

---

**Description**

See [Loshchilov & Hutter, ICLR2016](#), SGDR: Stochastic Gradient Descent with Warm Restarts.

When training a model, it is often useful to lower the learning rate as the training progresses. This schedule applies a cosine decay function with restarts to an optimizer step, given a provided initial learning rate. It requires a step value to compute the decayed learning rate. You can just pass a backend variable that you increment at each training step.

The schedule is a 1-arg callable that produces a decayed learning rate when passed the current optimizer step. This can be useful for changing the learning rate value across different invocations of optimizer functions.

The learning rate multiplier first decays from 1 to `alpha` for `first_decay_steps` steps. Then, a warm restart is performed. Each new warm restart runs for `t_mul` times more steps and with `m_mul` times initial learning rate as the new learning rate.



**Usage**

```
learning_rate_schedule_cosine_decay_restarts(
  initial_learning_rate,
  first_decay_steps,
  t_mul = 2,
  m_mul = 1,
  alpha = 0,
  name = "SGDRDecay"
)
```

**Arguments**

<code>initial_learning_rate</code>	A float. The initial learning rate.
<code>first_decay_steps</code>	An integer. Number of steps to decay over.
<code>t_mul</code>	A float. Used to derive the number of iterations in the i-th period.
<code>m_mul</code>	A float. Used to derive the initial learning rate of the i-th period.
<code>alpha</code>	A float. Minimum learning rate value as a fraction of the <code>initial_learning_rate</code> .
<code>name</code>	String. Optional name of the operation. Defaults to "SGDRDecay".

**Value**

A 1-arg callable learning rate schedule that takes the current optimizer step and outputs the decayed learning rate, a scalar tensor of the same type as `initial_learning_rate`.

**Example**

```
first_decay_steps <- 1000
lr_decayed_fn <- learning_rate_schedule_cosine_decay_restarts(
  0.001,
  first_decay_steps)
```

You can pass this schedule directly into a optimizer as the learning rate. The learning rate schedule is also serializable and deserializable using `keras$optimizers$schedules$serialize` and `keras$optimizers$schedules$deserialize`.

**See Also**

- [https://keras.io/api/optimizers/learning\\_rate\\_schedules/cosine\\_decay\\_restarts#cosinedecayrestarts-class](https://keras.io/api/optimizers/learning_rate_schedules/cosine_decay_restarts#cosinedecayrestarts-class)

Other optimizer learning rate schedules:

```
LearningRateSchedule()
learning_rate_schedule_cosine_decay()
learning_rate_schedule_exponential_decay()
learning_rate_schedule_inverse_time_decay()
learning_rate_schedule_piecwise_constant_decay()
learning_rate_schedule_polynomial_decay()
```

---

```
learning_rate_schedule_exponential_decay
```

A LearningRateSchedule *that uses an exponential decay schedule.*

---

### Description

When training a model, it is often useful to lower the learning rate as the training progresses. This schedule applies an exponential decay function to an optimizer step, given a provided initial learning rate.

The schedule is a 1-arg callable that produces a decayed learning rate when passed the current optimizer step. This can be useful for changing the learning rate value across different invocations of optimizer functions. It is computed as:

```
decayed_learning_rate <- function(step) {
  initial_learning_rate * decay_rate ^ (step / decay_steps)
}
```

If the argument `staircase` is `TRUE`, then `step / decay_steps` is an integer division and the decayed learning rate follows a staircase function.

You can pass this schedule directly into a optimizer as the learning rate.

### Usage

```
learning_rate_schedule_exponential_decay(
  initial_learning_rate,
  decay_steps,
  decay_rate,
  staircase = FALSE,
  name = "ExponentialDecay"
)
```

### Arguments

<code>initial_learning_rate</code>	A float. The initial learning rate.
<code>decay_steps</code>	A integer. Must be positive. See the decay computation above.
<code>decay_rate</code>	A float. The decay rate.
<code>staircase</code>	Boolean. If <code>TRUE</code> decay the learning rate at discrete intervals.
<code>name</code>	String. Optional name of the operation. Defaults to "ExponentialDecay".

### Value

A 1-arg callable learning rate schedule that takes the current optimizer step and outputs the decayed learning rate, a scalar tensor of the same type as `initial_learning_rate`.

## Examples

When fitting a Keras model, decay every 100000 steps with a base of 0.96:

```
initial_learning_rate <- 0.1
lr_schedule <- learning_rate_schedule_exponential_decay(
  initial_learning_rate,
  decay_steps=100000,
  decay_rate=0.96,
  staircase=TRUE)

model %>% compile(
  optimizer = optimizer_sgd(learning_rate = lr_schedule),
  loss = 'sparse_categorical_crossentropy',
  metrics = c('accuracy'))

model %>% fit(data, labels, epochs=5)
```

The learning rate schedule is also serializable and deserializable using `keras$optimizers$schedules$serialize` and `keras$optimizers$schedules$deserialize`.

## See Also

- [https://keras.io/api/optimizers/learning\\_rate\\_schedules/exponential\\_decay#exponentialdecay-class](https://keras.io/api/optimizers/learning_rate_schedules/exponential_decay#exponentialdecay-class)

Other optimizer learning rate schedules:

```
LearningRateSchedule()
learning_rate_schedule_cosine_decay()
learning_rate_schedule_cosine_decay_restarts()
learning_rate_schedule_inverse_time_decay()
learning_rate_schedule_piecewise_constant_decay()
learning_rate_schedule_polynomial_decay()
```

---

learning\_rate\_schedule\_inverse\_time\_decay

A `LearningRateSchedule` that uses an inverse time decay schedule.

---

## Description

When training a model, it is often useful to lower the learning rate as the training progresses. This schedule applies the inverse decay function to an optimizer step, given a provided initial learning rate. It requires a step value to compute the decayed learning rate. You can just pass a backend variable that you increment at each training step.

The schedule is a 1-arg callable that produces a decayed learning rate when passed the current optimizer step. This can be useful for changing the learning rate value across different invocations of optimizer functions. It is computed as:

```
decayed_learning_rate <- function(step) {
  initial_learning_rate / (1 + decay_rate * step / decay_step)
}
```

or, if staircase is TRUE, as:

```
decayed_learning_rate <- function(step) {
  initial_learning_rate /
    (1 + decay_rate * floor(step / decay_step))
}
```

You can pass this schedule directly into a `optimizer_*` as the learning rate.

### Usage

```
learning_rate_schedule_inverse_time_decay(
  initial_learning_rate,
  decay_steps,
  decay_rate,
  staircase = FALSE,
  name = "InverseTimeDecay"
)
```

### Arguments

<code>initial_learning_rate</code>	A float. The initial learning rate.
<code>decay_steps</code>	How often to apply decay.
<code>decay_rate</code>	A number. The decay rate.
<code>staircase</code>	Whether to apply decay in a discrete staircase, as opposed to continuous, fashion.
<code>name</code>	String. Optional name of the operation. Defaults to "InverseTimeDecay".

### Value

A 1-arg callable learning rate schedule that takes the current optimizer step and outputs the decayed learning rate, a scalar tensor of the same type as `initial_learning_rate`.

### Examples

Fit a Keras model when decaying  $1/t$  with a rate of 0.5:

```
...
initial_learning_rate <- 0.1
decay_steps <- 1.0
decay_rate <- 0.5
learning_rate_fn <- learning_rate_schedule_inverse_time_decay(
  initial_learning_rate, decay_steps, decay_rate)
```

```

model %>% compile(
  optimizer = optimizer_sgd(learning_rate=learning_rate_fn),
  loss = 'sparse_categorical_crossentropy',
  metrics = 'accuracy')
)

model %>% fit(data, labels, epochs=5)

```

**See Also**

- [https://keras.io/api/optimizers/learning\\_rate\\_schedules/inverse\\_time\\_decay#inversetimedecay-class](https://keras.io/api/optimizers/learning_rate_schedules/inverse_time_decay#inversetimedecay-class)

Other optimizer learning rate schedules:

```

LearningRateSchedule()
learning_rate_schedule_cosine_decay()
learning_rate_schedule_cosine_decay_restarts()
learning_rate_schedule_exponential_decay()
learning_rate_schedule_piecewise_constant_decay()
learning_rate_schedule_polynomial_decay()

```

---

learning\_rate\_schedule\_piecewise\_constant\_decay

A LearningRateSchedule *that uses a piecewise constant decay schedule.*

---

**Description**

The function returns a 1-arg callable to compute the piecewise constant when passed the current optimizer step. This can be useful for changing the learning rate value across different invocations of optimizer functions.

**Usage**

```

learning_rate_schedule_piecewise_constant_decay(
  boundaries,
  values,
  name = "PiecewiseConstant"
)

```

**Arguments**

**boundaries** A list of Python numbers with strictly increasing entries, and with all elements having the same type as the optimizer step.

values	A list of Python numbers that specifies the values for the intervals defined by boundaries. It should have one more element than boundaries, and all elements should have the same type.
name	A string. Optional name of the operation. Defaults to "PiecewiseConstant".

**Value**

A 1-arg callable learning rate schedule that takes the current optimizer step and outputs the decayed learning rate, a scalar tensor of the same type as the boundary tensors.

The output of the 1-arg function that takes the step is values[0] when step <= boundaries[0], values[1] when step > boundaries[0] and step <= boundaries[1], ..., and values[-1] when step > boundaries[-1].

**Examples**

use a learning rate that's 1.0 for the first 100001 steps, 0.5 for the next 10000 steps, and 0.1 for any additional steps.

```
step <- 0
boundaries <- c(100000, 110000)
values <- c(1.0, 0.5, 0.1)
learning_rate_fn <- learning_rate_schedule_piecewise_constant_decay(
  boundaries, values)
```

```
# Later, whenever we perform an optimization step, we pass in the step.
learning_rate <- learning_rate_fn(step)
```

You can pass this schedule directly into a optimizer as the learning rate. The learning rate schedule is also serializable and deserializable using `keras$optimizers$schedules$serialize` and `keras$optimizers$schedules$deserialize`.

**Raises**

`ValueError`: if the number of elements in the boundaries and values lists do not match.

**See Also**

- [https://keras.io/api/optimizers/learning\\_rate\\_schedules/piecewise\\_constant\\_decay#piecewiseconstantdecay-class](https://keras.io/api/optimizers/learning_rate_schedules/piecewise_constant_decay#piecewiseconstantdecay-class)

Other optimizer learning rate schedules:

```
LearningRateSchedule()
learning_rate_schedule_cosine_decay()
learning_rate_schedule_cosine_decay_restarts()
learning_rate_schedule_exponential_decay()
learning_rate_schedule_inverse_time_decay()
learning_rate_schedule_polynomial_decay()
```

---

```
learning_rate_schedule_polynomial_decay
```

A LearningRateSchedule *that uses a polynomial decay schedule.*

---

### Description

It is commonly observed that a monotonically decreasing learning rate, whose degree of change is carefully chosen, results in a better performing model. This schedule applies a polynomial decay function to an optimizer step, given a provided `initial_learning_rate`, to reach an `end_learning_rate` in the given `decay_steps`.

It requires a step value to compute the decayed learning rate. You can just pass a backend variable that you increment at each training step.

The schedule is a 1-arg callable that produces a decayed learning rate when passed the current optimizer step. This can be useful for changing the learning rate value across different invocations of optimizer functions. It is computed as:

```
decayed_learning_rate <- function(step) {
  step = min(step, decay_steps)
  ((initial_learning_rate - end_learning_rate) *
   (1 - step / decay_steps) ^ (power)) +
  end_learning_rate
}
```

If `cycle` is `TRUE` then a multiple of `decay_steps` is used, the first one that is bigger than `step`.

```
decayed_learning_rate <- function(step) {
  decay_steps = decay_steps * ceil(step / decay_steps)
  ((initial_learning_rate - end_learning_rate) *
   (1 - step / decay_steps) ^ (power)) +
  end_learning_rate
}
```

You can pass this schedule directly into a `Optimizer` as the learning rate.

### Usage

```
learning_rate_schedule_polynomial_decay(
  initial_learning_rate,
  decay_steps,
  end_learning_rate = 1e-04,
  power = 1,
  cycle = FALSE,
  name = "PolynomialDecay"
)
```

**Arguments**

initial_learning_rate	A float. The initial learning rate.
decay_steps	A integer. Must be positive. See the decay computation above.
end_learning_rate	A float. The minimal end learning rate.
power	A float. The power of the polynomial. Defaults to 1.0.
cycle	A boolean, whether it should cycle beyond decay_steps.
name	String. Optional name of the operation. Defaults to "PolynomialDecay".

**Value**

A 1-arg callable learning rate schedule that takes the current optimizer step and outputs the decayed learning rate, a scalar tensor of the same type as initial\_learning\_rate.

**Examples**

Fit a model while decaying from 0.1 to 0.01 in 10000 steps using sqrt (i.e. power=0.5):

```
...
starter_learning_rate <- 0.1
end_learning_rate <- 0.01
decay_steps <- 10000
learning_rate_fn <- learning_rate_schedule_polynomial_decay(
  starter_learning_rate,
  decay_steps,
  end_learning_rate,
  power=0.5)

model %>% compile(
  optimizer = optimizer_sgd(learning_rate=learning_rate_fn),
  loss = 'sparse_categorical_crossentropy',
  metrics = 'accuracy'
)

model %>% fit(data, labels, epochs=5)
```

The learning rate schedule is also serializable and deserializable using `keras$optimizers$schedules$serialize` and `keras$optimizers$schedules$deserialize`.

**See Also**

- [https://keras.io/api/optimizers/learning\\_rate\\_schedules/polynomial\\_decay#polynomialdecay-class](https://keras.io/api/optimizers/learning_rate_schedules/polynomial_decay#polynomialdecay-class)

Other optimizer learning rate schedules:

```
LearningRateSchedule()
learning_rate_schedule_cosine_decay()
learning_rate_schedule_cosine_decay_restarts()
```



```

learning_rate_schedule_exponential_decay()
learning_rate_schedule_inverse_time_decay()
learning_rate_schedule_piecewise_constant_decay()

```

---

load_model	<i>Loads a model saved via save_model().</i>
------------	--

---

### Description

Loads a model saved via save\_model().

### Usage

```
load_model(model, custom_objects = NULL, compile = TRUE, safe_mode = TRUE)
```

### Arguments

model	string, path to the saved model file, or a raw vector, as returned by save_model(filepath = NULL)
custom_objects	Optional named list mapping names to custom classes or functions to be considered during deserialization.
compile	Boolean, whether to compile the model after loading.
safe_mode	Boolean, whether to disallow unsafe lambda deserialization. When safe_mode=FALSE, loading an object has the potential to trigger arbitrary code execution. This argument is only applicable to the Keras v3 model format. Defaults to TRUE.

### Value

A Keras model instance. If the original model was compiled, and the argument compile = TRUE is set, then the returned model will be compiled. Otherwise, the model will be left uncompiled.

### Examples

```

model <- keras_model_sequential(input_shape = c(3)) |>
  layer_dense(5) |>
  layer_activation_softmax()

model |> save_model("model.keras")
loaded_model <- load_model("model.keras")

x <- random_uniform(c(10, 3))
stopifnot(all.equal(
  model |> predict(x),
  loaded_model |> predict(x)
))

```

Note that the model variables may have different name values (var\$name property, e.g. "dense\_1/kernel:0") after being reloaded. It is recommended that you use layer attributes to access specific variables, e.g. `model |> get_layer("dense_1") |> _$kernel`.

### See Also

- [https://keras.io/api/models/model\\_saving\\_apis/model\\_saving\\_and\\_loading#loadmodel-function](https://keras.io/api/models/model_saving_apis/model_saving_and_loading#loadmodel-function)

Other saving and loading functions:

```
export_savedmodel.keras.src.models.model.Model()
layer_tfsn()
load_model_weights()
register_keras_serializable()
save_model()
save_model_config()
save_model_weights()
with_custom_object_scope()
```

---

`load_model_weights`      *Load weights from a file saved via `save_model_weights()`.*

---

### Description

Weights are loaded based on the network's topology. This means the architecture should be the same as when the weights were saved. Note that layers that don't have weights are not taken into account in the topological ordering, so adding or removing layers is fine as long as they don't have weights.

#### Partial weight loading

If you have modified your model, for instance by adding a new layer (with weights) or by changing the shape of the weights of a layer, you can choose to ignore errors and continue loading by setting `skip_mismatch=TRUE`. In this case any layer with mismatching weights will be skipped. A warning will be displayed for each skipped layer.

### Usage

```
load_model_weights(model, filepath, skip_mismatch = FALSE, ...)
```

### Arguments

<code>model</code>	A keras model.
<code>filepath</code>	String, path to the weights file to load. It can either be a <code>.weights.h5</code> file or a legacy <code>.h5</code> weights file.
<code>skip_mismatch</code>	Boolean, whether to skip loading of layers where there is a mismatch in the number of weights, or a mismatch in the shape of the weights.
<code>...</code>	For forward/backward compatability.

**Value**

This is called primarily for side effects. `model` is returned, invisibly, to enable usage with the pipe.

**See Also**

- [https://keras.io/api/models/model\\_saving\\_apis/weights\\_saving\\_and\\_loading#loadweights-method](https://keras.io/api/models/model_saving_apis/weights_saving_and_loading#loadweights-method)

Other saving and loading functions:

```
export_savedmodel.keras.src.models.model.Model()
layer_tfsn()
load_model()
register_keras_serializable()
save_model()
save_model_config()
save_model_weights()
with_custom_object_scope()
```

---

Loss

*Subclass the base Loss class*

---

**Description**

Use this to define a custom loss class. Note, in most cases you do not need to subclass `Loss` to define a custom loss: you can also pass a bare R function, or a named R function defined with `custom_metric()`, as a loss function to `compile()`.

**Usage**

```
Loss(
  classname,
  call = NULL,
  ...,
  public = list(),
  private = list(),
  inherit = NULL,
  parent_env = parent.frame()
)
```

**Arguments**

<code>classname</code>	String, the name of the custom class. (Conventionally, CamelCase).
<code>call</code>	<code>function(y_true, y_pred)</code> Method to be implemented by subclasses: Function that contains the logic for loss calculation using <code>y_true</code> , <code>y_pred</code> .
<code>..., public</code>	Additional methods or public members of the custom class.

private	Named list of R objects (typically, functions) to include in instance private environments. private methods will have all the same symbols in scope as public methods (See section "Symbols in Scope"). Each instance will have it's own private environment. Any objects in private will be invisible from the Keras framework and the Python runtime.
inherit	What the custom class will subclass. By default, the base keras class.
parent_env	The R environment that all class methods will have as a grandparent.

## Details

Example subclass implementation:

```

loss_custom_mse <- Loss(
  classname = "CustomMeanSquaredError",
  call = function(y_true, y_pred) {
    op_mean(op_square(y_pred - y_true), axis = -1)
  }
)

# Usage in compile()
model <- keras_model_sequential(input_shape = 10) |> layer_dense(10)
model |> compile(loss = loss_custom_mse())

# Standalone usage
mse <- loss_custom_mse(name = "my_custom_mse_instance")

y_true <- op_arange(20) |> op_reshape(c(4, 5))
y_pred <- op_arange(20) |> op_reshape(c(4, 5)) * 2
(loss <- mse(y_true, y_pred))

## tf.Tensor(123.5, shape=(), dtype=float32)

loss2 <- (y_pred - y_true)^2 |>
  op_mean(axis = -1) |>
  op_mean()

stopifnot(all.equal(as.array(loss), as.array(loss2)))

sample_weight <- array(c(.25, .25, 1, 1))
(weighted_loss <- mse(y_true, y_pred, sample_weight = sample_weight))

## tf.Tensor(112.8125, shape=(), dtype=float32)

weighted_loss2 <- (y_true - y_pred)^2 |>
  op_mean(axis = -1) |>
  op_multiply(sample_weight) |>

```

```

op_mean()

stopifnot(all.equal(as.array(weighted_loss),
                    as.array(weighted_loss2)))

```

### Value

A function that returns Loss instances, similar to the builtin loss functions.

### Methods defined by base Loss class:

- `initialize(name=NULL, reduction="sum_over_batch_size", dtype=NULL)`  
 Args:
  - name
  - reduction: Valid values are one of {"sum\_over\_batch\_size", "sum", NULL, "none"}
  - dtype
- `__call__(y_true, y_pred, sample_weight=NULL)`  
 Call the loss instance as a function, optionally with `sample_weight`.
- `get_config()`

### Symbols in scope

All R function custom methods (public and private) will have the following symbols in scope:

- `self`: The custom class instance.
- `super`: The custom class superclass.
- `private`: An R environment specific to the class instance. Any objects assigned here are invisible to the Keras framework.
- `__class__` and `as.symbol(classname)`: the custom class type object.

### See Also

Other losses:

```

loss\_binary\_crossentropy\(\)
loss\_binary\_focal\_crossentropy\(\)
loss\_categorical\_crossentropy\(\)
loss\_categorical\_focal\_crossentropy\(\)
loss\_categorical\_hinge\(\)
loss\_cosine\_similarity\(\)
loss\_ctc\(\)
loss\_dice\(\)
loss\_hinge\(\)
loss\_huber\(\)
loss\_kl\_divergence\(\)
loss\_log\_cosh\(\)
loss\_mean\_absolute\_error\(\)
loss\_mean\_absolute\_percentage\_error\(\)

```

```
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

---

loss\_binary\_crossentropy

*Computes the cross-entropy loss between true labels and predicted labels.*

---

### Description

Use this cross-entropy loss for binary (0 or 1) classification applications. The loss function requires the following inputs:

- `y_true` (true label): This is either 0 or 1.
- `y_pred` (predicted value): This is the model's prediction, i.e, a single floating-point value which either represents a **logit**, (i.e, value in  $[-\infty, \infty]$  when `from_logits=TRUE`) or a probability (i.e, value in  $[0., 1.]$  when `from_logits=FALSE`).

### Usage

```
loss_binary_crossentropy(  
  y_true,  
  y_pred,  
  from_logits = FALSE,  
  label_smoothing = 0,  
  axis = -1L,  
)
```

```

    ...,
    reduction = "sum_over_batch_size",
    name = "binary_crossentropy",
    dtype = NULL
  )

```

### Arguments

<code>y_true</code>	Ground truth values. shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values. shape = [batch_size, d0, .. dN].
<code>from_logits</code>	Whether to interpret <code>y_pred</code> as a tensor of <b>logit</b> values. By default, we assume that <code>y_pred</code> is probabilities (i.e., values in [0, 1]).
<code>label_smoothing</code>	Float in range [0, 1]. When 0, no smoothing occurs. When > 0, we compute the loss between the predicted labels and a smoothed version of the true labels, where the smoothing squeezes the labels towards 0.5. Larger values of <code>label_smoothing</code> correspond to heavier smoothing.
<code>axis</code>	The axis along which to compute crossentropy (the features axis). Defaults to -1.
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

### Value

Binary crossentropy loss value. shape = [batch\_size, d0, .. dN-1].

### Examples

```

y_true <- rbind(c(0, 1), c(0, 0))
y_pred <- rbind(c(0.6, 0.4), c(0.4, 0.6))
loss <- loss_binary_crossentropy(y_true, y_pred)
loss

## tf.Tensor([0.91629073 0.71355818], shape=(2), dtype=float64)

```

**Recommended Usage:** (set `from_logits=TRUE`)

With `compile()` API:

```

model %>% compile(
  loss = loss_binary_crossentropy(from_logits=TRUE),
  ...
)

```

As a standalone function:

```
# Example 1: (batch_size = 1, number of samples = 4)
y_true <- op_array(c(0, 1, 0, 0))
y_pred <- op_array(c(-18.6, 0.51, 2.94, -12.8))
bce <- loss_binary_crossentropy(from_logits = TRUE)
bce(y_true, y_pred)

## tf.Tensor(0.865458, shape=(), dtype=float32)

# Example 2: (batch_size = 2, number of samples = 4)
y_true <- rbind(c(0, 1), c(0, 0))
y_pred <- rbind(c(-18.6, 0.51), c(2.94, -12.8))
# Using default 'auto'/'sum_over_batch_size' reduction type.
bce <- loss_binary_crossentropy(from_logits = TRUE)
bce(y_true, y_pred)

## tf.Tensor(0.865458, shape=(), dtype=float32)

# Using 'sample_weight' attribute
bce(y_true, y_pred, sample_weight = c(0.8, 0.2))

## tf.Tensor(0.2436386, shape=(), dtype=float32)

# 0.243
# Using 'sum' reduction` type.
bce <- loss_binary_crossentropy(from_logits = TRUE, reduction = "sum")
bce(y_true, y_pred)

## tf.Tensor(1.730916, shape=(), dtype=float32)

# Using 'none' reduction type.
bce <- loss_binary_crossentropy(from_logits = TRUE, reduction = NULL)
bce(y_true, y_pred)

## tf.Tensor([0.23515666 1.4957594 ], shape=(2), dtype=float32)

Default Usage: (set from_logits=FALSE)

# Make the following updates to the above "Recommended Usage" section
# 1. Set `from_logits=FALSE`
loss_binary_crossentropy() # OR ...('from_logits=FALSE')
```



```
## <keras.src.losses.losses.BinaryCrossentropy object>
## signature: (y_true, y_pred, sample_weight=None)

# 2. Update `y_pred` to use probabilities instead of logits
y_pred <- c(0.6, 0.3, 0.2, 0.8) # OR [[0.6, 0.3], [0.2, 0.8]]
```

### See Also

- [https://keras.io/api/losses/probabilistic\\_losses#binarycrossentropy-class](https://keras.io/api/losses/probabilistic_losses#binarycrossentropy-class)

Other losses:

```
Loss()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

---

loss\_binary\_focal\_crossentropy

*Computes focal cross-entropy loss between true labels and predictions.*

---

### Description

According to [Lin et al., 2018](#), it helps to apply a focal factor to down-weight easy examples and focus more on hard examples. By default, the focal tensor is computed as follows:

focal\_factor = (1 - output)<sup>gamma</sup> for class 1 focal\_factor = output<sup>gamma</sup> for class 0 where gamma is a focusing parameter. When gamma = 0, there is no focal effect on the binary crossentropy loss.

If apply\_class\_balancing == TRUE, this function also takes into account a weight balancing factor for the binary classes 0 and 1 as follows:

weight = alpha for class 1 (target == 1) weight = 1 - alpha for class 0 where alpha is a float in the range of [0, 1].

Binary cross-entropy loss is often used for binary (0 or 1) classification tasks. The loss function requires the following inputs:

- y\_true (true label): This is either 0 or 1.
- y\_pred (predicted value): This is the model's prediction, i.e, a single floating-point value which either represents a **logit**, (i.e, value in [-inf, inf] when from\_logits=TRUE) or a probability (i.e, value in [0., 1.] when from\_logits=FALSE).

According to [Lin et al., 2018](#), it helps to apply a "focal factor" to down-weight easy examples and focus more on hard examples. By default, the focal tensor is computed as follows:

focal\_factor = (1 - output) \*\* gamma for class 1 focal\_factor = output \*\* gamma for class 0 where gamma is a focusing parameter. When gamma=0, this function is equivalent to the binary crossentropy loss.

### Usage

```
loss_binary_focal_crossentropy(
  y_true,
  y_pred,
  apply_class_balancing = FALSE,
  alpha = 0.25,
  gamma = 2,
  from_logits = FALSE,
  label_smoothing = 0,
  axis = -1L,
  ...,
  reduction = "sum_over_batch_size",
  name = "binary_focal_crossentropy",
  dtype = NULL
)
```

**Arguments**

<code>y_true</code>	Ground truth values, of shape $(\text{batch\_size}, d_0, \dots, d_N)$ .
<code>y_pred</code>	The predicted values, of shape $(\text{batch\_size}, d_0, \dots, d_N)$ .
<code>apply_class_balancing</code>	A bool, whether to apply weight balancing on the binary classes 0 and 1.
<code>alpha</code>	A weight balancing factor for class 1, default is 0.25 as mentioned in reference <a href="#">Lin et al., 2018</a> . The weight for class 0 is $1.0 - \text{alpha}$ .
<code>gamma</code>	A focusing parameter used to compute the focal factor, default is 2.0 as mentioned in the reference <a href="#">Lin et al., 2018</a> .
<code>from_logits</code>	Whether to interpret <code>y_pred</code> as a tensor of <b>logit</b> values. By default, we assume that <code>y_pred</code> are probabilities (i.e., values in $[0, 1]$ ).
<code>label_smoothing</code>	Float in $[0, 1]$ . When 0, no smoothing occurs. When $> 0$ , we compute the loss between the predicted labels and a smoothed version of the true labels, where the smoothing squeezes the labels towards 0.5. Larger values of <code>label_smoothing</code> correspond to heavier smoothing.
<code>axis</code>	The axis along which to compute crossentropy (the features axis). Defaults to -1.
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

Binary focal crossentropy loss value with shape  $[\text{batch\_size}, d_0, \dots, d_{N-1}]$ .

**Examples**

```

y_true <- rbind(c(0, 1), c(0, 0))
y_pred <- rbind(c(0.6, 0.4), c(0.4, 0.6))
loss <- loss_binary_focal_crossentropy(y_true, y_pred, gamma = 2)
loss

## tf.Tensor([0.32986466 0.20579838], shape=(2), dtype=float64)

```

With the `compile()` API:

```

model %>% compile(
  loss = loss_binary_focal_crossentropy(
    gamma = 2.0, from_logits = TRUE),
  ...
)

```

As a standalone function:

```
# Example 1: (batch_size = 1, number of samples = 4)
y_true <- op_array(c(0, 1, 0, 0))
y_pred <- op_array(c(-18.6, 0.51, 2.94, -12.8))
loss <- loss_binary_focal_crossentropy(gamma = 2, from_logits = TRUE)
loss(y_true, y_pred)
```

```
## tf.Tensor(0.6912122, shape=(), dtype=float32)
```

```
# Apply class weight
loss <- loss_binary_focal_crossentropy(
  apply_class_balancing = TRUE, gamma = 2, from_logits = TRUE)
loss(y_true, y_pred)
```

```
## tf.Tensor(0.5101333, shape=(), dtype=float32)
```

```
# Example 2: (batch_size = 2, number of samples = 4)
y_true <- rbind(c(0, 1), c(0, 0))
y_pred <- rbind(c(-18.6, 0.51), c(2.94, -12.8))
# Using default 'auto'/'sum_over_batch_size' reduction type.
loss <- loss_binary_focal_crossentropy(
  gamma = 3, from_logits = TRUE)
loss(y_true, y_pred)
```

```
## tf.Tensor(0.6469951, shape=(), dtype=float32)
```

```
# Apply class weight
loss <- loss_binary_focal_crossentropy(
  apply_class_balancing = TRUE, gamma = 3, from_logits = TRUE)
loss(y_true, y_pred)
```

```
## tf.Tensor(0.48214132, shape=(), dtype=float32)
```

```
# Using 'sample_weight' attribute with focal effect
loss <- loss_binary_focal_crossentropy(
  gamma = 3, from_logits = TRUE)
loss(y_true, y_pred, sample_weight = c(0.8, 0.2))
```

```
## tf.Tensor(0.13312504, shape=(), dtype=float32)
```

```
# Apply class weight
loss <- loss_binary_focal_crossentropy(
  apply_class_balancing = TRUE, gamma = 3, from_logits = TRUE)
loss(y_true, y_pred, sample_weight = c(0.8, 0.2))

## tf.Tensor(0.09735977, shape=(), dtype=float32)

# Using 'sum' reduction` type.
loss <- loss_binary_focal_crossentropy(
  gamma = 4, from_logits = TRUE,
  reduction = "sum")
loss(y_true, y_pred)

## tf.Tensor(1.2218808, shape=(), dtype=float32)

# Apply class weight
loss <- loss_binary_focal_crossentropy(
  apply_class_balancing = TRUE, gamma = 4, from_logits = TRUE,
  reduction = "sum")
loss(y_true, y_pred)

## tf.Tensor(0.9140807, shape=(), dtype=float32)

# Using 'none' reduction type.
loss <- loss_binary_focal_crossentropy(
  gamma = 5, from_logits = TRUE,
  reduction = NULL)
loss(y_true, y_pred)

## tf.Tensor([0.00174837 1.1561027 ], shape=(2), dtype=float32)

# Apply class weight
loss <- loss_binary_focal_crossentropy(
  apply_class_balancing = TRUE, gamma = 5, from_logits = TRUE,
  reduction = NULL)
loss(y_true, y_pred)

## tf.Tensor([4.3709317e-04 8.6707699e-01], shape=(2), dtype=float32)
```

**See Also**

Other losses:

`Loss()`  
`loss_binary_crossentropy()`  
`loss_categorical_crossentropy()`  
`loss_categorical_focal_crossentropy()`  
`loss_categorical_hinge()`  
`loss_cosine_similarity()`  
`loss_ctc()`  
`loss_dice()`  
`loss_hinge()`  
`loss_huber()`  
`loss_kl_divergence()`  
`loss_log_cosh()`  
`loss_mean_absolute_error()`  
`loss_mean_absolute_percentage_error()`  
`loss_mean_squared_error()`  
`loss_mean_squared_logarithmic_error()`  
`loss_poisson()`  
`loss_sparse_categorical_crossentropy()`  
`loss_squared_hinge()`  
`loss_tversky()`  
`metric_binary_crossentropy()`  
`metric_binary_focal_crossentropy()`  
`metric_categorical_crossentropy()`  
`metric_categorical_focal_crossentropy()`  
`metric_categorical_hinge()`  
`metric_hinge()`  
`metric_huber()`  
`metric_kl_divergence()`  
`metric_log_cosh()`  
`metric_mean_absolute_error()`  
`metric_mean_absolute_percentage_error()`  
`metric_mean_squared_error()`  
`metric_mean_squared_logarithmic_error()`  
`metric_poisson()`  
`metric_sparse_categorical_crossentropy()`  
`metric_squared_hinge()`

---

loss\_categorical\_crossentropy

*Computes the crossentropy loss between the labels and predictions.*

---

**Description**

Use this crossentropy loss function when there are two or more label classes. We expect labels to be provided in a one\_hot representation. If you want to provide labels as integers, please use SparseCategoricalCrossentropy loss. There should be num\_classes floating point values per feature, i.e., the shape of both y\_pred and y\_true are [batch\_size, num\_classes].

**Usage**

```
loss_categorical_crossentropy(
    y_true,
    y_pred,
    from_logits = FALSE,
    label_smoothing = 0,
    axis = -1L,
    ...,
    reduction = "sum_over_batch_size",
    name = "categorical_crossentropy",
    dtype = NULL
)
```

**Arguments**

y_true	Tensor of one-hot true targets.
y_pred	Tensor of predicted targets.
from_logits	Whether y_pred is expected to be a logits tensor. By default, we assume that y_pred encodes a probability distribution.
label_smoothing	Float in $[0, 1]$ . When $> 0$ , label values are smoothed, meaning the confidence on label values are relaxed. For example, if $0.1$ , use $0.1 / \text{num\_classes}$ for non-target labels and $0.9 + 0.1 / \text{num\_classes}$ for target labels.
axis	The axis along which to compute crossentropy (the features axis). Defaults to $-1$ .
...	For forward/backward compatibility.
reduction	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
name	Optional name for the loss instance.
dtype	The dtype of the loss's computations. Defaults to NULL, which means using config_floatx(). config_floatx() is a "float32" unless set to different value (via config_set_floatx()).

**Value**

Categorical crossentropy loss value.

**Examples**

```

y_true <- rbind(c(0, 1, 0), c(0, 0, 1))
y_pred <- rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1))
loss <- loss_categorical_crossentropy(y_true, y_pred)
loss

## tf.Tensor([0.05129329 2.30258509], shape=(2), dtype=float64)

```

**Standalone usage:**

```

y_true <- rbind(c(0, 1, 0), c(0, 0, 1))
y_pred <- rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1))
# Using 'auto'/'sum_over_batch_size' reduction type.
cce <- loss_categorical_crossentropy()
cce(y_true, y_pred)

## tf.Tensor(1.1769392, shape=(), dtype=float32)

# Calling with 'sample_weight'.
cce(y_true, y_pred, sample_weight = op_array(c(0.3, 0.7)))

## tf.Tensor(0.8135988, shape=(), dtype=float32)

# Using 'sum' reduction type.
cce <- loss_categorical_crossentropy(reduction = "sum")
cce(y_true, y_pred)

## tf.Tensor(2.3538785, shape=(), dtype=float32)

# Using 'none' reduction type.
cce <- loss_categorical_crossentropy(reduction = NULL)
cce(y_true, y_pred)

## tf.Tensor([0.05129331 2.3025851 ], shape=(2), dtype=float32)

```

**Usage with the compile() API:**

```

model %>% compile(optimizer = 'sgd',
                 loss=loss_categorical_crossentropy())

```



**See Also**

- [https://keras.io/api/losses/probabilistic\\_losses#categorical\\_crossentropy-class](https://keras.io/api/losses/probabilistic_losses#categorical_crossentropy-class)

Other losses:

Loss()  
loss\_binary\_crossentropy()  
loss\_binary\_focal\_crossentropy()  
loss\_categorical\_focal\_crossentropy()  
loss\_categorical\_hinge()  
loss\_cosine\_similarity()  
loss\_ctc()  
loss\_dice()  
loss\_hinge()  
loss\_huber()  
loss\_kl\_divergence()  
loss\_log\_cosh()  
loss\_mean\_absolute\_error()  
loss\_mean\_absolute\_percentage\_error()  
loss\_mean\_squared\_error()  
loss\_mean\_squared\_logarithmic\_error()  
loss\_poisson()  
loss\_sparse\_categorical\_crossentropy()  
loss\_squared\_hinge()  
loss\_tversky()  
metric\_binary\_crossentropy()  
metric\_binary\_focal\_crossentropy()  
metric\_categorical\_crossentropy()  
metric\_categorical\_focal\_crossentropy()  
metric\_categorical\_hinge()  
metric\_hinge()  
metric\_huber()  
metric\_kl\_divergence()  
metric\_log\_cosh()  
metric\_mean\_absolute\_error()  
metric\_mean\_absolute\_percentage\_error()  
metric\_mean\_squared\_error()  
metric\_mean\_squared\_logarithmic\_error()  
metric\_poisson()  
metric\_sparse\_categorical\_crossentropy()  
metric\_squared\_hinge()

---

loss\_categorical\_focal\_crossentropy

*Computes the alpha balanced focal crossentropy loss.*

---

**Description**

Use this crossentropy loss function when there are two or more label classes and if you want to handle class imbalance without using `class_weights`. We expect labels to be provided in a `one_hot` representation.

According to [Lin et al., 2018](#), it helps to apply a focal factor to down-weight easy examples and focus more on hard examples. The general formula for the focal loss (FL) is as follows:

$$FL(p_t) = (1 - p_t)^\gamma * \log(p_t)$$

where `p_t` is defined as follows: `p_t = output if y_true == 1, else 1 - output`

$(1 - p_t)^\gamma$  is the `modulating_factor`, where `gamma` is a focusing parameter. When `gamma = 0`, there is no focal effect on the cross entropy. `gamma` reduces the importance given to simple examples in a smooth manner.

The authors use alpha-balanced variant of focal loss (FL) in the paper:  $FL(p_t) = -\alpha * (1 - p_t)^\gamma * \log(p_t)$

where `alpha` is the weight factor for the classes. If `alpha = 1`, the loss won't be able to handle class imbalance properly as all classes will have the same weight. This can be a constant or a list of constants. If `alpha` is a list, it must have the same length as the number of classes.

The formula above can be generalized to:  $FL(p_t) = \alpha * (1 - p_t)^\gamma * \text{CrossEntropy}(y\_true, y\_pred)$

where minus comes from `CrossEntropy(y_true, y_pred)` (CE).

Extending this to multi-class case is straightforward:  $FL(p_t) = \alpha * (1 - p_t)^\gamma * \text{CategoricalCE}(y\_true, y\_pred)$

In the snippet below, there is `num_classes` floating pointing values per example. The shape of both `y_pred` and `y_true` are `(batch_size, num_classes)`.

**Usage**

```
loss_categorical_focal_crossentropy(
    y_true,
    y_pred,
    alpha = 0.25,
    gamma = 2,
    from_logits = FALSE,
    label_smoothing = 0,
    axis = -1L,
    ...,
    reduction = "sum_over_batch_size",
    name = "categorical_focal_crossentropy",
    dtype = NULL
)
```

**Arguments**

<code>y_true</code>	Tensor of one-hot true targets.
<code>y_pred</code>	Tensor of predicted targets.

alpha	A weight balancing factor for all classes, default is 0.25 as mentioned in the reference. It can be a list of floats or a scalar. In the multi-class case, alpha may be set by inverse class frequency by using <code>compute_class_weight</code> from <code>sklearn.utils</code> .
gamma	A focusing parameter, default is 2.0 as mentioned in the reference. It helps to gradually reduce the importance given to simple examples in a smooth manner. When <code>gamma = 0</code> , there is no focal effect on the categorical crossentropy.
from_logits	Whether output is expected to be a logits tensor. By default, we consider that output encodes a probability distribution.
label_smoothing	Float in $[0, 1]$ . When $> 0$ , label values are smoothed, meaning the confidence on label values are relaxed. For example, if 0.1, use $0.1 / \text{num\_classes}$ for non-target labels and $0.9 + 0.1 / \text{num\_classes}$ for target labels.
axis	The axis along which to compute crossentropy (the features axis). Defaults to -1.
...	For forward/backward compatibility.
reduction	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
name	Optional name for the loss instance.
dtype	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

Categorical focal crossentropy loss value.

**Examples**

```
y_true <- rbind(c(0, 1, 0), c(0, 0, 1))
y_pred <- rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1))
loss <- loss_categorical_focal_crossentropy(y_true, y_pred)
loss

## tf.Tensor([3.20583090e-05 4.66273481e-01], shape=(2), dtype=float64)
```

Standalone usage:

```
y_true <- rbind(c(0, 1, 0), c(0, 0, 1))
y_pred <- rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1))
# Using 'auto'/'sum_over_batch_size' reduction type.
cce <- loss_categorical_focal_crossentropy()
cce(y_true, y_pred)

## tf.Tensor(0.23315276, shape=(), dtype=float32)
```

```
# Calling with 'sample_weight'.
cce(y_true, y_pred, sample_weight = op_array(c(0.3, 0.7)))

## tf.Tensor(0.16320053, shape=(), dtype=float32)

# Using 'sum' reduction type.
cce <- loss_categorical_focal_crossentropy(reduction = "sum")
cce(y_true, y_pred)

## tf.Tensor(0.46630552, shape=(), dtype=float32)

# Using 'none' reduction type.
cce <- loss_categorical_focal_crossentropy(reduction = NULL)
cce(y_true, y_pred)

## tf.Tensor([3.2058331e-05 4.6627346e-01], shape=(2), dtype=float32)
```

Usage with the `compile()` API:

```
model %>% compile(
  optimizer = 'adam',
  loss = loss_categorical_focal_crossentropy())
```

### See Also

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
```

```

loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()

```

---

loss\_categorical\_hinge

*Computes the categorical hinge loss between y\_true & y\_pred.*

---

### Description

Formula:

$$\text{loss} \leftarrow \text{maximum}(\text{neg} - \text{pos} + 1, 0)$$

where  $\text{neg} = \text{maximum}((1 - y_{\text{true}}) * y_{\text{pred}})$  and  $\text{pos} = \text{sum}(y_{\text{true}} * y_{\text{pred}})$

### Usage

```

loss_categorical_hinge(
  y_true,
  y_pred,
  ...,
  reduction = "sum_over_batch_size",
  name = "categorical_hinge",
  dtype = NULL
)

```

### Arguments

y_true	The ground truth values. y_true values are expected to be either {-1, +1} or {0, 1} (i.e. a one-hot-encoded tensor) with shape <- [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].

...	For forward/backward compatibility.
reduction	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
name	Optional name for the loss instance.
dtype	The dtype of the loss's computations. Defaults to NULL, which means using config_floatx(). config_floatx() is a "float32" unless set to different value (via config_set_floatx()).

**Value**

Categorical hinge loss values with shape = [batch\_size, d0, .. dN-1].

**Examples**

```
y_true <- rbind(c(0, 1), c(0, 0))
y_pred <- rbind(c(0.6, 0.4), c(0.4, 0.6))
loss <- loss_categorical_hinge(y_true, y_pred)
```

**See Also**

- [https://keras.io/api/losses/hinge\\_losses#categoricalhinge-class](https://keras.io/api/losses/hinge_losses#categoricalhinge-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
```

```
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

---

loss\_cosine\_similarity

*Computes the cosine similarity between y\_true & y\_pred.*

---

### Description

Formula:

```
loss <- -sum(l2_norm(y_true) * l2_norm(y_pred))
```

Note that it is a number between -1 and 1. When it is a negative number between -1 and 0, 0 indicates orthogonality and values closer to -1 indicate greater similarity. This makes it usable as a loss function in a setting where you try to maximize the proximity between predictions and targets. If either y\_true or y\_pred is a zero vector, cosine similarity will be 0 regardless of the proximity between predictions and targets.

### Usage

```
loss_cosine_similarity(
  y_true,
  y_pred,
  axis = -1L,
  ...,
  reduction = "sum_over_batch_size",
  name = "cosine_similarity",
  dtype = NULL
)
```

### Arguments

y_true	Tensor of true targets.
y_pred	Tensor of predicted targets.
axis	The axis along which the cosine similarity is computed (the features axis). Defaults to -1.

...	For forward/backward compatability.
reduction	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
name	Optional name for the loss instance.
dtype	The dtype of the loss's computations. Defaults to NULL, which means using config_floatx(). config_floatx() is a "float32" unless set to different value (via config_set_floatx()).

**Value**

Cosine similarity tensor.

**Examples**

```

y_true <- rbind(c(0., 1.), c(1., 1.), c(1., 1.))
y_pred <- rbind(c(1., 0.), c(1., 1.), c(-1., -1.))
loss <- loss_cosine_similarity(y_true, y_pred, axis=-1)
loss

## tf.Tensor([-0. -1.  1.], shape=(3), dtype=float64)

```

**See Also**

- [https://keras.io/api/losses/regression\\_losses#cosinesimilarity-class](https://keras.io/api/losses/regression_losses#cosinesimilarity-class)

Other losses:

```

Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()

```



```

metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()

```

---

loss_ctc	<i>CTC (Connectionist Temporal Classification) loss.</i>
----------	--

---

### Description

CTC (Connectionist Temporal Classification) loss.

### Usage

```

loss_ctc(
    y_true,
    y_pred,
    ...,
    reduction = "sum_over_batch_size",
    name = "ctc",
    dtype = NULL
)

```

### Arguments

<code>y_true</code>	A tensor of shape <code>(batch_size, target_max_length)</code> containing the true labels in integer format. <code>0</code> always represents the blank/mask index and should not be used for classes.
<code>y_pred</code>	A tensor of shape <code>(batch_size, output_max_length, num_classes)</code> containing logits (the output of your model). They should <i>not</i> be normalized via softmax.
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be <code>"sum_over_batch_size"</code> . Supported options are <code>"sum"</code> , <code>"sum_over_batch_size"</code> or <code>NULL</code> .
<code>name</code>	Optional name for the loss instance.

**dtype** The dtype of the loss's computations. Defaults to NULL, which means using `config_floatx()`. `config_floatx()` is a "float32" unless set to different value (via `config_set_floatx()`).

### Value

CTC loss value.

### See Also

Other losses:

- [Loss\(\)](#)
- [loss\\_binary\\_crossentropy\(\)](#)
- [loss\\_binary\\_focal\\_crossentropy\(\)](#)
- [loss\\_categorical\\_crossentropy\(\)](#)
- [loss\\_categorical\\_focal\\_crossentropy\(\)](#)
- [loss\\_categorical\\_hinge\(\)](#)
- [loss\\_cosine\\_similarity\(\)](#)
- [loss\\_dice\(\)](#)
- [loss\\_hinge\(\)](#)
- [loss\\_huber\(\)](#)
- [loss\\_kl\\_divergence\(\)](#)
- [loss\\_log\\_cosh\(\)](#)
- [loss\\_mean\\_absolute\\_error\(\)](#)
- [loss\\_mean\\_absolute\\_percentage\\_error\(\)](#)
- [loss\\_mean\\_squared\\_error\(\)](#)
- [loss\\_mean\\_squared\\_logarithmic\\_error\(\)](#)
- [loss\\_poisson\(\)](#)
- [loss\\_sparse\\_categorical\\_crossentropy\(\)](#)
- [loss\\_squared\\_hinge\(\)](#)
- [loss\\_tversky\(\)](#)
- [metric\\_binary\\_crossentropy\(\)](#)
- [metric\\_binary\\_focal\\_crossentropy\(\)](#)
- [metric\\_categorical\\_crossentropy\(\)](#)
- [metric\\_categorical\\_focal\\_crossentropy\(\)](#)
- [metric\\_categorical\\_hinge\(\)](#)
- [metric\\_hinge\(\)](#)
- [metric\\_huber\(\)](#)
- [metric\\_kl\\_divergence\(\)](#)
- [metric\\_log\\_cosh\(\)](#)
- [metric\\_mean\\_absolute\\_error\(\)](#)
- [metric\\_mean\\_absolute\\_percentage\\_error\(\)](#)
- [metric\\_mean\\_squared\\_error\(\)](#)
- [metric\\_mean\\_squared\\_logarithmic\\_error\(\)](#)
- [metric\\_poisson\(\)](#)
- [metric\\_sparse\\_categorical\\_crossentropy\(\)](#)
- [metric\\_squared\\_hinge\(\)](#)

---

loss_dice	<i>Computes the Dice loss value between y_true and y_pred.</i>
-----------	--

---

### Description

Formula:

$$\text{loss} = 1 - (2 * \text{sum}(y\_true * y\_pred)) / (\text{sum}(y\_true) + \text{sum}(y\_pred))$$

Formula:

$$\text{loss} = 1 - (2 * \text{sum}(y\_true * y\_pred)) / (\text{sum}(y\_true) + \text{sum}(y\_pred))$$

### Usage

```
loss_dice(  
    y_true,  
    y_pred,  
    ...,  
    reduction = "sum_over_batch_size",  
    name = "dice",  
    axis = NULL,  
    dtype = NULL  
)
```

### Arguments

y_true	Tensor of true targets.
y_pred	Tensor of predicted targets.
...	For forward/backward compatability.
reduction	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
name	String, name for the object
axis	List of which dimensions the loss is calculated. Defaults to NULL.
dtype	The dtype of the loss's computations. Defaults to NULL, which means using config_floatx(). config_floatx() is a "float32" unless set to different value (via config_set_floatx()).

### Value

if y\_true and y\_pred are provided, Dice loss value. Otherwise, a Loss() instance.

**Example**

```

y_true <- array(c(1, 1, 0, 0,
                 1, 1, 0, 0), dim = c(2, 2, 2, 1))
y_pred <- array(c(0, 0.4, 0, 0,
                 1, 0, 1, 0.9), dim = c(2, 2, 2, 1))

axis <- c(2, 3, 4)
loss <- loss_dice(y_true, y_pred, axis = axis)
stopifnot(shape(loss) == shape(2))
loss

## tf.Tensor([0.50000001 0.75757576], shape=(2), dtype=float64)

loss = loss_dice(y_true, y_pred)
stopifnot(shape(loss) == shape())
loss

## tf.Tensor(0.6164383614186526, shape=(), dtype=float64)

```

**See Also**

Other losses:

```

Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()

```

```

metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()

```

---

loss_hinge	<i>Computes the hinge loss between y_true &amp; y_pred.</i>
------------	---

---

### Description

Formula:

```
loss <- mean(maximum(1 - y_true * y_pred, 0), axis=-1)
```

y\_true values are expected to be -1 or 1. If binary (0 or 1) labels are provided we will convert them to -1 or 1.

### Usage

```

loss_hinge(
  y_true,
  y_pred,
  ...,
  reduction = "sum_over_batch_size",
  name = "hinge",
  dtype = NULL
)

```

### Arguments

y_true	The ground truth values. y_true values are expected to be -1 or 1. If binary (0 or 1) labels are provided they will be converted to -1 or 1 with shape = [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].
...	For forward/backward compatibility.
reduction	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.

name	Optional name for the loss instance.
dtype	The dtype of the loss's computations. Defaults to NULL, which means using config_floatx(). config_floatx() is a "float32" unless set to different value (via config_set_floatx()).

### Value

Hinge loss values with shape = [batch\_size, d0, .. dN-1].

### Examples

```
y_true <- array(sample(c(-1,1), 6, replace = TRUE), dim = c(2, 3))
y_pred <- random_uniform(c(2, 3))
loss <- loss_hinge(y_true, y_pred)
loss
```

```
## tf.Tensor([1.0610152 0.93285507], shape=(2), dtype=float32)
```

### See Also

- [https://keras.io/api/losses/hinge\\_losses#hinge-class](https://keras.io/api/losses/hinge_losses#hinge-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
```

```
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

---

loss\_huber

*Computes the Huber loss between y\_true & y\_pred.*

---

### Description

Formula:

```
for (x in error) {  
  if (abs(x) <= delta){  
    loss <- c(loss, (0.5 * x^2))  
  } else if (abs(x) > delta) {  
    loss <- c(loss, (delta * abs(x) - 0.5 * delta^2))  
  }  
}  
loss <- mean(loss)
```

See: [Huber loss](#).

### Usage

```
loss_huber(  
  y_true,  
  y_pred,  
  delta = 1,  
  ...,  
  reduction = "sum_over_batch_size",  
  name = "huber_loss",  
  dtype = NULL  
)
```

**Arguments**

<code>y_true</code>	tensor of true targets.
<code>y_pred</code>	tensor of predicted targets.
<code>delta</code>	A float, the point where the Huber loss function changes from a quadratic to linear. Defaults to 1.0.
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to loss. Options are "sum", "sum_over_batch_size" or NULL. Defaults to "sum_over_batch_size".
<code>name</code>	Optional name for the instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

Tensor with one scalar loss entry per sample.

**Examples**

```
y_true <- rbind(c(0, 1), c(0, 0))
y_pred <- rbind(c(0.6, 0.4), c(0.4, 0.6))
loss <- loss_huber(y_true, y_pred)
```

**See Also**

- [https://keras.io/api/losses/regression\\_losses#huber-class](https://keras.io/api/losses/regression_losses#huber-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
```



```
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

---

loss_kl_divergence	<i>Computes Kullback-Leibler divergence loss between y_true &amp; y_pred.</i>
--------------------	---

---

### Description

Formula:

```
loss <- y_true * log(y_true / y_pred)
```

y\_true and y\_pred are expected to be probability distributions, with values between 0 and 1. They will get clipped to the [0, 1] range.

### Usage

```
loss_kl_divergence(  
  y_true,  
  y_pred,  
  ...,  
  reduction = "sum_over_batch_size",  
  name = "kl_divergence",  
  dtype = NULL  
)
```

**Arguments**

<code>y_true</code>	Tensor of true targets.
<code>y_pred</code>	Tensor of predicted targets.
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

KL Divergence loss values with shape = [batch\_size, d0, .. dN-1].

**Examples**

```

y_true <- random_uniform(c(2, 3), 0, 2)
y_pred <- random_uniform(c(2,3))
loss <- loss_kl_divergence(y_true, y_pred)
loss

## tf.Tensor([3.5312676 0.2128672], shape=(2), dtype=float32)

```

**See Also**

- [https://keras.io/api/losses/probabilistic\\_losses#kldivergence-class](https://keras.io/api/losses/probabilistic_losses#kldivergence-class)

Other losses:

```

Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()

```

```

loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()

```

---

loss_log_cosh	<i>Computes the logarithm of the hyperbolic cosine of the prediction error.</i>
---------------	---

---

## Description

Formula:

```
loss <- mean(log(cosh(y_pred - y_true)), axis=-1)
```

Note that  $\log(\cosh(x))$  is approximately equal to  $(x ** 2) / 2$  for small  $x$  and to  $\text{abs}(x) - \log(2)$  for large  $x$ . This means that 'logcosh' works mostly like the mean squared error, but will not be so strongly affected by the occasional wildly incorrect prediction.

## Usage

```

loss_log_cosh(
  y_true,
  y_pred,
  ...,
  reduction = "sum_over_batch_size",
  name = "log_cosh",
  dtype = NULL
)

```

**Arguments**

<code>y_true</code>	Ground truth values with shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values with shape = [batch_size, d0, .. dN].
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to loss. Options are "sum", "sum_over_batch_size" or NULL. Defaults to "sum_over_batch_size".
<code>name</code>	Optional name for the instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

Logcosh error values with shape = [batch\_size, d0, .. dN-1].

**Examples**

```
y_true <- rbind(c(0., 1.), c(0., 0.))
y_pred <- rbind(c(1., 1.), c(0., 0.))
loss <- loss_log_cosh(y_true, y_pred)
# 0.108
```

**See Also**

- [https://keras.io/api/losses/regression\\_losses#logcosh-class](https://keras.io/api/losses/regression_losses#logcosh-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
```

```
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

---

loss\_mean\_absolute\_error

*Computes the mean of absolute difference between labels and predictions.*

---

### Description

Formula:

```
loss <- mean(abs(y_true - y_pred))
```

### Usage

```
loss_mean_absolute_error(  
  y_true,  
  y_pred,  
  ...,  
  reduction = "sum_over_batch_size",  
  name = "mean_absolute_error",  
  dtype = NULL  
)
```

### Arguments

y_true	Ground truth values with shape = [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].
...	For forward/backward compatibility.
reduction	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.

name	Optional name for the loss instance.
dtype	The dtype of the loss's computations. Defaults to NULL, which means using config_floatx(). config_floatx() is a "float32" unless set to different value (via config_set_floatx()).

**Value**

Mean absolute error values with shape = [batch\_size, d0, .. dN-1].

**Examples**

```
y_true <- random_uniform(c(2, 3), 0, 2)
y_pred <- random_uniform(c(2, 3))
loss <- loss_mean_absolute_error(y_true, y_pred)
```

**See Also**

- [https://keras.io/api/losses/regression\\_losses#meanabsoluteerror-class](https://keras.io/api/losses/regression_losses#meanabsoluteerror-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
```

```

metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()

```

---

loss\_mean\_absolute\_percentage\_error

*Computes the mean absolute percentage error between y\_true and y\_pred.*

---

### Description

Formula:

```

loss <- 100 * op_mean(op_abs((y_true - y_pred) / y_true),
                    axis=-1)

```

Division by zero is prevented by dividing by  $\max(y\_true, \epsilon)$  where  $\epsilon = \text{config\_epsilon}()$  (default to  $1e-7$ ).

### Usage

```

loss_mean_absolute_percentage_error(
  y_true,
  y_pred,
  ...,
  reduction = "sum_over_batch_size",
  name = "mean_absolute_percentage_error",
  dtype = NULL
)

```

### Arguments

y_true	Ground truth values with shape = [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].
...	For forward/backward compatability.
reduction	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
name	Optional name for the loss instance.
dtype	The dtype of the loss's computations. Defaults to NULL, which means using config_floatx(). config_floatx() is a "float32" unless set to different value (via config_set_floatx()).

**Value**

Mean absolute percentage error values with shape = [batch\_size, d0, ..dN-1].

**Examples**

```
y_true <- random_uniform(c(2, 3))
y_pred <- random_uniform(c(2, 3))
loss <- loss_mean_absolute_percentage_error(y_true, y_pred)
```

**See Also**

- [https://keras.io/api/losses/regression\\_losses#meanabsolutepercentageerror-class](https://keras.io/api/losses/regression_losses#meanabsolutepercentageerror-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
```



```
metric_squared_hinge()
```

---

```
loss_mean_squared_error
```

*Computes the mean of squares of errors between labels and predictions.*

---

## Description

Formula:

```
loss <- mean(square(y_true - y_pred))
```

## Usage

```
loss_mean_squared_error(  
  y_true,  
  y_pred,  
  ...,  
  reduction = "sum_over_batch_size",  
  name = "mean_squared_error",  
  dtype = NULL  
)
```

## Arguments

<code>y_true</code>	Ground truth values with shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values with shape = [batch_size, d0, .. dN].
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

## Value

Mean squared error values with shape = [batch\_size, d0, .. dN-1].

## Examples

```
y_true <- random_uniform(c(2, 3), 0, 2)  
y_pred <- random_uniform(c(2, 3))  
loss <- loss_mean_squared_error(y_true, y_pred)
```

**See Also**

- [https://keras.io/api/losses/regression\\_losses#meansquarederror-class](https://keras.io/api/losses/regression_losses#meansquarederror-class)

Other losses:

```
Loss()  
loss_binary_crossentropy()  
loss_binary_focal_crossentropy()  
loss_categorical_crossentropy()  
loss_categorical_focal_crossentropy()  
loss_categorical_hinge()  
loss_cosine_similarity()  
loss_ctc()  
loss_dice()  
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_logarithmic_error()  
loss_poisson()  
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

---

loss\_mean\_squared\_logarithmic\_error

*Computes the mean squared logarithmic error between y\_true and y\_pred.*

---

**Description**

Note that `y_pred` and `y_true` cannot be less or equal to 0. Negative values and 0 values will be replaced with `config_epsilon()` (default to  $1e-7$ ).

Formula:

```
loss <- mean(square(log(y_true + 1) - log(y_pred + 1)))
```

**Usage**

```
loss_mean_squared_logarithmic_error(
  y_true,
  y_pred,
  ...,
  reduction = "sum_over_batch_size",
  name = "mean_squared_logarithmic_error",
  dtype = NULL
)
```

**Arguments**

<code>y_true</code>	Ground truth values with shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values with shape = [batch_size, d0, .. dN].
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

Mean squared logarithmic error values with shape = [batch\_size, d0, .. dN-1].

**Examples**

```
y_true <- random_uniform(c(2, 3), 0, 2)
y_pred <- random_uniform(c(2, 3))
loss <- loss_mean_squared_logarithmic_error(y_true, y_pred)
```

**See Also**

- [https://keras.io/api/losses/regression\\_losses#meansquaredlogarithmicerror-class](https://keras.io/api/losses/regression_losses#meansquaredlogarithmicerror-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
```

```
loss_categorical_crossentropy()  
loss_categorical_focal_crossentropy()  
loss_categorical_hinge()  
loss_cosine_similarity()  
loss_ctc()  
loss_dice()  
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_error()  
loss_poisson()  
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

---

loss\_poisson

*Computes the Poisson loss between y\_true & y\_pred.*

---

### Description

Formula:

```
loss <- y_pred - y_true * log(y_pred)
```

**Usage**

```
loss_poisson(
  y_true,
  y_pred,
  ...,
  reduction = "sum_over_batch_size",
  name = "poisson",
  dtype = NULL
)
```

**Arguments**

<code>y_true</code>	Ground truth values. shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values. shape = [batch_size, d0, .. dN].
<code>...</code>	For forward/backward compatability.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

Poisson loss values with shape = [batch\_size, d0, .. dN-1].

**Examples**

```
y_true <- random_uniform(c(2, 3), 0, 2)
y_pred <- random_uniform(c(2, 3))
loss <- loss_poisson(y_true, y_pred)
loss

## tf.Tensor([2.5907533 0.66836613], shape=(2), dtype=float32)
```

**See Also**

- [https://keras.io/api/losses/probabilistic\\_losses#poisson-class](https://keras.io/api/losses/probabilistic_losses#poisson-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
```

```
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

---

loss\_sparse\_categorical\_crossentropy

*Computes the crossentropy loss between the labels and predictions.*

---

### Description

Use this crossentropy loss function when there are two or more label classes. We expect labels to be provided as integers. If you want to provide labels using one-hot representation, please use CategoricalCrossentropy loss. There should be # classes floating point values per feature for y\_pred and a single floating point value per feature for y\_true.

In the snippet below, there is a single floating point value per example for y\_true and num\_classes floating pointing values per example for y\_pred. The shape of y\_true is [batch\_size] and the shape of y\_pred is [batch\_size, num\_classes].

**Usage**

```
loss_sparse_categorical_crossentropy(
  y_true,
  y_pred,
  from_logits = FALSE,
  ignore_class = NULL,
  axis = -1L,
  ...,
  reduction = "sum_over_batch_size",
  name = "sparse_categorical_crossentropy",
  dtype = NULL
)
```

**Arguments**

<code>y_true</code>	Ground truth values.
<code>y_pred</code>	The predicted values.
<code>from_logits</code>	Whether <code>y_pred</code> is expected to be a logits tensor. By default, we assume that <code>y_pred</code> encodes a probability distribution.
<code>ignore_class</code>	Optional integer. The ID of a class to be ignored during loss computation. This is useful, for example, in segmentation problems featuring a "void" class (commonly -1 or 255) in segmentation maps. By default ( <code>ignore_class=NULL</code> ), all classes are considered.
<code>axis</code>	Defaults to -1. The dimension along which the entropy is computed.
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

Sparse categorical crossentropy loss value.

**Examples**

```
y_true <- c(1, 2)
y_pred <- rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1))
loss <- loss_sparse_categorical_crossentropy(y_true, y_pred)
loss

## tf.Tensor([0.05129339 2.30258509], shape=(2), dtype=float64)
```

```

y_true <- c(1, 2)
y_pred <- rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1))
# Using 'auto'/'sum_over_batch_size' reduction type.
scee <- loss_sparse_categorical_crossentropy()
scee(op_array(y_true), op_array(y_pred))

## tf.Tensor(1.1769392, shape=(), dtype=float32)

# 1.177

# Calling with 'sample_weight'.
scee(op_array(y_true), op_array(y_pred), sample_weight = op_array(c(0.3, 0.7)))

## tf.Tensor(0.8135988, shape=(), dtype=float32)

# Using 'sum' reduction type.
scee <- loss_sparse_categorical_crossentropy(reduction="sum")
scee(op_array(y_true), op_array(y_pred))

## tf.Tensor(2.3538785, shape=(), dtype=float32)

# 2.354

# Using 'none' reduction type.
scee <- loss_sparse_categorical_crossentropy(reduction=NULL)
scee(op_array(y_true), op_array(y_pred))

## tf.Tensor([0.05129344 2.3025851 ], shape=(2), dtype=float32)

# array([0.0513, 2.303], dtype=float32)

Usage with the compile() API:

model %>% compile(optimizer = 'sgd',
                 loss = loss_sparse_categorical_crossentropy())

```

**See Also**

- [https://keras.io/api/losses/probabilistic\\_losses#sparsecategorical\\_crossentropy-class](https://keras.io/api/losses/probabilistic_losses#sparsecategorical_crossentropy-class)

Other losses:

```

Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()

```



```
loss_categorical_crossentropy()  
loss_categorical_focal_crossentropy()  
loss_categorical_hinge()  
loss_cosine_similarity()  
loss_ctc()  
loss_dice()  
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_error()  
loss_mean_squared_logarithmic_error()  
loss_poisson()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

---

loss\_squared\_hinge      *Computes the squared hinge loss between y\_true & y\_pred.*

---

### Description

Formula:

```
loss <- square(maximum(1 - y_true * y_pred, 0))
```

y\_true values are expected to be -1 or 1. If binary (0 or 1) labels are provided we will convert them to -1 or 1.

**Usage**

```
loss_squared_hinge(
  y_true,
  y_pred,
  ...,
  reduction = "sum_over_batch_size",
  name = "squared_hinge",
  dtype = NULL
)
```

**Arguments**

<code>y_true</code>	The ground truth values. <code>y_true</code> values are expected to be -1 or 1. If binary (0 or 1) labels are provided we will convert them to -1 or 1 with shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values with shape = [batch_size, d0, .. dN].
<code>...</code>	For forward/backward compatibility.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance.
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

**Value**

Squared hinge loss values with shape = [batch\_size, d0, .. dN-1].

**Examples**

```
y_true <- array(sample(c(-1,1), 6, replace = TRUE), dim = c(2, 3))
y_pred <- random_uniform(c(2, 3))
loss <- loss_squared_hinge(y_true, y_pred)
```

**See Also**

- [https://keras.io/api/losses/hinge\\_losses#squaredhinge-class](https://keras.io/api/losses/hinge_losses#squaredhinge-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
```

```
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

---

loss\_tversky

*Computes the Tversky loss value between y\_true and y\_pred.*

---

### Description

This loss function is weighted by the alpha and beta coefficients that penalize false positives and false negatives.

With  $\alpha=0.5$  and  $\beta=0.5$ , the loss value becomes equivalent to Dice Loss.

This loss function is weighted by the alpha and beta coefficients that penalize false positives and false negatives.

With  $\alpha=0.5$  and  $\beta=0.5$ , the loss value becomes equivalent to Dice Loss.

### Usage

```
loss_tversky(
    y_true,
    y_pred,
```

```

    ...,
    alpha = 0.5,
    beta = 0.5,
    reduction = "sum_over_batch_size",
    name = "tversky",
    dtype = NULL
)

```

### Arguments

<code>y_true</code>	tensor of true targets.
<code>y_pred</code>	tensor of predicted targets.
<code>...</code>	For forward/backward compatibility.
<code>alpha</code>	The coefficient controlling incidence of false positives. Defaults to 0.5.
<code>beta</code>	The coefficient controlling incidence of false negatives. Defaults to 0.5.
<code>reduction</code>	Type of reduction to apply to the loss. In almost all cases this should be "sum_over_batch_size". Supported options are "sum", "sum_over_batch_size" or NULL.
<code>name</code>	Optional name for the loss instance. (string)
<code>dtype</code>	The dtype of the loss's computations. Defaults to NULL, which means using <code>config_floatx()</code> . <code>config_floatx()</code> is a "float32" unless set to different value (via <code>config_set_floatx()</code> ).

### Value

Tversky loss value.

### Reference

- [Salehi et al., 2017](#)

### See Also

Other losses:

```

Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()

```

```
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

---

Metric

*Subclass the base Metric class*

---

## Description

A Metric object encapsulates metric logic and state that can be used to track model performance during training. It is what is returned by the family of metric functions that start with prefix `metric_*`, as well as what is returned by custom metrics defined with `Metric()`.

## Usage

```
Metric(
    classname,
    initialize = NULL,
    update_state = NULL,
    result = NULL,
    ...,
    public = list(),
    private = list(),
    inherit = NULL,
    parent_env = parent.frame()
)
```

**Arguments**

<code>classname</code>	String, the name of the custom class. (Conventionally, CamelCase).
<code>initialize, update_state, result</code>	Recommended methods to implement. See description section.
<code>..., public</code>	Additional methods or public members of the custom class.
<code>private</code>	Named list of R objects (typically, functions) to include in instance private environments. <code>private</code> methods will have all the same symbols in scope as public methods (See section "Symbols in Scope"). Each instance will have it's own private environment. Any objects in <code>private</code> will be invisible from the Keras framework and the Python runtime.
<code>inherit</code>	What the custom class will subclass. By default, the base keras class.
<code>parent_env</code>	The R environment that all class methods will have as a grandparent.

**Value**

A function that returns `Metric` instances, similar to the builtin metric functions.

**Examples****Usage with `compile()`::**

```
model |> compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = c(metric_SOME_METRIC(), metric_SOME_OTHER_METRIC())
)
```

**Standalone usage::**

```
m <- metric_SOME_METRIC()
for (e in seq(epochs)) {
  for (i in seq(train_steps)) {
    c(y_true, y_pred, sample_weight = NULL) %<-% ...
    m$update_state(y_true, y_pred, sample_weight)
  }
  cat('Final epoch result: ', as.numeric(m$result()), "\n")
  m$reset_state()
}
```

**Full Examples****Usage with `compile()`::**

```
model <- keras_model_sequential()
model |>
  layer_dense(64, activation = "relu") |>
  layer_dense(64, activation = "relu") |>
  layer_dense(10, activation = "softmax")
```

```
model |>
  compile(optimizer = optimizer_rmsprop(0.01),
          loss = loss_categorical_crossentropy(),
          metrics = metric_categorical_accuracy())
```

```
data <- random_uniform(c(1000, 32))
labels <- random_uniform(c(1000, 10))
```

```
model |> fit(data, labels, verbose = 0)
```

To be implemented by subclasses (custom metrics):

- `initialize()`: All state variables should be created in this method by calling `self$add_variable()` like: `self$var <- self$add_variable(...)`.
- `update_state()`: Updates all the state variables like: `self$var$assign(...)`.
- `result()`: Computes and returns a scalar value or a named list of scalar values for the metric from the state variables.

Example subclass implementation:

```
metric_binary_true_positives <- Metric(
  classname = "BinaryTruePositives",

  initialize = function(name = 'binary_true_positives', ...) {
    super$initialize(name = name, ...)
    self$true_positives <-
      self$add_weight(shape = shape(),
                     initializer = 'zeros',
                     name = 'true_positives')
  },

  update_state = function(y_true, y_pred, sample_weight = NULL) {
    y_true <- op_cast(y_true, "bool")
    y_pred <- op_cast(y_pred, "bool")

    values <- y_true & y_pred # `&` calls op_logical_and()
    values <- op_cast(values, self$dtype)
    if (!is.null(sample_weight)) {
      sample_weight <- op_cast(sample_weight, self$dtype)
      sample_weight <- op_broadcast_to(sample_weight, shape(values))
      values <- values * sample_weight # `*` calls op_multiply()
    }
    self$true_positives$assign(self$true_positives + op_sum(values))
  },

  result = function() {
    self$true_positives
  }
)
model <- keras_model_sequential(input_shape = 32) |> layer_dense(10)
```

```
model |> compile(loss = loss_binary_crossentropy(),
               metrics = list(metric_binary_true_positives()))
model |> fit(data, labels, verbose = 0)
```

### Methods defined by the base Metric class:

- `__call__(...)`  
Calling a metric instance self like `m(...)` is equivalent to calling:
 

```
function(...) {
  m$update_state(...)
  m$result()
}
```
- `initialize(dtype=NULL, name=NULL)`  
Initialize self.  
Args:
  - `name`: (Optional) string name of the metric instance.
  - `dtype`: (Optional) data type of the metric result.
- `add_variable(shape, initializer, dtype=NULL, aggregation = 'sum', name=NULL)`
- `add_weight(shape=shape(), initializer=NULL, dtype=NULL, name=NULL)`
- `get_config()`  
Return the serializable config of the metric.
- `reset_state()`  
Reset all of the metric state variables.  
This function is called between epochs/steps, when a metric is evaluated during training.
- `result()`  
Compute the current metric value.  
Returns: A scalar tensor, or a named list of scalar tensors.
- `stateless_result(metric_variables)`
- `stateless_reset_state()`
- `stateless_update_state(metric_variables, ...)`
- `update_state(...)`  
Accumulate statistics for the metric.

### Readonly properties

- `dtype`
- `variables`



**Symbols in scope**

All R function custom methods (public and private) will have the following symbols in scope:

- `self`: The custom class instance.
- `super`: The custom class superclass.
- `private`: An R environment specific to the class instance. Any objects assigned here are invisible to the Keras framework.
- `__class__` and `as.symbol(classname)`: the custom class type object.

**See Also**

Other metrics:

```
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()
```

```

metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

metric_auc	<i>Approximates the AUC (Area under the curve) of the ROC or PR curves.</i>
------------	---

---

### Description

The AUC (Area under the curve) of the ROC (Receiver operating characteristic; default) or PR (Precision Recall) curves are quality measures of binary classifiers. Unlike the accuracy, and like cross-entropy losses, ROC-AUC and PR-AUC evaluate all the operational points of a model.

This class approximates AUCs using a Riemann sum. During the metric accumulation phrase, predictions are accumulated within predefined buckets by value. The AUC is then computed by interpolating per-bucket averages. These buckets define the evaluated operational points.

This metric creates four local variables, `true_positives`, `true_negatives`, `false_positives` and `false_negatives` that are used to compute the AUC. To discretize the AUC curve, a linearly spaced set of thresholds is used to compute pairs of recall and precision values. The area under the ROC-curve is therefore computed using the height of the recall values by the false positive rate, while the area under the PR-curve is the computed using the height of the precision values by the recall.

This value is ultimately returned as `auc`, an idempotent operation that computes the area under a discretized curve of precision versus recall values (computed using the aforementioned variables). The `num_thresholds` variable controls the degree of discretization with larger numbers of thresholds more closely approximating the true AUC. The quality of the approximation may vary dramatically depending on `num_thresholds`. The `thresholds` parameter can be used to manually specify thresholds which split the predictions more evenly.

For a best approximation of the real AUC, predictions should be distributed approximately uniformly in the range  $[0, 1]$  (if `from_logits=FALSE`). The quality of the AUC approximation may be poor if this is not the case. Setting `summation_method` to 'minoring' or 'majoring' can help quantify the error in the approximation by providing lower or upper bound estimate of the AUC.

If `sample_weight` is NULL, weights default to 1. Use `sample_weight` of 0 to mask values.

**Usage**

```
metric_auc(
    ...,
    num_thresholds = 200L,
    curve = "ROC",
    summation_method = "interpolation",
    name = NULL,
    dtype = NULL,
    thresholds = NULL,
    multi_label = FALSE,
    num_labels = NULL,
    label_weights = NULL,
    from_logits = FALSE
)
```

**Arguments**

...	For forward/backward compatibility.
num_thresholds	(Optional) The number of thresholds to use when discretizing the roc curve. Values must be > 1. Defaults to 200.
curve	(Optional) Specifies the name of the curve to be computed, 'ROC' (default) or 'PR' for the Precision-Recall-curve.
summation_method	(Optional) Specifies the <b>Riemann summation method</b> used. 'interpolation' (default) applies mid-point summation scheme for ROC. For PR-AUC, interpolates (true/false) positives but not the ratio that is precision (see Davis & Goadrich 2006 for details); 'minoring' applies left summation for increasing intervals and right summation for decreasing intervals; 'majoring' does the opposite.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.
thresholds	(Optional) A list of floating point values to use as the thresholds for discretizing the curve. If set, the num_thresholds parameter is ignored. Values should be in [0, 1]. Endpoint thresholds equal to {-epsilon, 1+epsilon} for a small positive epsilon value will be automatically included with these to correctly handle predictions equal to exactly 0 or 1.
multi_label	boolean indicating whether multilabel data should be treated as such, wherein AUC is computed separately for each label and then averaged across labels, or (when FALSE) if the data should be flattened into a single label before AUC computation. In the latter case, when multilabel data is passed to AUC, each label-prediction pair is treated as an individual data point. Should be set to 'FALSE' for multi-class data.
num_labels	(Optional) The number of labels, used when multi_label is TRUE. If num_labels is not specified, then state variables get created on the first call to update_state.
label_weights	(Optional) list, array, or tensor of non-negative weights used to compute AUCs for multilabel data. When multi_label is TRUE, the weights are applied to the individual label AUCs when they are averaged to produce the multi-label AUC.

When it's FALSE, they are used to weight the individual label predictions in computing the confusion matrix on the flattened data. Note that this is unlike `class_weights` in that `class_weights` weights the example depending on the value of its label, whereas `label_weights` depends only on the index of that label before flattening; therefore `label_weights` should not be used for multi-class data.

`from_logits` boolean indicating whether the predictions (`y_pred` in `update_state`) are probabilities or sigmoid logits. As a rule of thumb, when using a keras loss, the `from_logits` constructor argument of the loss should match the AUC `from_logits` constructor argument.

### Value

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Usage

Standalone usage:

```
m <- metric_auc(num_thresholds = 3)
m$update_state(c(0, 0, 1, 1),
               c(0, 0.5, 0.3, 0.9))
# threshold values are [0 - 1e-7, 0.5, 1 + 1e-7]
# tp = [2, 1, 0], fp = [2, 0, 0], fn = [0, 1, 2], tn = [0, 2, 2]
# tp_rate = recall = [1, 0.5, 0], fp_rate = [1, 0, 0]
# auc = (((1 + 0.5) / 2) * (1 - 0)) + (((0.5 + 0) / 2) * (0 - 0))
#     = 0.75
m$result()

## tf.Tensor(0.75, shape=(), dtype=float32)

m$reset_state()
m$update_state(c(0, 0, 1, 1),
               c(0, 0.5, 0.3, 0.9),
               sample_weight=c(1, 0, 0, 1))
m$result()

## tf.Tensor(1.0, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
# Reports the AUC of a model outputting a probability.
model |> compile(
  optimizer = 'sgd',
  loss = loss_binary_crossentropy(),
```

```
    metrics = list(metric_auc())
  )

# Reports the AUC of a model outputting a logit.
model |> compile(
  optimizer = 'sgd',
  loss = loss_binary_crossentropy(from_logits = TRUE),
  metrics = list(metric_auc(from_logits = TRUE))
)
```

### See Also

- [https://keras.io/api/metrics/classification\\_metrics#auc-class](https://keras.io/api/metrics/classification_metrics#auc-class)

Other confusion metrics:

```
metric_false_negatives()
metric_false_positives()
metric_precision()
metric_precision_at_recall()
metric_recall()
metric_recall_at_precision()
metric_sensitivity_at_specificity()
metric_specificity_at_sensitivity()
metric_true_negatives()
metric_true_positives()
```

Other metrics:

```
Metric()
custom_metric()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
```

```
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

---

metric\_binary\_accuracy

*Calculates how often predictions match binary labels.*

---

### Description

This metric creates two local variables, `total` and `count` that are used to compute the frequency with which `y_pred` matches `y_true`. This frequency is ultimately returned as `binary_accuracy`: an idempotent operation that simply divides `total` by `count`.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

### Usage

```
metric_binary_accuracy(  
    y_true,  
    y_pred,  
    threshold = 0.5,  
    ...,  
    name = "binary_accuracy",  
    dtype = NULL  
)
```

**Arguments**

<code>y_true</code>	Tensor of true targets.
<code>y_pred</code>	Tensor of predicted targets.
<code>threshold</code>	(Optional) Float representing the threshold for deciding whether prediction values are 1 or 0.
<code>...</code>	For forward/backward compatibility.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

If `y_true` and `y_pred` are missing, a `Metric` instance is returned. The `Metric` instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Usage**

Standalone usage:

```
m <- metric_binary_accuracy()
m$update_state(rbind(1, 1, 0, 0), rbind(0.98, 1, 0, 0.6))
m$result()
```

```
## tf.Tensor(0.75, shape=(), dtype=float32)
```

```
# 0.75
```

```
m$reset_state()
m$update_state(rbind(1, 1, 0, 0), rbind(0.98, 1, 0, 0.6),
              sample_weight = c(1, 0, 0, 1))
m$result()
```

```
## tf.Tensor(0.5, shape=(), dtype=float32)
```

```
# 0.5
```

Usage with `compile()` API:

```
model %>% compile(optimizer='sgd',
                 loss='binary_crossentropy',
                 metrics=list(metric_binary_accuracy()))
```

**See Also**

- [https://keras.io/api/metrics/accuracy\\_metrics#binaryaccuracy-class](https://keras.io/api/metrics/accuracy_metrics#binaryaccuracy-class)

Other accuracy metrics:

```
metric_categorical_accuracy()  
metric_sparse_categorical_accuracy()  
metric_sparse_top_k_categorical_accuracy()  
metric_top_k_categorical_accuracy()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()
```



```

metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

```
metric_binary_crossentropy
```

*Computes the crossentropy metric between the labels and predictions.*

---

### Description

This is the crossentropy metric class to be used when there are only two label classes (0 and 1).

### Usage

```

metric_binary_crossentropy(
    y_true,
    y_pred,
    from_logits = FALSE,
    label_smoothing = 0,
    axis = -1L,
    ...,
    name = "binary_crossentropy",
    dtype = NULL
)

```

### Arguments

<code>y_true</code>	Ground truth values. shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values. shape = [batch_size, d0, .. dN].
<code>from_logits</code>	(Optional) Whether output is expected to be a logits tensor. By default, we consider that output encodes a probability distribution.
<code>label_smoothing</code>	(Optional) Float in [0, 1]. When > 0, label values are smoothed, meaning the confidence on label values are relaxed. e.g. <code>label_smoothing=0.2</code> means that we will use a value of 0.1 for label "0" and 0.9 for label "1".
<code>axis</code>	The axis along which the mean is computed. Defaults to -1.
<code>...</code>	For forward/backward compatibility.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

If `y_true` and `y_pred` are missing, a `Metric` instance is returned. The `Metric` instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Examples**

Standalone usage:

```
m <- metric_binary_crossentropy()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)))
m$result()
```

```
## tf.Tensor(0.8149245, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)),
              sample_weight=c(1, 0))
m$result()
```

```
## tf.Tensor(0.91629076, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_binary_crossentropy()))
```

**See Also**

- [https://keras.io/api/metrics/probabilistic\\_metrics#binary\\_crossentropy-class](https://keras.io/api/metrics/probabilistic_metrics#binary_crossentropy-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
```

```
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

Other metrics:

```
Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
```

```
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

Other probabilistic metrics:

```
metric_categorical_crossentropy()  
metric_kl_divergence()  
metric_poisson()  
metric_sparse_categorical_crossentropy()
```

---

metric\_binary\_focal\_crossentropy

*Computes the binary focal crossentropy loss.*

---

### Description

According to [Lin et al., 2018](#), it helps to apply a focal factor to down-weight easy examples and focus more on hard examples. By default, the focal tensor is computed as follows:

$\text{focal\_factor} = (1 - \text{output})^\gamma$  for class 1  
 $\text{focal\_factor} = \text{output}^\gamma$  for class 0  
where  $\gamma$  is a focusing parameter. When  $\gamma = 0$ , there is no focal effect on the binary crossentropy loss.

If `apply_class_balancing == TRUE`, this function also takes into account a weight balancing factor for the binary classes 0 and 1 as follows:

weight = alpha for class 1 (target == 1) weight = 1 - alpha for class 0 where alpha is a float in the range of [0, 1].

### Usage

```
metric_binary_focal_crossentropy(
  y_true,
  y_pred,
  apply_class_balancing = FALSE,
  alpha = 0.25,
  gamma = 2,
  from_logits = FALSE,
  label_smoothing = 0,
  axis = -1L
)
```

### Arguments

y_true	Ground truth values, of shape (batch_size, d0, .. dN).
y_pred	The predicted values, of shape (batch_size, d0, .. dN).
apply_class_balancing	A bool, whether to apply weight balancing on the binary classes 0 and 1.
alpha	A weight balancing factor for class 1, default is 0.25 as mentioned in the reference. The weight for class 0 is 1.0 - alpha.
gamma	A focusing parameter, default is 2.0 as mentioned in the reference.
from_logits	Whether y_pred is expected to be a logits tensor. By default, we assume that y_pred encodes a probability distribution.
label_smoothing	Float in [0, 1]. If > 0 then smooth the labels by squeezing them towards 0.5, that is, using 1. - 0.5 * label_smoothing for the target class and 0.5 * label_smoothing for the non-target class.
axis	The axis along which the mean is computed. Defaults to -1.

### Value

Binary focal crossentropy loss value with shape = [batch\_size, d0, .. dN-1].

### Examples

```
y_true <- rbind(c(0, 1), c(0, 0))
y_pred <- rbind(c(0.6, 0.4), c(0.4, 0.6))
loss <- loss_binary_focal_crossentropy(y_true, y_pred, gamma=2)
loss

## tf.Tensor([0.32986466 0.20579838], shape=(2), dtype=float64)
```

**See Also**

Other losses:

[Loss\(\)](#)  
[loss\\_binary\\_crossentropy\(\)](#)  
[loss\\_binary\\_focal\\_crossentropy\(\)](#)  
[loss\\_categorical\\_crossentropy\(\)](#)  
[loss\\_categorical\\_focal\\_crossentropy\(\)](#)  
[loss\\_categorical\\_hinge\(\)](#)  
[loss\\_cosine\\_similarity\(\)](#)  
[loss\\_ctc\(\)](#)  
[loss\\_dice\(\)](#)  
[loss\\_hinge\(\)](#)  
[loss\\_huber\(\)](#)  
[loss\\_kl\\_divergence\(\)](#)  
[loss\\_log\\_cosh\(\)](#)  
[loss\\_mean\\_absolute\\_error\(\)](#)  
[loss\\_mean\\_absolute\\_percentage\\_error\(\)](#)  
[loss\\_mean\\_squared\\_error\(\)](#)  
[loss\\_mean\\_squared\\_logarithmic\\_error\(\)](#)  
[loss\\_poisson\(\)](#)  
[loss\\_sparse\\_categorical\\_crossentropy\(\)](#)  
[loss\\_squared\\_hinge\(\)](#)  
[loss\\_tversky\(\)](#)  
[metric\\_binary\\_crossentropy\(\)](#)  
[metric\\_categorical\\_crossentropy\(\)](#)  
[metric\\_categorical\\_focal\\_crossentropy\(\)](#)  
[metric\\_categorical\\_hinge\(\)](#)  
[metric\\_hinge\(\)](#)  
[metric\\_huber\(\)](#)  
[metric\\_kl\\_divergence\(\)](#)  
[metric\\_log\\_cosh\(\)](#)  
[metric\\_mean\\_absolute\\_error\(\)](#)  
[metric\\_mean\\_absolute\\_percentage\\_error\(\)](#)  
[metric\\_mean\\_squared\\_error\(\)](#)  
[metric\\_mean\\_squared\\_logarithmic\\_error\(\)](#)  
[metric\\_poisson\(\)](#)  
[metric\\_sparse\\_categorical\\_crossentropy\(\)](#)  
[metric\\_squared\\_hinge\(\)](#)

Other metrics:

[Metric\(\)](#)  
[custom\\_metric\(\)](#)  
[metric\\_auc\(\)](#)  
[metric\\_binary\\_accuracy\(\)](#)  
[metric\\_binary\\_crossentropy\(\)](#)  
[metric\\_binary\\_iou\(\)](#)  
[metric\\_categorical\\_accuracy\(\)](#)  
[metric\\_categorical\\_crossentropy\(\)](#)

```
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_binary\_iou

*Computes the Intersection-Over-Union metric for class 0 and/or 1.*

---

### **Description**

Formula:

```
iou <- true_positives / (true_positives + false_positives + false_negatives)
```

Intersection-Over-Union is a common evaluation metric for semantic image segmentation.

To compute IoUs, the predictions are accumulated in a confusion matrix, weighted by `sample_weight` and the metric is then calculated from it.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

This class can be used to compute IoUs for a binary classification task where the predictions are provided as logits. First a `threshold` is applied to the predicted values such that those that are below the threshold are converted to class 0 and those that are above the threshold are converted to class 1.

IoUs for classes 0 and 1 are then computed, the mean of IoUs for the classes that are specified by `target_class_ids` is returned.

### Usage

```
metric_binary_iou(
  ...,
  target_class_ids = list(0L, 1L),
  threshold = 0.5,
  name = NULL,
  dtype = NULL
)
```

### Arguments

<code>...</code>	For forward/backward compatibility.
<code>target_class_ids</code>	A list or list of target class ids for which the metric is returned. Options are 0, 1, or <code>c(0, 1)</code> . With 0 (or 1), the IoU metric for class 0 (or class 1, respectively) is returned. With <code>c(0, 1)</code> , the mean of IoUs for the two classes is returned.
<code>threshold</code>	A threshold that applies to the prediction logits to convert them to either predicted class 0 if the logit is below <code>threshold</code> or predicted class 1 if the logit is above <code>threshold</code> .
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

### Value

a `Metric` instance is returned. The `Metric` instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Note

with `threshold=0`, this metric has the same behavior as `IoU`.



## Examples

Standalone usage:

```
m <- metric_binary_iou(target_class_ids=c(0L, 1L), threshold = 0.3)
m$update_state(c(0, 1, 0, 1), c(0.1, 0.2, 0.4, 0.7))
m$result()
```

```
## tf.Tensor(0.33333334, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(c(0, 1, 0, 1), c(0.1, 0.2, 0.4, 0.7),
              sample_weight = c(0.2, 0.3, 0.4, 0.1))
m$result()
```

```
## tf.Tensor(0.17361109, shape=(), dtype=float32)
```

Usage with compile() API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_binary_iou(
    target_class_ids = 0L,
    threshold = 0.5
  ))
)
```

## See Also

Other iou metrics:

```
metric\_iou\(\)
metric\_mean\_iou\(\)
metric\_one\_hot\_iou\(\)
metric\_one\_hot\_mean\_iou\(\)
```

Other metrics:

```
Metric\(\)
custom\_metric\(\)
metric\_auc\(\)
metric\_binary\_accuracy\(\)
metric\_binary\_crossentropy\(\)
metric\_binary\_focal\_crossentropy\(\)
metric\_categorical\_accuracy\(\)
metric\_categorical\_crossentropy\(\)
metric\_categorical\_focal\_crossentropy\(\)
```

```
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_categorical\_accuracy

*Calculates how often predictions match one-hot labels.*

---

### **Description**

You can provide logits of classes as `y_pred`, since argmax of logits and probabilities are same.

This metric creates two local variables, `total` and `count` that are used to compute the frequency with which `y_pred` matches `y_true`. This frequency is ultimately returned as `categorical_accuracy`: an idempotent operation that simply divides `total` by `count`.

`y_pred` and `y_true` should be passed in as vectors of probabilities, rather than as labels. If necessary, use `op_one_hot` to expand `y_true` as a vector.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

### Usage

```
metric_categorical_accuracy(
  y_true,
  y_pred,
  ...,
  name = "categorical_accuracy",
  dtype = NULL
)
```

### Arguments

<code>y_true</code>	Tensor of true targets.
<code>y_pred</code>	Tensor of predicted targets.
<code>...</code>	For forward/backward compatibility.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

### Value

If `y_true` and `y_pred` are missing, a `Metric` instance is returned. The `Metric` instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

### Usage

Standalone usage:

```
m <- metric_categorical_accuracy()
m$update_state(rbind(c(0, 0, 1), c(0, 1, 0)), rbind(c(0.1, 0.9, 0.8),
  c(0.05, 0.95, 0)))
m$result()

## tf.Tensor(0.5, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0, 0, 1), c(0, 1, 0)), rbind(c(0.1, 0.9, 0.8),
  c(0.05, 0.95, 0)),
  sample_weight = c(0.7, 0.3))
m$result()
```

```
## tf.Tensor(0.3, shape=(), dtype=float32)
```

```
# 0.3
```

Usage with compile() API:

```
model %>% compile(optimizer = 'sgd',  
                 loss = 'categorical_crossentropy',  
                 metrics = list(metric_categorical_accuracy()))
```

### See Also

- [https://keras.io/api/metrics/accuracy\\_metrics#categoricalaccuracy-class](https://keras.io/api/metrics/accuracy_metrics#categoricalaccuracy-class)

Other accuracy metrics:

```
metric_binary_accuracy()  
metric_sparse_categorical_accuracy()  
metric_sparse_top_k_categorical_accuracy()  
metric_top_k_categorical_accuracy()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()
```

```
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

---

metric\_categorical\_crossentropy

*Computes the crossentropy metric between the labels and predictions.*

---

### Description

This is the crossentropy metric class to be used when there are multiple label classes (2 or more). It assumes that labels are one-hot encoded, e.g., when labels values are `c(2, 0, 1)`, then `y_true` is `rbind(c([0, 0, 1]), c(1, 0, 0), c(0, 1, 0))`.

### Usage

```
metric_categorical_crossentropy(
  y_true,
  y_pred,
  from_logits = FALSE,
  label_smoothing = 0,
  axis = -1L,
  ...,
  name = "categorical_crossentropy",
  dtype = NULL
)
```

**Arguments**

<code>y_true</code>	Tensor of one-hot true targets.
<code>y_pred</code>	Tensor of predicted targets.
<code>from_logits</code>	(Optional) Whether output is expected to be a logits tensor. By default, we consider that output encodes a probability distribution.
<code>label_smoothing</code>	(Optional) Float in $[0, 1]$ . When $> 0$ , label values are smoothed, meaning the confidence on label values are relaxed. e.g. <code>label_smoothing=0.2</code> means that we will use a value of 0.1 for label "0" and 0.9 for label "1".
<code>axis</code>	(Optional) Defaults to -1. The dimension along which entropy is computed.
<code>...</code>	For forward/backward compatibility.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

If `y_true` and `y_pred` are missing, a Metric instance is returned. The Metric instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Examples**

Standalone usage:

```
# EPSILON = 1e-7, y = y_true, y` = y_pred
# y` = clip_op_clip_by_value(output, EPSILON, 1. - EPSILON)
# y` = rbind(c(0.05, 0.95, EPSILON), c(0.1, 0.8, 0.1))
# xent = -sum(y * log(y`), axis = -1)
#       = -((log 0.95), (log 0.1))
#       = [0.051, 2.302]
# Reduced xent = (0.051 + 2.302) / 2
m <- metric_categorical_crossentropy()
m$update_state(rbind(c(0, 1, 0), c(0, 0, 1)),
              rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1)))
m$result()

## tf.Tensor(1.1769392, shape=(), dtype=float32)

# 1.1769392

m$reset_state()
m$update_state(rbind(c(0, 1, 0), c(0, 0, 1)),
              rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1)),
              sample_weight = c(0.3, 0.7))
m$result()
```

```
## tf.Tensor(1.6271976, shape=(), dtype=float32)
```

Usage with compile() API:

```
model %>% compile(  
  optimizer = 'sgd',  
  loss = 'mse',  
  metrics = list(metric_categorical_crossentropy())
```

### See Also

- [https://keras.io/api/metrics/probabilistic\\_metrics#categorical\\_crossentropy-class](https://keras.io/api/metrics/probabilistic_metrics#categorical_crossentropy-class)

Other losses:

```
Loss()  
loss_binary_crossentropy()  
loss_binary_focal_crossentropy()  
loss_categorical_crossentropy()  
loss_categorical_focal_crossentropy()  
loss_categorical_hinge()  
loss_cosine_similarity()  
loss_ctc()  
loss_dice()  
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_error()  
loss_mean_squared_logarithmic_error()  
loss_poisson()  
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()
```

```
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()
```



```
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

Other probabilistic metrics:

```
metric_binary_crossentropy()
metric_kl_divergence()
metric_poisson()
metric_sparse_categorical_crossentropy()
```

---

```
metric_categorical_focal_crossentropy
```

*Computes the categorical focal crossentropy loss.*

---

## Description

Computes the categorical focal crossentropy loss.

## Usage

```
metric_categorical_focal_crossentropy(
    y_true,
    y_pred,
    alpha = 0.25,
    gamma = 2,
    from_logits = FALSE,
    label_smoothing = 0,
    axis = -1L
)
```

## Arguments

<code>y_true</code>	Tensor of one-hot true targets.
<code>y_pred</code>	Tensor of predicted targets.
<code>alpha</code>	A weight balancing factor for all classes, default is 0.25 as mentioned in the reference. It can be a list of floats or a scalar. In the multi-class case, alpha may be set by inverse class frequency by using <code>compute_class_weight</code> from <code>sklearn.utils</code> .
<code>gamma</code>	A focusing parameter, default is 2.0 as mentioned in the reference. It helps to gradually reduce the importance given to simple examples in a smooth manner. When <code>gamma = 0</code> , there is no focal effect on the categorical crossentropy.
<code>from_logits</code>	Whether <code>y_pred</code> is expected to be a logits tensor. By default, we assume that <code>y_pred</code> encodes a probability distribution.

`label_smoothing` Float in  $[0, 1]$ . If  $> 0$  then smooth the labels. For example, if  $0.1$ , use  $0.1 / \text{num\_classes}$  for non-target labels and  $0.9 + 0.1 / \text{num\_classes}$  for target labels.

`axis` Defaults to  $-1$ . The dimension along which the entropy is computed.

**Value**

Categorical focal crossentropy loss value.

**Examples**

```
y_true <- rbind(c(0, 1, 0), c(0, 0, 1))
y_pred <- rbind(c(0.05, 0.9, 0.05), c(0.1, 0.85, 0.05))
loss <- loss_categorical_focal_crossentropy(y_true, y_pred)
loss

## tf.Tensor([2.63401289e-04 6.75912094e-01], shape=(2), dtype=float64)
```

**See Also**

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_hinge()
metric_hinge()
```

```
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

**Other metrics:**

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()
```

```

metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

metric\_categorical\_hinge

*Computes the categorical hinge metric between y\_true and y\_pred.*

---

### Description

Formula:

$$\text{loss} \leftarrow \text{maximum}(\text{neg} - \text{pos} + 1, 0)$$

where  $\text{neg} = \text{maximum}((1 - y_{\text{true}}) * y_{\text{pred}})$  and  $\text{pos} = \text{sum}(y_{\text{true}} * y_{\text{pred}})$

### Usage

```

metric_categorical_hinge(
  y_true,
  y_pred,
  ...,
  name = "categorical_hinge",
  dtype = NULL
)

```

### Arguments

y_true	The ground truth values. y_true values are expected to be either {-1, +1} or {0, 1} (i.e. a one-hot-encoded tensor) with shape = [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].
...	For forward/backward compatability.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

Categorical hinge loss values with shape = [batch\_size, d0, .. dN-1].

**Usage**

Standalone usage:

```
m <- metric_categorical_hinge()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)))
m$result()

## tf.Tensor(1.4000001, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)),
               sample_weight = c(1, 0))
m$result()

## tf.Tensor(1.2, shape=(), dtype=float32)
```

**See Also**

- [https://keras.io/api/metrics/hinge\\_metrics#categoricalhinge-class](https://keras.io/api/metrics/hinge_metrics#categoricalhinge-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_hinge()
```

```
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()
```

```

metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

Other hinge metrics:

```

metric_hinge()
metric_squared_hinge()

```

---

metric\_cosine\_similarity

*Computes the cosine similarity between the labels and predictions.*

---

## Description

Formula:

```
loss <- sum(l2_norm(y_true) * l2_norm(y_pred))
```

See: [Cosine Similarity](#). This metric keeps the average cosine similarity between predictions and labels over a stream of data.

## Usage

```

metric_cosine_similarity(
  ...,
  name = "cosine_similarity",
  dtype = NULL,
  axis = -1L
)

```

## Arguments

...	For forward/backward compatibility.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.
axis	(Optional) Defaults to -1. The dimension along which the cosine similarity is computed.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Examples**

Standalone usage:

```
m <- metric_cosine_similarity(axis=2)
m$update_state(rbind(c(0., 1.), c(1., 1.)), rbind(c(1., 0.), c(1., 1.)))
m$result()

## tf.Tensor(0.5, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0., 1.), c(1., 1.)), rbind(c(1., 0.), c(1., 1.)),
               sample_weight = c(0.3, 0.7))
m$result()

## tf.Tensor(0.7, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_cosine_similarity(axis=2)))
```

**See Also**

- [https://keras.io/api/metrics/regression\\_metrics#cosinesimilarity-class](https://keras.io/api/metrics/regression_metrics#cosinesimilarity-class)

Other regression metrics:

```
metric_log_cosh_error()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_r2_score()
metric_root_mean_squared_error()
```

Other metrics:

```
Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
```



```
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

**Description**

Formula:

```
f1_score <- 2 * (precision * recall) / (precision + recall)
```

This is the harmonic mean of precision and recall. Its output range is  $[0, 1]$ . It works for both multi-class and multi-label classification.

**Usage**

```
metric_f1_score(
  ...,
  average = NULL,
  threshold = NULL,
  name = "f1_score",
  dtype = NULL
)
```

**Arguments**

...	For forward/backward compatibility.
average	Type of averaging to be performed on data. Acceptable values are NULL, "micro", "macro" and "weighted". Defaults to NULL. If NULL, no averaging is performed and result() will return the score for each class. If "micro", compute metrics globally by counting the total true positives, false negatives and false positives. If "macro", compute metrics for each label, and return their unweighted mean. This does not take label imbalance into account. If "weighted", compute metrics for each label, and return their average weighted by support (the number of true instances for each label). This alters "macro" to account for label imbalance. It can result in a score that is not between precision and recall.
threshold	Elements of y_pred greater than threshold are converted to be 1, and the rest 0. If threshold is NULL, the argmax of y_pred is converted to 1, and the rest to 0.
name	Optional. String name of the metric instance.
dtype	Optional. Data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to compile(metrics = ), or used as a standalone object. See ?Metric for example usage.

**Examples**

```
metric <- metric_f1_score(threshold = 0.5)
y_true <- rbind(c(1, 1, 1),
               c(1, 0, 0),
               c(1, 1, 0))
```

```
y_pred <- rbind(c(0.2, 0.6, 0.7),
               c(0.2, 0.6, 0.6),
               c(0.6, 0.8, 0.0))
metric$update_state(y_true, y_pred)
result <- metric$result()
result

## tf.Tensor([0.49999997 0.79999995 0.66666657], shape=(3), dtype=float32)
```

## Returns

F-1 Score: float.

## See Also

Other f score metrics:

[metric\\_fbeta\\_score\(\)](#)

Other metrics:

[Metric\(\)](#)

[custom\\_metric\(\)](#)

[metric\\_auc\(\)](#)

[metric\\_binary\\_accuracy\(\)](#)

[metric\\_binary\\_crossentropy\(\)](#)

[metric\\_binary\\_focal\\_crossentropy\(\)](#)

[metric\\_binary\\_iou\(\)](#)

[metric\\_categorical\\_accuracy\(\)](#)

[metric\\_categorical\\_crossentropy\(\)](#)

[metric\\_categorical\\_focal\\_crossentropy\(\)](#)

[metric\\_categorical\\_hinge\(\)](#)

[metric\\_cosine\\_similarity\(\)](#)

[metric\\_false\\_negatives\(\)](#)

[metric\\_false\\_positives\(\)](#)

[metric\\_fbeta\\_score\(\)](#)

[metric\\_hinge\(\)](#)

[metric\\_huber\(\)](#)

[metric\\_iou\(\)](#)

[metric\\_kl\\_divergence\(\)](#)

[metric\\_log\\_cosh\(\)](#)

[metric\\_log\\_cosh\\_error\(\)](#)

[metric\\_mean\(\)](#)

[metric\\_mean\\_absolute\\_error\(\)](#)

[metric\\_mean\\_absolute\\_percentage\\_error\(\)](#)

[metric\\_mean\\_iou\(\)](#)

[metric\\_mean\\_squared\\_error\(\)](#)

[metric\\_mean\\_squared\\_logarithmic\\_error\(\)](#)

[metric\\_mean\\_wrapper\(\)](#)

[metric\\_one\\_hot\\_iou\(\)](#)

```

metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

metric\_false\_negatives

*Calculates the number of false negatives.*

---

### Description

If `sample_weight` is given, calculates the sum of the weights of false negatives. This metric creates one local variable, accumulator that is used to keep track of the number of false negatives.

If `sample_weight` is NULL, weights default to 1. Use `sample_weight` of 0 to mask values.

### Usage

```
metric_false_negatives(..., thresholds = NULL, name = NULL, dtype = NULL)
```

### Arguments

...	For forward/backward compatability.
thresholds	(Optional) Defaults to 0.5. A float value, or a Python list of float threshold values in $[0, 1]$ . A threshold is compared with prediction values to determine the truth value of predictions (i.e., above the threshold is TRUE, below is FALSE). If used with a loss function that sets <code>from_logits=TRUE</code> (i.e. no sigmoid applied to predictions), thresholds should be set to 0. One metric value is generated for each threshold value.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Usage**

Standalone usage:

```
m <- metric_false_negatives()
m$update_state(c(0, 1, 1, 1), c(0, 1, 0, 0))
m$result()

## tf.Tensor(2.0, shape=(), dtype=float32)

m$reset_state()
m$update_state(c(0, 1, 1, 1), c(0, 1, 0, 0), sample_weight=c(0, 0, 1, 0))
m$result()

## tf.Tensor(1.0, shape=(), dtype=float32)

# 1.0
```

**See Also**

- [https://keras.io/api/metrics/classification\\_metrics#falsenegatives-class](https://keras.io/api/metrics/classification_metrics#falsenegatives-class)

Other confusion metrics:

```
metric_auc()
metric_false_positives()
metric_precision()
metric_precision_at_recall()
metric_recall()
metric_recall_at_precision()
metric_sensitivity_at_specificity()
metric_specificity_at_sensitivity()
metric_true_negatives()
metric_true_positives()
```

Other metrics:

```
Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
```

```
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_false\_positives

*Calculates the number of false positives.*

---

**Description**

If `sample_weight` is given, calculates the sum of the weights of false positives. This metric creates one local variable, accumulator that is used to keep track of the number of false positives.

If `sample_weight` is NULL, weights default to 1. Use `sample_weight` of 0 to mask values.

**Usage**

```
metric_false_positives(..., thresholds = NULL, name = NULL, dtype = NULL)
```

**Arguments**

<code>...</code>	For forward/backward compatability.
<code>thresholds</code>	(Optional) Defaults to 0.5. A float value, or a Python list of float threshold values in <code>[0, 1]</code> . A threshold is compared with prediction values to determine the truth value of predictions (i.e., above the threshold is TRUE, below is FALSE). If used with a loss function that sets <code>from_logits=TRUE</code> (i.e. no sigmoid applied to predictions), <code>thresholds</code> should be set to 0. One metric value is generated for each threshold value.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Usage**

Standalone usage:

```
m <- metric_false_positives()
m$update_state(c(0, 1, 0, 0), c(0, 0, 1, 1))
m$result()
```

```
## tf.Tensor(2.0, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(c(0, 1, 0, 0), c(0, 0, 1, 1), sample_weight = c(0, 0, 1, 0))
m$result()
```

```
## tf.Tensor(1.0, shape=(), dtype=float32)
```

**See Also**

- [https://keras.io/api/metrics/classification\\_metrics#falsepositives-class](https://keras.io/api/metrics/classification_metrics#falsepositives-class)

Other confusion metrics:

```
metric_auc()  
metric_false_negatives()  
metric_precision()  
metric_precision_at_recall()  
metric_recall()  
metric_recall_at_precision()  
metric_sensitivity_at_specificity()  
metric_specificity_at_sensitivity()  
metric_true_negatives()  
metric_true_positives()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()
```



```
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

---

metric\_fbeta\_score      *Computes F-Beta score.*

---

## Description

Formula:

```
b2 <- beta^2
f_beta_score <- (1 + b2) * (precision * recall) / (precision * b2 + recall)
```

This is the weighted harmonic mean of precision and recall. Its output range is  $[0, 1]$ . It works for both multi-class and multi-label classification.

## Usage

```
metric_fbeta_score(
  ...,
  average = NULL,
  beta = 1,
  threshold = NULL,
  name = "fbeta_score",
  dtype = NULL
)
```

## Arguments

...                      For forward/backward compatibility.

average	Type of averaging to be performed across per-class results in the multi-class case. Acceptable values are NULL, "micro", "macro" and "weighted". Defaults to NULL. If NULL, no averaging is performed and result() will return the score for each class. If "micro", compute metrics globally by counting the total true positives, false negatives and false positives. If "macro", compute metrics for each label, and return their unweighted mean. This does not take label imbalance into account. If "weighted", compute metrics for each label, and return their average weighted by support (the number of true instances for each label). This alters "macro" to account for label imbalance. It can result in an score that is not between precision and recall.
beta	Determines the weight of given to recall in the harmonic mean between precision and recall (see pseudocode equation above). Defaults to 1.
threshold	Elements of y_pred greater than threshold are converted to be 1, and the rest 0. If threshold is NULL, the argmax of y_pred is converted to 1, and the rest to 0.
name	Optional. String name of the metric instance.
dtype	Optional. Data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to compile(metrics = ), or used as a standalone object. See ?Metric for example usage.

**Examples**

```
metric <- metric_fbeta_score(beta = 2.0, threshold = 0.5)
y_true <- rbind(c(1, 1, 1),
               c(1, 0, 0),
               c(1, 1, 0))
y_pred <- rbind(c(0.2, 0.6, 0.7),
               c(0.2, 0.6, 0.6),
               c(0.6, 0.8, 0.0))
metric$update_state(y_true, y_pred)
metric$result()

## tf.Tensor([0.3846154  0.90909094 0.8333332 ], shape=(3), dtype=float32)
```

**Returns**

F-Beta Score: float.

**See Also**

Other f score metrics:  
[metric\\_f1\\_score\(\)](#)

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric_hinge	<i>Computes the hinge metric between y_true and y_pred.</i>
--------------	---

---

### Description

Formula:

```
loss <- mean(maximum(1 - y_true * y_pred, 0), axis=-1)
```

y\_true values are expected to be -1 or 1. If binary (0 or 1) labels are provided we will convert them to -1 or 1.

### Usage

```
metric_hinge(y_true, y_pred, ..., name = "hinge", dtype = NULL)
```

### Arguments

y_true	The ground truth values. y_true values are expected to be -1 or 1. If binary (0 or 1) labels are provided they will be converted to -1 or 1 with shape = [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].
...	For forward/backward compatability.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

If y\_true and y\_pred are missing, a Metric instance is returned. The Metric instance that can be passed directly to compile(metrics = ), or used as a standalone object. See ?Metric for example usage. If y\_true and y\_pred are provided, then a tensor with the computed value is returned.

### Usage

Standalone usage:

```
m <- metric_hinge()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)))
m$result()

## tf.Tensor(1.3, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)),
              sample_weight = c(1, 0))
m$result()

## tf.Tensor(1.1, shape=(), dtype=float32)
```

### See Also

- [https://keras.io/api/metrics/hinge\\_metrics#hinge-class](https://keras.io/api/metrics/hinge_metrics#hinge-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

Other hinge metrics:  
`metric_categorical_hinge()`  
`metric_squared_hinge()`

---

`metric_huber`                      *Computes Huber loss value.*

---

## Description

Formula:

```
for (x in error) {  
  if (abs(x) <= delta){  
    loss <- c(loss, (0.5 * x^2))  
  } else if (abs(x) > delta) {  
    loss <- c(loss, (delta * abs(x) - 0.5 * delta^2))  
  }  
}  
loss <- mean(loss)
```

See: [Huber loss](#).

## Usage

```
metric_huber(y_true, y_pred, delta = 1)
```

## Arguments

<code>y_true</code>	tensor of true targets.
<code>y_pred</code>	tensor of predicted targets.
<code>delta</code>	A float, the point where the Huber loss function changes from a quadratic to linear. Defaults to 1.0.

## Value

Tensor with one scalar loss entry per sample.

## Examples

```
y_true <- rbind(c(0, 1), c(0, 0))  
y_pred <- rbind(c(0.6, 0.4), c(0.4, 0.6))  
loss <- loss_huber(y_true, y_pred)
```

**See Also**

Other losses:

```
Loss()  
loss_binary_crossentropy()  
loss_binary_focal_crossentropy()  
loss_categorical_crossentropy()  
loss_categorical_focal_crossentropy()  
loss_categorical_hinge()  
loss_cosine_similarity()  
loss_ctc()  
loss_dice()  
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_error()  
loss_mean_squared_logarithmic_error()  
loss_poisson()  
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()
```



```
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_iou

*Computes the Intersection-Over-Union metric for specific target classes.*

---

### **Description**

Formula:

```
iou <- true_positives / (true_positives + false_positives + false_negatives)
```

Intersection-Over-Union is a common evaluation metric for semantic image segmentation.

To compute IoUs, the predictions are accumulated in a confusion matrix, weighted by `sample_weight` and the metric is then calculated from it.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

Note, this class first computes IoUs for all individual classes, then returns the mean of IoUs for the classes that are specified by `target_class_ids`. If `target_class_ids` has only one id value, the IoU of that specific class is returned.

### Usage

```
metric_iou(
  ...,
  num_classes,
  target_class_ids,
  name = NULL,
  dtype = NULL,
  ignore_class = NULL,
  sparse_y_true = TRUE,
  sparse_y_pred = TRUE,
  axis = -1L
)
```

### Arguments

<code>...</code>	For forward/backward compatibility.
<code>num_classes</code>	The possible number of labels the prediction task can have.
<code>target_class_ids</code>	A list of target class ids for which the metric is returned. To compute IoU for a specific class, a list of a single id value should be provided.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.
<code>ignore_class</code>	Optional integer. The ID of a class to be ignored during metric computation. This is useful, for example, in segmentation problems featuring a "void" class (commonly -1 or 255) in segmentation maps. By default ( <code>ignore_class=NULL</code> ), all classes are considered.
<code>sparse_y_true</code>	Whether labels are encoded using integers or dense floating point vectors. If <code>FALSE</code> , the <code>argmax</code> function is used to determine each sample's most likely associated label.
<code>sparse_y_pred</code>	Whether predictions are encoded using integers or dense floating point vectors. If <code>FALSE</code> , the <code>argmax</code> function is used to determine each sample's most likely associated label.
<code>axis</code>	(Optional) -1 is the dimension containing the logits. Defaults to -1.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Examples**

Standalone usage:

```
m <- metric_iou(num_classes = 2L, target_class_ids = list(0L))
m$update_state(c(0, 0, 1, 1), c(0, 1, 0, 1))
m$result()
```

```
## tf.Tensor(0.3333333, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(c(0, 0, 1, 1), c(0, 1, 0, 1),
               sample_weight = c(0.3, 0.3, 0.3, 0.1))
m$result()
```

```
## tf.Tensor(0.33333325, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_iou(num_classes = 2L, target_class_ids = list(0L))))
```

**See Also**

Other iou metrics:

```
metric\_binary\_iou\(\)
metric\_mean\_iou\(\)
metric\_one\_hot\_iou\(\)
metric\_one\_hot\_mean\_iou\(\)
```

Other metrics:

```
Metric\(\)
custom\_metric\(\)
metric\_auc\(\)
metric\_binary\_accuracy\(\)
metric\_binary\_crossentropy\(\)
metric\_binary\_focal\_crossentropy\(\)
metric\_binary\_iou\(\)
metric\_categorical\_accuracy\(\)
```

```
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_kl\_divergence    *Computes Kullback-Leibler divergence metric between y\_true and*

---

### Description

Formula:

```
loss <- y_true * log(y_true / y_pred)
```

`y_true` and `y_pred` are expected to be probability distributions, with values between 0 and 1. They will get clipped to the `[0, 1]` range.

### Usage

```
metric_kl_divergence(y_true, y_pred, ..., name = "kl_divergence", dtype = NULL)
```

### Arguments

<code>y_true</code>	Tensor of true targets.
<code>y_pred</code>	Tensor of predicted targets.
<code>...</code>	For forward/backward compatability.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

### Value

If `y_true` and `y_pred` are missing, a Metric instance is returned. The Metric instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

### Usage

Standalone usage:

```
m <- metric_kl_divergence()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)))
m$result()

## tf.Tensor(0.45814303, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)),
              sample_weight = c(1, 0))
m$result()

## tf.Tensor(0.91628915, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(optimizer = 'sgd',
                 loss = 'mse',
                 metrics = list(metric_kl_divergence()))
```

**See Also**

- [https://keras.io/api/metrics/probabilistic\\_metrics#kldivergence-class](https://keras.io/api/metrics/probabilistic_metrics#kldivergence-class)

Other losses:

```
Loss()  
loss_binary_crossentropy()  
loss_binary_focal_crossentropy()  
loss_categorical_crossentropy()  
loss_categorical_focal_crossentropy()  
loss_categorical_hinge()  
loss_cosine_similarity()  
loss_ctc()  
loss_dice()  
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_error()  
loss_mean_squared_logarithmic_error()  
loss_poisson()  
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()
```

```
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

Other probabilistic metrics:

```
metric_binary_crossentropy()
metric_categorical_crossentropy()
metric_poisson()
metric_sparse_categorical_crossentropy()
```

---

metric\_log\_cosh      *Logarithm of the hyperbolic cosine of the prediction error.*

---

### Description

Formula:

```
loss <- mean(log(cosh(y_pred - y_true)), axis=-1)
```

Note that  $\log(\cosh(x))$  is approximately equal to  $(x ** 2) / 2$  for small  $x$  and to  $\text{abs}(x) - \log(2)$  for large  $x$ . This means that 'logcosh' works mostly like the mean squared error, but will not be so strongly affected by the occasional wildly incorrect prediction.

### Usage

```
metric_log_cosh(y_true, y_pred)
```

### Arguments

`y_true`            Ground truth values with shape = [batch\_size, d0, .. dN].  
`y_pred`            The predicted values with shape = [batch\_size, d0, .. dN].

### Value

Logcosh error values with shape = [batch\_size, d0, .. dN-1].

### Examples

```
y_true <- rbind(c(0., 1.), c(0., 0.))  
y_pred <- rbind(c(1., 1.), c(0., 0.))  
loss <- metric_log_cosh(y_true, y_pred)  
loss  
  
## tf.Tensor([ 2.16890413e-01 -1.90465432e-09], shape=(2), dtype=float64)
```

### See Also

Other losses:

[Loss\(\)](#)  
[loss\\_binary\\_crossentropy\(\)](#)  
[loss\\_binary\\_focal\\_crossentropy\(\)](#)  
[loss\\_categorical\\_crossentropy\(\)](#)  
[loss\\_categorical\\_focal\\_crossentropy\(\)](#)  
[loss\\_categorical\\_hinge\(\)](#)  
[loss\\_cosine\\_similarity\(\)](#)  
[loss\\_ctc\(\)](#)



```
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

Other metrics:

```
Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
```

```
metric_iou()
metric_kl_divergence()
metric_log_cosh_error()
metric_mean()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

---

`metric_log_cosh_error` *Computes the logarithm of the hyperbolic cosine of the prediction error.*

---

### Description

Formula:

```
error <- y_pred - y_true
logcosh <- mean(log((exp(error) + exp(-error))/2), axis=-1)
```

### Usage

```
metric_log_cosh_error(..., name = "logcosh", dtype = NULL)
```

**Arguments**

... For forward/backward compatibility.  
 name (Optional) string name of the metric instance.  
 dtype (Optional) data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Examples**

Standalone usage:

```
m <- metric_log_cosh_error()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)))
m$result()

## tf.Tensor(0.108445205, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)),
              sample_weight = c(1, 0))
m$result()

## tf.Tensor(0.21689041, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(optimizer = 'sgd',
                 loss = 'mse',
                 metrics = list(metric_log_cosh_error()))
```

**See Also**

- [https://keras.io/api/metrics/regression\\_metrics#logcosherror-class](https://keras.io/api/metrics/regression_metrics#logcosherror-class)

Other regression metrics:

```
metric_cosine_similarity()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_r2_score()
metric_root_mean_squared_error()
```

## Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric_mean	<i>Compute the (weighted) mean of the given values.</i>
-------------	---

---

### Description

For example, if values is `c(1, 3, 5, 7)` then the mean is 4. If `sample_weight` was specified as `c(1, 1, 0, 0)` then the mean would be 2.

This metric creates two variables, `total` and `count`. The mean value returned is simply `total` divided by `count`.

### Usage

```
metric_mean(..., name = "mean", dtype = NULL)
```

### Arguments

<code>...</code>	For forward/backward compatability.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

### Value

a `Metric` instance is returned. The `Metric` instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Examples

```
m <- metric_mean()
m$update_state(c(1, 3, 5, 7))
m$result()

## tf.Tensor(4.0, shape=(), dtype=float32)

m$reset_state()
m$update_state(c(1, 3, 5, 7), sample_weight = c(1, 1, 0, 0))
m$result()

## tf.Tensor(2.0, shape=(), dtype=float32)
```

**See Also**

Other reduction metrics:

`metric_mean_wrapper()`  
`metric_sum()`

Other metrics:

`Metric()`  
`custom_metric()`  
`metric_auc()`  
`metric_binary_accuracy()`  
`metric_binary_crossentropy()`  
`metric_binary_focal_crossentropy()`  
`metric_binary_iou()`  
`metric_categorical_accuracy()`  
`metric_categorical_crossentropy()`  
`metric_categorical_focal_crossentropy()`  
`metric_categorical_hinge()`  
`metric_cosine_similarity()`  
`metric_f1_score()`  
`metric_false_negatives()`  
`metric_false_positives()`  
`metric_fbeta_score()`  
`metric_hinge()`  
`metric_huber()`  
`metric_iou()`  
`metric_kl_divergence()`  
`metric_log_cosh()`  
`metric_log_cosh_error()`  
`metric_mean_absolute_error()`  
`metric_mean_absolute_percentage_error()`  
`metric_mean_iou()`  
`metric_mean_squared_error()`  
`metric_mean_squared_logarithmic_error()`  
`metric_mean_wrapper()`  
`metric_one_hot_iou()`  
`metric_one_hot_mean_iou()`  
`metric_poisson()`  
`metric_precision()`  
`metric_precision_at_recall()`  
`metric_r2_score()`  
`metric_recall()`  
`metric_recall_at_precision()`  
`metric_root_mean_squared_error()`  
`metric_sensitivity_at_specificity()`  
`metric_sparse_categorical_accuracy()`  
`metric_sparse_categorical_crossentropy()`  
`metric_sparse_top_k_categorical_accuracy()`  
`metric_specificity_at_sensitivity()`

```
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_mean\_absolute\_error

*Computes the mean absolute error between the labels and predictions.*

---

### Description

Formula:

```
loss <- mean(abs(y_true - y_pred))
```

### Usage

```
metric_mean_absolute_error(  
  y_true,  
  y_pred,  
  ...,  
  name = "mean_absolute_error",  
  dtype = NULL  
)
```

### Arguments

<code>y_true</code>	Ground truth values with shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values with shape = [batch_size, d0, .. dN].
<code>...</code>	For forward/backward compatability.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

### Value

If `y_true` and `y_pred` are missing, a Metric instance is returned. The Metric instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Examples**

Standalone usage:

```
m <- metric_mean_absolute_error()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)))
m$result()
```

```
## tf.Tensor(0.25, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)),
              sample_weight = c(1, 0))
m$result()
```

```
## tf.Tensor(0.5, shape=(), dtype=float32)
```

Usage with compile() API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_mean_absolute_error()))
```

**See Also**

- [https://keras.io/api/metrics/regression\\_metrics#meanabsoluteerror-class](https://keras.io/api/metrics/regression_metrics#meanabsoluteerror-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
```



```
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()
```

```
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

Other regression metrics:

```
metric_cosine_similarity()
metric_log_cosh_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_r2_score()
metric_root_mean_squared_error()
```

---

metric\_mean\_absolute\_percentage\_error

*Computes mean absolute percentage error between y\_true and y\_pred.*

---

## Description

Formula:

```
loss <- 100 * mean(abs((y_true - y_pred) / y_true), axis=-1)
```

Division by zero is prevented by dividing by `maximum(y_true, epsilon)` where `epsilon = keras$backend$epsilon()` (default to  $1e-7$ ).

**Usage**

```
metric_mean_absolute_percentage_error(
  y_true,
  y_pred,
  ...,
  name = "mean_absolute_percentage_error",
  dtype = NULL
)
```

**Arguments**

<code>y_true</code>	Ground truth values with shape = [batch_size, d0, .. dN].
<code>y_pred</code>	The predicted values with shape = [batch_size, d0, .. dN].
<code>...</code>	For forward/backward compatability.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

If `y_true` and `y_pred` are missing, a Metric instance is returned. The Metric instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Examples**

Standalone usage:

```
m <- metric_mean_absolute_percentage_error()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)))
m$result()

## tf.Tensor(250000000.0, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)),
              sample_weight = c(1, 0))
m$result()

## tf.Tensor(500000000.0, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_mean_absolute_percentage_error())
```

**See Also**

- [https://keras.io/api/metrics/regression\\_metrics#meanabsolutepercentageerror-class](https://keras.io/api/metrics/regression_metrics#meanabsolutepercentageerror-class)

Other losses:

```
Loss()  
loss_binary_crossentropy()  
loss_binary_focal_crossentropy()  
loss_categorical_crossentropy()  
loss_categorical_focal_crossentropy()  
loss_categorical_hinge()  
loss_cosine_similarity()  
loss_ctc()  
loss_dice()  
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_error()  
loss_mean_squared_logarithmic_error()  
loss_poisson()  
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()
```

```
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

Other regression metrics:

```
metric_cosine_similarity()  
metric_log_cosh_error()  
metric_mean_absolute_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()
```

```
metric_r2_score()
metric_root_mean_squared_error()
```

---

```
metric_mean_iou      Computes the mean Intersection-Over-Union metric.
```

---

## Description

Formula:

```
iou <- true_positives / (true_positives + false_positives + false_negatives)
```

Intersection-Over-Union is a common evaluation metric for semantic image segmentation.

To compute IoUs, the predictions are accumulated in a confusion matrix, weighted by `sample_weight` and the metric is then calculated from it.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

Note that this class first computes IoUs for all individual classes, then returns the mean of these values.

## Usage

```
metric_mean_iou(
  ...,
  num_classes,
  name = NULL,
  dtype = NULL,
  ignore_class = NULL,
  sparse_y_true = TRUE,
  sparse_y_pred = TRUE,
  axis = -1L
)
```

## Arguments

<code>...</code>	For forward/backward compatibility.
<code>num_classes</code>	The possible number of labels the prediction task can have. This value must be provided, since a confusion matrix of dimension = <code>[num_classes, num_classes]</code> will be allocated.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.
<code>ignore_class</code>	Optional integer. The ID of a class to be ignored during metric computation. This is useful, for example, in segmentation problems featuring a "void" class (commonly -1 or 255) in segmentation maps. By default ( <code>ignore_class=NULL</code> ), all classes are considered.

sparse_y_true	Whether labels are encoded using integers or dense floating point vectors. If FALSE, the argmax function is used to determine each sample's most likely associated label.
sparse_y_pred	Whether predictions are encoded using integers or dense floating point vectors. If FALSE, the argmax function is used to determine each sample's most likely associated label.
axis	(Optional) The dimension containing the logits. Defaults to -1.

### Value

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Examples

Standalone usage:

```
# cm = [[1, 1],
#       [1, 1]]
# sum_row = [2, 2], sum_col = [2, 2], true_positives = [1, 1]
# iou = true_positives / (sum_row + sum_col - true_positives)
# result = (1 / (2 + 2 - 1) + 1 / (2 + 2 - 1)) / 2 = 0.33
m <- metric_mean_iou(num_classes = 2)
m$update_state(c(0, 0, 1, 1), c(0, 1, 0, 1))
m$result()
```

```
## tf.Tensor(0.33333334, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(c(0, 0, 1, 1), c(0, 1, 0, 1),
               sample_weight=c(0.3, 0.3, 0.3, 0.1))
m$result()
```

```
## tf.Tensor(0.2380952, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_mean_iou(num_classes=2)))
```

**See Also**

- [https://keras.io/api/metrics/segmentation\\_metrics#meaniou-class](https://keras.io/api/metrics/segmentation_metrics#meaniou-class)

Other iou metrics:

```
metric_binary_iou()
metric_iou()
metric_one_hot_iou()
metric_one_hot_mean_iou()
```

Other metrics:

```
Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
```



```

metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

metric\_mean\_squared\_error

*Computes the mean squared error between y\_true and y\_pred.*

---

### Description

Formula:

```
loss <- mean(square(y_true - y_pred))
```

### Usage

```

metric_mean_squared_error(
  y_true,
  y_pred,
  ...,
  name = "mean_squared_error",
  dtype = NULL
)

```

### Arguments

y_true	Ground truth values with shape = [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].
...	For forward/backward compatibility.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

If y\_true and y\_pred are missing, a Metric instance is returned. The Metric instance that can be passed directly to compile(metrics = ), or used as a standalone object. See ?Metric for example usage. If y\_true and y\_pred are provided, then a tensor with the computed value is returned.

**Examples**

```
m <- metric_mean_squared_error()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)))
m$result()

## tf.Tensor(0.25, shape=(), dtype=float32)
```

**See Also**

- [https://keras.io/api/metrics/regression\\_metrics#meansquarederror-class](https://keras.io/api/metrics/regression_metrics#meansquarederror-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_logarithmic_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
```

`metric_squared_hinge()`

Other metrics:

`Metric()`  
`custom_metric()`  
`metric_auc()`  
`metric_binary_accuracy()`  
`metric_binary_crossentropy()`  
`metric_binary_focal_crossentropy()`  
`metric_binary_iou()`  
`metric_categorical_accuracy()`  
`metric_categorical_crossentropy()`  
`metric_categorical_focal_crossentropy()`  
`metric_categorical_hinge()`  
`metric_cosine_similarity()`  
`metric_f1_score()`  
`metric_false_negatives()`  
`metric_false_positives()`  
`metric_fbeta_score()`  
`metric_hinge()`  
`metric_huber()`  
`metric_iou()`  
`metric_kl_divergence()`  
`metric_log_cosh()`  
`metric_log_cosh_error()`  
`metric_mean()`  
`metric_mean_absolute_error()`  
`metric_mean_absolute_percentage_error()`  
`metric_mean_iou()`  
`metric_mean_squared_logarithmic_error()`  
`metric_mean_wrapper()`  
`metric_one_hot_iou()`  
`metric_one_hot_mean_iou()`  
`metric_poisson()`  
`metric_precision()`  
`metric_precision_at_recall()`  
`metric_r2_score()`  
`metric_recall()`  
`metric_recall_at_precision()`  
`metric_root_mean_squared_error()`  
`metric_sensitivity_at_specificity()`  
`metric_sparse_categorical_accuracy()`  
`metric_sparse_categorical_crossentropy()`  
`metric_sparse_top_k_categorical_accuracy()`  
`metric_specificity_at_sensitivity()`  
`metric_squared_hinge()`  
`metric_sum()`  
`metric_top_k_categorical_accuracy()`

```
metric_true_negatives()
metric_true_positives()
```

Other regression metrics:

```
metric_cosine_similarity()
metric_log_cosh_error()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_logarithmic_error()
metric_r2_score()
metric_root_mean_squared_error()
```

---

```
metric_mean_squared_logarithmic_error
```

*Computes mean squared logarithmic error between y\_true and y\_pred.*

---

## Description

Formula:

```
loss <- mean(square(log(y_true + 1) - log(y_pred + 1)), axis=-1)
```

Note that y\_pred and y\_true cannot be less or equal to 0. Negative values and 0 values will be replaced with keras.backend.epsilon() (default to 1e-7).

## Usage

```
metric_mean_squared_logarithmic_error(
    y_true,
    y_pred,
    ...,
    name = "mean_squared_logarithmic_error",
    dtype = NULL
)
```

## Arguments

y_true	Ground truth values with shape = [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].
...	For forward/backward compatability.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

**Value**

If `y_true` and `y_pred` are missing, a `Metric` instance is returned. The `Metric` instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Examples**

Standalone usage:

```
m <- metric_mean_squared_logarithmic_error()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)))
m$result()
```

```
## tf.Tensor(0.12011322, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)),
              sample_weight = c(1, 0))
m$result()
```

```
## tf.Tensor(0.24022643, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_mean_squared_logarithmic_error()))
```

**See Also**

- [https://keras.io/api/metrics/regression\\_metrics#meansquaredlogarithmicerror-class](https://keras.io/api/metrics/regression_metrics#meansquaredlogarithmicerror-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
```

```
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_hinge()
metric_huber()
metric_kl_divergence()
metric_log_cosh()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_poisson()
metric_sparse_categorical_crossentropy()
metric_squared_hinge()
```

Other metrics:

```
Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
```

```
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

Other regression metrics:

```
metric_cosine_similarity()  
metric_log_cosh_error()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_r2_score()  
metric_root_mean_squared_error()
```

---

metric\_mean\_wrapper      *Wrap a stateless metric function with the Mean metric.*

---

## Description

You could use this class to quickly build a mean metric from a function. The function needs to have the signature `fn(y_true, y_pred)` and return a per-sample loss array. `metric_mean_wrapper$result()` will return the average metric value across all samples seen so far.

For example:

```
mse <- function(y_true, y_pred) {  
  (y_true - y_pred)^2  
}  
  
mse_metric <- metric_mean_wrapper(fn = mse)  
mse_metric$update_state(c(0, 1), c(1, 1))  
mse_metric$result()  
  
## tf.Tensor(0.5, shape=(), dtype=float32)
```

### Usage

```
metric_mean_wrapper(..., fn, name = NULL, dtype = NULL)
```

### Arguments

...	Keyword arguments to pass on to fn.
fn	The metric function to wrap, with signature <code>fn(y_true, y_pred)</code> .
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### See Also

Other reduction metrics:

```
metric\_mean\(\)  
metric\_sum\(\)
```

Other metrics:

```
Metric\(\)  
custom\_metric\(\)  
metric\_auc\(\)  
metric\_binary\_accuracy\(\)  
metric\_binary\_crossentropy\(\)  
metric\_binary\_focal\_crossentropy\(\)  
metric\_binary\_iou\(\)  
metric\_categorical\_accuracy\(\)  
metric\_categorical\_crossentropy\(\)  
metric\_categorical\_focal\_crossentropy\(\)  
metric\_categorical\_hinge\(\)  
metric\_cosine\_similarity\(\)  
metric\_f1\_score\(\)  
metric\_false\_negatives\(\)
```



```
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

---

metric_one_hot_iou	<i>Computes the Intersection-Over-Union metric for one-hot encoded labels.</i>
--------------------	--

---

### Description

Formula:

```
iou <- true_positives / (true_positives + false_positives + false_negatives)
```

Intersection-Over-Union is a common evaluation metric for semantic image segmentation.

To compute IoUs, the predictions are accumulated in a confusion matrix, weighted by `sample_weight` and the metric is then calculated from it.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

This class can be used to compute IoU for multi-class classification tasks where the labels are one-hot encoded (the last axis should have one dimension per class). Note that the predictions should also have the same shape. To compute the IoU, first the labels and predictions are converted back into integer format by taking the `argmax` over the class axis. Then the same computation steps as for the base IoU class apply.

Note, if there is only one channel in the labels and predictions, this class is the same as class `IoU`. In this case, use `IoU` instead.

Also, make sure that `num_classes` is equal to the number of classes in the data, to avoid a "labels out of bound" error when the confusion matrix is computed.

## Usage

```
metric_one_hot_iou(
    ...,
    num_classes,
    target_class_ids,
    name = NULL,
    dtype = NULL,
    ignore_class = NULL,
    sparse_y_pred = FALSE,
    axis = -1L
)
```

## Arguments

<code>...</code>	For forward/backward compatibility.
<code>num_classes</code>	The possible number of labels the prediction task can have.
<code>target_class_ids</code>	A list or list of target class ids for which the metric is returned. To compute IoU for a specific class, a list (or list) of a single id value should be provided.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.
<code>ignore_class</code>	Optional integer. The ID of a class to be ignored during metric computation. This is useful, for example, in segmentation problems featuring a "void" class (commonly -1 or 255) in segmentation maps. By default ( <code>ignore_class=NULL</code> ), all classes are considered.
<code>sparse_y_pred</code>	Whether predictions are encoded using integers or dense floating point vectors. If <code>FALSE</code> , the <code>argmax</code> function is used to determine each sample's most likely associated label.
<code>axis</code>	(Optional) The dimension containing the logits. Defaults to -1.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Examples**

Standalone usage:

```
y_true <- rbind(c(0, 0, 1), c(1, 0, 0), c(0, 1, 0), c(1, 0, 0))
y_pred <- rbind(c(0.2, 0.3, 0.5), c(0.1, 0.2, 0.7), c(0.5, 0.3, 0.1),
               c(0.1, 0.4, 0.5))
sample_weight <- c(0.1, 0.2, 0.3, 0.4)
m <- metric_one_hot_iou(num_classes = 3, target_class_ids = c(0, 2))
m$update_state(
  y_true = y_true, y_pred = y_pred, sample_weight = sample_weight)
m$result()
```

## tf.Tensor(0.07142855, shape=(), dtype=float32)

Usage with `compile()` API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_one_hot_iou(
    num_classes = 3L,
    target_class_id = list(1L)
  ))
)
```

**See Also**

Other iou metrics:

```
metric\_binary\_iou\(\)
metric\_iou\(\)
metric\_mean\_iou\(\)
metric\_one\_hot\_mean\_iou\(\)
```

Other metrics:

```
Metric\(\)
custom\_metric\(\)
metric\_auc\(\)
metric\_binary\_accuracy\(\)
metric\_binary\_crossentropy\(\)
metric\_binary\_focal\_crossentropy\(\)
metric\_binary\_iou\(\)
metric\_categorical\_accuracy\(\)
```

```
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_one\_hot\_mean\_iou

*Computes mean Intersection-Over-Union metric for one-hot encoded labels.*

---

**Description**

Formula:

$$\text{iou} \leftarrow \frac{\text{true\_positives}}{\text{true\_positives} + \text{false\_positives} + \text{false\_negatives}}$$

Intersection-Over-Union is a common evaluation metric for semantic image segmentation.

To compute IoUs, the predictions are accumulated in a confusion matrix, weighted by `sample_weight` and the metric is then calculated from it.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

This class can be used to compute the mean IoU for multi-class classification tasks where the labels are one-hot encoded (the last axis should have one dimension per class). Note that the predictions should also have the same shape. To compute the mean IoU, first the labels and predictions are converted back into integer format by taking the `argmax` over the class axis. Then the same computation steps as for the base `MeanIoU` class apply.

Note, if there is only one channel in the labels and predictions, this class is the same as class `metric_mean_iou`. In this case, use `metric_mean_iou` instead.

Also, make sure that `num_classes` is equal to the number of classes in the data, to avoid a "labels out of bound" error when the confusion matrix is computed.

**Usage**

```
metric_one_hot_mean_iou(
    ...,
    num_classes,
    name = NULL,
    dtype = NULL,
    ignore_class = NULL,
    sparse_y_pred = FALSE,
    axis = -1L
)
```

**Arguments**

<code>...</code>	For forward/backward compatibility.
<code>num_classes</code>	The possible number of labels the prediction task can have.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.
<code>ignore_class</code>	Optional integer. The ID of a class to be ignored during metric computation. This is useful, for example, in segmentation problems featuring a "void" class (commonly -1 or 255) in segmentation maps. By default ( <code>ignore_class=NULL</code> ), all classes are considered.
<code>sparse_y_pred</code>	Whether predictions are encoded using natural numbers or probability distribution vectors. If <code>FALSE</code> , the <code>argmax</code> function will be used to determine each sample's most likely associated label.
<code>axis</code>	(Optional) The dimension containing the logits. Defaults to -1.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Examples**

Standalone usage:

```
y_true <- rbind(c(0, 0, 1), c(1, 0, 0), c(0, 1, 0), c(1, 0, 0))
y_pred <- rbind(c(0.2, 0.3, 0.5), c(0.1, 0.2, 0.7), c(0.5, 0.3, 0.1),
               c(0.1, 0.4, 0.5))
sample_weight <- c(0.1, 0.2, 0.3, 0.4)
m <- metric_one_hot_mean_iou(num_classes = 3L)
m$update_state(
  y_true = y_true, y_pred = y_pred, sample_weight = sample_weight)
m$result()

## tf.Tensor(0.047619034, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_one_hot_mean_iou(num_classes = 3L)))
```

**See Also**

Other iou metrics:

```
metric_binary_iou()
metric_iou()
metric_mean_iou()
metric_one_hot_iou()
```

Other metrics:

```
Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
```

```
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_poisson

*Computes the Poisson metric between y\_true and y\_pred.*

---

### Description

Formula:

```
metric <- y_pred - y_true * log(y_pred)
```

**Usage**

```
metric_poisson(y_true, y_pred, ..., name = "poisson", dtype = NULL)
```

**Arguments**

y_true	Ground truth values. shape = [batch_size, d0, .. dN].
y_pred	The predicted values. shape = [batch_size, d0, .. dN].
...	For forward/backward compatability.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

**Value**

If y\_true and y\_pred are missing, a Metric instance is returned. The Metric instance that can be passed directly to compile(metrics = ), or used as a standalone object. See ?Metric for example usage. If y\_true and y\_pred are provided, then a tensor with the computed value is returned.

**Examples**

Standalone usage:

```
m <- metric_poisson()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)))
m$result()

## tf.Tensor(0.49999997, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)),
              sample_weight = c(1, 0))
m$result()

## tf.Tensor(0.99999994, shape=(), dtype=float32)
```

Usage with compile() API:

```
model %>% compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_poisson())
)
```



**See Also**

- [https://keras.io/api/metrics/probabilistic\\_metrics#poisson-class](https://keras.io/api/metrics/probabilistic_metrics#poisson-class)

Other losses:

```
Loss()  
loss_binary_crossentropy()  
loss_binary_focal_crossentropy()  
loss_categorical_crossentropy()  
loss_categorical_focal_crossentropy()  
loss_categorical_hinge()  
loss_cosine_similarity()  
loss_ctc()  
loss_dice()  
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_error()  
loss_mean_squared_logarithmic_error()  
loss_poisson()  
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_sparse_categorical_crossentropy()  
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()
```

```
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

Other probabilistic metrics:

```
metric_binary_crossentropy()
metric_categorical_crossentropy()
metric_kl_divergence()
metric_sparse_categorical_crossentropy()
```

---

metric_precision	<i>Computes the precision of the predictions with respect to the labels.</i>
------------------	--

---

### Description

The metric creates two local variables, `true_positives` and `false_positives` that are used to compute the precision. This value is ultimately returned as `precision`, an idempotent operation that simply divides `true_positives` by the sum of `true_positives` and `false_positives`.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

If `top_k` is set, we'll calculate precision as how often on average a class among the top-k classes with the highest predicted values of a batch entry is correct and can be found in the label for that entry.

If `class_id` is specified, we calculate precision by considering only the entries in the batch for which `class_id` is above the threshold and/or in the top-k highest predictions, and computing the fraction of them for which `class_id` is indeed a correct label.

### Usage

```
metric_precision(
    ...,
    thresholds = NULL,
    top_k = NULL,
    class_id = NULL,
    name = NULL,
    dtype = NULL
)
```

### Arguments

<code>...</code>	For forward/backward compatibility.
<code>thresholds</code>	(Optional) A float value, or a Python list of float threshold values in $[0, 1]$ . A threshold is compared with prediction values to determine the truth value of predictions (i.e., above the threshold is <code>TRUE</code> , below is <code>FALSE</code> ). If used with a loss function that sets <code>from_logits=TRUE</code> (i.e. no sigmoid applied to predictions), <code>thresholds</code> should be set to 0. One metric value is generated for each threshold value. If neither <code>thresholds</code> nor <code>top_k</code> are set, the default is to calculate precision with <code>thresholds=0.5</code> .
<code>top_k</code>	(Optional) Unset by default. An int value specifying the top-k predictions to consider when calculating precision.
<code>class_id</code>	(Optional) Integer class ID for which we want binary metrics. This must be in the half-open interval $[0, \text{num\_classes})$ , where <code>num_classes</code> is the last dimension of predictions.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Usage**

Standalone usage:

```
m <- metric_precision()
m$update_state(c(0, 1, 1, 1),
              c(1, 0, 1, 1))
m$result() |> as.double() |> signif()

## [1] 0.666667

m$reset_state()
m$update_state(c(0, 1, 1, 1),
              c(1, 0, 1, 1),
              sample_weight = c(0, 0, 1, 0))
m$result() |> as.double() |> signif()

## [1] 1

# With top_k=2, it will calculate precision over y_true[1:2]
# and y_pred[1:2]
m <- metric_precision(top_k = 2)
m$update_state(c(0, 0, 1, 1), c(1, 1, 1, 1))
m$result()

## tf.Tensor(0.0, shape=(), dtype=float32)

# With top_k=4, it will calculate precision over y_true[1:4]
# and y_pred[1:4]
m <- metric_precision(top_k = 4)
m$update_state(c(0, 0, 1, 1), c(1, 1, 1, 1))
m$result()

## tf.Tensor(0.5, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model |> compile(
  optimizer = 'sgd',
  loss = 'binary_crossentropy',
  metrics = list(metric_precision())
)
```

Usage with a loss with from\_logits=TRUE:

```
model |> compile(  
  optimizer = 'adam',  
  loss = loss_binary_crossentropy(from_logits = TRUE),  
  metrics = list(metric_precision(thresholds = 0))  
)
```

### See Also

- [https://keras.io/api/metrics/classification\\_metrics#precision-class](https://keras.io/api/metrics/classification_metrics#precision-class)

Other confusion metrics:

```
metric_auc()  
metric_false_negatives()  
metric_false_positives()  
metric_precision_at_recall()  
metric_recall()  
metric_recall_at_precision()  
metric_sensitivity_at_specificity()  
metric_specificity_at_sensitivity()  
metric_true_negatives()  
metric_true_positives()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()
```

```

metric_mean_absolute_percentage_error()
metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

```
metric_precision_at_recall
```

*Computes best precision where recall is  $\geq$  specified value.*

---

### Description

This metric creates four local variables, `true_positives`, `true_negatives`, `false_positives` and `false_negatives` that are used to compute the precision at the given recall. The threshold for the given recall value is computed and used to evaluate the corresponding precision.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

If `class_id` is specified, we calculate precision by considering only the entries in the batch for which `class_id` is above the threshold predictions, and computing the fraction of them for which `class_id` is indeed a correct label.

### Usage

```

metric_precision_at_recall(
  ...,
  recall,
  num_thresholds = 200L,
  class_id = NULL,

```

```

    name = NULL,
    dtype = NULL
  )

```

### Arguments

```

...           For forward/backward compatability.
recall        A scalar value in range [0, 1].
num_thresholds (Optional) Defaults to 200. The number of thresholds to use for matching the
               given recall.
class_id      (Optional) Integer class ID for which we want binary metrics. This must be
               in the half-open interval [0, num_classes), where num_classes is the last
               dimension of predictions.
name          (Optional) string name of the metric instance.
dtype        (Optional) data type of the metric result.

```

### Value

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Usage

Standalone usage:

```

m <- metric_precision_at_recall(recall = 0.5)
m$update_state(c(0, 0, 0, 1, 1),
              c(0, 0.3, 0.8, 0.3, 0.8))
m$result()

## tf.Tensor(0.5, shape=(), dtype=float32)

m$reset_state()
m$update_state(c(0, 0, 0, 1, 1),
              c(0, 0.3, 0.8, 0.3, 0.8),
              sample_weight = c(2, 2, 2, 1, 1))
m$result()

## tf.Tensor(0.33333334, shape=(), dtype=float32)

```

Usage with `compile()` API:

```

model |> compile(
  optimizer = 'sgd',
  loss = 'binary_crossentropy',
  metrics = list(metric_precision_at_recall(recall = 0.8))
)

```

**See Also**

- [https://keras.io/api/metrics/classification\\_metrics#precisionatrecall-class](https://keras.io/api/metrics/classification_metrics#precisionatrecall-class)

Other confusion metrics:

```
metric_auc()  
metric_false_negatives()  
metric_false_positives()  
metric_precision()  
metric_recall()  
metric_recall_at_precision()  
metric_sensitivity_at_specificity()  
metric_specificity_at_sensitivity()  
metric_true_negatives()  
metric_true_positives()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()
```



```
metric_precision()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric_r2_score	<i>Computes R2 score.</i>
-----------------	---------------------------

---

## Description

Formula:

```
sum_squares_residuals <- sum((y_true - y_pred) ** 2)  
sum_squares <- sum((y_true - mean(y_true)) ** 2)  
R2 <- 1 - sum_squares_residuals / sum_squares
```

This is also called the **coefficient of determination**.

It indicates how close the fitted regression line is to ground-truth data.

- The highest score possible is 1.0. It indicates that the predictors perfectly accounts for variation in the target.
- A score of 0.0 indicates that the predictors do not account for variation in the target.
- It can also be negative if the model is worse than random.

This metric can also compute the "Adjusted R2" score.

## Usage

```
metric_r2_score(  
    ...,  
    class_aggregation = "uniform_average",  
    num_regressors = 0L,  
    name = "r2_score",  
    dtype = NULL  
)
```

**Arguments**

...	For forward/backward compatability.
class_aggregation	Specifies how to aggregate scores corresponding to different output classes (or target dimensions), i.e. different dimensions on the last axis of the predictions. Equivalent to multioutput argument in Scikit-Learn. Should be one of NULL (no aggregation), "uniform_average", "variance_weighted_average".
num_regressors	Number of independent regressors used ("Adjusted R2" score). 0 is the standard R2 score. Defaults to 0.
name	Optional. string name of the metric instance.
dtype	Optional. data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Examples**

```

y_true <- rbind(1, 4, 3)
y_pred <- rbind(2, 4, 4)
metric <- metric_r2_score()
metric$update_state(y_true, y_pred)
metric$result()

## tf.Tensor(0.57142854, shape=(), dtype=float32)

```

**See Also**

Other regression metrics:

```

metric_cosine_similarity()
metric_log_cosh_error()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_root_mean_squared_error()

```

Other metrics:

```

Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()

```

```
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_recall

*Computes the recall of the predictions with respect to the labels.*

---

**Description**

This metric creates two local variables, `true_positives` and `false_negatives`, that are used to compute the recall. This value is ultimately returned as `recall`, an idempotent operation that simply divides `true_positives` by the sum of `true_positives` and `false_negatives`.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

If `top_k` is set, recall will be computed as how often on average a class among the labels of a batch entry is in the top-k predictions.

If `class_id` is specified, we calculate recall by considering only the entries in the batch for which `class_id` is in the label, and computing the fraction of them for which `class_id` is above the threshold and/or in the top-k predictions.

**Usage**

```
metric_recall(
    ...,
    thresholds = NULL,
    top_k = NULL,
    class_id = NULL,
    name = NULL,
    dtype = NULL
)
```

**Arguments**

<code>...</code>	For forward/backward compatibility.
<code>thresholds</code>	(Optional) A float value, or a Python list of float threshold values in <code>[0, 1]</code> . A threshold is compared with prediction values to determine the truth value of predictions (i.e., above the threshold is <code>TRUE</code> , below is <code>FALSE</code> ). If used with a loss function that sets <code>from_logits=TRUE</code> (i.e. no sigmoid applied to predictions), <code>thresholds</code> should be set to 0. One metric value is generated for each threshold value. If neither <code>thresholds</code> nor <code>top_k</code> are set, the default is to calculate recall with <code>thresholds=0.5</code> .
<code>top_k</code>	(Optional) Unset by default. An int value specifying the top-k predictions to consider when calculating recall.
<code>class_id</code>	(Optional) Integer class ID for which we want binary metrics. This must be in the half-open interval <code>[0, num_classes)</code> , where <code>num_classes</code> is the last dimension of predictions.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

a `Metric` instance is returned. The `Metric` instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Usage**

Standalone usage:

```
m <- metric_recall()
m$update_state(c(0, 1, 1, 1),
              c(1, 0, 1, 1))
m$result()

## tf.Tensor(0.6666667, shape=(), dtype=float32)

m$reset_state()
m$update_state(c(0, 1, 1, 1),
              c(1, 0, 1, 1),
              sample_weight = c(0, 0, 1, 0))
m$result()

## tf.Tensor(1.0, shape=(), dtype=float32)
```

Usage with compile() API:

```
model |> compile(
  optimizer = 'sgd',
  loss = 'binary_crossentropy',
  metrics = list(metric_recall())
)
```

Usage with a loss with from\_logits=TRUE:

```
model |> compile(
  optimizer = 'adam',
  loss = loss_binary_crossentropy(from_logits = TRUE),
  metrics = list(metric_recall(thresholds = 0))
)
```

**See Also**

- [https://keras.io/api/metrics/classification\\_metrics#recall-class](https://keras.io/api/metrics/classification_metrics#recall-class)

Other confusion metrics:

```
metric_auc()
metric_false_negatives()
metric_false_positives()
metric_precision()
metric_precision_at_recall()
metric_recall_at_precision()
metric_sensitivity_at_specificity()
```

```
metric_specificity_at_sensitivity()  
metric_true_negatives()  
metric_true_positives()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()
```

```

metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

```
metric_recall_at_precision
```

*Computes best recall where precision is  $\geq$  specified value.*

---

### Description

For a given score-label-distribution the required precision might not be achievable, in this case 0.0 is returned as recall.

This metric creates four local variables, `true_positives`, `true_negatives`, `false_positives` and `false_negatives` that are used to compute the recall at the given precision. The threshold for the given precision value is computed and used to evaluate the corresponding recall.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

If `class_id` is specified, we calculate precision by considering only the entries in the batch for which `class_id` is above the threshold predictions, and computing the fraction of them for which `class_id` is indeed a correct label.

### Usage

```

metric_recall_at_precision(
    ...,
    precision,
    num_thresholds = 200L,
    class_id = NULL,
    name = NULL,
    dtype = NULL
)

```

### Arguments

<code>...</code>	For forward/backward compatability.
<code>precision</code>	A scalar value in range $[0, 1]$ .
<code>num_thresholds</code>	(Optional) Defaults to 200. The number of thresholds to use for matching the given precision.
<code>class_id</code>	(Optional) Integer class ID for which we want binary metrics. This must be in the half-open interval $[0, \text{num\_classes})$ , where <code>num_classes</code> is the last dimension of predictions.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Usage**

Standalone usage:

```
m <- metric_recall_at_precision(precision = 0.8)
m$update_state(c(0, 0, 1, 1),
               c(0, 0.5, 0.3, 0.9))
m$result()
```

```
## tf.Tensor(0.5, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(c(0, 0, 1, 1),
               c(0, 0.5, 0.3, 0.9),
               sample_weight = c(1, 0, 0, 1))
m$result()
```

```
## tf.Tensor(1.0, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model |> compile(
  optimizer = 'sgd',
  loss = 'binary_crossentropy',
  metrics = list(metric_recall_at_precision(precision = 0.8))
)
```

**See Also**

Other confusion metrics:

```
metric\_auc\(\)
metric\_false\_negatives\(\)
metric\_false\_positives\(\)
metric\_precision\(\)
metric\_precision\_at\_recall\(\)
metric\_recall\(\)
metric\_sensitivity\_at\_specificity\(\)
metric\_specificity\_at\_sensitivity\(\)
metric\_true\_negatives\(\)
metric\_true\_positives\(\)
```



Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

```
metric_root_mean_squared_error
```

*Computes root mean squared error metric between y\_true and y\_pred.*

---

### Description

Formula:

```
loss <- sqrt(mean((y_pred - y_true) ^ 2))
```

### Usage

```
metric_root_mean_squared_error(  
  ...,  
  name = "root_mean_squared_error",  
  dtype = NULL  
)
```

### Arguments

...	For forward/backward compatibility.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Examples

Standalone usage:

```
m <- metric_root_mean_squared_error()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)))
m$result()

## tf.Tensor(0.5, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(1, 1), c(0, 0)),
              sample_weight = c(1, 0))
m$result()
```

```
## tf.Tensor(0.70710677, shape=(), dtype=float32)
```

Usage with compile() API:

```
model %>% compile(  
  optimizer = 'sgd',  
  loss = 'mse',  
  metrics = list(metric_root_mean_squared_error()))
```

### See Also

- [https://keras.io/api/metrics/regression\\_metrics#rootmeansquarederror-class](https://keras.io/api/metrics/regression_metrics#rootmeansquarederror-class)

Other regression metrics:

```
metric_cosine_similarity()  
metric_log_cosh_error()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_r2_score()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()
```

```

metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

```
metric_sensitivity_at_specificity
```

*Computes best sensitivity where specificity is  $\geq$  specified value.*

---

### Description

Sensitivity measures the proportion of actual positives that are correctly identified as such ( $tp / (tp + fn)$ ). Specificity measures the proportion of actual negatives that are correctly identified as such ( $tn / (tn + fp)$ ).

This metric creates four local variables, `true_positives`, `true_negatives`, `false_positives` and `false_negatives` that are used to compute the sensitivity at the given specificity. The threshold for the given specificity value is computed and used to evaluate the corresponding sensitivity.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

If `class_id` is specified, we calculate precision by considering only the entries in the batch for which `class_id` is above the threshold predictions, and computing the fraction of them for which `class_id` is indeed a correct label.

For additional information about specificity and sensitivity, see [the following](#).

### Usage

```
metric_sensitivity_at_specificity(
    ...,

```

```

    specificity,
    num_thresholds = 200L,
    class_id = NULL,
    name = NULL,
    dtype = NULL
  )

```

### Arguments

...	For forward/backward compatibility.
specificity	A scalar value in range [0, 1].
num_thresholds	(Optional) Defaults to 200. The number of thresholds to use for matching the given specificity.
class_id	(Optional) Integer class ID for which we want binary metrics. This must be in the half-open interval [0, num_classes), where num_classes is the last dimension of predictions.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Usage

Standalone usage:

```

m <- metric_sensitivity_at_specificity(specificity = 0.5)
m$update_state(c(0, 0, 0, 1, 1),
              c(0, 0.3, 0.8, 0.3, 0.8))
m$result()

```

```
## tf.Tensor(0.5, shape=(), dtype=float32)
```

```

m$reset_state()
m$update_state(c(0, 0, 0, 1, 1),
              c(0, 0.3, 0.8, 0.3, 0.8),
              sample_weight = c(1, 1, 2, 2, 1))
m$result()

```

```
## tf.Tensor(0.33333334, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model |> compile(  
  optimizer = 'sgd',  
  loss = 'binary_crossentropy',  
  metrics = list(metric_sensitivity_at_specificity())  
)
```

**See Also**

- [https://keras.io/api/metrics/classification\\_metrics#sensitivityatspecificity-class](https://keras.io/api/metrics/classification_metrics#sensitivityatspecificity-class)

Other confusion metrics:

```
metric_auc()  
metric_false_negatives()  
metric_false_positives()  
metric_precision()  
metric_precision_at_recall()  
metric_recall()  
metric_recall_at_precision()  
metric_specificity_at_sensitivity()  
metric_true_negatives()  
metric_true_positives()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()
```

```

metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

```
metric_sparse_categorical_accuracy
```

*Calculates how often predictions match integer labels.*

---

### Description

```
acc <- sample_weight %*% (y_true == which.max(y_pred))
```

You can provide logits of classes as `y_pred`, since `argmax` of logits and probabilities are same.

This metric creates two local variables, `total` and `count` that are used to compute the frequency with which `y_pred` matches `y_true`. This frequency is ultimately returned as `sparse_categorical_accuracy`: an idempotent operation that simply divides `total` by `count`.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

### Usage

```

metric_sparse_categorical_accuracy(
  y_true,
  y_pred,
  ...,
  name = "sparse_categorical_accuracy",
  dtype = NULL
)

```

**Arguments**

<code>y_true</code>	Tensor of true targets.
<code>y_pred</code>	Tensor of predicted targets.
<code>...</code>	For forward/backward compatibility.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

If `y_true` and `y_pred` are missing, a Metric instance is returned. The Metric instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Usage**

Standalone usage:

```
m <- metric_sparse_categorical_accuracy()
m$update_state(rbind(2L, 1L), rbind(c(0.1, 0.6, 0.3), c(0.05, 0.95, 0)))
m$result()
```

```
## tf.Tensor(0.5, shape=(), dtype=float32)
```

```
m$reset_state()
m$update_state(rbind(2L, 1L), rbind(c(0.1, 0.6, 0.3), c(0.05, 0.95, 0)),
              sample_weight = c(0.7, 0.3))
m$result()
```

```
## tf.Tensor(0.3, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model %>% compile(optimizer = 'sgd',
                 loss = 'sparse_categorical_crossentropy',
                 metrics = list(metric_sparse_categorical_accuracy()))
```

**See Also**

- [https://keras.io/api/metrics/accuracy\\_metrics#sparsecategoricalaccuracy-class](https://keras.io/api/metrics/accuracy_metrics#sparsecategoricalaccuracy-class)

Other accuracy metrics:

```
metric_binary_accuracy()
metric_categorical_accuracy()
metric_sparse_top_k_categorical_accuracy()
metric_top_k_categorical_accuracy()
```



Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

```
metric_sparse_categorical_crossentropy
```

*Computes the crossentropy metric between the labels and predictions.*

---

### Description

Use this crossentropy metric when there are two or more label classes. It expects labels to be provided as integers. If you want to provide labels that are one-hot encoded, please use the `metric_categorical_crossentropy` metric instead.

There should be `num_classes` floating point values per feature for `y_pred` and a single floating point value per feature for `y_true`.

### Usage

```
metric_sparse_categorical_crossentropy(
    y_true,
    y_pred,
    from_logits = FALSE,
    ignore_class = NULL,
    axis = -1L,
    ...,
    name = "sparse_categorical_crossentropy",
    dtype = NULL
)
```

### Arguments

<code>y_true</code>	Ground truth values.
<code>y_pred</code>	The predicted values.
<code>from_logits</code>	(Optional) Whether output is expected to be a logits tensor. By default, we consider that output encodes a probability distribution.
<code>ignore_class</code>	Optional integer. The ID of a class to be ignored during loss computation. This is useful, for example, in segmentation problems featuring a "void" class (commonly -1 or 255) in segmentation maps. By default ( <code>ignore_class=NULL</code> ), all classes are considered.
<code>axis</code>	(Optional) Defaults to -1. The dimension along which entropy is computed.
<code>...</code>	For forward/backward compatibility.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

If `y_true` and `y_pred` are missing, a `Metric` instance is returned. The `Metric` instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Examples**

Standalone usage:

```
m <- metric_sparse_categorical_crossentropy()
m$update_state(array(c(1, 2)),
               rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1)))
m$result()

## tf.Tensor(1.1769392, shape=(), dtype=float32)

m$reset_state()
m$update_state(array(c(1, 2)),
               rbind(c(0.05, 0.95, 0), c(0.1, 0.8, 0.1)),
               sample_weight = c(0.3, 0.7))
m$result()

## tf.Tensor(1.6271976, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model |> compile(
  optimizer = 'sgd',
  loss = 'mse',
  metrics = list(metric_sparse_categorical_crossentropy())
)
```

**See Also**

- [https://keras.io/api/metrics/probabilistic\\_metrics#sparsecategorical\\_crossentropy-class](https://keras.io/api/metrics/probabilistic_metrics#sparsecategorical_crossentropy-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
```

```
loss_hinge()  
loss_huber()  
loss_kl_divergence()  
loss_log_cosh()  
loss_mean_absolute_error()  
loss_mean_absolute_percentage_error()  
loss_mean_squared_error()  
loss_mean_squared_logarithmic_error()  
loss_poisson()  
loss_sparse_categorical_crossentropy()  
loss_squared_hinge()  
loss_tversky()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_squared_hinge()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()
```

```
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()
metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()
```

Other probabilistic metrics:

```
metric_binary_crossentropy()
metric_categorical_crossentropy()
metric_kl_divergence()
metric_poisson()
```

---

metric\_sparse\_top\_k\_categorical\_accuracy

*Computes how often integer targets are in the top K predictions.*

---

## Description

Computes how often integer targets are in the top K predictions.

**Usage**

```
metric_sparse_top_k_categorical_accuracy(
  y_true,
  y_pred,
  k = 5L,
  ...,
  name = "sparse_top_k_categorical_accuracy",
  dtype = NULL
)
```

**Arguments**

<code>y_true</code>	Tensor of true targets.
<code>y_pred</code>	Tensor of predicted targets.
<code>k</code>	(Optional) Number of top elements to look at for computing accuracy. Defaults to 5.
<code>...</code>	For forward/backward compatibility.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

If `y_true` and `y_pred` are missing, a Metric instance is returned. The Metric instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

**Usage**

Standalone usage:

```
m <- metric_sparse_top_k_categorical_accuracy(k = 1L)
m$update_state(
  rbind(2, 1),
  op_array(rbind(c(0.1, 0.9, 0.8), c(0.05, 0.95, 0)), dtype = "float32")
)
m$result()

## tf.Tensor(0.5, shape=(), dtype=float32)

m$reset_state()
m$update_state(
  rbind(2, 1),
  op_array(rbind(c(0.1, 0.9, 0.8), c(0.05, 0.95, 0)), dtype = "float32"),
  sample_weight = c(0.7, 0.3)
)
m$result()
```

```
## tf.Tensor(0.3, shape=(), dtype=float32)
```

Usage with compile() API:

```
model %>% compile(optimizer = 'sgd',  
                 loss = 'sparse_categorical_crossentropy',  
                 metrics = list(metric_sparse_top_k_categorical_accuracy()))
```

### See Also

- [https://keras.io/api/metrics/accuracy\\_metrics#sparsesetopkcategoryalaccuracy-class](https://keras.io/api/metrics/accuracy_metrics#sparsesetopkcategoryalaccuracy-class)

Other accuracy metrics:

```
metric_binary_accuracy()  
metric_categorical_accuracy()  
metric_sparse_categorical_accuracy()  
metric_top_k_categorical_accuracy()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()
```

```

metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

```
metric_specificity_at_sensitivity
```

*Computes best specificity where sensitivity is  $\geq$  specified value.*

---

### Description

Sensitivity measures the proportion of actual positives that are correctly identified as such ( $tp / (tp + fn)$ ). Specificity measures the proportion of actual negatives that are correctly identified as such ( $tn / (tn + fp)$ ).

This metric creates four local variables, `true_positives`, `true_negatives`, `false_positives` and `false_negatives` that are used to compute the specificity at the given sensitivity. The threshold for the given sensitivity value is computed and used to evaluate the corresponding specificity.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

If `class_id` is specified, we calculate precision by considering only the entries in the batch for which `class_id` is above the threshold predictions, and computing the fraction of them for which `class_id` is indeed a correct label.

For additional information about specificity and sensitivity, see [the following](#).

### Usage

```

metric_specificity_at_sensitivity(
    ...,
    sensitivity,
    num_thresholds = 200L,
    class_id = NULL,
    name = NULL,

```



```

    dtype = NULL
  )

```

### Arguments

```

...           For forward/backward compatability.
sensitivity   A scalar value in range [0, 1].
num_thresholds (Optional) Defaults to 200. The number of thresholds to use for matching the
               given sensitivity.
class_id      (Optional) Integer class ID for which we want binary metrics. This must be
               in the half-open interval [0, num_classes), where num_classes is the last
               dimension of predictions.
name          (Optional) string name of the metric instance.
dtype        (Optional) data type of the metric result.

```

### Value

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Usage

Standalone usage:

```

m <- metric_specificity_at_sensitivity(sensitivity = 0.5)
m$update_state(c(0, 0, 0, 1, 1),
               c(0, 0.3, 0.8, 0.3, 0.8))
m$result()

## tf.Tensor(0.6666667, shape=(), dtype=float32)

m$reset_state()
m$update_state(c(0, 0, 0, 1, 1),
               c(0, 0.3, 0.8, 0.3, 0.8),
               sample_weight = c(1, 1, 2, 2, 2))
m$result()

## tf.Tensor(0.5, shape=(), dtype=float32)

```

Usage with `compile()` API:

```

model |> compile(
  optimizer = 'sgd',
  loss = 'binary_crossentropy',
  metrics = list(metric_sensitivity_at_specificity())
)

```

**See Also**

- [https://keras.io/api/metrics/classification\\_metrics#specificityatsensitivity-class](https://keras.io/api/metrics/classification_metrics#specificityatsensitivity-class)

Other confusion metrics:

```
metric_auc()  
metric_false_negatives()  
metric_false_positives()  
metric_precision()  
metric_precision_at_recall()  
metric_recall()  
metric_recall_at_precision()  
metric_sensitivity_at_specificity()  
metric_true_negatives()  
metric_true_positives()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()
```

```

metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

---

metric\_squared\_hinge *Computes the hinge metric between y\_true and y\_pred.*

---

### Description

Formula:

```
loss <- mean(square(maximum(1 - y_true * y_pred, 0)))
```

y\_true values are expected to be -1 or 1. If binary (0 or 1) labels are provided we will convert them to -1 or 1.

### Usage

```
metric_squared_hinge(y_true, y_pred, ..., name = "squared_hinge", dtype = NULL)
```

### Arguments

y_true	The ground truth values. y_true values are expected to be -1 or 1. If binary (0 or 1) labels are provided we will convert them to -1 or 1 with shape = [batch_size, d0, .. dN].
y_pred	The predicted values with shape = [batch_size, d0, .. dN].
...	For forward/backward compatability.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

If y\_true and y\_pred are missing, a Metric instance is returned. The Metric instance that can be passed directly to compile(metrics = ), or used as a standalone object. See ?Metric for example usage. If y\_true and y\_pred are provided, then a tensor with the computed value is returned.

**Usage**

Standalone usage:

```
m <- metric_squared_hinge()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)))
m$result()

## tf.Tensor(1.86, shape=(), dtype=float32)

m$reset_state()
m$update_state(rbind(c(0, 1), c(0, 0)), rbind(c(0.6, 0.4), c(0.4, 0.6)),
              sample_weight = c(1, 0))
m$result()

## tf.Tensor(1.46, shape=(), dtype=float32)
```

**See Also**

- [https://keras.io/api/metrics/hinge\\_metrics#squaredhinge-class](https://keras.io/api/metrics/hinge_metrics#squaredhinge-class)

Other losses:

```
Loss()
loss_binary_crossentropy()
loss_binary_focal_crossentropy()
loss_categorical_crossentropy()
loss_categorical_focal_crossentropy()
loss_categorical_hinge()
loss_cosine_similarity()
loss_ctc()
loss_dice()
loss_hinge()
loss_huber()
loss_kl_divergence()
loss_log_cosh()
loss_mean_absolute_error()
loss_mean_absolute_percentage_error()
loss_mean_squared_error()
loss_mean_squared_logarithmic_error()
loss_poisson()
loss_sparse_categorical_crossentropy()
loss_squared_hinge()
loss_tversky()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
```

```
metric_hinge()  
metric_huber()  
metric_kl_divergence()  
metric_log_cosh()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_poisson()  
metric_sparse_categorical_crossentropy()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()
```

```

metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_negatives()
metric_true_positives()

```

Other hinge metrics:

```

metric_categorical_hinge()
metric_hinge()

```

---

metric\_sum

*Compute the (weighted) sum of the given values.*

---

### Description

For example, if values is [1, 3, 5, 7] then their sum is 16. If sample\_weight was specified as [1, 1, 0, 0] then the sum would be 4.

This metric creates one variable, total. This is ultimately returned as the sum value.

### Usage

```
metric_sum(..., name = "sum", dtype = NULL)
```

### Arguments

...	For forward/backward compatability.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

a Metric instance is returned. The Metric instance can be passed directly to compile(metrics = ), or used as a standalone object. See ?Metric for example usage.

**Examples**

```
m <- metric_sum()
m$update_state(c(1, 3, 5, 7))
m$result()

## tf.Tensor(16.0, shape=(), dtype=float32)

m <- metric_sum()
m$update_state(c(1, 3, 5, 7), sample_weight = c(1, 1, 0, 0))
m$result()

## tf.Tensor(4.0, shape=(), dtype=float32)
```

**See Also**

Other reduction metrics:

```
metric\_mean\(\)
metric\_mean\_wrapper\(\)
```

Other metrics:

```
Metric\(\)
custom\_metric\(\)
metric\_auc\(\)
metric\_binary\_accuracy\(\)
metric\_binary\_crossentropy\(\)
metric\_binary\_focal\_crossentropy\(\)
metric\_binary\_iou\(\)
metric\_categorical\_accuracy\(\)
metric\_categorical\_crossentropy\(\)
metric\_categorical\_focal\_crossentropy\(\)
metric\_categorical\_hinge\(\)
metric\_cosine\_similarity\(\)
metric\_f1\_score\(\)
metric\_false\_negatives\(\)
metric\_false\_positives\(\)
metric\_fbeta\_score\(\)
metric\_hinge\(\)
metric\_huber\(\)
metric\_iou\(\)
metric\_kl\_divergence\(\)
metric\_log\_cosh\(\)
metric\_log\_cosh\_error\(\)
metric\_mean\(\)
metric\_mean\_absolute\_error\(\)
metric\_mean\_absolute\_percentage\_error\(\)
metric\_mean\_iou\(\)
```

```
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()  
metric_true_positives()
```

---

metric\_top\_k\_categorical\_accuracy

*Computes how often targets are in the top K predictions.*

---

### Description

Computes how often targets are in the top K predictions.

### Usage

```
metric_top_k_categorical_accuracy(  
    y_true,  
    y_pred,  
    k = 5L,  
    ...,  
    name = "top_k_categorical_accuracy",  
    dtype = NULL  
)
```

### Arguments

y_true	Tensor of true targets.
y_pred	Tensor of predicted targets.



k	(Optional) Number of top elements to look at for computing accuracy. Defaults to 5.
...	For forward/backward compatibility.
name	(Optional) string name of the metric instance.
dtype	(Optional) data type of the metric result.

### Value

If `y_true` and `y_pred` are missing, a `Metric` instance is returned. The `Metric` instance that can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage. If `y_true` and `y_pred` are provided, then a tensor with the computed value is returned.

### Usage

Standalone usage:

```
m <- metric_top_k_categorical_accuracy(k = 1)
m$update_state(
  rbind(c(0, 0, 1), c(0, 1, 0)),
  op_array(rbind(c(0.1, 0.9, 0.8), c(0.05, 0.95, 0)), dtype = "float32")
)
m$result()

## tf.Tensor(0.5, shape=(), dtype=float32)

m$reset_state()
m$update_state(
  rbind(c(0, 0, 1), c(0, 1, 0)),
  op_array(rbind(c(0.1, 0.9, 0.8), c(0.05, 0.95, 0)), dtype = "float32"),
  sample_weight = c(0.7, 0.3))
m$result()

## tf.Tensor(0.3, shape=(), dtype=float32)
```

Usage with `compile()` API:

```
model.compile(optimizer = 'sgd',
              loss = 'categorical_crossentropy',
              metrics = list(metric_top_k_categorical_accuracy()))
```

### See Also

- [https://keras.io/api/metrics/accuracy\\_metrics#topkcategoryalaccuracy-class](https://keras.io/api/metrics/accuracy_metrics#topkcategoryalaccuracy-class)

Other accuracy metrics:

[metric\\_binary\\_accuracy\(\)](#)

```
metric_categorical_accuracy()  
metric_sparse_categorical_accuracy()  
metric_sparse_top_k_categorical_accuracy()
```

Other metrics:

```
Metric()  
custom_metric()  
metric_auc()  
metric_binary_accuracy()  
metric_binary_crossentropy()  
metric_binary_focal_crossentropy()  
metric_binary_iou()  
metric_categorical_accuracy()  
metric_categorical_crossentropy()  
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()
```

```
metric_squared_hinge()
metric_sum()
metric_true_negatives()
metric_true_positives()
```

---

metric\_true\_negatives *Calculates the number of true negatives.*

---

### Description

If `sample_weight` is given, calculates the sum of the weights of true negatives. This metric creates one local variable, accumulator that is used to keep track of the number of true negatives.

If `sample_weight` is NULL, weights default to 1. Use `sample_weight` of 0 to mask values.

### Usage

```
metric_true_negatives(..., thresholds = NULL, name = NULL, dtype = NULL)
```

### Arguments

<code>...</code>	For forward/backward compatibility.
<code>thresholds</code>	(Optional) Defaults to 0.5. A float value, or a Python list of float threshold values in $[0, 1]$ . A threshold is compared with prediction values to determine the truth value of predictions (i.e., above the threshold is TRUE, below is FALSE). If used with a loss function that sets <code>from_logits=TRUE</code> (i.e. no sigmoid applied to predictions), <code>thresholds</code> should be set to 0. One metric value is generated for each threshold value.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

### Value

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

### Usage

Standalone usage:

```
m <- metric_true_negatives()
m$update_state(c(0, 1, 0, 0), c(1, 1, 0, 0))
m$result()

## tf.Tensor(2.0, shape=(), dtype=float32)
```

```

m$reset_state()
m$update_state(c(0, 1, 0, 0), c(1, 1, 0, 0), sample_weight = c(0, 0, 1, 0))
m$result()

## tf.Tensor(1.0, shape=(), dtype=float32)

```

### See Also

- [https://keras.io/api/metrics/classification\\_metrics#truenegatives-class](https://keras.io/api/metrics/classification_metrics#truenegatives-class)

Other confusion metrics:

```

metric_auc()
metric_false_negatives()
metric_false_positives()
metric_precision()
metric_precision_at_recall()
metric_recall()
metric_recall_at_precision()
metric_sensitivity_at_specificity()
metric_specificity_at_sensitivity()
metric_true_positives()

```

Other metrics:

```

Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
metric_categorical_focal_crossentropy()
metric_categorical_hinge()
metric_cosine_similarity()
metric_f1_score()
metric_false_negatives()
metric_false_positives()
metric_fbeta_score()
metric_hinge()
metric_huber()
metric_iou()
metric_kl_divergence()
metric_log_cosh()
metric_log_cosh_error()
metric_mean()
metric_mean_absolute_error()
metric_mean_absolute_percentage_error()

```

```

metric_mean_iou()
metric_mean_squared_error()
metric_mean_squared_logarithmic_error()
metric_mean_wrapper()
metric_one_hot_iou()
metric_one_hot_mean_iou()
metric_poisson()
metric_precision()
metric_precision_at_recall()
metric_r2_score()
metric_recall()
metric_recall_at_precision()
metric_root_mean_squared_error()
metric_sensitivity_at_specificity()
metric_sparse_categorical_accuracy()
metric_sparse_categorical_crossentropy()
metric_sparse_top_k_categorical_accuracy()
metric_specificity_at_sensitivity()
metric_squared_hinge()
metric_sum()
metric_top_k_categorical_accuracy()
metric_true_positives()

```

---

`metric_true_positives` *Calculates the number of true positives.*

---

### Description

If `sample_weight` is given, calculates the sum of the weights of true positives. This metric creates one local variable, `true_positives` that is used to keep track of the number of true positives.

If `sample_weight` is `NULL`, weights default to 1. Use `sample_weight` of 0 to mask values.

### Usage

```
metric_true_positives(..., thresholds = NULL, name = NULL, dtype = NULL)
```

### Arguments

<code>...</code>	For forward/backward compatibility.
<code>thresholds</code>	(Optional) Defaults to 0.5. A float value, or a Python list of float threshold values in $[\theta, 1]$ . A threshold is compared with prediction values to determine the truth value of predictions (i.e., above the threshold is <code>TRUE</code> , below is <code>FALSE</code> ). If used with a loss function that sets <code>from_logits=TRUE</code> (i.e. no sigmoid applied to predictions), <code>thresholds</code> should be set to 0. One metric value is generated for each threshold value.
<code>name</code>	(Optional) string name of the metric instance.
<code>dtype</code>	(Optional) data type of the metric result.

**Value**

a Metric instance is returned. The Metric instance can be passed directly to `compile(metrics = )`, or used as a standalone object. See `?Metric` for example usage.

**Usage**

Standalone usage:

```
m <- metric_true_positives()
m$update_state(c(0, 1, 1, 1), c(1, 0, 1, 1))
m$result()

## tf.Tensor(2.0, shape=(), dtype=float32)

m$reset_state()
m$update_state(c(0, 1, 1, 1), c(1, 0, 1, 1), sample_weight = c(0, 0, 1, 0))
m$result()

## tf.Tensor(1.0, shape=(), dtype=float32)
```

**See Also**

- [https://keras.io/api/metrics/classification\\_metrics#truepositives-class](https://keras.io/api/metrics/classification_metrics#truepositives-class)

Other confusion metrics:

```
metric_auc()
metric_false_negatives()
metric_false_positives()
metric_precision()
metric_precision_at_recall()
metric_recall()
metric_recall_at_precision()
metric_sensitivity_at_specificity()
metric_specificity_at_sensitivity()
metric_true_negatives()
```

Other metrics:

```
Metric()
custom_metric()
metric_auc()
metric_binary_accuracy()
metric_binary_crossentropy()
metric_binary_focal_crossentropy()
metric_binary_iou()
metric_categorical_accuracy()
metric_categorical_crossentropy()
```

```
metric_categorical_focal_crossentropy()  
metric_categorical_hinge()  
metric_cosine_similarity()  
metric_f1_score()  
metric_false_negatives()  
metric_false_positives()  
metric_fbeta_score()  
metric_hinge()  
metric_huber()  
metric_iou()  
metric_kl_divergence()  
metric_log_cosh()  
metric_log_cosh_error()  
metric_mean()  
metric_mean_absolute_error()  
metric_mean_absolute_percentage_error()  
metric_mean_iou()  
metric_mean_squared_error()  
metric_mean_squared_logarithmic_error()  
metric_mean_wrapper()  
metric_one_hot_iou()  
metric_one_hot_mean_iou()  
metric_poisson()  
metric_precision()  
metric_precision_at_recall()  
metric_r2_score()  
metric_recall()  
metric_recall_at_precision()  
metric_root_mean_squared_error()  
metric_sensitivity_at_specificity()  
metric_sparse_categorical_accuracy()  
metric_sparse_categorical_crossentropy()  
metric_sparse_top_k_categorical_accuracy()  
metric_specificity_at_sensitivity()  
metric_squared_hinge()  
metric_sum()  
metric_top_k_categorical_accuracy()  
metric_true_negatives()
```

---

Model

*Subclass the base Keras Model Class*

---

### **Description**

This is for advanced use cases where you need to subclass the base Model type, e.g., you want to override the `train_step()` method.

If you just want to create or define a keras model, prefer `keras_model()` or `keras_model_sequential()`.

If you just want to encapsulate some custom logic and state, and don't need to customize training behavior (besides calling `self$add_loss()` in the `call()` method), prefer `Layer()`.

### Usage

```
Model(
  classname,
  initialize = NULL,
  call = NULL,
  train_step = NULL,
  predict_step = NULL,
  test_step = NULL,
  compute_loss = NULL,
  compute_metrics = NULL,
  ...,
  public = list(),
  private = list(),
  inherit = NULL,
  parent_env = parent.frame()
)
```

### Arguments

<code>classname</code>	String, the name of the custom class. (Conventionally, CamelCase).
<code>initialize</code> , <code>call</code> , <code>train_step</code> , <code>predict_step</code> , <code>test_step</code> , <code>compute_loss</code> , <code>compute_metrics</code>	Optional methods that can be overridden.
<code>...</code> , <code>public</code>	Additional methods or public members of the custom class.
<code>private</code>	Named list of R objects (typically, functions) to include in instance private environments. <code>private</code> methods will have all the same symbols in scope as public methods (See section "Symbols in Scope"). Each instance will have it's own private environment. Any objects in <code>private</code> will be invisible from the Keras framework and the Python runtime.
<code>inherit</code>	What the custom class will subclass. By default, the base keras class.
<code>parent_env</code>	The R environment that all class methods will have as a grandparent.

### Value

A model constructor function, which you can call to create an instance of the new model type.

### Symbols in scope

All R function custom methods (public and private) will have the following symbols in scope:

- `self`: The custom class instance.
- `super`: The custom class superclass.



- `private`: An R environment specific to the class instance. Any objects assigned here are invisible to the Keras framework.
- `__class__` and `as.symbol(classname)`: the custom class type object.

### See Also

[active\\_property\(\)](#) (e.g., for a metrics property implemented as a function).

---

normalize	<i>Normalizes an array.</i>
-----------	-----------------------------

---

### Description

If the input is an R array, an R array will be returned. If it's a backend tensor, a backend tensor will be returned.

### Usage

```
normalize(x, axis = -1L, order = 2L)
```

### Arguments

<code>x</code>	Array to normalize.
<code>axis</code>	axis along which to normalize.
<code>order</code>	Normalization order (e.g. <code>order=2</code> for L2 norm).

### Value

A normalized copy of the array.

### See Also

- [https://keras.io/api/utils/python\\_utils#normalize-function](https://keras.io/api/utils/python_utils#normalize-function)

Other numerical utils:

[to\\_categorical\(\)](#)

Other utils:

[audio\\_dataset\\_from\\_directory\(\)](#)

[clear\\_session\(\)](#)

[config\\_disable\\_interactive\\_logging\(\)](#)

[config\\_disable\\_traceback\\_filtering\(\)](#)

[config\\_enable\\_interactive\\_logging\(\)](#)

[config\\_enable\\_traceback\\_filtering\(\)](#)

[config\\_is\\_interactive\\_logging\\_enabled\(\)](#)

[config\\_is\\_traceback\\_filtering\\_enabled\(\)](#)

[get\\_file\(\)](#)

```
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()
```

---

optimizer\_adadelta      *Optimizer that implements the Adadelta algorithm.*

---

## Description

Adadelta optimization is a stochastic gradient descent method that is based on adaptive learning rate per dimension to address two drawbacks:

- The continual decay of learning rates throughout training.
- The need for a manually selected global learning rate.

Adadelta is a more robust extension of Adagrad that adapts learning rates based on a moving window of gradient updates, instead of accumulating all past gradients. This way, Adadelta continues learning even when many updates have been done. Compared to Adagrad, in the original version of Adadelta you don't have to set an initial learning rate. In this version, the initial learning rate can be set, as in most other Keras optimizers.

## Usage

```
optimizer_adadelta(
    learning_rate = 0.001,
    rho = 0.95,
    epsilon = 1e-07,
    weight_decay = NULL,
    clipnorm = NULL,
    clipvalue = NULL,
    global_clipnorm = NULL,
    use_ema = FALSE,
    ema_momentum = 0.99,
    ema_overwrite_frequency = NULL,
```

```

    name = "adadelta",
    ...,
    loss_scale_factor = NULL,
    gradient_accumulation_steps = NULL
)

```

## Arguments

learning_rate	A float, a [LearningRateSchedule()] instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to 0.001. Note that Adadelta tends to benefit from higher initial learning rate values compared to other optimizers. To match the exact form in the original paper, use 1.0.
rho	A floating point value. The decay rate. Defaults to 0.95.
epsilon	Small floating point value for maintaining numerical stability.
weight_decay	Float. If set, weight decay is applied.
clipnorm	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
ema_momentum	Float, defaults to 0.99. Only used if use_ema = TRUE. This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or NULL, defaults to NULL. Only used if use_ema = TRUE. Every ema_overwrite_frequency steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling optimizer\$finalize_variable_values() (which updates the model variables in-place). When using the built-in fit() training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String. The name to use for momentum accumulator weights created by the optimizer.
...	For forward/backward compatibility.
loss_scale_factor	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, optimizer_loss_scale() will automatically set a loss scale factor.

gradient\_accumulation\_steps

Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every gradient\_accumulation\_steps steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

### Value

an Optimizer instance

### Reference

- [Zeiler, 2012](#)

### See Also

- <https://keras.io/api/optimizers/adadelta#adadelta-class>

Other optimizers:

`optimizer_adafactor()`  
`optimizer_adagrad()`  
`optimizer_adam()`  
`optimizer_adam_w()`  
`optimizer_adamax()`  
`optimizer_ftrl()`  
`optimizer_lion()`  
`optimizer_loss_scale()`  
`optimizer_nadam()`  
`optimizer_rmsprop()`  
`optimizer_sgd()`

---

optimizer\_adafactor     *Optimizer that implements the Adafactor algorithm.*

---

### Description

Adafactor is commonly used in NLP tasks, and has the advantage of taking less memory because it only saves partial information of previous gradients.

The default argument setup is based on the original paper (see reference). When gradients are of dimension  $> 2$ , Adafactor optimizer will delete the last 2 dimensions separately in its accumulator variables.

**Usage**

```
optimizer_adafactor(
  learning_rate = 0.001,
  beta_2_decay = -0.8,
  epsilon_1 = 1e-30,
  epsilon_2 = 0.001,
  clip_threshold = 1,
  relative_step = TRUE,
  weight_decay = NULL,
  clipnorm = NULL,
  clipvalue = NULL,
  global_clipnorm = NULL,
  use_ema = FALSE,
  ema_momentum = 0.99,
  ema_overwrite_frequency = NULL,
  name = "adafactor",
  ...,
  loss_scale_factor = NULL,
  gradient_accumulation_steps = NULL
)
```

**Arguments**

<code>learning_rate</code>	A float, a <a href="#">LearningRateSchedule()</a> instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to 0.001.
<code>beta_2_decay</code>	float, defaults to -0.8. The decay rate of <code>beta_2</code> .
<code>epsilon_1</code>	float, defaults to 1e-30. A small offset to keep denominator away from 0.
<code>epsilon_2</code>	float, defaults to 1e-3. A small offset to avoid learning rate becoming too small by time.
<code>clip_threshold</code>	float, defaults to 1.0. Clipping threshold. This is a part of Adafactor algorithm, independent from <code>clipnorm</code> , <code>clipvalue</code> , and <code>global_clipnorm</code> .
<code>relative_step</code>	bool, defaults to TRUE. If <code>learning_rate</code> is a constant and <code>relative_step=TRUE</code> , learning rate will be adjusted based on current iterations. This is a default learning rate decay in Adafactor.
<code>weight_decay</code>	Float. If set, weight decay is applied.
<code>clipnorm</code>	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
<code>clipvalue</code>	Float. If set, the gradient of each weight is clipped to be no higher than this value.
<code>global_clipnorm</code>	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
<code>use_ema</code>	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.

ema_momentum	Float, defaults to 0.99. Only used if use_ema = TRUE. This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or NULL, defaults to NULL. Only used if use_ema=TRUE. Every ema_overwrite_frequency steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling optimizer\$finalize_variable_values() (which updates the model variables in-place). When using the built-in fit() training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String. The name to use for momentum accumulator weights created by the optimizer.
...	For forward/backward compatibility.
loss_scale_factor	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, optimizer_loss_scale() will automatically set a loss scale factor.
gradient_accumulation_steps	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every gradient_accumulation_steps steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

**Value**

an Optimizer instance

**Reference**

- [Shazeer, Noam et al., 2018.](#)

**See Also**

- <https://keras.io/api/optimizers/adafactor#adafactor-class>

Other optimizers:

```
optimizer_adadelta()
optimizer_adagrad()
optimizer_adam()
optimizer_adam_w()
optimizer_adamax()
optimizer_ftrl()
optimizer_lion()
optimizer_loss_scale()
optimizer_nadam()
```

```
optimizer_rmsprop()
optimizer_sgd()
```

---

```
optimizer_adagrad      Optimizer that implements the Adagrad algorithm.
```

---

## Description

Adagrad is an optimizer with parameter-specific learning rates, which are adapted relative to how frequently a parameter gets updated during training. The more updates a parameter receives, the smaller the updates.

## Usage

```
optimizer_adagrad(
  learning_rate = 0.001,
  initial_accumulator_value = 0.1,
  epsilon = 1e-07,
  weight_decay = NULL,
  clipnorm = NULL,
  clipvalue = NULL,
  global_clipnorm = NULL,
  use_ema = FALSE,
  ema_momentum = 0.99,
  ema_overwrite_frequency = NULL,
  name = "adagrad",
  ...,
  loss_scale_factor = NULL,
  gradient_accumulation_steps = NULL
)
```

## Arguments

<code>learning_rate</code>	A float, a <code>LearningRateSchedule()</code> instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to <code>0.001</code> . Note that Adagrad tends to benefit from higher initial learning rate values compared to other optimizers. To match the exact form in the original paper, use <code>1.0</code> .
<code>initial_accumulator_value</code>	Floating point value. Starting value for the accumulators (per-parameter momentum values). Must be non-negative.
<code>epsilon</code>	Small floating point value for maintaining numerical stability.
<code>weight_decay</code>	Float. If set, weight decay is applied.
<code>clipnorm</code>	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.

clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
ema_momentum	Float, defaults to 0.99. Only used if use_ema=TRUE. This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or NULL, defaults to NULL. Only used if use_ema=TRUE. Every ema_overwrite_frequency steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling optimizer\$finalize_variable_values() (which updates the model variables in-place). When using the built-in fit() training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String. The name to use for momentum accumulator weights created by the optimizer.
...	For forward/backward compatibility.
loss_scale_factor	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, optimizer_loss_scale() will automatically set a loss scale factor.
gradient_accumulation_steps	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every gradient_accumulation_steps steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

**Value**

an Optimizer instance

**Reference**

- [Duchi et al., 2011.](#)

**See Also**

- <https://keras.io/api/optimizers/adagrad#adagrad-class>



Other optimizers:  
`optimizer_adadelata()`  
`optimizer_adafactor()`  
`optimizer_adam()`  
`optimizer_adam_w()`  
`optimizer_adamax()`  
`optimizer_ftrl()`  
`optimizer_lion()`  
`optimizer_loss_scale()`  
`optimizer_nadam()`  
`optimizer_rmsprop()`  
`optimizer_sgd()`

---

<code>optimizer_adam</code>	<i>Optimizer that implements the Adam algorithm.</i>
-----------------------------	--

---

## Description

Adam optimization is a stochastic gradient descent method that is based on adaptive estimation of first-order and second-order moments.

According to [Kingma et al., 2014](#), the method is "*computationally efficient, has little memory requirement, invariant to diagonal rescaling of gradients, and is well suited for problems that are large in terms of data/parameters*".

## Usage

```
optimizer_adam(  
    learning_rate = 0.001,  
    beta_1 = 0.9,  
    beta_2 = 0.999,  
    epsilon = 1e-07,  
    amsgrad = FALSE,  
    weight_decay = NULL,  
    clipnorm = NULL,  
    clipvalue = NULL,  
    global_clipnorm = NULL,  
    use_ema = FALSE,  
    ema_momentum = 0.99,  
    ema_overwrite_frequency = NULL,  
    name = "adam",  
    ...,  
    loss_scale_factor = NULL,  
    gradient_accumulation_steps = NULL  
)
```

**Arguments**

learning_rate	A float, a <code>LearningRateSchedule()</code> instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to <code>0.001</code> .
beta_1	A float value or a constant float tensor, or a callable that takes no arguments and returns the actual value to use. The exponential decay rate for the 1st moment estimates. Defaults to <code>0.9</code> .
beta_2	A float value or a constant float tensor, or a callable that takes no arguments and returns the actual value to use. The exponential decay rate for the 2nd moment estimates. Defaults to <code>0.999</code> .
epsilon	A small constant for numerical stability. This epsilon is "epsilon hat" in the Kingma and Ba paper (in the formula just before Section 2.1), not the epsilon in Algorithm 1 of the paper. Defaults to <code>1e-7</code> .
amsgrad	Boolean. Whether to apply AMSGrad variant of this algorithm from the paper "On the Convergence of Adam and beyond". Defaults to <code>FALSE</code> .
weight_decay	Float. If set, weight decay is applied.
clipnorm	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to <code>FALSE</code> . If <code>TRUE</code> , exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
ema_momentum	Float, defaults to <code>0.99</code> . Only used if <code>use_ema=TRUE</code> . This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or <code>NULL</code> , defaults to <code>NULL</code> . Only used if <code>use_ema=TRUE</code> . Every <code>ema_overwrite_frequency</code> steps of iterations, we overwrite the model variable by its moving average. If <code>NULL</code> , the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling <code>optimizer\$finalize_variable_values()</code> (which updates the model variables in-place). When using the built-in <code>fit()</code> training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String. The name to use for momentum accumulator weights created by the optimizer.
...	For forward/backward compatibility.
loss_scale_factor	Float or <code>NULL</code> . If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed

precision training. Alternately, `optimizer_loss_scale()` will automatically set a loss scale factor.

`gradient_accumulation_steps`

Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every `gradient_accumulation_steps` steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

### Value

an Optimizer instance

### See Also

- <https://keras.io/api/optimizers/adam#adam-class>

Other optimizers:

```
optimizer_adadelata()
optimizer_adafactor()
optimizer_adagrad()
optimizer_adam_w()
optimizer_adamax()
optimizer_ftrl()
optimizer_lion()
optimizer_loss_scale()
optimizer_nadam()
optimizer_rmsprop()
optimizer_sgd()
```

---

optimizer\_adamax

*Optimizer that implements the Adamax algorithm.*

---

### Description

Adamax, a variant of Adam based on the infinity norm, is a first-order gradient-based optimization method. Due to its capability of adjusting the learning rate based on data characteristics, it is suited to learn time-variant process, e.g., speech data with dynamically changed noise conditions. Default parameters follow those provided in the paper (see references below).

Initialization:

```
m <- 0 # Initialize initial 1st moment vector
u <- 0 # Initialize the exponentially weighted infinity norm
t <- 0 # Initialize timestep
```

The update rule for parameter  $w$  with gradient  $g$  is described at the end of section 7.1 of the paper (see the reference section):

```

t <- t + 1
m <- beta1 * m + (1 - beta) * g
u <- max(beta2 * u, abs(g))
current_lr <- learning_rate / (1 - beta1 ** t)
w <- w - current_lr * m / (u + epsilon)

```

### Usage

```

optimizer_adamax(
  learning_rate = 0.001,
  beta_1 = 0.9,
  beta_2 = 0.999,
  epsilon = 1e-07,
  weight_decay = NULL,
  clipnorm = NULL,
  clipvalue = NULL,
  global_clipnorm = NULL,
  use_ema = FALSE,
  ema_momentum = 0.99,
  ema_overwrite_frequency = NULL,
  name = "adamax",
  ...,
  loss_scale_factor = NULL,
  gradient_accumulation_steps = NULL
)

```

### Arguments

learning_rate	A float, a <a href="#">LearningRateSchedule()</a> instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to 0.001.
beta_1	A float value or a constant float tensor. The exponential decay rate for the 1st moment estimates.
beta_2	A float value or a constant float tensor. The exponential decay rate for the exponentially weighted infinity norm.
epsilon	A small constant for numerical stability. name: String. The name to use for momentum accumulator weights created by the optimizer.
weight_decay	Float. If set, weight decay is applied.
clipnorm	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.

ema_momentum	Float, defaults to 0.99. Only used if use_ema=TRUE. This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or NULL, defaults to NULL. Only used if use_ema=TRUE. Every ema_overwrite_frequency steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling optimizer\$finalize_variable_values() (which updates the model variables in-place). When using the built-in fit() training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String, name for the object
...	For forward/backward compatibility.
loss_scale_factor	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, optimizer_loss_scale() will automatically set a loss scale factor.
gradient_accumulation_steps	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every gradient_accumulation_steps steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

**Value**

an Optimizer instance

**Reference**

- [Kingma et al., 2014](#)

**See Also**

- <https://keras.io/api/optimizers/adamax#adamax-class>

Other optimizers:

```
optimizer_adadelta()
optimizer_adafactor()
optimizer_adagrad()
optimizer_adam()
optimizer_adam_w()
optimizer_ftrl()
optimizer_lion()
optimizer_loss_scale()
optimizer_nadam()
optimizer_rmsprop()
```

`optimizer_sgd()`

---

`optimizer_adam_w`

*Optimizer that implements the AdamW algorithm.*

---

## Description

AdamW optimization is a stochastic gradient descent method that is based on adaptive estimation of first-order and second-order moments with an added method to decay weights per the techniques discussed in the paper, 'Decoupled Weight Decay Regularization' by [Loshchilov, Hutter et al., 2019](#).

According to [Kingma et al., 2014](#), the underlying Adam method is "*computationally efficient, has little memory requirement, invariant to diagonal rescaling of gradients, and is well suited for problems that are large in terms of data/parameters*".

## Usage

```
optimizer_adam_w(
    learning_rate = 0.001,
    weight_decay = 0.004,
    beta_1 = 0.9,
    beta_2 = 0.999,
    epsilon = 1e-07,
    amsgrad = FALSE,
    clipnorm = NULL,
    clipvalue = NULL,
    global_clipnorm = NULL,
    use_ema = FALSE,
    ema_momentum = 0.99,
    ema_overwrite_frequency = NULL,
    name = "adamw",
    ...,
    loss_scale_factor = NULL,
    gradient_accumulation_steps = NULL
)
```

## Arguments

- |                            |  |
|----------------------------|--|
| <code>learning_rate</code> | A float, a <a href="#">LearningRateSchedule()</a> instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to <code>0.001</code> .                     |
| <code>weight_decay</code>  | Float. If set, weight decay is applied.  |
| <code>beta_1</code>        | A float value or a constant float tensor, or a callable that takes no arguments and returns the actual value to use. The exponential decay rate for the 1st moment estimates. Defaults to <code>0.9</code> .   |
| <code>beta_2</code>        | A float value or a constant float tensor, or a callable that takes no arguments and returns the actual value to use. The exponential decay rate for the 2nd moment estimates. Defaults to <code>0.999</code> . |

epsilon	A small constant for numerical stability. This epsilon is "epsilon hat" in the Kingma and Ba paper (in the formula just before Section 2.1), not the epsilon in Algorithm 1 of the paper. Defaults to 1e-7.
amsgrad	Boolean. Whether to apply AMSGrad variant of this algorithm from the paper "On the Convergence of Adam and beyond". Defaults to FALSE.
clipnorm	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
ema_momentum	Float, defaults to 0.99. Only used if use_ema=TRUE. This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or NULL, defaults to NULL. Only used if use_ema=TRUE. Every ema_overwrite_frequency steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling <code>optimizer\$finalize_variable_values()</code> (which updates the model variables in-place). When using the built-in <code>fit()</code> training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String. The name to use for momentum accumulator weights created by the optimizer.
...	For forward/backward compatibility.
loss_scale_factor	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, <code>optimizer_loss_scale()</code> will automatically set a loss scale factor.
gradient_accumulation_steps	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every gradient_accumulation_steps steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

**Value**

an Optimizer instance

## References

- [Loshchilov et al., 2019](#)
- [Kingma et al., 2014](#) for adam
- [Reddi et al., 2018](#) for amsgrad.

## See Also

- <https://keras.io/api/optimizers/adamw#adamw-class>

Other optimizers:

```
optimizer_adadelat()
optimizer_adafactor()
optimizer_adagrad()
optimizer_adam()
optimizer_adamax()
optimizer_ftrl()
optimizer_lion()
optimizer_loss_scale()
optimizer_nadam()
optimizer_rmsprop()
optimizer_sgd()
```

---

optimizer\_ftrl

*Optimizer that implements the FTRL algorithm.*

---

## Description

"Follow The Regularized Leader" (FTRL) is an optimization algorithm developed at Google for click-through rate prediction in the early 2010s. It is most suitable for shallow models with large and sparse feature spaces. The algorithm is described by [McMahan et al., 2013](#). The Keras version has support for both online L2 regularization (the L2 regularization described in the paper above) and shrinkage-type L2 regularization (which is the addition of an L2 penalty to the loss function).

Initialization:

```
n <- 0
sigma <- 0
z <- 0
```

Update rule for one variable w:

```
prev_n <- n
n <- n + g^2
sigma <- (n^(-lr_power) - prev_n^(-lr_power)) / lr
z <- z + g - sigma * w
if (abs(z) < lambda_1) {
```



```

    w <- 0
  } else {
    w <- (sgn(z) * lambda_1 - z) / ((beta + sqrt(n)) / alpha + lambda_2)
  }

```

Notation:

- lr is the learning rate
- g is the gradient for the variable
- lambda\_1 is the L1 regularization strength
- lambda\_2 is the L2 regularization strength
- lr\_power is the power to scale n.

Check the documentation for the `l2_shrinkage_regularization_strength` parameter for more details when shrinkage is enabled, in which case `gradient` is replaced with a `gradient` with shrinkage.

## Usage

```

optimizer_ftrl(
  learning_rate = 0.001,
  learning_rate_power = -0.5,
  initial_accumulator_value = 0.1,
  l1_regularization_strength = 0,
  l2_regularization_strength = 0,
  l2_shrinkage_regularization_strength = 0,
  beta = 0,
  weight_decay = NULL,
  clipnorm = NULL,
  clipvalue = NULL,
  global_clipnorm = NULL,
  use_ema = FALSE,
  ema_momentum = 0.99,
  ema_overwrite_frequency = NULL,
  name = "ftrl",
  ...,
  loss_scale_factor = NULL,
  gradient_accumulation_steps = NULL
)

```

## Arguments

- `learning_rate` A float, a [LearningRateSchedule\(\)](#) instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to `0.001`.
- `learning_rate_power` A float value, must be less or equal to zero. Controls how the learning rate decreases during training. Use zero for a fixed learning rate.
- `initial_accumulator_value` The starting value for accumulators. Only zero or positive values are allowed.

<code>l1_regularization_strength</code>	A float value, must be greater than or equal to zero. Defaults to 0.0.
<code>l2_regularization_strength</code>	A float value, must be greater than or equal to zero. Defaults to 0.0.
<code>l2_shrinkage_regularization_strength</code>	A float value, must be greater than or equal to zero. This differs from L2 above in that the L2 above is a stabilization penalty, whereas this L2 shrinkage is a magnitude penalty. When input is sparse shrinkage will only happen on the active weights.
<code>beta</code>	A float value, representing the beta value from the paper. Defaults to 0.0.
<code>weight_decay</code>	Float. If set, weight decay is applied.
<code>clipnorm</code>	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
<code>clipvalue</code>	Float. If set, the gradient of each weight is clipped to be no higher than this value.
<code>global_clipnorm</code>	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
<code>use_ema</code>	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
<code>ema_momentum</code>	Float, defaults to 0.99. Only used if <code>use_ema=TRUE</code> . This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
<code>ema_overwrite_frequency</code>	Int or NULL, defaults to NULL. Only used if <code>use_ema=TRUE</code> . Every <code>ema_overwrite_frequency</code> steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling <code>optimizer\$finalize_variable_values()</code> (which updates the model variables in-place). When using the built-in <code>fit()</code> training loop, this happens automatically after the last epoch, and you don't need to do anything.
<code>name</code>	String. The name to use for momentum accumulator weights created by the optimizer.
<code>...</code>	For forward/backward compatibility.
<code>loss_scale_factor</code>	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, <code>optimizer_loss_scale</code> will automatically set a loss scale factor.
<code>gradient_accumulation_steps</code>	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every <code>gradient_accumulation_steps</code> steps,

using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

### Value

an `Optimizer` instance

### See Also

- <https://keras.io/api/optimizers/ftrl#ftrl-class>

Other optimizers:

```
optimizer_adadelata()
optimizer_adafactor()
optimizer_adagrad()
optimizer_adam()
optimizer_adam_w()
optimizer_adamax()
optimizer_lion()
optimizer_loss_scale()
optimizer_nadam()
optimizer_rmsprop()
optimizer_sgd()
```

---

optimizer\_lion

*Optimizer that implements the Lion algorithm.*

---

### Description

The Lion optimizer is a stochastic-gradient-descent method that uses the sign operator to control the magnitude of the update, unlike other adaptive optimizers such as Adam that rely on second-order moments. This makes Lion more memory-efficient as it only keeps track of the momentum. According to the authors (see reference), its performance gain over Adam grows with the batch size. Because the update of Lion is produced through the sign operation, resulting in a larger norm, a suitable learning rate for Lion is typically 3-10x smaller than that for AdamW. The weight decay for Lion should be in turn 3-10x larger than that for AdamW to maintain a similar strength ( $lr * wd$ ).

### Usage

```
optimizer_lion(
    learning_rate = 0.001,
    beta_1 = 0.9,
    beta_2 = 0.99,
    weight_decay = NULL,
    clipnorm = NULL,
```

```

clipvalue = NULL,
global_clipnorm = NULL,
use_ema = FALSE,
ema_momentum = 0.99,
ema_overwrite_frequency = NULL,
name = "lion",
...,
loss_scale_factor = NULL,
gradient_accumulation_steps = NULL
)

```

### Arguments

learning_rate	A float, a <code>LearningRateSchedule()</code> instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to <code>0.001</code> .
beta_1	A float value or a constant float tensor, or a callable that takes no arguments and returns the actual value to use. The rate to combine the current gradient and the 1st moment estimate. Defaults to <code>0.9</code> .
beta_2	A float value or a constant float tensor, or a callable that takes no arguments and returns the actual value to use. The exponential decay rate for the 1st moment estimate. Defaults to <code>0.99</code> .
weight_decay	Float. If set, weight decay is applied.
clipnorm	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to <code>FALSE</code> . If <code>TRUE</code> , exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
ema_momentum	Float, defaults to <code>0.99</code> . Only used if <code>use_ema=TRUE</code> . This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or <code>NULL</code> , defaults to <code>NULL</code> . Only used if <code>use_ema=TRUE</code> . Every <code>ema_overwrite_frequency</code> steps of iterations, we overwrite the model variable by its moving average. If <code>NULL</code> , the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling <code>optimizer\$finalize_variable_values()</code> (which updates the model variables in-place). When using the built-in <code>fit()</code> training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String. The name to use for momentum accumulator weights created by the optimizer.

... For forward/backward compatability.

`loss_scale_factor`  
Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, `optimizer_loss_scale()` will automatically set a loss scale factor.

`gradient_accumulation_steps`  
Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every `gradient_accumulation_steps` steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

### Value

an Optimizer instance

### References

- [Chen et al., 2023](#)
- [Authors' implementation](#)

### See Also

Other optimizers:

`optimizer_adadelata()`  
`optimizer_adafactor()`  
`optimizer_adagrad()`  
`optimizer_adam()`  
`optimizer_adam_w()`  
`optimizer_adamax()`  
`optimizer_ftrl()`  
`optimizer_loss_scale()`  
`optimizer_nadam()`  
`optimizer_rmsprop()`  
`optimizer_sgd()`

### Description

Loss scaling is a technique to prevent numeric underflow in intermediate gradients when float16 is used. To prevent underflow, the loss is multiplied (or "scaled") by a certain factor called the "loss scale", which causes intermediate gradients to be scaled by the loss scale as well. The final gradients are divided (or "unscaled") by the loss scale to bring them back to their original value.

LossScaleOptimizer wraps another optimizer and applies dynamic loss scaling to it. This loss scale is dynamically updated over time as follows:

- On any train step, if a nonfinite gradient is encountered, the loss scale is halved, and the train step is skipped.
- If dynamic\_growth\_steps have occurred since the last time the loss scale was updated, and no nonfinite gradients have occurred, the loss scale is doubled.

### Usage

```
optimizer_loss_scale(
    inner_optimizer,
    initial_scale = 32768,
    dynamic_growth_steps = 2000L,
    ...,
    name = NULL,
    weight_decay = NULL,
    clipnorm = NULL,
    clipvalue = NULL,
    global_clipnorm = NULL,
    use_ema = NULL,
    ema_momentum = NULL,
    ema_overwrite_frequency = NULL,
    loss_scale_factor = NULL,
    gradient_accumulation_steps = NULL
)
```

### Arguments

inner_optimizer	The keras Optimizer instance to wrap.
initial_scale	Float. The initial loss scale. This scale will be updated during training. It is recommended for this to be a very high number, because a loss scale that is too high gets lowered far more quickly than a loss scale that is too low gets raised.
dynamic_growth_steps	Int. How often to update the scale upwards. After every dynamic_growth_steps steps with finite gradients, the loss scale is doubled.
...	For forward/backward compatibility.
name	String. The name to use for momentum accumulator weights created by the optimizer.
weight_decay	Float. If set, weight decay is applied.

<code>clipnorm</code>	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
<code>clipvalue</code>	Float. If set, the gradient of each weight is clipped to be no higher than this value.
<code>global_clipnorm</code>	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
<code>use_ema</code>	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
<code>ema_momentum</code>	Float, defaults to 0.99. Only used if <code>use_ema=TRUE</code> . This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
<code>ema_overwrite_frequency</code>	Int or NULL, defaults to NULL. Only used if <code>use_ema=TRUE</code> . Every <code>ema_overwrite_frequency</code> steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling <code>optimizer\$finalize_variable_values()</code> (which updates the model variables in-place). When using the built-in <code>fit()</code> training loop, this happens automatically after the last epoch, and you don't need to do anything.
<code>loss_scale_factor</code>	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, <code>optimizer_loss_scale()</code> will automatically set a loss scale factor.
<code>gradient_accumulation_steps</code>	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every <code>gradient_accumulation_steps</code> steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

**Value**

an `Optimizer` instance

**See Also**

Other optimizers:

`optimizer_adadelta()`  
`optimizer_adafactor()`  
`optimizer_adagrad()`  
`optimizer_adam()`  
`optimizer_adam_w()`  
`optimizer_adamax()`

```
optimizer_ftrl()
optimizer_lion()
optimizer_nadam()
optimizer_rmsprop()
optimizer_sgd()
```

---

optimizer_nadam	<i>Optimizer that implements the Nadam algorithm.</i>
-----------------	---

---

### Description

Much like Adam is essentially RMSprop with momentum, Nadam is Adam with Nesterov momentum.

### Usage

```
optimizer_nadam(
    learning_rate = 0.001,
    beta_1 = 0.9,
    beta_2 = 0.999,
    epsilon = 1e-07,
    weight_decay = NULL,
    clipnorm = NULL,
    clipvalue = NULL,
    global_clipnorm = NULL,
    use_ema = FALSE,
    ema_momentum = 0.99,
    ema_overwrite_frequency = NULL,
    name = "nadam",
    ...,
    loss_scale_factor = NULL,
    gradient_accumulation_steps = NULL
)
```

### Arguments

learning_rate	A float, a <a href="#">LearningRateSchedule()</a> instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to 0.001.
beta_1	A float value or a constant float tensor, or a callable that takes no arguments and returns the actual value to use. The exponential decay rate for the 1st moment estimates. Defaults to 0.9.
beta_2	A float value or a constant float tensor, or a callable that takes no arguments and returns the actual value to use. The exponential decay rate for the 2nd moment estimates. Defaults to 0.999.



epsilon	A small constant for numerical stability. This epsilon is "epsilon hat" in the Kingma and Ba paper (in the formula just before Section 2.1), not the epsilon in Algorithm 1 of the paper. Defaults to $1e-7$ .
weight_decay	Float. If set, weight decay is applied.
clipnorm	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
ema_momentum	Float, defaults to 0.99. Only used if use_ema=TRUE. This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or NULL, defaults to NULL. Only used if use_ema=TRUE. Every ema_overwrite_frequency steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling <code>optimizer\$finalize_variable_values()</code> (which updates the model variables in-place). When using the built-in <code>fit()</code> training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String. The name to use for momentum accumulator weights created by the optimizer.
...	For forward/backward compatibility.
loss_scale_factor	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, <code>optimizer_loss_scale()</code> will automatically set a loss scale factor.
gradient_accumulation_steps	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every gradient_accumulation_steps steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

**Value**

an Optimizer instance

## Reference

- [Dozat, 2015.](#)

## See Also

- <https://keras.io/api/optimizers/Nadam#nadam-class>

Other optimizers:

```
optimizer_adadelata()  
optimizer_adafactor()  
optimizer_adagrad()  
optimizer_adam()  
optimizer_adam_w()  
optimizer_adamax()  
optimizer_ftrl()  
optimizer_lion()  
optimizer_loss_scale()  
optimizer_rmsprop()  
optimizer_sgd()
```

---

optimizer\_rmsprop

*Optimizer that implements the RMSprop algorithm.*

---

## Description

The gist of RMSprop is to:

- Maintain a moving (discounted) average of the square of gradients
- Divide the gradient by the root of this average

This implementation of RMSprop uses plain momentum, not Nesterov momentum.

The centered version additionally maintains a moving average of the gradients, and uses that average to estimate the variance.

## Usage

```
optimizer_rmsprop(  
    learning_rate = 0.001,  
    rho = 0.9,  
    momentum = 0,  
    epsilon = 1e-07,  
    centered = FALSE,  
    weight_decay = NULL,  
    clipnorm = NULL,  
    clipvalue = NULL,  
    global_clipnorm = NULL,
```

```

    use_ema = FALSE,
    ema_momentum = 0.99,
    ema_overwrite_frequency = NULL,
    name = "rmsprop",
    ...,
    loss_scale_factor = NULL,
    gradient_accumulation_steps = NULL
)

```

## Arguments

learning_rate	A float, a learning_rate_schedule_* instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to 0.001.
rho	float, defaults to 0.9. Discounting factor for the old gradients.
momentum	float, defaults to 0.0. If not 0.0., the optimizer tracks the momentum value, with a decay rate equals to 1 - momentum.
epsilon	A small constant for numerical stability. This epsilon is "epsilon hat" in the Kingma and Ba paper (in the formula just before Section 2.1), not the epsilon in Algorithm 1 of the paper. Defaults to 1e-7.
centered	Boolean. If TRUE, gradients are normalized by the estimated variance of the gradient; if FALSE, by the uncentered second moment. Setting this to TRUE may help with training, but is slightly more expensive in terms of computation and memory. Defaults to FALSE.
weight_decay	Float. If set, weight decay is applied.
clipnorm	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
ema_momentum	Float, defaults to 0.99. Only used if use_ema=TRUE. This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or NULL, defaults to NULL. Only used if use_ema=TRUE. Every ema_overwrite_frequency steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling optimizer\$finalize_variable_values() (which updates the model variables in-place). When using the built-in fit() training loop, this happens automatically after the last epoch, and you don't need to do anything.

name	String. The name to use for momentum accumulator weights created by the optimizer.
...	For forward/backward compatibility.
loss_scale_factor	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, <code>optimizer_loss_scale()</code> will automatically set a loss scale factor.
gradient_accumulation_steps	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every <code>gradient_accumulation_steps</code> steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

**Value**

an `Optimizer` instance

**Usage**

```
opt <- optimizer_rmsprop(learning_rate=0.1)
```

**Reference**

- [Hinton, 2012](#)

**See Also**

- <https://keras.io/api/optimizers/rmsprop#rmsprop-class>

Other optimizers:

```
optimizer_adadelta()
optimizer_adafactor()
optimizer_adagrad()
optimizer_adam()
optimizer_adam_w()
optimizer_adamax()
optimizer_ftrl()
optimizer_lion()
optimizer_loss_scale()
optimizer_nadam()
optimizer_sgd()
```

---

optimizer\_sgd                      *Gradient descent (with momentum) optimizer.*

---

### Description

Update rule for parameter  $w$  with gradient  $g$  when momentum is 0:

```
w <- w - learning_rate * g
```

Update rule when momentum is larger than 0:

```
velocity <- momentum * velocity - learning_rate * g
w <- w + velocity
```

When nesterov=TRUE, this rule becomes:

```
velocity <- momentum * velocity - learning_rate * g
w <- w + momentum * velocity - learning_rate * g
```

### Usage

```
optimizer_sgd(
  learning_rate = 0.01,
  momentum = 0,
  nesterov = FALSE,
  weight_decay = NULL,
  clipnorm = NULL,
  clipvalue = NULL,
  global_clipnorm = NULL,
  use_ema = FALSE,
  ema_momentum = 0.99,
  ema_overwrite_frequency = NULL,
  name = "SGD",
  ...,
  loss_scale_factor = NULL,
  gradient_accumulation_steps = NULL
)
```

### Arguments

learning_rate	A float, a learning_rate_schedule_* instance, or a callable that takes no arguments and returns the actual value to use. The learning rate. Defaults to 0.01.
momentum	float hyperparameter $\geq 0$ that accelerates gradient descent in the relevant direction and dampens oscillations. 0 is vanilla gradient descent. Defaults to 0.0.
nesterov	boolean. Whether to apply Nesterov momentum. Defaults to FALSE.

weight_decay	Float. If set, weight decay is applied.
clipnorm	Float. If set, the gradient of each weight is individually clipped so that its norm is no higher than this value.
clipvalue	Float. If set, the gradient of each weight is clipped to be no higher than this value.
global_clipnorm	Float. If set, the gradient of all weights is clipped so that their global norm is no higher than this value.
use_ema	Boolean, defaults to FALSE. If TRUE, exponential moving average (EMA) is applied. EMA consists of computing an exponential moving average of the weights of the model (as the weight values change after each training batch), and periodically overwriting the weights with their moving average.
ema_momentum	Float, defaults to 0.99. Only used if use_ema=TRUE. This is the momentum to use when computing the EMA of the model's weights: $\text{new\_average} = \text{ema\_momentum} * \text{old\_average} + (1 - \text{ema\_momentum}) * \text{current\_variable\_value}$ .
ema_overwrite_frequency	Int or NULL, defaults to NULL. Only used if use_ema=TRUE. Every ema_overwrite_frequency steps of iterations, we overwrite the model variable by its moving average. If NULL, the optimizer does not overwrite model variables in the middle of training, and you need to explicitly overwrite the variables at the end of training by calling optimizer\$finalize_variable_values() (which updates the model variables in-place). When using the built-in fit() training loop, this happens automatically after the last epoch, and you don't need to do anything.
name	String. The name to use for momentum accumulator weights created by the optimizer.
...	For forward/backward compatibility.
loss_scale_factor	Float or NULL. If a float, the scale factor will be multiplied the loss before computing gradients, and the inverse of the scale factor will be multiplied by the gradients before updating variables. Useful for preventing underflow during mixed precision training. Alternately, optimizer_loss_scale() will automatically set a loss scale factor.
gradient_accumulation_steps	Int or NULL. If an int, model & optimizer variables will not be updated at every step; instead they will be updated every gradient_accumulation_steps steps, using the average value of the gradients since the last update. This is known as "gradient accumulation". This can be useful when your batch size is very small, in order to reduce gradient noise at each update step.

**Value**

an Optimizer instance

**See Also**

- <https://keras.io/api/optimizers/sgd#sgd-class>

Other optimizers:  
[optimizer\\_adadelat](#)()  
[optimizer\\_adafactor](#)()  
[optimizer\\_adagrad](#)()  
[optimizer\\_adam](#)()  
[optimizer\\_adam\\_w](#)()  
[optimizer\\_adamax](#)()  
[optimizer\\_ftrl](#)()  
[optimizer\\_lion](#)()  
[optimizer\\_loss\\_scale](#)()  
[optimizer\\_nadam](#)()  
[optimizer\\_rmsprop](#)()

---

op\_abs

*Compute the absolute value element-wise.*

---

### Description

Compute the absolute value element-wise.

### Usage

```
op_abs(x)
```

### Arguments

x	Input tensor
---	--------------

### Value

An array containing the absolute value of each element in x.

### Example

```
x <- op_convert_to_tensor(c(-1.2, 1.2))
op_abs(x)

## tf.Tensor([1.2 1.2], shape=(2), dtype=float32)
```

### See Also

Other numpy ops:  
[op\\_add](#)()  
[op\\_all](#)()  
[op\\_any](#)()  
[op\\_append](#)()

```
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()
```



```
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
```

op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()

```
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
```

```
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
```

```
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
```

```
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
```

```
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_add

*Add arguments element-wise.*

---

### Description

Add arguments element-wise.

### Usage

```
op_add(x1, x2)
```

### Arguments

x1	First input tensor.
x2	Second input tensor.

### Value

The tensor containing the element-wise sum of x1 and x2.

**Examples**

```
x1 <- op_convert_to_tensor(c(1, 4))
x2 <- op_convert_to_tensor(c(5, 6))
op_add(x1, x2)

## tf.Tensor([ 6. 10.], shape=(2), dtype=float32)

# alias for x1 + x2
x1 + x2

## tf.Tensor([ 6. 10.], shape=(2), dtype=float32)
```

op\_add also broadcasts shapes:

```
x1 <- op_convert_to_tensor(array(c(5, 5, 4, 6), dim =c(2, 2)))
x2 <- op_convert_to_tensor(c(5, 6))
op_add(x1, x2)

## tf.Tensor(
## [[10. 10.]
## [10. 12.]], shape=(2, 2), dtype=float64)
```

Note that this function is automatically called when using the R operator + with tensors.

```
x <- op_ones(c(3))
op_add(x, x)

## tf.Tensor([2. 2. 2.], shape=(3), dtype=float32)

x + x

## tf.Tensor([2. 2. 2.], shape=(3), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/numpy#add-function>

Other numpy ops:

```
op_abs()
op_all()
op_any()
op_append()
op_arange()
```



op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()

```
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
```

```
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
```

```
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()
```

```
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
```

```
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()
```

```
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_all

*Test whether all array elements along a given axis evaluate to TRUE.*

---

### Description

Test whether all array elements along a given axis evaluate to TRUE.

### Usage

```
op_all(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	An integer or tuple of integers that represent the axis along which a logical AND reduction is performed. The default ( <code>axis = NULL</code> ) is to perform a logical AND over all the dimensions of the input array. <code>axis</code> may be negative, in which case it counts for the last to the first axis.



**keepdims** If TRUE, axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array. Defaults to FALSE.

### Value

The tensor containing the logical AND reduction over the axis.

### Examples

```
x <- op_convert_to_tensor(c(TRUE, FALSE))
op_all(x)

## tf.Tensor(False, shape=(), dtype=bool)

(x <- op_convert_to_tensor(array(c(TRUE, FALSE, TRUE, TRUE, TRUE, TRUE), dim = c(3, 2))))

## tf.Tensor(
## [[ True  True]
## [False  True]
## [ True  True]], shape=(3, 2), dtype=bool)

op_all(x, axis = 1)

## tf.Tensor([False  True], shape=(2), dtype=bool)

keepdims = TRUE outputs a tensor with dimensions reduced to one.

op_all(x, keepdims = TRUE)

## tf.Tensor([[False]], shape=(1, 1), dtype=bool)
```

### See Also

- <https://keras.io/api/ops/numpy#all-function>

Other numpy ops:

```
op_abs()
op_add()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
```

op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()

op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()

```
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
```

op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

```
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
```

```
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
```



```

op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_any

*Test whether any array element along a given axis evaluates to TRUE.*


---

### Description

Test whether any array element along a given axis evaluates to TRUE.

### Usage

```
op_any(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	An integer or tuple of integers that represent the axis along which a logical OR reduction is performed. The default ( <code>axis = NULL</code> ) is to perform a logical OR over all the dimensions of the input array. <code>axis</code> may be negative, in which case it counts for the last to the first axis.
keepdims	If TRUE, axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array. Defaults to FALSE.

**Value**

The tensor containing the logical OR reduction over the axis.

**Examples**

```
x <- op_array(c(TRUE, FALSE))
op_any(x)

## tf.Tensor(True, shape=(), dtype=bool)

(x <- op_reshape(c(FALSE, FALSE, FALSE,
                  TRUE, FALSE, FALSE),
                c(2, 3)))

## tf.Tensor(
## [[False False False]
## [ True False False]], shape=(2, 3), dtype=bool)

op_any(x, axis = 1)

## tf.Tensor([ True False False], shape=(3), dtype=bool)

op_any(x, axis = 2)

## tf.Tensor([False  True], shape=(2), dtype=bool)

op_any(x, axis = -1)

## tf.Tensor([False  True], shape=(2), dtype=bool)

keepdims = TRUE outputs a tensor with dimensions reduced to one.

op_any(x, keepdims = TRUE)

## tf.Tensor([[ True]], shape=(1, 1), dtype=bool)

op_any(x, 1, keepdims = TRUE)

## tf.Tensor([[ True False False]], shape=(1, 3), dtype=bool)
```

**See Also**

- <https://keras.io/api/ops/numpy#any-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()
```

```
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```



```
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```

op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()  
op\_zeros()  
op\_zeros\_like()

---

op\_append

*Append tensor x2 to the end of tensor x1.*

---

### **Description**

Append tensor x2 to the end of tensor x1.

### **Usage**

op\_append(x1, x2, axis = NULL)

**Arguments**

x1	First input tensor.
x2	Second input tensor.
axis	Axis along which tensor x2 is appended to tensor x1. If NULL, both tensors are flattened before use.

**Value**

A tensor with the values of x2 appended to x1.

**Examples**

```
x1 <- op_convert_to_tensor(c(1, 2, 3))
x2 <- op_convert_to_tensor(rbind(c(4, 5, 6), c(7, 8, 9)))
op_append(x1, x2)

## tf.Tensor([1. 2. 3. 4. 5. 6. 7. 8. 9.], shape=(9), dtype=float64)
```

When axis is specified, x1 and x2 must have compatible shapes.

```
x1 <- op_convert_to_tensor(rbind(c(1, 2, 3), c(4, 5, 6)))
x2 <- op_convert_to_tensor(rbind(c(7, 8, 9)))
op_append(x1, x2, axis = 1)
```

```
## tf.Tensor(
## [[1. 2. 3.]
## [4. 5. 6.]
## [7. 8. 9.]], shape=(3, 3), dtype=float64)
```

```
x3 <- op_convert_to_tensor(c(7, 8, 9))
try(op_append(x1, x3, axis = 1))
```

```
## Error in py_call_impl(callable, call_args$unnamed, call_args$named) :
## tensorflow.python.framework.errors_impl.InvalidArgumentError: {{function_node __wrapped__ConcatV
```

**See Also**

- <https://keras.io/api/ops/numpy#append-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_arange()
```

op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()

op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()

```
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
```

```
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()
```

```
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
```



```
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
```

```
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_arange

*Return evenly spaced values within a given interval.*

---

### Description

arange can be called with a varying number of positional arguments:

- `arange(stop)`: Values are generated within the half-open interval  $[\theta, \text{stop})$  (in other words, the interval including `start` but excluding `stop`).
- `arange(start, stop)`: Values are generated within the half-open interval  $[\text{start}, \text{stop})$ .
- `arange(start, stop, step)`: Values are generated within the half-open interval  $[\text{start}, \text{stop})$ , with spacing between values given by `step`.

### Usage

```
op_arange(start, stop = NULL, step = 1L, dtype = NULL)
```

**Arguments**

start	Integer or real, representing the start of the interval. The interval includes this value.
stop	Integer or real, representing the end of the interval. The interval does not include this value, except in some cases where <code>step</code> is not an integer and floating point round-off affects the length of <code>out</code> . Defaults to <code>NULL</code> .
step	Integer or real, represent the spacing between values. For any output <code>out</code> , this is the distance between two adjacent values, <code>out[i+1] - out[i]</code> . The default step size is 1. If <code>step</code> is specified as a position argument, <code>start</code> must also be given.
dtype	The type of the output array. If <code>dtype</code> is not given, infer the data type from the other input arguments.

**Value**

Tensor of evenly spaced values. For floating point arguments, the length of the result is `ceiling((stop - start)/step)`. Because of floating point overflow, this rule may result in the last element of `out` being greater than `stop`.

**Examples**

```
op_arange(3L)

## tf.Tensor([0 1 2], shape=(3), dtype=int32)

op_arange(3) # float

## tf.Tensor([0. 1. 2.], shape=(3), dtype=float32)

op_arange(3, dtype = 'int32') #int

## tf.Tensor([0 1 2], shape=(3), dtype=int32)

op_arange(3L, 7L)

## tf.Tensor([3 4 5 6], shape=(4), dtype=int32)

op_arange(3L, 7L, 2L)

## tf.Tensor([3 5], shape=(2), dtype=int32)
```

**See Also**

- <https://keras.io/api/ops/numpy#arange-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
```



```
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_arccos

*Trigonometric inverse cosine, element-wise.*

---

### **Description**

The inverse of  $\cos$  so that, if  $y = \cos(x)$ , then  $x = \arccos(y)$ .

### **Usage**

```
op_arccos(x)
```

**Arguments**

x                    Input tensor.

**Value**

Tensor of the angle of the ray intersecting the unit circle at the given x-coordinate in radians [0, pi].

**Examples**

```
x <- op_convert_to_tensor(c(1, -1))
op_arccos(x)

## tf.Tensor([0.                    3.1415927], shape=(2), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/numpy#arccos-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
```

```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
```

```
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
```

```
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()
```



op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()

```
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
```

```
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()
```

```
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
```

[op\\_while\\_loop\(\)](#)  
[op\\_zeros\(\)](#)  
[op\\_zeros\\_like\(\)](#)

---

op_arccosh	<i>Inverse hyperbolic cosine, element-wise.</i>
------------	---

---

### Description

Inverse hyperbolic cosine, element-wise.

### Usage

```
op_arccosh(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor of same shape as x.

### Examples

```
x <- op_convert_to_tensor(c(10, 100))
op_arccosh(x)

## tf.Tensor([2.993223 5.298292], shape=(2), dtype=float32)
```

### See Also

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)

op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()

```
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
```

op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()



```
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
```

```
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
```

```
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()
```

```
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()
```

```
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_arcsin

*Inverse sine, element-wise.*

---

### Description

Inverse sine, element-wise.

### Usage

```
op_arcsin(x)
```

### Arguments

x                    Input tensor.

### Value

Tensor of the inverse sine of each element in x, in radians and in the closed interval  $[-\pi/2, \pi/2]$ .

### Examples

```
x <- op_convert_to_tensor(c(1, -1, 0))
op_arcsin(x)

## tf.Tensor([ 1.5707964 -1.5707964  0.          ], shape=(3), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/numpy#arcsin-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:



op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()

```
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```

op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()  
op\_zeros()  
op\_zeros\_like()

---

op\_arcsinh

*Inverse hyperbolic sine, element-wise.*

---

### **Description**

Inverse hyperbolic sine, element-wise.

### **Usage**

op\_arcsinh(x)

**Arguments**

x                    Input tensor.

**Value**

Output tensor of same shape as x.

**Examples**

```
x <- op_convert_to_tensor(c(1, -1, 0))
op_arcsinh(x)
```

```
## tf.Tensor([ 0.8813736 -0.8813736  0.          ], shape=(3), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/numpy#arcsinh-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
```

`op_cross()`  
`op_ctc_decode()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_einsum()`  
`op_empty()`  
`op_equal()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`  
`op_full_like()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_lstsq()`  
`op_matmul()`

op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()



op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()

```
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()
```

```
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
```

```
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()
```

op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()

[op\\_zeros\(\)](#)  
[op\\_zeros\\_like\(\)](#)

---

op_arctan	<i>Trigonometric inverse tangent, element-wise.</i>
-----------	---

---

### Description

Trigonometric inverse tangent, element-wise.

### Usage

```
op_arctan(x)
```

### Arguments

x                    Input tensor.

### Value

Tensor of the inverse tangent of each element in x, in the interval  $[-\pi/2, \pi/2]$ .

### Examples

```
x <- op_convert_to_tensor(c(0, 1))
op_arctan(x)

## tf.Tensor([0.          0.7853982], shape=(2), dtype=float32)
```

### See Also

- <https://keras.io/api/ops/numpy#arctan-function>

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)

op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()

```
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()
```



op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()

```
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
```

op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()

```
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()
```

```
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
```

```
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_arctan2

*Element-wise arc tangent of x1/x2 choosing the quadrant correctly.*

---

### Description

The quadrant (i.e., branch) is chosen so that  $\arctan2(x1, x2)$  is the signed angle in radians between the ray ending at the origin and passing through the point  $(1, 0)$ , and the ray ending at the origin and passing through the point  $(x2, x1)$ . (Note the role reversal: the "y-coordinate" is the first function parameter, the "x-coordinate" is the second.) By IEEE convention, this function is defined for  $x2 = +/-0$  and for either or both of  $x1$  and  $x2 = +/-inf$ .

### Usage

```
op_arctan2(x1, x2)
```

### Arguments

x1	First input tensor.
x2	Second input tensor.

### Value

Tensor of angles in radians, in the range  $[-\pi, \pi]$ .

## Examples

Consider four points in different quadrants:

```
x <- op_array(c(-1, 1, 1, -1))
y <- op_array(c(-1, -1, 1, 1))
op_arctan2(y, x) * 180 / pi

## tf.Tensor([-135.  -45.   45.  135.], shape=(4), dtype=float32)
```

Note the order of the parameters. `arctan2` is defined also when  $x_2 = 0$  and at several other points, obtaining values in the range  $[-\pi, \pi]$ :

```
op_arctan2(
  op_array(c(1, -1)),
  op_array(c(0, 0))
)

## tf.Tensor([ 1.5707964 -1.5707964], shape=(2), dtype=float32)

op_arctan2(
  op_array(c(0, 0, Inf)),
  op_array(c(+0, -0, Inf))
)

## tf.Tensor([0.          3.1415927  0.7853982], shape=(3), dtype=float32)
```

## See Also

- <https://keras.io/api/ops/numpy#arctan2-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctanh()
op_argmax()
op_argmin()
```

op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()



op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()

op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()

```
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()
```

```
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
```

op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()

```
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
```

```
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_arctanh

*Inverse hyperbolic tangent, element-wise.*

---

### Description

Inverse hyperbolic tangent, element-wise.

### Usage

```
op_arctanh(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor of same shape as x.

### See Also

- <https://keras.io/api/ops/numpy#arctanh-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()
```

```
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()
```



op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()

```
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
```

op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()

```
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
```

op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()

```
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_argmax

*Returns the indices of the maximum values along an axis.*

---

### Description

Returns the indices of the maximum values along an axis.

### Usage

```
op_argmax(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	By default, the index is into the flattened tensor, otherwise along the specified axis.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one. Defaults to FALSE.

**Value**

Tensor of indices. It has the same shape as `x`, with the dimension along `axis` removed. Note that the returned integer is 0-based (i.e., if the argmax is in the first index position, the returned value will be 0)

**Examples**

```
x <- op_arange(6L) |> op_reshape(c(2, 3)) |> op_add(10)
x
```

```
## tf.Tensor(
## [[10. 11. 12.]
## [13. 14. 15.]], shape=(2, 3), dtype=float32)
```

```
op_argmax(x)
```

```
## tf.Tensor(5, shape=(), dtype=int32)
```

```
op_argmax(x, axis = 1)
```

```
## tf.Tensor([1 1 1], shape=(3), dtype=int32)
```

```
op_argmax(x, axis = 2)
```

```
## tf.Tensor([2 2], shape=(2), dtype=int32)
```

**Note**

This is similar to `R max.col(x) - 1` for the case of a 2-d array (a matrix), or for an nd-array, `apply(x, axis, which.max) - 1`

**See Also**

- <https://keras.io/api/ops/numpy#argmax-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
```



op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()

```
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
```

op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()

```
op_arctanh()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
```

```
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
```

```
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
```

```
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```

```

op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_argmin

*Returns the indices of the minimum values along an axis.*


---

### Description

Returns the indices of the minimum values along an axis.

### Usage

```
op_argmin(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	By default, the index is into the flattened tensor, otherwise along the specified axis.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one. Defaults to FALSE.

### Value

Tensor of indices. It has the same shape as x, with the dimension along axis removed.



**Examples**

```
x <- op_arange(6L) |> op_reshape(c(2, 3)) |> op_add(10)
x
```

```
## tf.Tensor(
## [[10. 11. 12.]
## [13. 14. 15.]], shape=(2, 3), dtype=float32)
```

```
op_argmin(x)
```

```
## tf.Tensor(0, shape=(), dtype=int32)
```

```
op_argmin(x, axis = 1)
```

```
## tf.Tensor([0 0 0], shape=(3), dtype=int32)
```

```
op_argmin(x, axis = 2)
```

```
## tf.Tensor([0 0], shape=(2), dtype=int32)
```

**Note**

This is similar to an R expression `apply(x, axis, which.min) - 1`, where `x` is a R array.

**See Also**

- <https://keras.io/api/ops/numpy#argmin-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argpartition()
```

```
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
```

```
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()
```

op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()

op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
```

`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`

```
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()
```



```
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_argpartition	<i>Performs an indirect partition along the given axis.</i>
-----------------	---

---

### Description

It returns an array of indices of the same shape as `x` that index data along the given axis in partitioned order.

### Usage

```
op_argpartition(x, kth, axis = -1L)
```

### Arguments

<code>x</code>	Array to sort.
<code>kth</code>	Element index to partition by. The <code>k</code> -th element will be in its final sorted position and all smaller elements will be moved before it and all larger elements behind it. The order of all elements in the partitions is undefined. If provided with a sequence of <code>k</code> -th it will partition all of them into their sorted position at once.
<code>axis</code>	Axis along which to sort. The default is <code>-1</code> (the last axis). If <code>NULL</code> , the flattened array is used.

### Value

Array of indices that partition `x` along the specified axis.

**See Also**

Other numpy ops:

- `op_abs()`
- `op_add()`
- `op_all()`
- `op_any()`
- `op_append()`
- `op_arange()`
- `op_arccos()`
- `op_arccosh()`
- `op_arcsin()`
- `op_arcsinh()`
- `op_arctan()`
- `op_arctan2()`
- `op_arctanh()`
- `op_argmax()`
- `op_argmin()`
- `op_argsort()`
- `op_array()`
- `op_average()`
- `op_bincount()`
- `op_broadcast_to()`
- `op_ceil()`
- `op_clip()`
- `op_concatenate()`
- `op_conj()`
- `op_copy()`
- `op_correlate()`
- `op_cos()`
- `op_cosh()`
- `op_count_nonzero()`
- `op_cross()`
- `op_ctc_decode()`
- `op_cumprod()`
- `op_cumsum()`
- `op_diag()`
- `op_diagonal()`
- `op_diff()`
- `op_digitize()`
- `op_divide()`
- `op_divide_no_nan()`
- `op_dot()`
- `op_einsum()`
- `op_empty()`
- `op_equal()`
- `op_exp()`
- `op_expand_dims()`
- `op_expm1()`

`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`  
`op_full_like()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_lstsq()`  
`op_matmul()`  
`op_max()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`

```
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
```

`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`  
`op_det()`  
`op_diag()`

```
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
```

```
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()
```

```
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
```



```
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_argsort

*Returns the indices that would sort a tensor.*

---

### **Description**

Returns the indices that would sort a tensor.

### **Usage**

```
op_argsort(x, axis = -1L)
```

**Arguments**

<code>x</code>	Input tensor.
<code>axis</code>	Axis along which to sort. Defaults to <code>-1</code> (the last axis). If <code>NULL</code> , the flattened tensor is used.

**Value**

Tensor of indices that sort `x` along the specified axis.

**Examples**

One dimensional array:

```
x <- op_array(c(3, 1, 2))
op_argsort(x)

## tf.Tensor([1 2 0], shape=(3), dtype=int32)
```

Two-dimensional array:

```
x <- op_array(rbind(c(0, 3),
                    c(3, 2),
                    c(4, 5)), dtype = "int32")
op_argsort(x, axis = 1)

## tf.Tensor(
## [[0 1]
## [1 0]
## [2 2]], shape=(3, 2), dtype=int32)

op_argsort(x, axis = 2)

## tf.Tensor(
## [[0 1]
## [1 0]
## [0 1]], shape=(3, 2), dtype=int32)
```

**See Also**

- <https://keras.io/api/ops/numpy#argsort-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
```

`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_array()`  
`op_average()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_einsum()`  
`op_empty()`  
`op_equal()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`

```
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
```

op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()

```
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
```

```
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
```

```
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
```



```
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
```

```
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_array

*Create a tensor.*

---

### **Description**

Create a tensor.

### **Usage**

```
op_array(x, dtype = NULL)
```

### **Arguments**

x	Input tensor.
dtype	The desired data-type for the tensor.

**Value**

A tensor.

**Examples**

```
op_array(c(1, 2, 3))
```

```
## tf.Tensor([1. 2. 3.], shape=(3), dtype=float32)
```

```
op_array(c(1, 2, 3), dtype = "float32")
```

```
## tf.Tensor([1. 2. 3.], shape=(3), dtype=float32)
```

```
op_array(c(1, 2, 3), dtype = "int32")
```

```
## tf.Tensor([1 2 3], shape=(3), dtype=int32)
```

**See Also**

- <https://keras.io/api/ops/numpy#array-function>

Other numpy ops:

`op_abs()`

`op_add()`

`op_all()`

`op_any()`

`op_append()`

`op_arange()`

`op_arccos()`

`op_arccosh()`

`op_arcsin()`

`op_arcsinh()`

`op_arctan()`

`op_arctan2()`

`op_arctanh()`

`op_argmax()`

`op_argmin()`

`op_argpartition()`

`op_argsort()`

`op_average()`

`op_bincount()`

`op_broadcast_to()`

`op_ceil()`

`op_clip()`

`op_concatenate()`

`op_conj()`

```
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
```

```
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
```

```
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()
```

```
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
```

```
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
```



```
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
```

```
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
```

```

op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_average	<i>Compute the weighted average along the specified axis.</i>
------------	---

---

### Description

Compute the weighted average along the specified axis.

### Usage

```
op_average(x, axis = NULL, weights = NULL)
```

### Arguments

x	Input tensor.
axis	Integer along which to average x. The default, axis = NULL, will average over all of the elements of the input tensor. If axis is negative it counts from the last to the first axis.
weights	Tensor of weights associated with the values in x. Each value in x contributes to the average according to its associated weight. The weights array can either be 1-D (in which case its length must be the size of a along the given axis) or of the same shape as x. If weights = NULL (default), then all data in x are assumed to have a weight equal to one. The 1-D calculation is: $avg = \frac{\sum(a * weights)}{\sum(weights)}$ . The only constraint on weights is that $\sum(weights)$ must not be 0.

### Value

Return the average along the specified axis.

### Examples

```

data <- op_arange(1, 5, dtype = "int32")
data

## tf.Tensor([1 2 3 4], shape=(4), dtype=int32)

op_average(data)

```

```
## tf.Tensor(2.5, shape=(), dtype=float32)

op_average(
  op_arange(1, 11),
  weights = op_arange(10, 0, -1)
)

## tf.Tensor(4.0, shape=(), dtype=float32)

data <- op_arange(6) |> op_reshape(c(3, 2))
data

## tf.Tensor(
## [[0. 1.]
## [2. 3.]
## [4. 5.]], shape=(3, 2), dtype=float32)

op_average(
  data,
  axis = 2,
  weights = op_array(c(1/4, 3/4))
)

## tf.Tensor([0.75 2.75 4.75], shape=(3), dtype=float32)

# Error: Axis must be specified when shapes of x and weights differ.
try(op_average(
  data,
  weights = op_array(c(1/4, 3/4))
))

## Error in op_average(data, weights = op_array(c(1/4, 3/4))) :
##   Axis must be specified when shapes of x and weights differ.
```

### See Also

- <https://keras.io/api/ops/numpy#average-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
```

op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()

```
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()
```

```
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
```

```
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
```



op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()

```
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
```

```
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqr()(  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_average_pool	<i>Average pooling operation.</i>
-----------------	-----------------------------------

---

### Description

Average pooling operation.

### Usage

```
op_average_pool(  
    inputs,  
    pool_size,  
    strides = NULL,  
    padding = "valid",  
    data_format = NULL  
)
```

**Arguments**

inputs	Tensor of rank N+2. inputs has shape (batch_size,) + inputs_spatial_shape + (num_channels,) if data_format = "channels_last", or (batch_size, num_channels) + inputs_spatial_shape if data_format = "channels_first". Pooling happens over the spatial dimensions only.
pool_size	int or tuple/list of integers of size len(inputs_spatial_shape), specifying the size of the pooling window for each spatial dimension of the input tensor. If pool_size is int, then every spatial dimension shares the same pool_size.
strides	int or tuple/list of integers of size len(inputs_spatial_shape). The stride of the sliding window for each spatial dimension of the input tensor. If strides is int, then every spatial dimension shares the same strides.
padding	string, either "valid" or "same". "valid" means no padding is applied, and "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input when strides = 1.
data_format	A string, either "channels_last" or "channels_first". data_format determines the ordering of the dimensions in the inputs. If data_format = "channels_last", inputs is of shape (batch_size, ..., channels) while if data_format = "channels_first", inputs is of shape (batch_size, channels, ...).

**Value**

A tensor of rank N+2, the result of the average pooling operation.

**See Also**

- <https://keras.io/api/ops/nn#averagepool-function>

Other nn ops:

```

op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()

```

```
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()
```

```
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
```

```
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()
```



`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`  
`op_scatter()`  
`op_scatter_update()`  
`op_segment_max()`  
`op_segment_sum()`  
`op_select()`  
`op_selu()`  
`op_separable_conv()`  
`op_shape()`  
`op_sigmoid()`  
`op_sign()`  
`op_silu()`  
`op_sin()`

```
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

`op_batch_normalization`*Normalizes x by mean and variance.*

---

### Description

This op is typically used by the batch normalization step in a neural network. It normalizes the input tensor along the given axis.

### Usage

```
op_batch_normalization(  
  x,  
  mean,  
  variance,  
  axis,  
  offset = NULL,  
  scale = NULL,  
  epsilon = 0.001  
)
```

### Arguments

<code>x</code>	Input tensor.
<code>mean</code>	A mean vector of the same length as the <code>axis</code> dimension of the input tensor.
<code>variance</code>	A variance vector of the same length as the <code>axis</code> dimension of the input tensor.
<code>axis</code>	Integer, the axis that should be normalized.
<code>offset</code>	An offset vector of the same length as the <code>axis</code> dimension of the input tensor. If not NULL, <code>offset</code> is added to the normalized tensor. Defaults to NULL.
<code>scale</code>	A scale vector of the same length as the <code>axis</code> dimension of the input tensor. If not NULL, the normalized tensor is multiplied by <code>scale</code> . Defaults to NULL.
<code>epsilon</code>	Small float added to variance to avoid dividing by zero. Defaults to 1e-3.

### Value

The normalized tensor.

### Examples

```
x <- op_convert_to_tensor(rbind(c(0.1, 0.2, 0.3),  
                                c(0.4, 0.5, 0.6),  
                                c(0.7, 0.8, 0.9)))  
op_batch_normalization(  
  x,  
  mean = c(0.4, 0.5, 0.6),
```

```
    variance = c(0.67, 0.67, 0.67),
    axis = -1
)

## tf.Tensor(
## [[-0.36623513 -0.36623513 -0.36623513]
## [ 0.          0.          0.          ]
## [ 0.36623513  0.36623513  0.36623513]], shape=(3, 3), dtype=float64)
```

### See Also

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/ops/batch\\_normalization](https://www.tensorflow.org/api_docs/python/tf/keras/ops/batch_normalization)

Other nn ops:

```
op_average_pool()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_psnr()
op_relu()
op_relu6()
op_selu()
op_separable_conv()
op_sigmoid()
op_silu()
op_softmax()
op_softplus()
op_softsign()
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()
op_add()
```

`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`  
`op_det()`  
`op_diag()`  
`op_diagonal()`

```
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
```

`op_is_tensor()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_istft()`  
`op_leaky_relu()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_log_sigmoid()`  
`op_log_softmax()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`

```
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
```



```
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_binary\_crossentropy

*Computes binary cross-entropy loss between target and output tensor.*

---

### **Description**

The binary cross-entropy loss is commonly used in binary classification tasks where each input sample belongs to one of the two classes. It measures the dissimilarity between the target and output probabilities or logits.

### **Usage**

```
op_binary_crossentropy(target, output, from_logits = FALSE)
```

**Arguments**

target	The target tensor representing the true binary labels. Its shape should match the shape of the output tensor.
output	The output tensor representing the predicted probabilities or logits. Its shape should match the shape of the target tensor.
from_logits	(optional) Whether output is a tensor of logits or probabilities. Set it to TRUE if output represents logits; otherwise, set it to FALSE if output represents probabilities. Defaults to FALSE.

**Value**

Integer tensor: The computed binary cross-entropy loss between target and output.

**Examples**

```
target <- op_array(c(0, 1, 1, 0))
output <- op_array(c(0.1, 0.9, 0.8, 0.2))
op_binary_crossentropy(target, output)

## tf.Tensor([0.10536055 0.10536055 0.22314353 0.22314353], shape=(4), dtype=float32)
```

**See Also**

- [https://keras.io/api/ops/nn#binary\\_crossentropy-function](https://keras.io/api/ops/nn#binary_crossentropy-function)

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_psnr()
op_relu()
op_relu6()
```

op\_selu()  
op\_separable\_conv()  
op\_sigmoid()  
op\_silu()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_sparse\_categorical\_crossentropy()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()

op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()

```
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()
```

```
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()
```

```
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

**Description**

Count the number of occurrences of each value in a tensor of integers.

**Usage**

```
op_bincount(x, weights = NULL, minlength = 0L, sparse = FALSE)
```

**Arguments**

<code>x</code>	Input tensor. It must be of dimension 1, and it must only contain non-negative integer(s).
<code>weights</code>	Weight tensor. It must have the same length as <code>x</code> . The default value is <code>NULL</code> . If specified, <code>x</code> is weighted by it, i.e. if <code>n = x[i]</code> , <code>out[n] += weight[i]</code> instead of the default behavior <code>out[n] += 1</code> .
<code>minlength</code>	An integer. The default value is 0. If specified, there will be at least this number of bins in the output tensor. If greater than <code>max(x) + 1</code> , each value of the output at an index higher than <code>max(x)</code> is set to 0.
<code>sparse</code>	Whether to return a sparse tensor; for backends that support sparse tensors.

**Value**

1D tensor where each element gives the number of occurrence(s) of its index value in `x`. Its length is the maximum between `max(x) + 1` and `minlength`.

**Examples**

```
(x <- op_array(c(1, 2, 2, 3), dtype = "uint8"))
## tf.Tensor([1 2 2 3], shape=(4), dtype=uint8)

op_bincount(x)
## tf.Tensor([0 1 2 1], shape=(4), dtype=int32)

(weights <- x / 2)
## tf.Tensor([0.5 1. 1. 1.5], shape=(4), dtype=float32)

op_bincount(x, weights = weights)
## tf.Tensor([0. 0.5 2. 1.5], shape=(4), dtype=float32)

minlength <- as.integer(op_max(x) + 1 + 2) # 6
op_bincount(x, minlength = minlength)
## tf.Tensor([0 1 2 1 0 0], shape=(6), dtype=int32)
```



**See Also**

- <https://keras.io/api/ops/numpy#bincount-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
```

```
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_broadcast\_to

*Broadcast a tensor to a new shape.*

---

### **Description**

Broadcast a tensor to a new shape.

### **Usage**

```
op_broadcast_to(x, shape)
```



**Arguments**

x	The tensor to broadcast.
shape	The shape of the desired tensor.

**Value**

A tensor with the desired shape.

**Examples**

```
x <- op_array(c(1, 2, 3))
op_broadcast_to(x, shape = c(3, 3))

## tf.Tensor(
## [[1. 2. 3.]
## [1. 2. 3.]
## [1. 2. 3.]], shape=(3, 3), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/numpy#broadcastto-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
```

```
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```

`op_logical_xor()`  
`op_logspace()`  
`op_lstsq()`  
`op_matmul()`  
`op_max()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`

```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
```

```
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
```

```
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
```

`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`  
`op_scatter()`  
`op_scatter_update()`  
`op_segment_max()`  
`op_segment_sum()`  
`op_select()`

```
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
```



```
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_cast	<i>Cast a tensor to the desired dtype.</i>
---------	--

---

### Description

Cast a tensor to the desired dtype.

### Usage

```
op_cast(x, dtype)
```

### Arguments

x	A tensor or variable.
dtype	The target type.

### Value

A tensor of the specified dtype.

### Examples

```
(x <- op_arange(4))

## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)

op_cast(x, dtype = "float16")

## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float16)
```

**See Also**

- <https://keras.io/api/ops/core#cast-function>

Other core ops:

```
op_cond()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_custom_gradient()  
op_dtype()  
op_fori_loop()  
op_is_tensor()  
op_map()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_shape()  
op_slice()  
op_slice_update()  
op_stop_gradient()  
op_switch()  
op_unstack()  
op_vectorized_map()  
op_while_loop()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()
```

```
op_broadcast_to()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
```

```
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```

`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`

```
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
```

```
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_categorical\_crossentropy

*Computes categorical cross-entropy loss between target and output tensor.*

---

### Description

The categorical cross-entropy loss is commonly used in multi-class classification tasks where each input sample can belong to one of multiple classes. It measures the dissimilarity between the target and output probabilities or logits.

### Usage

```
op_categorical_crossentropy(target, output, from_logits = FALSE, axis = -1L)
```

### Arguments

target	The target tensor representing the true categorical labels. Its shape should match the shape of the output tensor except for the last dimension.
output	The output tensor representing the predicted probabilities or logits. Its shape should match the shape of the target tensor except for the last dimension.
from_logits	(optional) Whether output is a tensor of logits or probabilities. Set it to TRUE if output represents logits; otherwise, set it to FALSE if output represents probabilities. Defaults to FALSE.
axis	(optional) The axis along which the categorical cross-entropy is computed. Defaults to -1, which corresponds to the last dimension of the tensors.

### Value

Integer tensor: The computed categorical cross-entropy loss between target and output.

**Examples**

```
target <- op_array(rbind(c(1, 0, 0),
                        c(0, 1, 0),
                        c(0, 0, 1)))
output <- op_array(rbind(c(0.9, 0.05, 0.05),
                        c(0.1, 0.8, 0.1),
                        c(0.2, 0.3, 0.5)))
op_categorical_crossentropy(target, output)

## tf.Tensor([0.10536052 0.22314355 0.69314718], shape=(3), dtype=float64)
```

**See Also**

- [https://keras.io/api/ops/nn#categorical\\_crossentropy-function](https://keras.io/api/ops/nn#categorical_crossentropy-function)

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_psnr()
op_relu()
op_relu6()
op_selu()
op_separable_conv()
op_sigmoid()
op_silu()
op_softmax()
op_softplus()
op_softsign()
op_sparse_categorical_crossentropy()
```



Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()
```

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()
```

```
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_ceil

*Return the ceiling of the input, element-wise.*

---

### **Description**

The ceil of the scalar  $x$  is the smallest integer  $i$ , such that  $i \geq x$ .

### **Usage**

```
op_ceil(x)
```

**Arguments**

x                    Input tensor.

**Value**

The ceiling of each element in x, with float dtype.

**See Also**

- <https://keras.io/api/ops/numpy#ceil-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()

```
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
```

op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()



```
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()
```

```
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
```

```
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()
```

```
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
```

```
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_cholesky

*Computes the Cholesky decomposition of a positive semi-definite matrix.*

---

**Description**

Computes the Cholesky decomposition of a positive semi-definite matrix.

**Usage**

```
op_cholesky(x)
```

**Arguments**

x                    Input tensor of shape  $(\dots, M, M)$ .

**Value**

A tensor of shape  $(\dots, M, M)$  representing the lower triangular Cholesky factor of x.

**See Also**

Other linear algebra ops:

```
op_det()  
op_eig()  
op_eigh()  
op_inv()  
op_lstsq()  
op_lu_factor()  
op_norm()  
op_slogdet()  
op_solve_triangular()  
op_svd()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()
```

```
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
```

```
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
```



op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()

```
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
```

```
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_clip

*Clip (limit) the values in a tensor.*

---

### Description

Given an interval, values outside the interval are clipped to the interval edges. For example, if an interval of  $[\theta, 1]$  is specified, values smaller than 0 become 0, and values larger than 1 become 1.

### Usage

```
op_clip(x, x_min, x_max)
```

### Arguments

x	Input tensor.
x_min	Minimum value.
x_max	Maximum value.

### Value

The clipped tensor.

### See Also

- <https://keras.io/api/ops/numpy#clip-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
```

op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()

op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()

op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()

op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()

```
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
```



```
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
```

```
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
```

```
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_concatenate	<i>Join a sequence of tensors along an existing axis.</i>
----------------	---

---

### Description

Join a sequence of tensors along an existing axis.

### Usage

```
op_concatenate(xs, axis = 1L)
```

### Arguments

xs	The sequence of tensors to concatenate.
axis	The axis along which the tensors will be joined. Defaults to 0.

**Value**

The concatenated tensor.

**See Also**

- <https://keras.io/api/ops/numpy#concatenate-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()

```
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
```

```
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()
```

op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()

```
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
```



```
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
```

```
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()
```

```
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_cond

*Conditionally applies true\_fn or false\_fn.*

---

### **Description**

Conditionally applies true\_fn or false\_fn.

**Usage**

```
op_cond(pred, true_fn, false_fn)
```

**Arguments**

pred	Boolean scalar type
true_fn	Callable returning the output for the pred == TRUE case.
false_fn	Callable returning the output for the pred == FALSE case.

**Value**

The output of either true\_fn or false\_fn depending on pred.

**Examples**

```
fn <- tensorflow::tf_function(function(x) {
  op_cond(x > 0,
    true_fn = \() x + 1,
    false_fn = \() x - 1)
})

fn(tensorflow::as_tensor(1))

## tf.Tensor(2.0, shape=(), dtype=float64)

fn(tensorflow::as_tensor(-1))

## tf.Tensor(-2.0, shape=(), dtype=float64)

#
# Conditional side-effect (print only, no return value).
file <- tempfile(fileext = ".txt")
fn <- tensorflow::tf_function(function(epochs) {
  op_fori_loop(
    0, epochs,
    body_fun = \(\epoch, state) {
      op_cond(epoch %% 20 == 0,
        \() {
          tensorflow::tf$print(
            "epoch:", epoch,
            output_stream = paste0("file://", file))
          NULL
        },
        \() {NULL})
      state
    },
    state
  ),
```

```
    init_val = tensorflow::as_tensor(0))
  })

  fn(tensorflow::as_tensor(100))

  ## tf.Tensor(0.0, shape=(), dtype=float64)

  readLines(file)

  ## [1] "epoch: 0" "epoch: 20" "epoch: 40" "epoch: 60" "epoch: 80"

  # cleanup
  unlink(file)
```

### See Also

Other core ops:

- [op\\_cast\(\)](#)
- [op\\_convert\\_to\\_numpy\(\)](#)
- [op\\_convert\\_to\\_tensor\(\)](#)
- [op\\_custom\\_gradient\(\)](#)
- [op\\_dtype\(\)](#)
- [op\\_fori\\_loop\(\)](#)
- [op\\_is\\_tensor\(\)](#)
- [op\\_map\(\)](#)
- [op\\_scan\(\)](#)
- [op\\_scatter\(\)](#)
- [op\\_scatter\\_update\(\)](#)
- [op\\_shape\(\)](#)
- [op\\_slice\(\)](#)
- [op\\_slice\\_update\(\)](#)
- [op\\_stop\\_gradient\(\)](#)
- [op\\_switch\(\)](#)
- [op\\_unstack\(\)](#)
- [op\\_vectorized\\_map\(\)](#)
- [op\\_while\\_loop\(\)](#)

Other ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)

```
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
```

op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()

```
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
```



```
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_conj

*Returns the complex conjugate, element-wise.*

---

### Description

The complex conjugate of a complex number is obtained by changing the sign of its imaginary part.

### Usage

```
op_conj(x)
```

### Arguments

x                    Input tensor.

### Value

The complex conjugate of each element in x.

**See Also**

- <https://keras.io/api/ops/numpy#conjugate-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()
```

op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```



```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_conv

*General N-D convolution.*

---

### **Description**

This ops supports 1D, 2D and 3D convolution.

### **Usage**

```
op_conv(  
  inputs,
```

```

    kernel,
    strides = 1L,
    padding = "valid",
    data_format = NULL,
    dilation_rate = 1L
)

```

### Arguments

inputs	Tensor of rank N+2. inputs has shape (batch_size,) + inputs_spatial_shape + (num_channels,) if data_format = "channels_last", or (batch_size, num_channels) + inputs_spatial_shape if data_format = "channels_first".
kernel	Tensor of rank N+2. kernel has shape (kernel_spatial_shape, num_input_channels, num_output_channels). num_input_channels should match the number of channels in inputs.
strides	int or int tuple/list of len(inputs_spatial_shape), specifying the strides of the convolution along each spatial dimension. If strides is int, then every spatial dimension shares the same strides.
padding	string, either "valid" or "same". "valid" means no padding is applied, and "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input when strides = 1.
data_format	A string, either "channels_last" or "channels_first". data_format determines the ordering of the dimensions in the inputs. If data_format = "channels_last", inputs is of shape (batch_size, ..., channels) while if data_format = "channels_first", inputs is of shape (batch_size, channels, ...).
dilation_rate	int or int tuple/list of len(inputs_spatial_shape), specifying the dilation rate to use for dilated convolution. If dilation_rate is int, then every spatial dimension shares the same dilation_rate.

### Value

A tensor of rank N+2, the result of the conv operation.

### See Also

- <https://keras.io/api/ops/nn#conv-function>

Other nn ops:

```

op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()

```

```
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()
```

```
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
```

```
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
```

op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()

```
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
```



```
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_convert\_to\_numpy     *Convert a tensor to a NumPy array.*

---

### Description

Convert a tensor to a NumPy array.

### Usage

```
op_convert_to_numpy(x)
```

### Arguments

x                    A tensor.

### Value

A NumPy array.

### See Also

- <https://keras.io/api/ops/core#converttonumpy-function>

Other core ops:

```
op_cast()
op_cond()
op_convert_to_tensor()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_shape()
op_slice()
op_slice_update()
```

```
op_stop_gradient()  
op_switch()  
op_unstack()  
op_vectorized_map()  
op_while_loop()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()
```

```
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
```

```
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
```

```
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()
```

```
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

**Description**

Convert an array to a tensor.

**Usage**

```
op_convert_to_tensor(x, dtype = NULL, sparse = NULL)
```

**Arguments**

x	An array.
dtype	The target type.
sparse	Whether to keep sparse tensors. FALSE will cause sparse tensors to be densified. The default value of NULL means that sparse tensors are kept only if the backend supports them.

**Value**

A tensor of the specified dtype.

**Examples**

```
x <- array(c(1, 2, 3))
y <- op_convert_to_tensor(x)
y

## tf.Tensor([1. 2. 3.], shape=(3), dtype=float64)

op_convert_to_tensor(c(1, 3, 2, 0), "int32")

## tf.Tensor([1 3 2 0], shape=(4), dtype=int32)
```

**See Also**

- [op\\_array\(\)](#)
- <https://keras.io/api/ops/core#converttotensor-function>

Other core ops:

```
op_cast()
op_cond()
op_convert_to_numpy()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
```

```
op_scatter()  
op_scatter_update()  
op_shape()  
op_slice()  
op_slice_update()  
op_stop_gradient()  
op_switch()  
op_unstack()  
op_vectorized_map()  
op_while_loop()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_copy()
```



op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()

```
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
```

`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrtd()`  
`op_scan()`  
`op_scatter()`  
`op_scatter_update()`  
`op_segment_max()`  
`op_segment_sum()`  
`op_select()`  
`op_selu()`  
`op_separable_conv()`  
`op_shape()`  
`op_sigmoid()`  
`op_sign()`  
`op_silu()`  
`op_sin()`  
`op_sinh()`

```
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_conv\_transpose      *General N-D convolution transpose.*

---

## Description

Also known as de-convolution. This ops supports 1D, 2D and 3D convolution.

## Usage

```
op_conv_transpose(
    inputs,
    kernel,
    strides,
    padding = "valid",
    output_padding = NULL,
    data_format = NULL,
    dilation_rate = 1L
)
```

## Arguments

inputs	Tensor of rank N+2. inputs has shape (batch_size,) + inputs_spatial_shape + (num_channels,) if data_format = "channels_last", or (batch_size, num_channels) + inputs_spatial_shape if data_format = "channels_first".
kernel	Tensor of rank N+2. kernel has shape [kernel_spatial_shape, num_output_channels, num_input_channels]. num_input_channels should match the number of channels in inputs.
strides	int or int tuple/list of len(inputs_spatial_shape), specifying the strides of the convolution along each spatial dimension. If strides is int, then every spatial dimension shares the same strides.
padding	string, either "valid" or "same". "valid" means no padding is applied, and "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input when strides = 1.
output_padding	int or int tuple/list of len(inputs_spatial_shape), specifying the amount of padding along the height and width of the output tensor. Can be a single integer to specify the same value for all spatial dimensions. The amount of output padding along a given dimension must be lower than the stride along that same dimension. If set to NULL (default), the output shape is inferred.
data_format	A string, either "channels_last" or "channels_first". data_format determines the ordering of the dimensions in the inputs. If data_format = "channels_last", inputs is of shape (batch_size, ..., channels) while if data_format = "channels_first", inputs is of shape (batch_size, channels, ...).
dilation_rate	int or int tuple/list of len(inputs_spatial_shape), specifying the dilation rate to use for dilated convolution. If dilation_rate is int, then every spatial dimension shares the same dilation_rate.

**Value**

A tensor of rank N+2, the result of the conv operation.

**See Also**

- <https://keras.io/api/ops/nn#convtranspose-function>

Other nn ops:

`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_categorical_crossentropy()`  
`op_conv()`  
`op_ctc_loss()`  
`op_depthwise_conv()`  
`op_elu()`  
`op_gelu()`  
`op_hard_sigmoid()`  
`op_hard_silu()`  
`op_leaky_relu()`  
`op_log_sigmoid()`  
`op_log_softmax()`  
`op_max_pool()`  
`op_moments()`  
`op_multi_hot()`  
`op_normalize()`  
`op_one_hot()`  
`op_psnr()`  
`op_relu()`  
`op_relu6()`  
`op_selu()`  
`op_separable_conv()`  
`op_sigmoid()`  
`op_silu()`  
`op_softmax()`  
`op_softplus()`  
`op_softsign()`  
`op_sparse_categorical_crossentropy()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`

`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`  
`op_det()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_dtype()`  
`op_eig()`

```
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
```



`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_log_sigmoid()`  
`op_log_softmax()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`

```
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
```

```
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_copy

*Returns a copy of x.*

---

### Description

Returns a copy of x.

### Usage

```
op_copy(x)
```

### Arguments

x                   Input tensor.

### Value

A copy of x.

**See Also**

- <https://keras.io/api/ops/numpy#copy-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

```
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()

```
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```



```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()  
op\_zeros()  
op\_zeros\_like()

---

op\_correlate

*Compute the cross-correlation of two 1-dimensional tensors.*

---

### **Description**

Compute the cross-correlation of two 1-dimensional tensors.

### **Usage**

op\_correlate(x1, x2, mode = "valid")

**Arguments**

x1	First 1-dimensional input tensor of length M.
x2	Second 1-dimensional input tensor of length N.
mode	Either "valid", "same" or "full". By default the mode is set to "valid", which returns an output of length $\max(M, N) - \min(M, N) + 1$ . "same" returns an output of length $\max(M, N)$ . "full" mode returns the convolution at each point of overlap, with an output length of $N+M-1$ .

**Value**

Output tensor, cross-correlation of x1 and x2.

**See Also**

Other numpy ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)
- [op\\_argmax\(\)](#)
- [op\\_argmin\(\)](#)
- [op\\_argpartition\(\)](#)
- [op\\_argsort\(\)](#)
- [op\\_array\(\)](#)
- [op\\_average\(\)](#)
- [op\\_bincount\(\)](#)
- [op\\_broadcast\\_to\(\)](#)
- [op\\_ceil\(\)](#)
- [op\\_clip\(\)](#)
- [op\\_concatenate\(\)](#)
- [op\\_conj\(\)](#)
- [op\\_copy\(\)](#)
- [op\\_cos\(\)](#)
- [op\\_cosh\(\)](#)
- [op\\_count\\_nonzero\(\)](#)
- [op\\_cross\(\)](#)
- [op\\_ctc\\_decode\(\)](#)
- [op\\_cumprod\(\)](#)
- [op\\_cumsum\(\)](#)

op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()

```
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
```

```
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()
```

op\_copy()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()



```
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
```

```
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()
```

```
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_cos	<i>Cosine, element-wise.</i>
--------	------------------------------

---

**Description**

Cosine, element-wise.

**Usage**

```
op_cos(x)
```

**Arguments**

x                    Input tensor.

**Value**

The corresponding cosine values.

**See Also**

- <https://keras.io/api/ops/numpy#cos-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()
```

op\_conj()  
op\_copy()  
op\_correlate()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()

```
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
```

```
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()
```

```
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()
```



```
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
```

```
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
```

op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()

```
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_cosh

*Hyperbolic cosine, element-wise.*

---

### Description

Hyperbolic cosine, element-wise.

### Usage

```
op_cosh(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor of same shape as x.

### See Also

- <https://keras.io/api/ops/numpy#cosh-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()
```

op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()

```
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()
```

```
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
```

```
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
```



```
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
```

```
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()
```

```
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
```

```
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_count_nonzero	<i>Counts the number of non-zero values in x along the given axis.</i>
------------------	--

---

### Description

If no axis is specified then all non-zeros in the tensor are counted.

### Usage

```
op_count_nonzero(x, axis = NULL)
```

### Arguments

x	Input tensor.
axis	Axis or a tuple of axes along which to count the number of non-zeros. Defaults to NULL.

### Value

An integer or a tensor of integers.

### Examples

```
x <- op_array(rbind(c(0, 1, 7, 0),
                    c(3, 0, 2, 19)))
op_count_nonzero(x)

## tf.Tensor(5, shape=(), dtype=int32)
```

```
op_count_nonzero(x, axis = 1)

## tf.Tensor([1 1 2 1], shape=(4), dtype=int32)

op_count_nonzero(x, axis = 2)

## tf.Tensor([2 3], shape=(2), dtype=int32)
```

**See Also**

- <https://keras.io/api/ops/numpy#countnonzero-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
```

```
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
```

`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`

```
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
```



`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`  
`op_det()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_dtype()`  
`op_eig()`  
`op_eigh()`  
`op_einsum()`  
`op_elu()`  
`op_empty()`  
`op_equal()`  
`op_erf()`  
`op_erfinv()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_extract_sequences()`  
`op_eye()`  
`op_fft()`  
`op_fft2()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_fori_loop()`  
`op_full()`  
`op_full_like()`  
`op_gelu()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hard_sigmoid()`  
`op_hard_silu()`  
`op_hstack()`  
`op_identity()`

```
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
```

`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`  
`op_scatter()`  
`op_scatter_update()`  
`op_segment_max()`  
`op_segment_sum()`  
`op_select()`  
`op_selu()`  
`op_separable_conv()`  
`op_shape()`  
`op_sigmoid()`  
`op_sign()`  
`op_silu()`  
`op_sin()`  
`op_sinh()`  
`op_size()`

```
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

`op_cross`*Returns the cross product of two (arrays of) vectors.*

---

### Description

The cross product of  $x_1$  and  $x_2$  in  $\mathbb{R}^3$  is a vector perpendicular to both  $x_1$  and  $x_2$ . If  $x_1$  and  $x_2$  are arrays of vectors, the vectors are defined by the last axis of  $x_1$  and  $x_2$  by default, and these axes can have dimensions 2 or 3.

Where the dimension of either  $x_1$  or  $x_2$  is 2, the third component of the input vector is assumed to be zero and the cross product calculated accordingly.

In cases where both input vectors have dimension 2, the z-component of the cross product is returned.

### Usage

```
op_cross(x1, x2, axisa = -1L, axisb = -1L, axisc = -1L, axis = NULL)
```

### Arguments

<code>x1</code>	Components of the first vector(s).
<code>x2</code>	Components of the second vector(s).
<code>axisa</code>	Axis of $x_1$ that defines the vector(s). Defaults to -1.
<code>axisb</code>	Axis of $x_2$ that defines the vector(s). Defaults to -1.
<code>axisc</code>	Axis of the result containing the cross product vector(s). Ignored if both input vectors have dimension 2, as the return is scalar. By default, the last axis.
<code>axis</code>	If defined, the axis of $x_1$ , $x_2$ and the result that defines the vector(s) and cross product(s). Overrides <code>axisa</code> , <code>axisb</code> and <code>axisc</code> .

### Value

Vector cross product(s).

### Note

Torch backend does not support two dimensional vectors, or the arguments `axisa`, `axisb` and `axisc`. Use `axis` instead.

### See Also

- <https://keras.io/api/ops/numpy#cross-function>

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)

```
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()
```

op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()

op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()



```
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
```

```
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
```

```
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
```

```
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
```

```
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_ctc\_decode

*Decodes the output of a CTC model.*

---

### **Description**

Decodes the output of a CTC model.

### **Usage**

```
op_ctc_decode(
    inputs,
    sequence_lengths,
    strategy = "greedy",
    beam_width = 100L,
    top_paths = 1L,
    merge_repeated = TRUE,
    mask_index = 0L
)
```

**Arguments**

inputs	A tensor of shape (batch_size, max_length, num_classes) containing the logits (the output of the model). They should <i>not</i> be normalized via softmax.
sequence_lengths	A tensor of shape (batch_size) containing the sequence lengths for the batch.
strategy	A string for the decoding strategy. Supported values are "greedy" and "beam_search".
beam_width	An integer scalar beam width used in beam search. Defaults to 100.
top_paths	An integer scalar, the number of top paths to return. Defaults to 1.
merge_repeated	A boolean scalar, whether to merge repeated labels in the output. Defaults to TRUE.
mask_index	An integer scalar, the (0-based) index of the mask character in the vocabulary. Defaults to 0.

**Value**

A list containing:

- The tensor representing the list of decoded sequences. If strategy="greedy", the shape is (1, batch\_size, max\_length). If strategy="beam\_search", the shape is (top\_paths, batch\_size, max\_length). Note that: -1 indicates the blank label.
- If strategy="greedy", a tensor of shape (batch\_size, 1) representing the negative of the sum of the probability logits for each sequence. If strategy="beam\_search", a tensor of shape (batch\_size, top\_paths) representing the log probability for each sequence.

**See Also**

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)  
[op\\_argmin\(\)](#)  
[op\\_argpartition\(\)](#)  
[op\\_argsort\(\)](#)  
[op\\_array\(\)](#)  
[op\\_average\(\)](#)  
[op\\_bincount\(\)](#)

`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_einsum()`  
`op_empty()`  
`op_equal()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`  
`op_full_like()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`

op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()



op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()

```
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
```

```
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```

```
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()
```

op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()

```
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op_ctc_loss	<i>CTC (Connectionist Temporal Classification) loss.</i>
-------------	--

---

### Description

CTC (Connectionist Temporal Classification) loss.

### Usage

```
op_ctc_loss(target, output, target_length, output_length, mask_index = 0L)
```

### Arguments

target	A tensor of shape (batch_size, max_length) containing the true labels in integer format.
output	A tensor of shape (batch_size, max_length, num_classes) containing logits (the output of your model).
target_length	A tensor of shape (batch_size) containing the true label lengths.
output_length	A tensor of shape (batch_size) containing the output lengths.
mask_index	The index of the mask character in the vocabulary. Defaults to 0.

### Value

A tensor, shape (batch\_size), of loss values.

### See Also

Other nn ops:  
[op\\_average\\_pool\(\)](#)  
[op\\_batch\\_normalization\(\)](#)  
[op\\_binary\\_crossentropy\(\)](#)  
[op\\_categorical\\_crossentropy\(\)](#)  
[op\\_conv\(\)](#)

```
op_conv_transpose()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()
```

```
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()
```



```
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
```

```
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
```

```
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
```

```
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_cumprod

*Return the cumulative product of elements along a given axis.*

---

### Description

Return the cumulative product of elements along a given axis.

### Usage

```
op_cumprod(x, axis = NULL, dtype = NULL)
```

### Arguments

x	Input tensor.
axis	Axis along which the cumulative product is computed. By default the input is flattened.
dtype	dtype of returned tensor. Defaults to x\$dtype.

### Value

Output tensor.

### See Also

- <https://keras.io/api/ops/numpy#cumprod-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()
```

op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()

```
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()
```

```
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

**Other ops:**

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
```

```
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()
```



```
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
```

op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()

```
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
```

```
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_cumsum

*Returns the cumulative sum of elements along a given axis.*

---

### Description

Returns the cumulative sum of elements along a given axis.

### Usage

```
op_cumsum(x, axis = NULL, dtype = NULL)
```

### Arguments

x	Input tensor.
axis	Axis along which the cumulative sum is computed. By default the input is flattened.
dtype	dtype of returned tensor. Defaults to x\$dtype.

### Value

Output tensor.

**See Also**

- <https://keras.io/api/ops/numpy#cumsum-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_custom_gradient()
op_depthwise_conv()
op_det()
```



op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_custom\_gradient      *Decorator to define a function with a custom gradient.*

---

### **Description**

This decorator allows fine grained control over the gradients of a sequence for operations. This may be useful for multiple reasons, including providing a more efficient or numerically stable gradient for a sequence of operations.

### **Usage**

```
op_custom_gradient(f)
```

**Arguments**

- `f` Function `f(...)` that returns a tuple (output, grad\_fn) where:
- ... is a sequence of unnamed arguments, each a tensor input or nested structure of tensor inputs to the function.
  - output is a (potentially nested structure of) tensor outputs of applying operations in `forward_fn f()` to ...
  - grad\_fn is a function with the signature `grad_fn(..., upstream)` which returns a list of tensors the same size as (flattened) ...: the derivatives of tensors in output with respect to the tensors in ... upstream is a tensor or sequence of tensors holding the initial value gradients for each tensor in output.

**Value**

A function `h(...)` which returns the same value as `f(...)[[1]]` and whose gradient is determined by `f(...)[[2]]`.

**Example**

Backend-agnostic example.

```
log1pexp <- op_custom_gradient(\(x) {
  e <- op_exp(x)

  grad <- function(..., upstream = NULL) {
    upstream <- upstream %||% ..1
    op_multiply(upstream, 1.0 - 1.0 / op_add(1, e))
  }

  tuple(op_log(1 + e), grad)
})

if(config_backend() == "tensorflow") {
  tf <- tensorflow::tf
  x <- op_convert_to_tensor(100.0)
  with(tf$GradientTape() %as% tape, {
    tape$watch(x)
    y <- log1pexp(x)
  })
  dy_dx <- tape$gradient(y, x)
  stopifnot(as.numeric(dy_dx) == 1)
}
```

**Note**

Note that the grad function that returns gradient computation requires ... as well as an upstream named argument, depending on the backend being set. With the JAX and TensorFlow backends, it

requires only one argument, whereas it might use the upstream argument in the case of the PyTorch backend.

When working with TensorFlow/JAX backend, `grad(upstream)` is sufficient. With PyTorch, the `grad` function requires `...` as well as `upstream`, e.g. `grad <- \(..., upstream)`. Follow the example above to use `op_custom_gradient()` in a way that is compatible with all backends.

### See Also

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/ops/custom\\_gradient](https://www.tensorflow.org/api_docs/python/tf/keras/ops/custom_gradient)

Other core ops:

```
op_cast()
op_cond()
op_convert_to_numpy()
op_convert_to_tensor()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_shape()
op_slice()
op_slice_update()
op_stop_gradient()
op_switch()
op_unstack()
op_vectorized_map()
op_while_loop()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
```

```
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
```

```
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
```



```
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()
```

```
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()
```

```

op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_depthwise_conv	<i>General N-D depthwise convolution.</i>
-------------------	---

---

### Description

This ops supports 1D and 2D depthwise convolution.

### Usage

```

op_depthwise_conv(
    inputs,
    kernel,
    strides = 1L,
    padding = "valid",
    data_format = NULL,
    dilation_rate = 1L
)

```

### Arguments

inputs	Tensor of rank N+2. inputs has shape (batch_size,) + inputs_spatial_shape + (num_channels,) if data_format = "channels_last", or (batch_size, num_channels) + inputs_spatial_shape if data_format = "channels_first".
kernel	Tensor of rank N+2. kernel has shape [kernel_spatial_shape, num_input_channels, num_channels]. num_input_channels should match the number of channels in inputs.
strides	int or int tuple/list of len(inputs_spatial_shape), specifying the strides of the convolution along each spatial dimension. If strides is int, then every spatial dimension shares the same strides.

padding	string, either "valid" or "same". "valid" means no padding is applied, and "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input when strides = 1.
data_format	A string, either "channels_last" or "channels_first". data_format determines the ordering of the dimensions in the inputs. If data_format = "channels_last", inputs is of shape (batch_size, ..., channels) while if data_format = "channels_first", inputs is of shape (batch_size, channels, ...).
dilation_rate	int or int tuple/list of len(inputs_spatial_shape), specifying the dilation rate to use for dilated convolution. If dilation_rate is int, then every spatial dimension shares the same dilation_rate.

**Value**

A tensor of rank N+2, the result of the depthwise conv operation.

**See Also**

- <https://keras.io/api/ops/nn#depthwiseconv-function>

Other nn ops:

```

op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_psnr()
op_relu()
op_relu6()
op_selu()
op_separable_conv()
op_sigmoid()
op_silu()
op_softmax()
op_softplus()

```

op\_softsign()  
op\_sparse\_categorical\_crossentropy()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()

```
op_cumprod()
op_cumsum()
op_custom_gradient()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
```

```
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()
```

```
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
```



```
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_det

*Computes the determinant of a square tensor.*

---

### **Description**

Computes the determinant of a square tensor.

**Usage**

```
op_det(x)
```

**Arguments**

x                    Input tensor of shape (... , M, M).

**Value**

A tensor of shape (...) representing the determinant of x.

**See Also**

Other linear algebra ops:

```
op_cholesky()  
op_eig()  
op_eigh()  
op_inv()  
op_lstsq()  
op_lu_factor()  
op_norm()  
op_slogdet()  
op_solve_triangular()  
op_svd()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()
```

```
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
```

```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```

```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()
```

```
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()
```

```
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_diag

*Extract a diagonal or construct a diagonal array.*

---

### Description

Extract a diagonal or construct a diagonal array.

### Usage

```
op_diag(x, k = 0L)
```

### Arguments

x	Input tensor. If x is 2-D, returns the k-th diagonal of x. If x is 1-D, return a 2-D tensor with x on the k-th diagonal.
k	The diagonal to consider. Defaults to 0. Use $k > 0$ for diagonals above the main diagonal, and $k < 0$ for diagonals below the main diagonal.

### Value

The extracted diagonal or constructed diagonal tensor.

### Examples

```
x <- op_arange(9L) |> op_reshape(c(3, 3))
x

## tf.Tensor(
## [[0 1 2]
## [3 4 5]
## [6 7 8]], shape=(3, 3), dtype=int32)
```

```
op_diag(x)

## tf.Tensor([0 4 8], shape=(3), dtype=int32)

op_diag(x, k = 1)

## tf.Tensor([1 5], shape=(2), dtype=int32)

op_diag(x, k = -1)

## tf.Tensor([3 7], shape=(2), dtype=int32)

op_diag(op_diag(x))

## tf.Tensor(
## [[0 0 0]
## [0 4 0]
## [0 0 8]], shape=(3, 3), dtype=int32)
```

### See Also

- <https://keras.io/api/ops/numpy#diag-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
```



op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()

```
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()
```

```
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
```

```
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
```

```
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
```

```
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()
```

```
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
```

```

op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_diagonal	<i>Return specified diagonals.</i>
-------------	------------------------------------

---

### Description

If  $x$  is 2-D, returns the diagonal of  $x$  with the given offset, i.e., the collection of elements of the form  $x[i, i+offset]$ .

If  $x$  has more than two dimensions, the axes specified by `axis1` and `axis2` are used to determine the 2-D sub-array whose diagonal is returned.

The shape of the resulting array can be determined by removing `axis1` and `axis2` and appending an index to the right equal to the size of the resulting diagonals.

### Usage

```
op_diagonal(x, offset = 0L, axis1 = 1L, axis2 = 2L)
```

### Arguments

<code>x</code>	Input tensor.
<code>offset</code>	Offset of the diagonal from the main diagonal. Can be positive or negative. Defaults to 0 (main diagonal).
<code>axis1</code>	Axis to be used as the first axis of the 2-D sub-arrays. Defaults to 1 (first axis).
<code>axis2</code>	Axis to be used as the second axis of the 2-D sub-arrays. Defaults to 2 (second axis).

### Value

Tensor of diagonals.



**Examples**

```
x <- op_arange(4L) |> op_reshape(c(2, 2))
x

## tf.Tensor(
## [[0 1]
## [2 3]], shape=(2, 2), dtype=int32)

op_diagonal(x)

## tf.Tensor([0 3], shape=(2), dtype=int32)

op_diagonal(x, offset = 1)

## tf.Tensor([1], shape=(1), dtype=int32)

x <- op_array(1:8) |> op_reshape(c(2, 2, 2))
x

## tf.Tensor(
## [[[1 2]
## [3 4]]
## [[5 6]
## [7 8]]], shape=(2, 2, 2), dtype=int32)

x |> op_diagonal(0)

## tf.Tensor(
## [[1 7]
## [2 8]], shape=(2, 2), dtype=int32)

x |> op_diagonal(0, 1, 2) # same as above, the default

## tf.Tensor(
## [[1 7]
## [2 8]], shape=(2, 2), dtype=int32)

x |> op_diagonal(0, 2, 3)

## tf.Tensor(
## [[1 4]
## [5 8]], shape=(2, 2), dtype=int32)
```

**See Also**

- <https://keras.io/api/ops/numpy#diagonal-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

```
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`

```
op_det()
op_diag()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```



```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_diff

*Calculate the n-th discrete difference along the given axis.*

---

### Description

The first difference is given by  $\text{out}[i] = a[i+1] - a[i]$  along the given axis, higher differences are calculated by using `diff` recursively.

### Usage

```
op_diff(a, n = 1L, axis = -1L)
```

**Arguments**

a	Input tensor.
n	The number of times values are differenced. Defaults to 1.
axis	Axis to compute discrete difference(s) along. Defaults to -1 (last axis).

**Value**

Tensor of diagonals.

**Examples**

```
x <- op_array(c(1, 2, 4, 7, 0))
op_diff(x)

## tf.Tensor([ 1.  2.  3. -7.], shape=(4), dtype=float32)

op_diff(x, n = 2)

## tf.Tensor([ 1.  1. -10.], shape=(3), dtype=float32)

x <- op_array(rbind(c(1, 3, 6, 10),
                    c(0, 5, 6, 8)))
op_diff(x)

## tf.Tensor(
## [[2.  3.  4.]
## [5.  1.  2.]], shape=(2, 3), dtype=float64)

op_diff(x, axis = 1)

## tf.Tensor([[ -1.  2.  0. -2.]], shape=(1, 4), dtype=float64)
```

**See Also**

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)

op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()

```
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
```

```
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
```

```
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
```

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

```
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()
```



```
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
```

```
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_digitize

*Returns the indices of the bins to which each value in x belongs.*

---

### Description

Returns the indices of the bins to which each value in x belongs.

### Usage

```
op_digitize(x, bins)
```

### Arguments

x	Input array to be binned.
bins	Array of bins. It has to be one-dimensional and monotonically increasing.

### Value

Output array of indices, of same shape as x.

**Examples**

```
x <- op_array(c(0.0, 1.0, 3.0, 1.6))
bins <- array(c(0.0, 3.0, 4.5, 7.0))
op_digitize(x, bins)

## tf.Tensor([1 1 2 1], shape=(4), dtype=int32)

# array([1, 1, 2, 1])
```

**See Also**

- <https://keras.io/api/ops/numpy#digitize-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
```

```
op_diag()
op_diagonal()
op_diff()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
```

`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`

```
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
```

op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()

```
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
```



```
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()
```

```
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_divide	<i>Divide arguments element-wise.</i>
-----------	---------------------------------------

---

**Description**

Note that this function is automatically called when using the R operator `*` with a tensor.

```
(x <- op_arange(4))

## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)

op_divide(x, 2)

## tf.Tensor([0. 0.5 1. 1.5], shape=(4), dtype=float32)

x / 2

## tf.Tensor([0. 0.5 1. 1.5], shape=(4), dtype=float32)
```

**Usage**

```
op_divide(x1, x2)
```

**Arguments**

x1	First input tensor.
x2	Second input tensor.

**Value**

Output tensor, the quotient  $x1/x2$ , element-wise.

**Example**

```
op_divide(3, 2)

## tf.Tensor(1.5, shape=(), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/numpy#divide-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()

```
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
```

```
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
```

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```



```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_divide_no_nan	<i>Safe element-wise division which returns 0 where the denominator is 0.</i>
------------------	---

---

### Description

Safe element-wise division which returns 0 where the denominator is 0.

### Usage

```
op_divide_no_nan(x1, x2)
```

**Arguments**

x1	First input tensor.
x2	Second input tensor.

**Value**

The quotient  $x1/x2$ , element-wise, with zero where  $x2$  is zero.

**See Also**

Other numpy ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)
- [op\\_argmax\(\)](#)
- [op\\_argmin\(\)](#)
- [op\\_argpartition\(\)](#)
- [op\\_argsort\(\)](#)
- [op\\_array\(\)](#)
- [op\\_average\(\)](#)
- [op\\_bincount\(\)](#)
- [op\\_broadcast\\_to\(\)](#)
- [op\\_ceil\(\)](#)
- [op\\_clip\(\)](#)
- [op\\_concatenate\(\)](#)
- [op\\_conj\(\)](#)
- [op\\_copy\(\)](#)
- [op\\_correlate\(\)](#)
- [op\\_cos\(\)](#)
- [op\\_cosh\(\)](#)
- [op\\_count\\_nonzero\(\)](#)
- [op\\_cross\(\)](#)
- [op\\_ctc\\_decode\(\)](#)
- [op\\_cumprod\(\)](#)
- [op\\_cumsum\(\)](#)
- [op\\_diag\(\)](#)
- [op\\_diagonal\(\)](#)
- [op\\_diff\(\)](#)

```
op_digitize()
op_divide()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
```

op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()

op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()

```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
```



```
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()
```

```
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
```

```
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

**Description**

- If both  $x_1$  and  $x_2$  are 1-D tensors, it is inner product of vectors (without complex conjugation).
- If both  $x_1$  and  $x_2$  are 2-D tensors, it is matrix multiplication.
- If either  $x_1$  or  $x_2$  is 0-D (scalar), it is equivalent to  $x_1 * x_2$ .
- If  $x_1$  is an N-D tensor and  $x_2$  is a 1-D tensor, it is a sum product over the last axis of  $x_1$  and  $x_2$ .
- If  $x_1$  is an N-D tensor and  $x_2$  is an M-D tensor (where  $M \geq 2$ ), it is a sum product over the last axis of  $x_1$  and the second-to-last axis of  $x_2$ :  $\text{dot}(x_1, x_2)[i, j, k, m] = \text{sum}(a[i, j, :] * b[k, :, m])$ .

**Usage**

```
op_dot(x1, x2)
```

**Arguments**

$x_1$	First argument.
$x_2$	Second argument.

**Value**

Dot product of  $x_1$  and  $x_2$ .

**Note**

Torch backend does not accept 0-D tensors as arguments.

**See Also**

- <https://keras.io/api/ops/numpy#dot-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()
```

```
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
```

```
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
```

op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()

```
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
```



```
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
```

```
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
```

```
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
```

```
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_dtype

*Return the dtype of the tensor input as a standardized string.*

---

### Description

Note that due to the standardization, the dtype will not compare equal to the backend-specific version of the dtype.

### Usage

```
op_dtype(x)
```

### Arguments

x                    A tensor. This function will try to access the dtype attribute of the input tensor.

### Value

A string indicating the dtype of the input tensor, e.g. "float32".

### Examples

```
x <- op_zeros(c(8, 12))
op_dtype(x)

## [1] "float32"
```

**See Also**

Other core ops:

- [op\\_cast\(\)](#)
- [op\\_cond\(\)](#)
- [op\\_convert\\_to\\_numpy\(\)](#)
- [op\\_convert\\_to\\_tensor\(\)](#)
- [op\\_custom\\_gradient\(\)](#)
- [op\\_fori\\_loop\(\)](#)
- [op\\_is\\_tensor\(\)](#)
- [op\\_map\(\)](#)
- [op\\_scan\(\)](#)
- [op\\_scatter\(\)](#)
- [op\\_scatter\\_update\(\)](#)
- [op\\_shape\(\)](#)
- [op\\_slice\(\)](#)
- [op\\_slice\\_update\(\)](#)
- [op\\_stop\\_gradient\(\)](#)
- [op\\_switch\(\)](#)
- [op\\_unstack\(\)](#)
- [op\\_vectorized\\_map\(\)](#)
- [op\\_while\\_loop\(\)](#)

Other ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)
- [op\\_argmax\(\)](#)
- [op\\_argmin\(\)](#)
- [op\\_argpartition\(\)](#)
- [op\\_argsort\(\)](#)
- [op\\_array\(\)](#)
- [op\\_average\(\)](#)
- [op\\_average\\_pool\(\)](#)
- [op\\_batch\\_normalization\(\)](#)
- [op\\_binary\\_crossentropy\(\)](#)
- [op\\_bincount\(\)](#)
- [op\\_broadcast\\_to\(\)](#)
- [op\\_cast\(\)](#)

```
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()
```

```
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
```

```
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
```



```
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
```

```
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_eig

*Computes the eigenvalues and eigenvectors of a square matrix.*

---

### Description

Computes the eigenvalues and eigenvectors of a square matrix.

### Usage

```
op_eig(x)
```

### Arguments

x                    Input tensor of shape  $(\dots, M, M)$ .

### Value

A list of two tensors: a tensor of shape  $(\dots, M)$  containing eigenvalues and a tensor of shape  $(\dots, M, M)$  containing eigenvectors.

### See Also

Other linear algebra ops:

```
op_cholesky()  
op_det()  
op_eigh()  
op_inv()  
op_lstsq()  
op_lu_factor()  
op_norm()  
op_slogdet()  
op_solve_triangular()  
op_svd()
```

Other ops:

```
op_abs()
```

```
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()
```

```
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
```

```
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()
```

```
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
```

```
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_eigh

*Computes the eigenvalues and eigenvectors of a complex Hermitian.*

---

### **Description**

Computes the eigenvalues and eigenvectors of a complex Hermitian.

### **Usage**

```
op_eigh(x)
```

**Arguments**

x                    Input tensor of shape  $(\dots, M, M)$ .

**Value**

A list of two tensors: a tensor of shape  $(\dots, M)$  containing eigenvalues and a tensor of shape  $(\dots, M, M)$  containing eigenvectors.

**See Also**

Other linear algebra ops:

- [op\\_cholesky\(\)](#)
- [op\\_det\(\)](#)
- [op\\_eig\(\)](#)
- [op\\_inv\(\)](#)
- [op\\_lstsq\(\)](#)
- [op\\_lu\\_factor\(\)](#)
- [op\\_norm\(\)](#)
- [op\\_slogdet\(\)](#)
- [op\\_solve\\_triangular\(\)](#)
- [op\\_svd\(\)](#)

Other ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)
- [op\\_argmax\(\)](#)
- [op\\_argmin\(\)](#)
- [op\\_argpartition\(\)](#)
- [op\\_argsort\(\)](#)
- [op\\_array\(\)](#)
- [op\\_average\(\)](#)
- [op\\_average\\_pool\(\)](#)
- [op\\_batch\\_normalization\(\)](#)
- [op\\_binary\\_crossentropy\(\)](#)
- [op\\_bincount\(\)](#)
- [op\\_broadcast\\_to\(\)](#)
- [op\\_cast\(\)](#)



```
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
```

```
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
```

```
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
```

```
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
```

```

op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_einsum

*Evaluates the Einstein summation convention on the operands.*


---

### Description

Evaluates the Einstein summation convention on the operands.

### Usage

```
op_einsum(subscripts, ...)
```

### Arguments

subscripts	Specifies the subscripts for summation as comma separated list of subscript labels. An implicit (classical Einstein summation) calculation is performed unless the explicit indicator <code>-&gt;</code> is included as well as subscript labels of the precise output form.
...	The operands to compute the Einstein sum of.

### Value

The calculation based on the Einstein summation convention.

### Examples

```

a <- op_arange(25) |> op_reshape(c(5, 5))
b <- op_arange(5)
c <- op_arange(6) |> op_reshape(c(2, 3))
Trace of a matrix:

op_einsum("ii", a)
op_trace(a)

## tf.Tensor(60.0, shape=(), dtype=float32)
## tf.Tensor(60.0, shape=(), dtype=float32)

```

Extract the diagonal:

```
op_einsum("ii -> i", a)
op_diag(a)

## tf.Tensor([ 0.  6. 12. 18. 24.], shape=(5), dtype=float32)
## tf.Tensor([ 0.  6. 12. 18. 24.], shape=(5), dtype=float32)
```

Sum over an axis:

```
op_einsum("ij -> i", a)
op_sum(a, axis = 2)

## tf.Tensor([ 10.  35.  60.  85. 110.], shape=(5), dtype=float32)
## tf.Tensor([ 10.  35.  60.  85. 110.], shape=(5), dtype=float32)
```

For higher dimensional tensors summing a single axis can be done with ellipsis:

```
op_einsum("...j -> ...", a)
op_sum(a, axis = -1)

## tf.Tensor([ 10.  35.  60.  85. 110.], shape=(5), dtype=float32)
## tf.Tensor([ 10.  35.  60.  85. 110.], shape=(5), dtype=float32)
```

Compute a matrix transpose or reorder any number of axes:

```
op_einsum("ji", c) # return c unchanged

## tf.Tensor(
## [[0. 1. 2.]
## [3. 4. 5.]], shape=(2, 3), dtype=float32)

op_einsum("ij -> ji", c) # transpose
op_transpose(c)          # same as above

## tf.Tensor(
## [[0. 3.]
## [1. 4.]
## [2. 5.]], shape=(3, 2), dtype=float32)
## tf.Tensor(
## [[0. 3.]
## [1. 4.]
## [2. 5.]], shape=(3, 2), dtype=float32)
```

Matrix vector multiplication:

```
op_einsum("ij, j", a, b)
op_einsum("...j, j", a, b)
a %*% b
op_matmul(a, b)

## tf.Tensor([ 30.  80. 130. 180. 230.], shape=(5), dtype=float32)
## tf.Tensor([ 30.  80. 130. 180. 230.], shape=(5), dtype=float32)
## tf.Tensor([ 30.  80. 130. 180. 230.], shape=(5), dtype=float32)
## tf.Tensor([ 30.  80. 130. 180. 230.], shape=(5), dtype=float32)
```

### See Also

- <https://keras.io/api/ops/numpy#einsum-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
```

```
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_empty()  
op_equal()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()
```



op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()

```
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
```

```
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```

```
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
```

op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrt()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()

```
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_elu

*Exponential Linear Unit activation function.*

---

### Description

It is defined as:

$f(x) = \alpha * (\exp(x) - 1.)$  for  $x < 0$ ,  $f(x) = x$  for  $x \geq 0$ .

### Usage

```
op_elu(x, alpha = 1)
```

### Arguments

x	Input tensor.
alpha	A scalar, slope of positive section. Defaults to 1.0.

### Value

A tensor with the same shape as x.

### Examples

```
x <- op_array(c(-1., 0., 1.))
op_elu(x)

## tf.Tensor([-0.63212055  0.          1.          ], shape=(3), dtype=float32)
```

### See Also

- <https://keras.io/api/ops/nn#elu-function>

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
```

```
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()
```



```
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
```

```
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
```

```
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
```

```
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
```

```
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_empty	<i>Return a tensor of given shape and type filled with uninitialized data.</i>
----------	--

---

### Description

Return a tensor of given shape and type filled with uninitialized data.

### Usage

```
op_empty(shape, dtype = NULL)
```

### Arguments

shape	Shape of the empty tensor.
dtype	Desired data type of the empty tensor.

### Value

The empty tensor.

### See Also

- <https://keras.io/api/ops/numpy#empty-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
```

```
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
```

```
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()
```

op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()



```
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
```

```
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
```

`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`

```
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
```

```
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_equal	Returns (x1 == x2) element-wise.
----------	----------------------------------

---

### Description

Note that this function is automatically called when using the R operator == with a tensor.

```
(x <- op_arange(4))
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)

op_equal(x, 2)
## tf.Tensor([False False  True False], shape=(4), dtype=bool)

x == 2
## tf.Tensor([False False  True False], shape=(4), dtype=bool)
```

### Usage

```
op_equal(x1, x2)
```

### Arguments

x1	Tensor to compare.
x2	Tensor to compare.

**Value**

Output tensor, element-wise comparison of x1 and x2.

**See Also**

- <https://keras.io/api/ops/numpy#equal-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()

```
op_einsum()  
op_empty()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()
```

```
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()
```



`op_zeros()`  
`op_zeros_like()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`

```
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
```

```
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
```

```
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
```

```
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_erf

*Computes the error function of x, element-wise.*

---

### **Description**

Computes the error function of x, element-wise.

**Usage**

```
op_erf(x)
```

**Arguments**

x                    Input tensor.

**Value**

A tensor with the same dtype as x.

**Examples**

```
x <- op_array(c(-3, -2, -1, 0, 1))
op_erf(x)
```

```
## tf.Tensor([-0.99997777 -0.9953222 -0.84270084 0.            0.84270084], shape=(5), dtype=float32)
```

```
# array([-0.99998 , -0.99532, -0.842701, 0., 0.842701], dtype=float32)
```

**See Also**

Other math ops:

```
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
op_in_top_k()
op_irfft()
op_istft()
op_logsumexp()
op_qr()
op_rfft()
op_rsqrt()
op_segment_max()
op_segment_sum()
op_solve()
op_stft()
op_top_k()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
```

op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()

```
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
```



```
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
```

```
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
```

```
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_erfinv

*Computes the inverse error function of x, element-wise.*

---

### Description

Computes the inverse error function of x, element-wise.

### Usage

```
op_erfinv(x)
```

### Arguments

x                    Input tensor.

### Value

A tensor with the same dtype as x.

**Examples**

```
x <- op_array(c(-0.5, -0.2, -0.1, 0.0, 0.3))
op_erfinv(x)

## tf.Tensor([-0.4769363 -0.17914344 -0.088856 0. 0.27246267], shape=(5), dtype=float32)
```

**See Also**

Other math ops:

- [op\\_erf\(\)](#)
- [op\\_extract\\_sequences\(\)](#)
- [op\\_fft\(\)](#)
- [op\\_fft2\(\)](#)
- [op\\_in\\_top\\_k\(\)](#)
- [op\\_irfft\(\)](#)
- [op\\_istft\(\)](#)
- [op\\_logsumexp\(\)](#)
- [op\\_qr\(\)](#)
- [op\\_rfft\(\)](#)
- [op\\_rsqr\(\)](#)
- [op\\_segment\\_max\(\)](#)
- [op\\_segment\\_sum\(\)](#)
- [op\\_solve\(\)](#)
- [op\\_stft\(\)](#)
- [op\\_top\\_k\(\)](#)

Other ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)
- [op\\_argmax\(\)](#)
- [op\\_argmin\(\)](#)
- [op\\_argpartition\(\)](#)
- [op\\_argsort\(\)](#)
- [op\\_array\(\)](#)
- [op\\_average\(\)](#)
- [op\\_average\\_pool\(\)](#)

op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()

```
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
```

op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()

```
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
```



```
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_exp

*Calculate the exponential of all elements in the input tensor.*

---

### Description

Calculate the exponential of all elements in the input tensor.

### Usage

```
op_exp(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor, element-wise exponential of x.

### See Also

- <https://keras.io/api/ops/numpy#exp-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()
```

op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()

```
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()
```

```
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
```

op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()

```
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()

```
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
```



```
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_expand\_dims

*Expand the shape of a tensor.*

---

### Description

Insert a new axis at the `axis` position in the expanded tensor shape.

### Usage

```
op_expand_dims(x, axis)
```

### Arguments

<code>x</code>	Input tensor.
<code>axis</code>	Position in the expanded axes where the new axis (or axes) is placed.

### Value

Output tensor with the number of dimensions increased.

**See Also**

- <https://keras.io/api/ops/numpy#expanddims-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()
```

```
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()
```

```
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()
```

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```

```
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()
```

```
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```



```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_expm1

*Calculate  $\exp(x) - 1$  for all elements in the tensor.*

---

### **Description**

Calculate  $\exp(x) - 1$  for all elements in the tensor.

### **Usage**

op\_expm1(x)

**Arguments**

x                    Input values.

**Value**

Output tensor, element-wise exponential minus one.

**See Also**

- <https://keras.io/api/ops/numpy#expml-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()

```
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
```

```
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
```

op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()

```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
```

```
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
```

```
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
```



```
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_extract\_sequences *Expands the dimension of last axis into sequences of sequence\_length.*

---

**Description**

Slides a window of size `sequence_length` over the last axis of the input with a stride of `sequence_stride`, replacing the last axis with `[num_sequences, sequence_length]` sequences.

If the dimension along the last axis is `N`, the number of sequences can be computed by:  
`num_sequences = 1 + (N - sequence_length) // sequence_stride`

**Usage**

```
op_extract_sequences(x, sequence_length, sequence_stride)
```

**Arguments**

`x` Input tensor.  
`sequence_length` An integer representing the sequences length.  
`sequence_stride` An integer representing the sequences hop size.

**Value**

A tensor of sequences with shape `[..., num_sequences, sequence_length]`.

**Examples**

```
x <- op_convert_to_tensor(1:6)
op_extract_sequences(x, 3, 2)

## tf.Tensor(
## [[1 2 3]
## [3 4 5]], shape=(2, 3), dtype=int32)
```

**See Also**

- <https://keras.io/api/ops/core#extractsequences-function>

Other math ops:

```
op_erf()
op_erfinv()
op_fft()
op_fft2()
op_in_top_k()
op_irfft()
op_istft()
op_logsumexp()
op_qr()
op_rfft()
op_rsqr()
op_segment_max()
```

`op_segment_sum()`  
`op_solve()`  
`op_stft()`  
`op_top_k()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`

```
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()
```

```
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
```

```
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
```

```
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_eye

*Return a 2-D tensor with ones on the diagonal and zeros elsewhere.*

---

### **Description**

Return a 2-D tensor with ones on the diagonal and zeros elsewhere.

**Usage**

```
op_eye(N, M = NULL, k = 0L, dtype = NULL)
```

**Arguments**

N	Number of rows in the output.
M	Number of columns in the output. If NULL, defaults to N.
k	Index of the diagonal: 0 (the default) refers to the main diagonal, a positive value refers to an upper diagonal, and a negative value to a lower diagonal.
dtype	Data type of the returned tensor.

**Value**

Tensor with ones on the k-th diagonal and zeros elsewhere.

**See Also**

- <https://keras.io/api/ops/numpy#eye-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()
```



```
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
```

```
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
```

```
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()
```

```
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
```

```
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
```

```
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()
```

```
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
```

```
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_fft

*Computes the Fast Fourier Transform along last axis of input.*

---

### Description

Computes the Fast Fourier Transform along last axis of input.

### Usage

```
op_fft(x)
```

### Arguments

x list of the real and imaginary parts of the input tensor. Both tensors provided should be of floating type.

### Value

A list containing two tensors - the real and imaginary parts of the output tensor.

### Examples

```
x = c(op_array(c(1., 2.)),
      op_array(c(0., 1.)))
op_fft(x)

## [[1]]
## tf.Tensor([ 3. -1.], shape=(2), dtype=float32)
##
## [[2]]
## tf.Tensor([ 1. -1.], shape=(2), dtype=float32)
```

### See Also

- <https://keras.io/api/ops/fft#fft-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft2()
op_in_top_k()
```



```
op_irfft()  
op_istft()  
op_logsumexp()  
op_qr()  
op_rfft()  
op_rsqr()  
op_segment_max()  
op_segment_sum()  
op_solve()  
op_stft()  
op_top_k()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```

```
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
```

```
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()
```

op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()

```
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_fft2	<i>Computes the 2D Fast Fourier Transform along the last two axes of input.</i>
---------	---

---

### Description

Computes the 2D Fast Fourier Transform along the last two axes of input.

### Usage

```
op_fft2(x)
```

### Arguments

**x** list of the real and imaginary parts of the input tensor. Both tensors provided should be of floating type.

### Value

A list containing two tensors - the real and imaginary parts of the output.

### Examples

```
x <- c(op_array(rbind(c(1, 2),
                     c(2, 1))),
      op_array(rbind(c(0, 1),
                     c(1, 0))))
op_fft2(x)

## [[1]]
## tf.Tensor(
## [[ 6.  0.]
## [ 0. -2.]], shape=(2, 2), dtype=float64)
##
## [[2]]
## tf.Tensor(
## [[ 2.  0.]
## [ 0. -2.]], shape=(2, 2), dtype=float64)
```

### See Also

- <https://keras.io/api/ops/fft#fft2-function>

Other math ops:

[op\\_erf\(\)](#)

[op\\_erfinv\(\)](#)

[op\\_extract\\_sequences\(\)](#)

op\_fft()  
op\_in\_top\_k()  
op\_irfft()  
op\_istft()  
op\_logsumexp()  
op\_qr()  
op\_rfft()  
op\_rsqr()  
op\_segment\_max()  
op\_segment\_sum()  
op\_solve()  
op\_stft()  
op\_top\_k()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()

```
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
```



```
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
```

```
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()
```

op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()  
op\_zeros()

`op_zeros_like()`

---

`op_flip`

*Reverse the order of elements in the tensor along the given axis.*

---

### Description

The shape of the tensor is preserved, but the elements are reordered.

### Usage

```
op_flip(x, axis = NULL)
```

### Arguments

<code>x</code>	Input tensor.
<code>axis</code>	Axis or axes along which to flip the tensor. The default, <code>axis = NULL</code> , will flip over all of the axes of the input tensor.

### Value

Output tensor with entries of `axis` reversed.

### See Also

- <https://keras.io/api/ops/numpy#flip-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()
```

```
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
```

```
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
```

```
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()
```

```
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
```



```
op_fft()  
op_fft2()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()
```

```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()
```

op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()

```
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_floor

*Return the floor of the input, element-wise.*

---

### Description

The floor of the scalar  $x$  is the largest integer  $i$ , such that  $i \leq x$ .

### Usage

```
op_floor(x)
```

### Arguments

$x$                     Input tensor.

### Value

Output tensor, element-wise floor of  $x$ .

### See Also

- <https://keras.io/api/ops/numpy#floor-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
```

op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()

```
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
```

op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()

```
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
```



```
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
```

op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()

```
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
```

```
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_floor_divide	<i>Returns the largest integer smaller or equal to the division of inputs.</i>
-----------------	--

---

### Description

Note that this function is automatically called when using the R operator `%%` with a tensor.

```
(x <- op_arange(10))
```

```
## tf.Tensor([0. 1. 2. 3. 4. 5. 6. 7. 8. 9.], shape=(10), dtype=float32)
```

```
op_floor_divide(x, 2)
```

```
## tf.Tensor([0. 0. 1. 1. 2. 2. 3. 3. 4. 4.], shape=(10), dtype=float32)
```

```
x %% 2
```

```
## tf.Tensor([0. 0. 1. 1. 2. 2. 3. 3. 4. 4.], shape=(10), dtype=float32)
```

**Usage**

`op_floor_divide(x1, x2)`

**Arguments**

<code>x1</code>	Numerator.
<code>x2</code>	Denominator.

**Value**

Output tensor,  $y \leftarrow \text{floor}(x1/x2)$

**See Also**

Other numpy ops:

- `op_abs()`
- `op_add()`
- `op_all()`
- `op_any()`
- `op_append()`
- `op_arange()`
- `op_arccos()`
- `op_arccosh()`
- `op_arcsin()`
- `op_arcsinh()`
- `op_arctan()`
- `op_arctan2()`
- `op_arctanh()`
- `op_argmax()`
- `op_argmin()`
- `op_argpartition()`
- `op_argsort()`
- `op_array()`
- `op_average()`
- `op_bincount()`
- `op_broadcast_to()`
- `op_ceil()`
- `op_clip()`
- `op_concatenate()`
- `op_conj()`
- `op_copy()`
- `op_correlate()`
- `op_cos()`
- `op_cosh()`
- `op_count_nonzero()`
- `op_cross()`
- `op_ctc_decode()`
- `op_cumprod()`

```
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
```

```
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()
```

```
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()
```



`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`  
`op_det()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_dtype()`  
`op_eig()`  
`op_eigh()`  
`op_einsum()`  
`op_elu()`  
`op_empty()`  
`op_equal()`  
`op_erf()`  
`op_erfinv()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_extract_sequences()`  
`op_eye()`  
`op_fft()`  
`op_fft2()`  
`op_flip()`  
`op_floor()`  
`op_fori_loop()`  
`op_full()`  
`op_full_like()`  
`op_gelu()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hard_sigmoid()`  
`op_hard_silu()`  
`op_hstack()`

```
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()
```

```
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()
```

```
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_fori_loop	<i>For loop implementation.</i>
--------------	---------------------------------

---

**Description**

For loop implementation.

**Usage**

```
op_fori_loop(lower, upper, body_fun, init_val)
```

**Arguments**

lower	The initial value of the loop variable.
upper	The upper bound of the loop variable.
body_fun	A callable that represents the loop body. Must take two arguments: the loop variable and the loop state. The loop state should be updated and returned by this function.
init_val	The initial value of the loop state.

**Value**

The final state after the loop.

**Examples**

```
lower <- 0L
upper <- 10L
body_fun <- function(i, state) state + i
init_state <- 0L
final_state <- op_fori_loop(lower, upper, body_fun, init_state)
final_state

## tf.Tensor(45, shape=(), dtype=int32)
```

**See Also**

Other core ops:

- [op\\_cast\(\)](#)
- [op\\_cond\(\)](#)
- [op\\_convert\\_to\\_numpy\(\)](#)
- [op\\_convert\\_to\\_tensor\(\)](#)
- [op\\_custom\\_gradient\(\)](#)
- [op\\_dtype\(\)](#)
- [op\\_is\\_tensor\(\)](#)

```
op_map()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_shape()  
op_slice()  
op_slice_update()  
op_stop_gradient()  
op_switch()  
op_unstack()  
op_vectorized_map()  
op_while_loop()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()
```

```
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```

```
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
```



```
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
```

```
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_full	<i>Return a new tensor of given shape and type, filled with fill_value.</i>
---------	---

---

### Description

Return a new tensor of given shape and type, filled with fill\_value.

### Usage

```
op_full(shape, fill_value, dtype = NULL)
```

### Arguments

shape	Shape of the new tensor.
fill_value	Fill value.
dtype	Desired data type of the tensor.

### Value

Output tensor.

### See Also

- <https://keras.io/api/ops/numpy#full-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()
```

```
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
```

op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()

op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()

```
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
```

```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```



op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrt()  
op\_scan()

```
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
```

```
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op_full_like	<i>Return a full tensor with the same shape and type as the given tensor.</i>
--------------	---

---

### Description

Return a full tensor with the same shape and type as the given tensor.

### Usage

```
op_full_like(x, fill_value, dtype = NULL)
```

### Arguments

x	Input tensor.
fill_value	Fill value.
dtype	Overrides data type of the result.

### Value

Tensor of fill\_value with the same shape and type as x.

### See Also

- <https://keras.io/api/ops/numpy#fulllike-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()
```

```
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()
```

`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_lstsq()`  
`op_matmul()`  
`op_max()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`

op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()

```
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
```

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
```



```
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()
```

```
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```

```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_gelu

*Gaussian Error Linear Unit (GELU) activation function.*

---

### Description

If approximate is TRUE, it is defined as:  $f(x) = 0.5 * x * (1 + \tanh(\sqrt{2 / \pi} * (x + 0.044715 * x^3)))$

Or if approximate is FALSE, it is defined as:  $f(x) = x * P(X \leq x) = 0.5 * x * (1 + \operatorname{erf}(x / \sqrt{2}))$ , where  $P(X) \sim N(0, 1)$ .

### Usage

```
op_gelu(x, approximate = TRUE)
```

### Arguments

x	Input tensor.
approximate	Approximate version of GELU activation. Defaults to TRUE.

### Value

A tensor with the same shape as x.

**Examples**

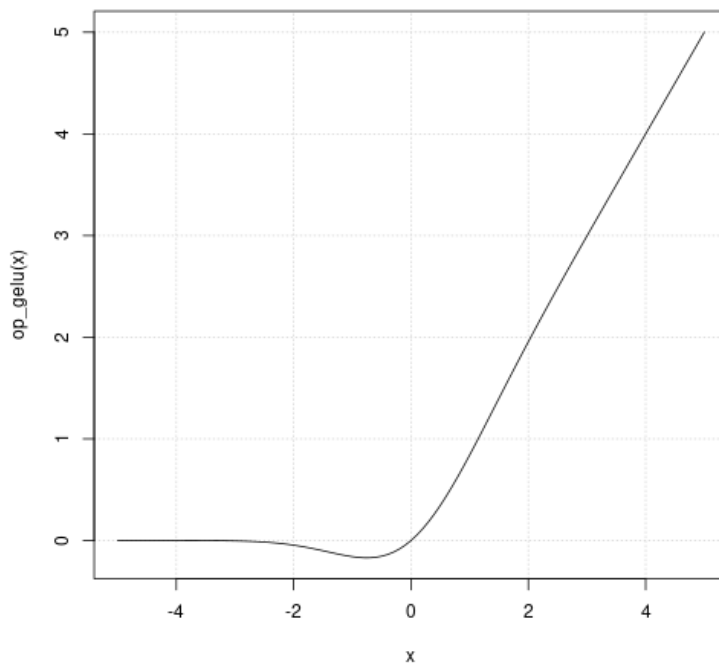
```
x <- op_array(c(-1., 0., 1.))
op_gelu(x)

## tf.Tensor([-0.15880796  0.          0.841192  ], shape=(3), dtype=float32)

op_gelu(x, FALSE)

## tf.Tensor([-0.15865526  0.          0.8413447 ], shape=(3), dtype=float32)

x <- seq(-5, 5, .1)
plot(x, op_gelu(x),
     type = "l", #, frame.plot = FALSE,
     panel.first = grid())
```

**See Also**

- <https://keras.io/api/ops/nn#gelu-function>

Other nn ops:

[op\\_average\\_pool\(\)](#)

```
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()
```

```
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
```

```
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
```

op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()



```
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
```

```
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_get_item	<i>Return</i> x[key].
-------------	-----------------------

---

### Description

Return x[key].

### Usage

```
op_get_item(x, key)
```

### Arguments

x	A dictionary-like object
key	Generally, a string, but most object with a <code>__hash__</code> method are acceptable.

### Value

key.

### Note

Generally, calling x[[key]] or x\$key is preferable.

**See Also**

- <https://keras.io/api/ops/numpy#getitem-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()
```

`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`  
`op_zeros()`  
`op_zeros_like()`

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()
```

`op_det()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_dtype()`  
`op_eig()`  
`op_eigh()`  
`op_einsum()`  
`op_elu()`  
`op_empty()`  
`op_equal()`  
`op_erf()`  
`op_erfinv()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_extract_sequences()`  
`op_eye()`  
`op_fft()`  
`op_fft2()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_fori_loop()`  
`op_full()`  
`op_full_like()`  
`op_gelu()`  
`op_greater()`  
`op_greater_equal()`  
`op_hard_sigmoid()`  
`op_hard_silu()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_image_affine_transform()`  
`op_image_crop()`  
`op_image_extract_patches()`  
`op_image_hsv_to_rgb()`  
`op_image_map_coordinates()`  
`op_image_pad()`  
`op_image_resize()`  
`op_image_rgb_to_grayscale()`  
`op_image_rgb_to_hsv()`  
`op_in_top_k()`

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```



```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_greater

*Return the truth value of  $x1 > x2$  element-wise.*

---

### Description

Note that this function is automatically called when using the R operator `>` with a tensor.

```
(x <- op_arange(4))
```

```
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)
```

```
op_greater(x, 2)

## tf.Tensor([False False False  True], shape=(4), dtype=bool)

x > 2

## tf.Tensor([False False False  True], shape=(4), dtype=bool)
```

### Usage

```
op_greater(x1, x2)
```

### Arguments

x1	First input tensor.
x2	Second input tensor.

### Value

Output tensor, element-wise comparison of x1 and x2.

### See Also

- <https://keras.io/api/ops/numpy#greater-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
```

```
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
```

```
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()
```

op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()

```
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
```

```
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
```



`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`  
`op_scatter()`

```
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
```

```
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_greater_equal	<i>Return the truth value of <math>x1 \geq x2</math> element-wise.</i>
------------------	--

---

### Description

Note that this function is automatically called when using the R operator  $\geq$  with a tensor.

```
(x <- op_arange(4))
```

```
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)
```

```
op_greater_equal(x, 2)
```

```
## tf.Tensor([False False  True  True], shape=(4), dtype=bool)
```

```
x >= 2
```

```
## tf.Tensor([False False  True  True], shape=(4), dtype=bool)
```

### Usage

```
op_greater_equal(x1, x2)
```

### Arguments

x1	First input tensor.
x2	Second input tensor.

### Value

Output tensor, element-wise comparison of x1 and x2.

**See Also**

- <https://keras.io/api/ops/numpy#greaterequal-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()
```

```
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()
```

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```



```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```

op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()  
op\_zeros()  
op\_zeros\_like()

---

op\_hard\_sigmoid

*Hard sigmoid activation function.*

---

### **Description**

It is defined as:

0 if  $x < -2.5$ , 1 if  $x > 2.5$ ,  $(0.2 * x) + 0.5$  if  $-2.5 \leq x \leq 2.5$ .

### **Usage**

op\_hard\_sigmoid(x)

**Arguments**

x                    Input tensor.

**Value**

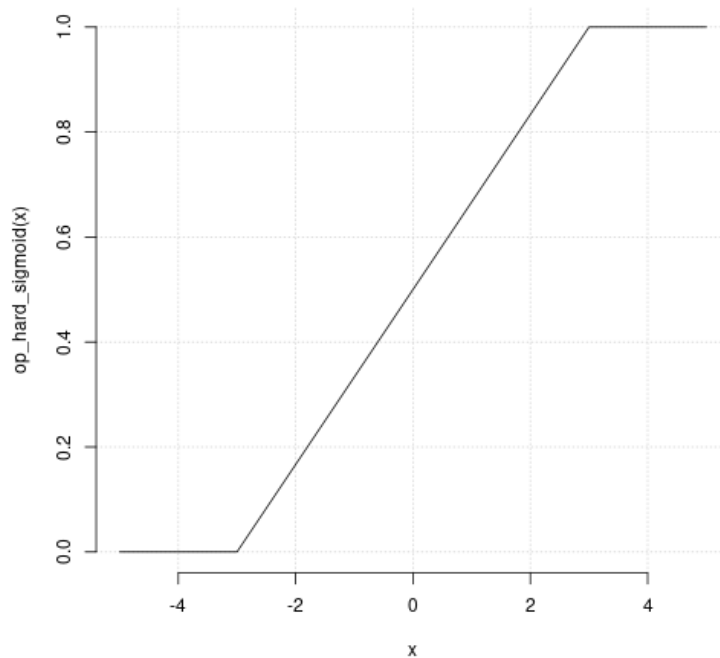
A tensor with the same shape as x.

**Examples**

```
x <- op_array(c(-1., 0., 1.))
op_hard_sigmoid(x)
```

```
## tf.Tensor([0.33333334 0.5            0.6666667 ], shape=(3), dtype=float32)
```

```
x <- as.array(seq(-5, 5, .1))
plot(x, op_hard_sigmoid(x),
      type = 'l', panel.first = grid(), frame.plot = FALSE)
```

**See Also**

- <https://keras.io/api/ops/nn#hardsigmoid-function>

## Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

## Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()
```

```
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
```

```
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()
```

```
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()
```



```
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()
```

```
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_hard\_silu

*Hard SiLU activation function, also known as Hard Swish.*

---

### Description

It is defined as:

- 0 if  $x < -3$
- $x$  if  $x > 3$
- $x * (x + 3) / 6$  if  $-3 \leq x \leq 3$

It's a faster, piecewise linear approximation of the silu activation.

### Usage

```
op_hard_silu(x)
```

```
op_hard_swish(x)
```

### Arguments

`x`                      Input tensor.

### Value

A tensor with the same shape as `x`.

**Examples**

```
x <- op_convert_to_tensor(c(-3.0, -1.0, 0.0, 1.0, 3.0))
op_hard_silu(x)

## tf.Tensor([-0.          -0.33333334  0.          0.6666667  3.          ], shape=(5), dtype=float32)
```

**See Also**

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_psnr()
op_relu()
op_relu6()
op_selu()
op_separable_conv()
op_sigmoid()
op_silu()
op_softmax()
op_softplus()
op_softsign()
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
```

```
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
```

```
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
```

```
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
```

```
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()
```

```
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_hstack

*Stack tensors in sequence horizontally (column wise).*

---

### **Description**

This is equivalent to concatenation along the first axis for 1-D tensors, and along the second axis for all other tensors.

### **Usage**

```
op_hstack(xs)
```

### **Arguments**

xs                      Sequence of tensors.



**Value**

The tensor formed by stacking the given tensors.

**See Also**

- <https://keras.io/api/ops/numpy#hstack-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()

```
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
```

```
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()
```

```
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()
```

```
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
```

```
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
```

op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()

```
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_identity

*Return the identity tensor.*

---

### Description

The identity tensor is a square tensor with ones on the main diagonal and zeros elsewhere.



**Usage**

`op_identity(n, dtype = NULL)`

**Arguments**

`n`                    Number of rows (and columns) in the  $n \times n$  output tensor.  
`dtype`                Data type of the output tensor.

**Value**

The identity tensor.

**See Also**

- <https://keras.io/api/ops/numpy#identity-function>

Other numpy ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`

```
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
```

```
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()
```

```
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```

op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()

```
op_hard_silu()
op_hstack()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
```

op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrt()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()

```
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```



---

`op_imag`*Return the imaginary part of the complex argument.*

---

**Description**

Return the imaginary part of the complex argument.

**Usage**

```
op_imag(x)
```

**Arguments**

`x`                    Input tensor.

**Value**

The imaginary component of the complex argument.

**See Also**

- <https://keras.io/api/ops/numpy#imag-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()
```

```
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
```

```
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
```

```
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
```

```
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
```

```
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
```

op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()

```
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
```



```

op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

```
op_image_affine_transform
```

*Applies the given transform(s) to the image(s).*

---

### Description

Applies the given transform(s) to the image(s).

### Usage

```

op_image_affine_transform(
    images,
    transform,
    interpolation = "bilinear",
    fill_mode = "constant",
    fill_value = 0L,
    data_format = NULL
)

```

### Arguments

images	Input image or batch of images. Must be 3D or 4D.
transform	Projective transform matrix/matrices. A vector of length 8 or tensor of size N x 8. If one row of transform is $[a_0, a_1, a_2, b_0, b_1, b_2, c_0, c_1]$ , then it maps the output point $(x, y)$ to a transformed input point $(x', y') = ((a_0 x + a_1 y + a_2) / k, (b_0 x + b_1 y + b_2) / k)$ where $k = c_0 x + c_1 y + 1$ . The transform is inverted compared to the transform mapping input points to output points. Note that gradients are not backpropagated into transformation parameters. Note that $c_0$ and $c_1$ are only effective when using TensorFlow backend and will be considered as 0 when using other backends.
interpolation	Interpolation method. Available methods are "nearest", and "bilinear". Defaults to "bilinear".
fill_mode	Points outside the boundaries of the input are filled according to the given mode. Available methods are "constant", "nearest", "wrap" and "reflect". Defaults to "constant". <ul style="list-style-type: none"> <li>"reflect": (d c b a   a b c d   d c b a) The input is extended by reflecting about the edge of the last pixel.</li> </ul>

- "constant": (k k k k | a b c d | k k k k) The input is extended by filling all values beyond the edge with the same constant value k specified by fill\_value.
- "wrap": (a b c d | a b c d | a b c d) The input is extended by wrapping around to the opposite edge.
- "nearest": (a a a a | a b c d | d d d d) The input is extended by the nearest pixel.

fill\_value Value used for points outside the boundaries of the input if fill\_mode = "constant". Defaults to 0.

data\_format A string specifying the data format of the input tensor. It can be either "channels\_last" or "channels\_first". "channels\_last" corresponds to inputs with shape (batch, height, width, channels), while "channels\_first" corresponds to inputs with shape (batch, channels, height, width).  
If not specified, the value will default to config\_image\_data\_format().

**Value**

Applied affine transform image or batch of images.

**Examples**

```
x <- random_uniform(c(2, 64, 80, 3)) # batch of 2 RGB images
transform <- op_array(rbind(c(1.5, 0, -20, 0, 1.5, -16, 0, 0), # zoom
                           c(1, 0, -20, 0, 1, -16, 0, 0))) # translation))
y <- op_image_affine_transform(x, transform)
shape(y)

## shape(2, 64, 80, 3)

# (2, 64, 80, 3)

x <- random_uniform(c(64, 80, 3)) # single RGB image
transform <- op_array(c(1.0, 0.5, -20, 0.5, 1.0, -16, 0, 0)) # shear
y <- op_image_affine_transform(x, transform)
shape(y)

## shape(64, 80, 3)

# (64, 80, 3)

x <- random_uniform(c(2, 3, 64, 80)) # batch of 2 RGB images
transform <- op_array(rbind(
  c(1.5, 0, -20, 0, 1.5, -16, 0, 0), # zoom
  c(1, 0, -20, 0, 1, -16, 0, 0) # translation
))
y <- op_image_affine_transform(x, transform, data_format = "channels_first")
shape(y)
```

```
## shape(2, 3, 64, 80)  
  
# (2, 3, 64, 80)
```

**See Also**

- <https://keras.io/api/ops/image#affinetransform-function>

Other image ops:

```
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()
```

Other image utils:

```
image_array_save()  
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()
```

```
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
```

```
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
```

```
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
```

```
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()
```

```
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_image\_crop

*Crop images to a specified height and width.*

---

### Description

Crop images to a specified height and width.

### Usage

```
op_image_crop(
    images,
    top_cropping = NULL,
    left_cropping = NULL,
    bottom_cropping = NULL,
    right_cropping = NULL,
    target_height = NULL,
    target_width = NULL,
    data_format = NULL
)
```

### Arguments

images	Input image or batch of images. Must be 3D or 4D.
top_cropping	Number of columns to crop from the top.
left_cropping	Number of columns to crop from the left.



bottom_cropping	Number of columns to crop from the bottom.
right_cropping	Number of columns to crop from the right.
target_height	Height of the output images.
target_width	Width of the output images.
data_format	A string specifying the data format of the input tensor. It can be either "channels_last" or "channels_first". "channels_last" corresponds to inputs with shape (batch, height, width, channels), while "channels_first" corresponds to inputs with shape (batch, channels, height, width). If not specified, the value will default to config_image_data_format().

**Value**

Cropped image or batch of images.

**Examples**

```
images <- op_reshape(op_arange(1, 28, dtype="float32"), c(3, 3, 3))
images[, , 1] # print the first channel of the images

cropped_images <- op_image_crop(images, 0, 0, 2, 2)
cropped_images[, , 1] # print the first channel of the cropped images
```

**See Also**

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/ops/image/crop\\_images](https://www.tensorflow.org/api_docs/python/tf/keras/ops/image/crop_images)

Other image ops:

```
op_image_affine_transform()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other image utils:

```
image_array_save()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
op_image_affine_transform()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
```

```
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()
```

```
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
```

```
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()
```

`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrtd()`  
`op_scan()`  
`op_scatter()`  
`op_scatter_update()`  
`op_segment_max()`  
`op_segment_sum()`  
`op_select()`  
`op_selu()`  
`op_separable_conv()`  
`op_shape()`  
`op_sigmoid()`  
`op_sign()`  
`op_silu()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_slice()`  
`op_slice_update()`  
`op_slogdet()`  
`op_softmax()`  
`op_softplus()`  
`op_softsign()`

```
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_image\_extract\_patches

*Extracts patches from the image(s).*

---

### **Description**

Extracts patches from the image(s).

**Usage**

```
op_image_extract_patches(
  images,
  size,
  strides = NULL,
  dilation_rate = 1L,
  padding = "valid",
  data_format = "channels_last"
)
```

**Arguments**

images	Input image or batch of images. Must be 3D or 4D.
size	Patch size int or list (patch_height, patch_width)
strides	strides along height and width. If not specified, or if NULL, it defaults to the same value as size.
dilation_rate	This is the input stride, specifying how far two consecutive patch samples are in the input. For value other than 1, strides must be 1. NOTE: strides > 1 is not supported in conjunction with dilation_rate > 1
padding	The type of padding algorithm to use: "same" or "valid".
data_format	A string specifying the data format of the input tensor. It can be either "channels_last" or "channels_first". "channels_last" corresponds to inputs with shape (batch, height, width, channels), while "channels_first" corresponds to inputs with shape (batch, channels, height, width). If not specified, the value will default to config_image_data_format().

**Value**

Extracted patches 3D (if not batched) or 4D (if batched)

**Examples**

```
image <- random_uniform(c(2, 20, 20, 3), dtype = "float32") # batch of 2 RGB images
patches <- op_image_extract_patches(image, c(5, 5))
shape(patches)

## shape(2, 4, 4, 75)

# (2, 4, 4, 75)
image <- random_uniform(c(20, 20, 3), dtype = "float32") # 1 RGB image
patches <- op_image_extract_patches(image, c(3, 3), c(1, 1))
shape(patches)

## shape(18, 18, 27)

# (18, 18, 27)
```

**See Also**

- <https://keras.io/api/ops/image#extractpatches-function>

Other image ops:

```
op_image_affine_transform()  
op_image_crop()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()
```

Other image utils:

```
image_array_save()  
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
op_image_affine_transform()  
op_image_crop()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()
```



```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()
```

```
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
```

`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`

```
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
```

```
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_image\_hsv\_to\_rgb     *Convert HSV images to RGB.*

---

### Description

images must be of float dtype, and the output is only well defined if the values in images are in [0, 1].

### Usage

```
op_image_hsv_to_rgb(images, data_format = NULL)
```

### Arguments

images	Input image or batch of images. Must be 3D or 4D.
data_format	A string specifying the data format of the input tensor. It can be either "channels_last" or "channels_first". "channels_last" corresponds to inputs with shape (batch, height, width, channels), while "channels_first" corresponds to inputs with shape (batch, channels, height, width). If not specified, the value will default to config_image_data_format().

### Value

RGB image or batch of RGB images.

### Examples

```
x <- random_uniform(c(2, 4, 4, 3))
y <- op_image_hsv_to_rgb(x)
shape(y)
```

```
## shape(2, 4, 4, 3)

x <- random_uniform(c(4, 4, 3)) # Single HSV image
y <- op_image_hsv_to_rgb(x)
shape(y)

## shape(4, 4, 3)

x <- random_uniform(c(2, 3, 4, 4))
y <- op_image_hsv_to_rgb(x, data_format="channels_first")
shape(y)

## shape(2, 3, 4, 4)
```

**See Also**

Other image ops:

```
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other image utils:

```
image_array_save()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other ops:

```
op_abs()
op_add()
op_all()
```

`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`  
`op_det()`  
`op_diag()`  
`op_diagonal()`

```
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
```



```
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()
```

```
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
```

```
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_image\_map\_coordinates

*Map the input array to new coordinates by interpolation.*

---

### Description

Note that interpolation near boundaries differs from the `scipy` function, because we fixed an outstanding bug [scipy/issues/2640](https://github.com/scipy/scipy/issues/2640).

### Usage

```
op_image_map_coordinates(
    inputs,
    coordinates,
```

```

    order,
    fill_mode = "constant",
    fill_value = 0L
)

```

### Arguments

inputs	The input array.
coordinates	The coordinates at which inputs is evaluated.
order	The order of the spline interpolation. The order must be 0 or 1. 0 indicates the nearest neighbor and 1 indicates the linear interpolation.
fill_mode	Points outside the boundaries of the inputs are filled according to the given mode. Available methods are "constant", "nearest", "wrap" and "mirror" and "reflect". Defaults to "constant". <ul style="list-style-type: none"> <li>• "constant": (k k k k   a b c d   k k k k) inputs is extended by filling all values beyond the edge with the same constant value k specified by fill_value.</li> <li>• "nearest": (a a a a   a b c d   d d d d) inputs is extended by the nearest pixel.</li> <li>• "wrap": (a b c d   a b c d   a b c d) inputs is extended by wrapping around to the opposite edge.</li> <li>• "mirror": (c d c b   a b c d   c b a b) inputs is extended by mirroring about the edge.</li> <li>• "reflect": (d c b a   a b c d   d c b a) inputs is extended by reflecting about the edge of the last pixel.</li> </ul>
fill_value	Value used for points outside the boundaries of the inputs if fill_mode = "constant". Defaults to 0.

### Value

Output input or batch of inputs.

### See Also

Other image ops:

```

op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()

```

Other image utils:

```

image_array_save()
image_from_array()

```

```
image_load()  
image_smart_resize()  
image_to_array()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```

```
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```

```
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
```

op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()



`op_sinh()`  
`op_size()`  
`op_slice()`  
`op_slice_update()`  
`op_slogdet()`  
`op_softmax()`  
`op_softplus()`  
`op_softsign()`  
`op_solve()`  
`op_solve_triangular()`  
`op_sort()`  
`op_sparse_categorical_crossentropy()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_stft()`  
`op_stop_gradient()`  
`op_subtract()`  
`op_sum()`  
`op_svd()`  
`op_swapaxes()`  
`op_switch()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_top_k()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_unstack()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vectorized_map()`  
`op_vstack()`  
`op_where()`  
`op_while_loop()`  
`op_zeros()`  
`op_zeros_like()`

---

op_image_pad	<i>Pad images with zeros to the specified height and width.</i>
--------------	---

---

**Description**

Pad images with zeros to the specified height and width.

**Usage**

```
op_image_pad(
  images,
  top_padding = NULL,
  left_padding = NULL,
  bottom_padding = NULL,
  right_padding = NULL,
  target_height = NULL,
  target_width = NULL,
  data_format = NULL
)
```

**Arguments**

images	Input image or batch of images. Must be 3D or 4D.
top_padding	Number of rows of zeros to add on top.
left_padding	Number of columns of zeros to add on the left.
bottom_padding	Number of rows of zeros to add at the bottom.
right_padding	Number of columns of zeros to add on the right.
target_height	Height of output images.
target_width	Width of output images.
data_format	A string specifying the data format of the input tensor. It can be either "channels_last" or "channels_first". "channels_last" corresponds to inputs with shape (batch, height, width, channels), while "channels_first" corresponds to inputs with shape (batch, channels, height, width). If not specified, the value will default to config_image_data_format().

**Value**

Padded image or batch of images.

**Examples**

```
images <- random_uniform(c(15, 25, 3))
padded_images <- op_image_pad(
  images, 2, 3, target_height = 20, target_width = 30
)
shape(padded_images)
```

```
## shape(20, 30, 3)

batch_images <- random_uniform(c(2, 15, 25, 3))
padded_batch <- op_image_pad(batch_images, 2, 3,
                             target_height = 20,
                             target_width = 30)

shape(padded_batch)

## shape(2, 20, 30, 3)
```

### See Also

Other image ops:

```
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other image utils:

```
image_array_save()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
```

```
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
```

```
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
```

```
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()
```

```
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqr()(  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_image\_resize

*Resize images to size using the specified interpolation method.*

---

### **Description**

Resize images to size using the specified interpolation method.

### **Usage**

```
op_image_resize(
    images,
    size,
    interpolation = "bilinear",
    antialias = FALSE,
    crop_to_aspect_ratio = FALSE,
    pad_to_aspect_ratio = FALSE,
    fill_mode = "constant",
    fill_value = 0,
    data_format = NULL
)
```



**Arguments**

images	Input image or batch of images. Must be 3D or 4D.
size	Size of output image in (height, width) format.
interpolation	Interpolation method. Available methods are "nearest", "bilinear", and "bicubic". Defaults to "bilinear".
antialias	Whether to use an antialiasing filter when downsampling an image. Defaults to FALSE.
crop_to_aspect_ratio	If TRUE, resize the images without aspect ratio distortion. When the original aspect ratio differs from the target aspect ratio, the output image will be cropped so as to return the largest possible window in the image (of size (height, width)) that matches the target aspect ratio. By default (crop_to_aspect_ratio=FALSE), aspect ratio may not be preserved.
pad_to_aspect_ratio	If TRUE, pad the images without aspect ratio distortion. When the original aspect ratio differs from the target aspect ratio, the output image will be evenly padded on the short side.
fill_mode	When using pad_to_aspect_ratio=TRUE, padded areas are filled according to the given mode. Only "constant" is supported at this time (fill with constant value, equal to fill_value).
fill_value	Float. Padding value to use when pad_to_aspect_ratio=TRUE.
data_format	A string specifying the data format of the input tensor. It can be either "channels_last" or "channels_first". "channels_last" corresponds to inputs with shape (batch, height, width, channels), while "channels_first" corresponds to inputs with shape (batch, channels, height, width). If not specified, the value will default to config_image_data_format().

**Value**

Resized image or batch of images.

**Examples**

```
x <- random_uniform(c(2, 4, 4, 3)) # batch of 2 RGB images
y <- op_image_resize(x, c(2, 2))
shape(y)
```

```
## shape(2, 2, 2, 3)
```

```
x <- random_uniform(c(4, 4, 3)) # single RGB image
y <- op_image_resize(x, c(2, 2))
shape(y)
```

```
## shape(2, 2, 3)
```

```
x <- random_uniform(c(2, 3, 4, 4)) # batch of 2 RGB images
y <- op_image_resize(x, c(2, 2), data_format = "channels_first")
shape(y)

## shape(2, 3, 2, 2)
```

### See Also

- <https://keras.io/api/ops/image#resize-function>

Other image ops:

```
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other image utils:

```
image_array_save()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
```

```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```

```
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()
```

```
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()
```

```
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```

```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_image\_rgb\_to\_grayscale

*Convert RGB images to grayscale.*

---

### Description

This function converts RGB images to grayscale images. It supports both 3D and 4D tensors, where the last dimension represents channels.

### Usage

```
op_image_rgb_to_grayscale(images, data_format = NULL)
```

### Arguments

images	Input image or batch of images. Must be 3D or 4D.
data_format	A string specifying the data format of the input tensor. It can be either "channels_last" or "channels_first". "channels_last" corresponds to inputs with shape (batch, height, width, channels), while "channels_first" corresponds to inputs with shape (batch, channels, height, width). If not specified, the value will default to config_image_data_format().

**Value**

Grayscale image or batch of grayscale images.

**Examples**

```
x <- random_uniform(c(2, 4, 4, 3))
y <- op_image_rgb_to_grayscale(x)
shape(y)
```

```
## shape(2, 4, 4, 1)
```

```
x <- random_uniform(c(4, 4, 3)) # Single RGB image
y = op_image_rgb_to_grayscale(x)
shape(y)
```

```
## shape(4, 4, 1)
```

```
x <- random_uniform(c(2, 3, 4, 4))
y <- op_image_rgb_to_grayscale(x, data_format="channels_first")
shape(y)
```

```
## shape(2, 1, 4, 4)
```

**See Also**

Other image ops:

```
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_hsv()
```

Other image utils:

```
image_array_save()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
```



`op_image_map_coordinates()`  
`op_image_pad()`  
`op_image_resize()`  
`op_image_rgb_to_hsv()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`

```
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()
```

```
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
```

```
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
```

```
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

**Description**

images must be of float dtype, and the output is only well defined if the values in images are in  $[0, 1]$ .

All HSV values are in  $[0, 1]$ . A hue of 0 corresponds to pure red, 1/3 is pure green, and 2/3 is pure blue.

**Usage**

```
op_image_rgb_to_hsv(images, data_format = NULL)
```

**Arguments**

images	Input image or batch of images. Must be 3D or 4D.
data_format	A string specifying the data format of the input tensor. It can be either "channels_last" or "channels_first". "channels_last" corresponds to inputs with shape (batch, height, width, channels), while "channels_first" corresponds to inputs with shape (batch, channels, height, width). If not specified, the value will default to config_image_data_format().

**Value**

HSV image or batch of HSV images.

**Examples**

```
x <- random_uniform(c(2, 4, 4, 3))
y <- op_image_rgb_to_hsv(x)
shape(y)

## shape(2, 4, 4, 3)

x <- random_uniform(c(4, 4, 3)) # Single RGB image
y <- op_image_rgb_to_hsv(x)
shape(y)

## shape(4, 4, 3)

x <- random_uniform(c(2, 3, 4, 4))
y <- op_image_rgb_to_hsv(x, data_format = "channels_first")
shape(y)

## shape(2, 3, 4, 4)
```

**See Also**

Other image ops:

`op_image_affine_transform()`  
`op_image_crop()`  
`op_image_extract_patches()`  
`op_image_hsv_to_rgb()`  
`op_image_map_coordinates()`  
`op_image_pad()`  
`op_image_resize()`  
`op_image_rgb_to_grayscale()`

Other image utils:

`image_array_save()`  
`image_from_array()`  
`image_load()`  
`image_smart_resize()`  
`image_to_array()`  
`op_image_affine_transform()`  
`op_image_crop()`  
`op_image_extract_patches()`  
`op_image_hsv_to_rgb()`  
`op_image_map_coordinates()`  
`op_image_pad()`  
`op_image_resize()`  
`op_image_rgb_to_grayscale()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`

```
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
```



```
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
```

`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`

```
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()
```

```
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_inv

*Computes the inverse of a square tensor.*

---

### Description

Computes the inverse of a square tensor.

### Usage

```
op_inv(x)
```

### Arguments

x                    Input tensor of shape  $(\dots, M, M)$ .

### Value

A tensor of shape  $(\dots, M, M)$  representing the inverse of x.

### See Also

Other linear algebra ops:

```
op_cholesky()  
op_det()  
op_eig()  
op_eigh()  
op_lstsq()  
op_lu_factor()  
op_norm()  
op_slogdet()  
op_solve_triangular()
```

op\_svd()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()

```
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
```

```
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
```

```
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
```



```
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_in\_top\_k

*Checks if the targets are in the top-k predictions.*

---

### **Description**

Checks if the targets are in the top-k predictions.

**Usage**

```
op_in_top_k(targets, predictions, k)
```

**Arguments**

targets	A tensor of true labels.
predictions	A tensor of predicted labels.
k	An integer representing the number of predictions to consider.

**Value**

A boolean tensor of the same shape as `targets`, where each element indicates whether the corresponding target is in the top-k predictions.

**Examples**

```
targets <- op_array(c(2, 5, 3), "int32")
predictions <- op_array(dtype = "float32", rbind(
  c(0.1, 0.4, 0.6, 0.9, 0.5),
  c(0.1, 0.7, 0.9, 0.8, 0.3),
  c(0.1, 0.6, 0.9, 0.9, 0.5)
))
op_in_top_k(targets, predictions, k = 3L)

## tf.Tensor([ True False  True], shape=(3), dtype=bool)
```

**See Also**

- <https://keras.io/api/ops/core#intopk-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
op_irfft()
op_istft()
op_logsumexp()
op_qr()
op_rfft()
op_rsqr()
op_segment_max()
op_segment_sum()
op_solve()
op_stft()
op_top_k()
```

Other ops:

- op\_abs()
- op\_add()
- op\_all()
- op\_any()
- op\_append()
- op\_arange()
- op\_arccos()
- op\_arccosh()
- op\_arcsin()
- op\_arcsinh()
- op\_arctan()
- op\_arctan2()
- op\_arctanh()
- op\_argmax()
- op\_argmin()
- op\_argpartition()
- op\_argsort()
- op\_array()
- op\_average()
- op\_average\_pool()
- op\_batch\_normalization()
- op\_binary\_crossentropy()
- op\_bincount()
- op\_broadcast\_to()
- op\_cast()
- op\_categorical\_crossentropy()
- op\_ceil()
- op\_cholesky()
- op\_clip()
- op\_concatenate()
- op\_cond()
- op\_conj()
- op\_conv()
- op\_conv\_transpose()
- op\_convert\_to\_numpy()
- op\_convert\_to\_tensor()
- op\_copy()
- op\_correlate()
- op\_cos()
- op\_cosh()
- op\_count\_nonzero()
- op\_cross()
- op\_ctc\_decode()
- op\_ctc\_loss()
- op\_cumprod()
- op\_cumsum()
- op\_custom\_gradient()

```
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
```

```
op_image_rgb_to_hsv()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()
```

```
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_irfft

*Inverse real-valued Fast Fourier transform along the last axis.*

---

### Description

Computes the inverse 1D Discrete Fourier Transform of a real-valued signal over the inner-most dimension of input.

The inner-most dimension of the input is assumed to be the result of RFFT: the `fft_length / 2 + 1` unique components of the DFT of a real-valued signal. If `fft_length` is not provided, it is

computed from the size of the inner-most dimension of the input ( $\text{fft\_length} = 2 * (\text{inner} - 1)$ ). If the FFT length used to compute is odd, it should be provided since it cannot be inferred properly.

Along the axis IRFFT is computed on, if  $\text{fft\_length} / 2 + 1$  is smaller than the corresponding dimension of the input, the dimension is cropped. If it is larger, the dimension is padded with zeros.

### Usage

```
op_irfft(x, fft_length = NULL)
```

### Arguments

**x** List of the real and imaginary parts of the input tensor. Both tensors in the list should be of floating type.

**fft\_length** An integer representing the number of the fft length. If not specified, it is inferred from the length of the last axis of x. Defaults to NULL.

### Value

A tensor containing the inverse real-valued Fast Fourier Transform along the last axis of x.

### Examples

```
real <- op_array(c(0, 1, 2, 3, 4))
imag <- op_array(c(0, 1, 2, 3, 4))
op_irfft(c(real, imag))

#> tf.Tensor(
#> [ 2.          -2.0606601  0.5          -0.35355338  0.          0.06066012
#> -0.5          0.35355338], shape=(8), dtype=float32)

all.equal(op_irfft(op_rfft(real, 5), 5), real)

#> [1] TRUE
```

### See Also

- <https://keras.io/api/ops/fft#irfft-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
op_in_top_k()
op_istft()
op_logsumexp()
```



op\_qr()  
op\_rfft()  
op\_rsqr()(  
op\_segment\_max()  
op\_segment\_sum()  
op\_solve()  
op\_stft()  
op\_top\_k()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()

```
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
```

```
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
```

```
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
```

```
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

**Description**

Return whether two tensors are element-wise almost equal.

**Usage**

```
op_isclose(x1, x2, rtol = 1e-05, atol = 1e-08, equal_nan = FALSE)
```

**Arguments**

x1	First input tensor.
x2	Second input tensor.
rtol	Relative tolerance.
atol	Absolute tolerance.
equal_nan	If TRUE, element-wise NaNs are considered equal.

**Value**

Output boolean tensor.

**See Also**

- <https://keras.io/api/ops/numpy#isclose-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()
```

op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()

```
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
```



```
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()
```

```
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()
```

```
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
```

```
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
```

```
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
```

```
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op_isfinite	<i>Return whether a tensor is finite, element-wise.</i>
-------------	---

---

### Description

Real values are finite when they are not NaN, not positive infinity, and not negative infinity. Complex values are finite when both their real and imaginary parts are finite.

### Usage

```
op_isfinite(x)
```

### Arguments

x	Input tensor.
---	---------------

### Value

Output boolean tensor.

### See Also

- <https://keras.io/api/ops/numpy#isfinite-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()
```

op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isinf()  
op\_isnan()

```
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()
```



`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`  
`op_zeros()`  
`op_zeros_like()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`

```
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
```

```
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
```

op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()

```
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()
```

```
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_isinf

*Test element-wise for positive or negative infinity.*

---

### Description

Test element-wise for positive or negative infinity.

### Usage

```
op_isinf(x)
```

### Arguments

x                    Input tensor.

### Value

Output boolean tensor.

### See Also

- <https://keras.io/api/ops/numpy#isinf-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
```

op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()

```
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
```



`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`  
`op_zeros()`  
`op_zeros_like()`

**Other ops:**

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`

```
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
```

```
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isnan()
op_istft()
```

```
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
```

```
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_isnan

*Test element-wise for NaN and return result as a boolean tensor.*

---

### Description

Test element-wise for NaN and return result as a boolean tensor.

### Usage

```
op_isnan(x)
```

### Arguments

x                    Input tensor.

### Value

Output boolean tensor.

**See Also**

- <https://keras.io/api/ops/numpy#isnan-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()
```



op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_istft

*Inverse Short-Time Fourier Transform along the last axis of the input.*

---

### **Description**

To reconstruct an original waveform, the parameters should be the same in stft.

### **Usage**

```
op_istft(  
  x,
```

```

    sequence_length,
    sequence_stride,
    fft_length,
    length = NULL,
    window = "hann",
    center = TRUE
)

```

### Arguments

x	Tuple of the real and imaginary parts of the input tensor. Both tensors in the list should be of floating type.
sequence_length	An integer representing the sequence length.
sequence_stride	An integer representing the sequence hop size.
fft_length	An integer representing the size of the FFT that produced stft.
length	An integer representing the output is clipped to exactly length. If not specified, no padding or clipping take place. Defaults to NULL.
window	A string, a tensor of the window or NULL. If window is a string, available values are "hann" and "hamming". If window is a tensor, it will be used directly as the window and its length must be sequence_length. If window is NULL, no windowing is used. Defaults to "hann".
center	Whether x was padded on both sides so that the t-th sequence is centered at time $t * \text{sequence\_stride}$ . Defaults to TRUE.

### Value

A tensor containing the inverse Short-Time Fourier Transform along the last axis of x.

### Examples

```

x <- op_convert_to_tensor(c(0, 1, 2, 3, 4))
op_istft(op_stft(x, 1, 1, 1), 1, 1, 1)

## tf.Tensor([], shape=(0), dtype=float32)

# array([0.0, 1.0, 2.0, 3.0, 4.0])

```

### See Also

- <https://keras.io/api/ops/fft#istft-function>

Other math ops:

```

op_erf()
op_erfinv()
op_extract_sequences()

```

op\_fft()  
op\_fft2()  
op\_in\_top\_k()  
op\_irfft()  
op\_logsumexp()  
op\_qr()  
op\_rfft()  
op\_rsqr()  
op\_segment\_max()  
op\_segment\_sum()  
op\_solve()  
op\_stft()  
op\_top\_k()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()



```
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
```

```
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
```

```
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()
```

```
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
```

[op\\_zeros\\_like\(\)](#)

---

op\_is\_tensor                      *Check whether the given object is a tensor.*

---

### Description

Check whether the given object is a tensor.

### Usage

```
op_is_tensor(x)
```

### Arguments

x                      A variable.

### Value

TRUE if x is a tensor, otherwise FALSE.

### Note

This checks for backend specific tensors so passing a TensorFlow tensor would return FALSE if your backend is PyTorch or JAX.

### See Also

Other core ops:

- [op\\_cast\(\)](#)
- [op\\_cond\(\)](#)
- [op\\_convert\\_to\\_numpy\(\)](#)
- [op\\_convert\\_to\\_tensor\(\)](#)
- [op\\_custom\\_gradient\(\)](#)
- [op\\_dtype\(\)](#)
- [op\\_fori\\_loop\(\)](#)
- [op\\_map\(\)](#)
- [op\\_scan\(\)](#)
- [op\\_scatter\(\)](#)
- [op\\_scatter\\_update\(\)](#)
- [op\\_shape\(\)](#)
- [op\\_slice\(\)](#)
- [op\\_slice\\_update\(\)](#)
- [op\\_stop\\_gradient\(\)](#)
- [op\\_switch\(\)](#)
- [op\\_unstack\(\)](#)
- [op\\_vectorized\\_map\(\)](#)

`op_while_loop()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`  
`op_categorical_crossentropy()`  
`op_ceil()`  
`op_cholesky()`  
`op_clip()`  
`op_concatenate()`  
`op_cond()`  
`op_conj()`  
`op_conv()`  
`op_conv_transpose()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`

```
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
```

```
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
```



```
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
```

```
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_leaky\_relu

*Leaky version of a Rectified Linear Unit activation function.*

---

### Description

It allows a small gradient when the unit is not active, it is defined as:

$f(x) = \alpha * x$  for  $x < 0$  or  $f(x) = x$  for  $x \geq 0$ .

**Usage**

```
op_leaky_relu(x, negative_slope = 0.2)
```

**Arguments**

*x*                    Input tensor.

*negative\_slope*   Slope of the activation function at  $x < 0$ . Defaults to 0.2.

**Value**

A tensor with the same shape as *x*.

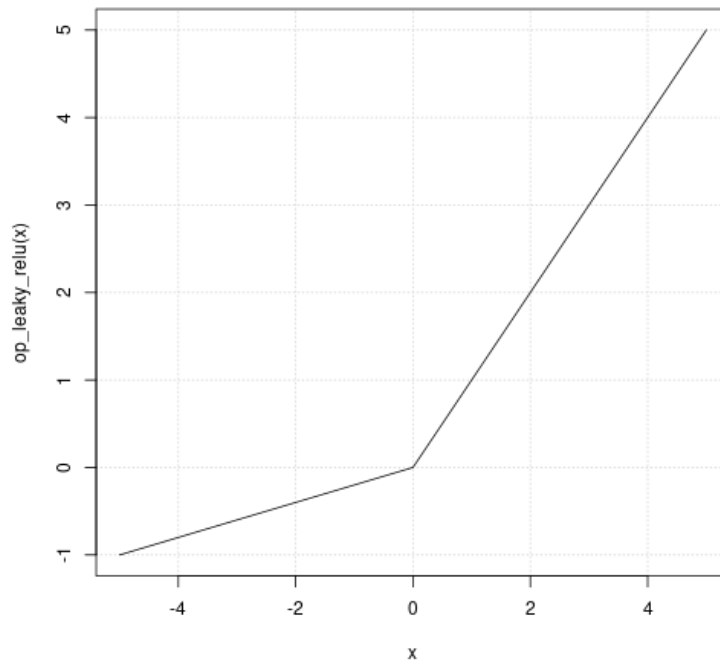
**Examples**

```
x <- op_array(c(-1., 0., 1.))
op_leaky_relu(x)
```

```
## tf.Tensor([-0.2  0.  1. ], shape=(3), dtype=float32)
```

```
# array([-0.2,  0. ,  1. ], shape=(3,), dtype=float64)
```

```
x <- seq(-5, 5, .1)
plot(x, op_leaky_relu(x),
     type = 'l', panel.first = grid())
```



### See Also

- <https://keras.io/api/ops/nn#leakyrelu-function>

Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()
```

```
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```

```
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```

op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()

op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()



`op_sinh()`  
`op_size()`  
`op_slice()`  
`op_slice_update()`  
`op_slogdet()`  
`op_softmax()`  
`op_softplus()`  
`op_softsign()`  
`op_solve()`  
`op_solve_triangular()`  
`op_sort()`  
`op_sparse_categorical_crossentropy()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_stft()`  
`op_stop_gradient()`  
`op_subtract()`  
`op_sum()`  
`op_svd()`  
`op_swapaxes()`  
`op_switch()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_top_k()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_unstack()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vectorized_map()`  
`op_vstack()`  
`op_where()`  
`op_while_loop()`  
`op_zeros()`  
`op_zeros_like()`

---

op_less	<i>Return the truth value of <math>x1 &lt; x2</math> element-wise.</i>
---------	--

---

### Description

Note that this function is automatically called when using the R operator `<` with a tensor.

```
(x <- op_arange(4))
```

```
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)
```

```
op_less(x, 2)
```

```
## tf.Tensor([ True  True False False], shape=(4), dtype=bool)
```

```
x < 2
```

```
## tf.Tensor([ True  True False False], shape=(4), dtype=bool)
```

### Usage

```
op_less(x1, x2)
```

### Arguments

x1	First input tensor.
x2	Second input tensor.

### Value

Output tensor, element-wise comparison of x1 and x2.

### See Also

- <https://keras.io/api/ops/numpy#less-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()
```

op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()

```
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()
```

op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()

```
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
```

```
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
```

op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()



```
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
```

```
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op_less_equal	<i>Return the truth value of <math>x_1 \leq x_2</math> element-wise.</i>
---------------	--

---

### Description

Note that this function is automatically called when using the R operator `<=` with a tensor.

```
(x <- op_arange(4))  
  
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)  
  
op_less_equal(x, 2)  
  
## tf.Tensor([ True  True  True False], shape=(4), dtype=bool)  
  
x <= 2  
  
## tf.Tensor([ True  True  True False], shape=(4), dtype=bool)
```

**Usage**

`op_less_equal(x1, x2)`

**Arguments**

<code>x1</code>	First input tensor.
<code>x2</code>	Second input tensor.

**Value**

Output tensor, element-wise comparison of `x1` and `x2`.

**See Also**

- <https://keras.io/api/ops/numpy#lessequal-function>

Other numpy ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`

```
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
```

```
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()
```

```
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```

```
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```

```
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
```



op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()

```
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_linspace	<i>Return evenly spaced numbers over a specified interval.</i>
-------------	--

---

### Description

Returns num evenly spaced samples, calculated over the interval [start, stop].

The endpoint of the interval can optionally be excluded.

### Usage

```
op_linspace(  
    start,  
    stop,  
    num = 50L,  
    endpoint = TRUE,  
    retstep = FALSE,  
    dtype = NULL,  
    axis = 1L  
)
```

### Arguments

start	The starting value of the sequence.
stop	The end value of the sequence, unless endpoint is set to FALSE. In that case, the sequence consists of all but the last of num + 1 evenly spaced samples, so that stop is excluded. Note that the step size changes when endpoint is FALSE.
num	Number of samples to generate. Defaults to 50. Must be non-negative.
endpoint	If TRUE, stop is the last sample. Otherwise, it is not included. Defaults to TRUE.
retstep	If TRUE, return (samples, step), where step is the spacing between samples.
dtype	The type of the output tensor.
axis	The axis in the result to store the samples. Relevant only if start or stop are array-like. Defaults to 1, the first axis.

### Value

A tensor of evenly spaced numbers. If retstep is TRUE, returns (samples, step)

### Note

Torch backend does not support axis argument.

**See Also**

- <https://keras.io/api/ops/numpy#linspace-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()
```

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()
```

```
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```



```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_log

*Natural logarithm, element-wise.*

---

### **Description**

Natural logarithm, element-wise.

### **Usage**

```
op_log(x)
```

**Arguments**

x                    Input tensor.

**Value**

Output tensor, element-wise natural logarithm of x.

**See Also**

- <https://keras.io/api/ops/numpy#log-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()

```
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
```

op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()

```
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()
```

```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
```



```
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
```

```
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
```

```
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

**Description**

Return the base 10 logarithm of the input tensor, element-wise.

**Usage**

```
op_log10(x)
```

**Arguments**

x                    Input tensor.

**Value**

Output tensor, element-wise base 10 logarithm of x.

**See Also**

- <https://keras.io/api/ops/numpy#log10-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()
```

```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
```

```
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()
```

```
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()
```

```
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
```



```
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
```

```
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()
```

```
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
```

[op\\_zeros\(\)](#)  
[op\\_zeros\\_like\(\)](#)

---

op\_log1p

*Returns the natural logarithm of one plus the x, element-wise.*

---

### Description

Calculates  $\log(1 + x)$ .

### Usage

```
op_log1p(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor, element-wise natural logarithm of  $1 + x$ .

### See Also

- <https://keras.io/api/ops/numpy#log1p-function>

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)  
[op\\_argmin\(\)](#)  
[op\\_argpartition\(\)](#)  
[op\\_argsort\(\)](#)  
[op\\_array\(\)](#)  
[op\\_average\(\)](#)  
[op\\_bincount\(\)](#)

op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()

op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()

op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()

```
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
```



```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```

```
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()
```

```
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
```

```
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_log2

*Base-2 logarithm of x, element-wise.*

---

### Description

Base-2 logarithm of x, element-wise.

### Usage

```
op_log2(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor, element-wise base-2 logarithm of x.

### See Also

- <https://keras.io/api/ops/numpy#log2-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()
```

op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()

```
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
```

```
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
```

```
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
```



```
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
```

```
op_log10()  
op_log1p()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()
```

```
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
```

```
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_logaddexp

*Logarithm of the sum of exponentiations of the inputs.*

---

### Description

Calculates  $\log(\exp(x1) + \exp(x2))$ .

### Usage

```
op_logaddexp(x1, x2)
```

### Arguments

x1	Input tensor.
x2	Input tensor.

### Value

Output tensor, element-wise logarithm of the sum of exponentiations of the inputs.

**See Also**

- <https://keras.io/api/ops/numpy#logaddexp-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()
```

`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`  
`op_zeros()`  
`op_zeros_like()`

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()
```



op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
```

```
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_logical\_and

*Computes the element-wise logical AND of the given input tensors.*

---

### **Description**

Zeros are treated as FALSE and non-zeros are treated as TRUE.

### **Usage**

```
op_logical_and(x1, x2)
```

**Arguments**

x1	Input tensor.
x2	Input tensor.

**Details**

Note that this function is automatically called when using the R operator & with a tensor.

**Value**

Output tensor, element-wise logical AND of the inputs.

**See Also**

- <https://keras.io/api/ops/numpy#logicaland-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()

```
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
```

```
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()
```

```
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```



`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`  
`op_det()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_dtype()`  
`op_eig()`  
`op_eigh()`  
`op_einsum()`  
`op_elu()`  
`op_empty()`  
`op_equal()`  
`op_erf()`  
`op_erfinv()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_extract_sequences()`  
`op_eye()`  
`op_fft()`  
`op_fft2()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_fori_loop()`  
`op_full()`  
`op_full_like()`  
`op_gelu()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hard_sigmoid()`

```
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
```

op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()

```
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_logical_not	<i>Computes the element-wise NOT of the given input tensor.</i>
----------------	---

---

**Description**

Zeros are treated as FALSE and non-zeros are treated as TRUE.

Note that this function is automatically called when using the R operator ! with a tensor.

**Usage**

```
op_logical_not(x)
```

**Arguments**

x                    Input tensor.

**Value**

Output tensor, element-wise logical NOT of the input.

**See Also**

- <https://keras.io/api/ops/numpy#logicalnot-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()
```

op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()

```
op_logical_and()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()
```

```
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
```



```
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()
```

```
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
```

```
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()
```

```
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
```

```
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_logical\_or

*Computes the element-wise logical OR of the given input tensors.*

---

### Description

Zeros are treated as FALSE and non-zeros are treated as TRUE.

Note that this function is automatically called when using the R operator | with a tensor.

### Usage

```
op_logical_or(x1, x2)
```

### Arguments

x1	Input tensor.
x2	Input tensor.

### Value

Output tensor, element-wise logical OR of the inputs.

### See Also

- <https://keras.io/api/ops/numpy#logicalor-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
```

op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()

`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_xor()`  
`op_logspace()`  
`op_lstsq()`  
`op_matmul()`  
`op_max()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`

op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()



```
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
```

```
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()
```

`op_log1p()`  
`op_log2()`  
`op_log_sigmoid()`  
`op_log_softmax()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`

```
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
```

```
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_logical\_xor

*Compute the truth value of x1 XOR x2, element-wise.*

---

### Description

Compute the truth value of x1 XOR x2, element-wise.

### Usage

```
op_logical_xor(x1, x2)
```

### Arguments

x1	First input tensor.
x2	Second input tensor.

### Value

Output boolean tensor.

### See Also

Other numpy ops:

```
op_abs()  
op_add()  
op_all()
```

op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()

`op_full()`  
`op_full_like()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logspace()`  
`op_lstsq()`  
`op_matmul()`  
`op_max()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`

```
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
```



op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()

```
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
```

```
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()
```

```
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
```

```
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_logspace

*Returns numbers spaced evenly on a log scale.*

---

### Description

In linear space, the sequence starts at base \*\* start and ends with base \*\* stop (see endpoint below).

### Usage

```
op_logspace(
    start,
    stop,
    num = 50L,
    endpoint = TRUE,
    base = 10L,
    dtype = NULL,
```

```

    axis = 1L
)

```

### Arguments

start	The starting value of the sequence.
stop	The final value of the sequence, unless endpoint is FALSE. In that case, num + 1 values are spaced over the interval in log-space, of which all but the last (a sequence of length num) are returned.
num	Number of samples to generate. Defaults to 50.
endpoint	If TRUE, stop is the last sample. Otherwise, it is not included. Defaults to TRUE.
base	The base of the log space. Defaults to 10.
dtype	The type of the output tensor.
axis	The axis in the result to store the samples. Relevant only if start or stop are array-like.

### Value

A tensor of evenly spaced samples on a log scale.

### Note

Torch backend does not support axis argument.

### See Also

- <https://keras.io/api/ops/numpy#logspace-function>

Other numpy ops:

```

op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()

```

`op_bincount()`  
`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_einsum()`  
`op_empty()`  
`op_equal()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`  
`op_full_like()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`

```
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()
```



op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()

```
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
```

```
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
```

```
op_logical_or()
op_logical_xor()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()

```

```
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()
```

```

op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_logsumexp

*Computes the logarithm of sum of exponentials of elements in a tensor.*


---

### Description

Computes the logarithm of sum of exponentials of elements in a tensor.

### Usage

```
op_logsumexp(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	An integer or a list of integers specifying the axis/axes along which to compute the sum. If NULL, the sum is computed over all elements. Defaults to NULL.
keepdims	A boolean indicating whether to keep the dimensions of the input tensor when computing the sum. Defaults to FALSE.

### Value

A tensor containing the logarithm of the sum of exponentials of elements in x.

### Examples

```

x <- op_convert_to_tensor(c(1, 2, 3))
op_logsumexp(x)

## tf.Tensor(3.407606, shape=(), dtype=float32)

```

**See Also**

- <https://keras.io/api/ops/core#logsumexp-function>

Other math ops:

op\_erf()  
op\_erfinv()  
op\_extract\_sequences()  
op\_fft()  
op\_fft2()  
op\_in\_top\_k()  
op\_irfft()  
op\_istft()  
op\_qr()  
op\_rfft()  
op\_rsqrt()  
op\_segment\_max()  
op\_segment\_sum()  
op\_solve()  
op\_stft()  
op\_top\_k()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()

```
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()
```



```
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
```

```
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()
```

```
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
```

```
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_log\_sigmoid      *Logarithm of the sigmoid activation function.*

---

### Description

It is defined as  $f(x) = \log(1 / (1 + \exp(-x)))$ .

### Usage

```
op_log_sigmoid(x)
```

### Arguments

x                      Input tensor.

### Value

A tensor with the same shape as x.

### Examples

```
x <- op_convert_to_tensor(c(-0.541391, 0.0, 0.50, 5.0))
op_log_sigmoid(x)
```

```
## tf.Tensor([-1.0000418 -0.6931472 -0.474077 -0.00671535], shape=(4), dtype=float32)
```

### See Also

- <https://keras.io/api/ops/nn#logsigmoid-function>

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
```

```
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

**Other ops:**

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()
```

```
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
```

```
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()
```

```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()
```



op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()

```
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_log_softmax	<i>Log-softmax activation function.</i>
----------------	---

---

### Description

It is defined as:  $f(x) = x - \max(x) - \log(\sum(\exp(x - \max(x))))$

### Usage

```
op_log_softmax(x, axis = -1L)
```

### Arguments

x	Input tensor.
axis	Integer, axis along which the log-softmax is applied. Defaults to -1.

### Value

A tensor with the same shape as x.

### Examples

```
x <- op_array(c(-1., 0., 1.))
op_log_softmax(x)

## tf.Tensor([-2.407606  -1.4076059  -0.40760595], shape=(3), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/nn#logsoftmax-function>

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_psnr()
op_relu()
op_relu6()
op_selu()
op_separable_conv()
op_sigmoid()
op_silu()
op_softmax()
op_softplus()
op_softsign()
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
```

```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

```
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()
```

```
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```

```

op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_lstsq

*Return the least-squares solution to a linear matrix equation.*


---

### Description

Computes the vector  $x$  that approximately solves the equation  $a \% \% x = b$ . The equation may be under-, well-, or over-determined (i.e., the number of linearly independent rows of  $a$  can be less than, equal to, or greater than its number of linearly independent columns). If  $a$  is square and of full rank, then  $x$  (but for round-off error) is the exact solution of the equation. Else,  $x$  minimizes the L2 norm of  $b - a \% \% x$ .

If there are multiple minimizing solutions, the one with the smallest L2 norm is returned.

### Usage

```
op_lstsq(a, b, rcond = NULL)
```

### Arguments

<code>a</code>	"Coefficient" matrix of shape (M, N).
<code>b</code>	Ordinate or "dependent variable" values, of shape (M) or (M, K). If $b$ is two-dimensional, the least-squares solution is calculated for each of the $K$ columns of $b$ .



rcond            Cut-off ratio for small singular values of a. For the purposes of rank determination, singular values are treated as zero if they are smaller than rcond times the largest singular value of a.

### Value

Tensor with shape (N) or (N, K) containing the least-squares solutions.

**NOTE:** The output differs from `numpy.linalg.lstsq()`. NumPy returns a tuple with four elements, the first of which being the least-squares solutions and the others being essentially never used. Keras only returns the first value. This is done both to ensure consistency across backends (which cannot be achieved for the other values) and to simplify the API.

### See Also

Other linear algebra ops:

- [op\\_cholesky\(\)](#)
- [op\\_det\(\)](#)
- [op\\_eig\(\)](#)
- [op\\_eigh\(\)](#)
- [op\\_inv\(\)](#)
- [op\\_lu\\_factor\(\)](#)
- [op\\_norm\(\)](#)
- [op\\_slogdet\(\)](#)
- [op\\_solve\\_triangular\(\)](#)
- [op\\_svd\(\)](#)

Other numpy ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)
- [op\\_argmax\(\)](#)
- [op\\_argmin\(\)](#)
- [op\\_argpartition\(\)](#)
- [op\\_argsort\(\)](#)
- [op\\_array\(\)](#)
- [op\\_average\(\)](#)
- [op\\_bincount\(\)](#)
- [op\\_broadcast\\_to\(\)](#)

```
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
```

op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()

op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()

```
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
```

```
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```

op\_logspace()  
op\_logsumexp()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()

```
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
```



```
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_lu\_factor

*Computes the lower-upper decomposition of a square matrix.*

---

### Description

Computes the lower-upper decomposition of a square matrix.

### Usage

```
op_lu_factor(x)
```

### Arguments

x                    A tensor of shape  $(\dots, M, M)$ .

### Value

A tuple of two tensors: a tensor of shape  $(\dots, M, M)$  containing the lower and upper triangular matrices and a tensor of shape  $(\dots, M)$  containing the pivots.

### See Also

Other linear algebra ops:

```
op_cholesky()
op_det()
op_eig()
op_eigh()
op_inv()
op_lstsq()
op_norm()
op_slogdet()
op_solve_triangular()
op_svd()
```

Other ops:

```
op_abs()
```

```
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()
```

```
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
```

```
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
```

```
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
```

```
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_map

*Map a function over leading array axes.*

---

### Description

Like `purrr::map()` or `base::lapply()`, except inputs and outputs are in the form of stacked arrays. Consider using the `op_vectorized_map()` transform instead, unless you need to apply a function element by element for reduced memory usage or heterogeneous computation with other control flow primitives.

When `xs` is an array type, the semantics of `op_map()` match this implementation:

```
op_map <- function(xs, f) {  
  xs |>  
  op_unstack() |>  
  lapply(f) |>  
  op_stack()  
}
```

### Usage

```
op_map(xs, f)
```

### Arguments

xs	Values over which to map along the leading axis.
f	Callable defines the function to apply element-wise over the first axis or axes of xs.

### Value

Mapped values.

### Examples

```
f <- function(x) x^2  
xs <- op_arange(10)  
ys <- op_map(xs, f)  
ys
```

```
## tf.Tensor([ 0.  1.  4.  9. 16. 25. 36. 49. 64. 81.], shape=(10), dtype=float32)
```

```
f <- function(x) list(y1 = x^2, y2 = x * 10) # Can have nested outputs  
ys <- op_map(xs, f)  
ys$y1
```

```
## tf.Tensor([ 0.  1.  4.  9. 16. 25. 36. 49. 64. 81.], shape=(10), dtype=float32)
```

```
ys$y2
```

```
## tf.Tensor([ 0. 10. 20. 30. 40. 50. 60. 70. 80. 90.], shape=(10), dtype=float32)
```

**See Also**

Other core ops:

- [op\\_cast\(\)](#)
- [op\\_cond\(\)](#)
- [op\\_convert\\_to\\_numpy\(\)](#)
- [op\\_convert\\_to\\_tensor\(\)](#)
- [op\\_custom\\_gradient\(\)](#)
- [op\\_dtype\(\)](#)
- [op\\_fori\\_loop\(\)](#)
- [op\\_is\\_tensor\(\)](#)
- [op\\_scan\(\)](#)
- [op\\_scatter\(\)](#)
- [op\\_scatter\\_update\(\)](#)
- [op\\_shape\(\)](#)
- [op\\_slice\(\)](#)
- [op\\_slice\\_update\(\)](#)
- [op\\_stop\\_gradient\(\)](#)
- [op\\_switch\(\)](#)
- [op\\_unstack\(\)](#)
- [op\\_vectorized\\_map\(\)](#)
- [op\\_while\\_loop\(\)](#)

Other ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)
- [op\\_argmax\(\)](#)
- [op\\_argmin\(\)](#)
- [op\\_argpartition\(\)](#)
- [op\\_argsort\(\)](#)
- [op\\_array\(\)](#)
- [op\\_average\(\)](#)
- [op\\_average\\_pool\(\)](#)
- [op\\_batch\\_normalization\(\)](#)
- [op\\_binary\\_crossentropy\(\)](#)
- [op\\_bincount\(\)](#)
- [op\\_broadcast\\_to\(\)](#)
- [op\\_cast\(\)](#)



```
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
```

```
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
```

```
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()
```

```
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
```

```
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_matmul

*Matrix product of two tensors.*

---

### Description

- If both tensors are 1-dimensional, the dot product (scalar) is returned.
- If either tensor is N-D,  $N > 2$ , it is treated as a stack of matrices residing in the last two indexes and broadcast accordingly.
- If the first tensor is 1-D, it is promoted to a matrix by prepending a 1 to its dimensions. After matrix multiplication the prepended 1 is removed.
- If the second tensor is 1-D, it is promoted to a matrix by appending a 1 to its dimensions. After matrix multiplication the appended 1 is removed.

### Usage

```
op_matmul(x1, x2)
```

### Arguments

x1	First tensor.
x2	Second tensor.

### Value

Output tensor, matrix product of the inputs.

### See Also

- <https://keras.io/api/ops/numpy#matmul-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
```

```
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()
```

op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()

```
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
```



```
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
```

```
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
```

op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()

```
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_max

*Return the maximum of a tensor or maximum along an axis.*

---

### Description

Return the maximum of a tensor or maximum along an axis.

### Usage

```
op_max(x, axis = NULL, keepdims = FALSE, initial = NULL)
```

### Arguments

x	Input tensor.
axis	Axis or axes along which to operate. By default, flattened input is used.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one. Defaults to FALSE.
initial	The minimum value of an output element. Defaults to NULL.

**Value**

Maximum of  $x$ .

**Examples**

```
(x <- op_convert_to_tensor(rbind(c(1, 3, 5), c(1, 5, 2))))
```

```
## tf.Tensor(  
## [[1. 3. 5.]  
## [1. 5. 2.]], shape=(2, 3), dtype=float64)
```

```
op_max(x)
```

```
## tf.Tensor(5.0, shape=(), dtype=float64)
```

```
op_max(x, axis = 1)
```

```
## tf.Tensor([1. 5. 5.], shape=(3), dtype=float64)
```

```
op_max(x, axis = 1, keepdims = TRUE)
```

```
## tf.Tensor([[1. 5. 5.]], shape=(1, 3), dtype=float64)
```

**See Also**

- <https://keras.io/api/ops/numpy#max-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()
```

op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()

```
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()
```



```
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
```

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()
```

```
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
```

```
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()
```

```
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
```

```
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_maximum

*Element-wise maximum of x1 and x2.*

---

### Description

Element-wise maximum of x1 and x2.

### Usage

```
op_maximum(x1, x2)
```

```
op_pmax(x1, x2)
```

### Arguments

x1	First tensor.
x2	Second tensor.

### Value

Output tensor, element-wise maximum of x1 and x2.

### See Also

- <https://keras.io/api/ops/numpy#maximum-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
```

`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_einsum()`  
`op_empty()`  
`op_equal()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`

```
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
```



`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`  
`op_zeros()`  
`op_zeros_like()`

**Other ops:**

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`

```
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()
```

```
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
```

```
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
```

```
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()
```

```
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_max\_pool

*Max pooling operation.*

---

### **Description**

Max pooling operation.

### **Usage**

```
op_max_pool(
    inputs,
    pool_size,
    strides = NULL,
    padding = "valid",
    data_format = NULL
)
```

**Arguments**

inputs	Tensor of rank N+2. inputs has shape (batch_size,) + inputs_spatial_shape + (num_channels,) if data_format = "channels_last", or (batch_size, num_channels) + inputs_spatial_shape if data_format = "channels_first". Pooling happens over the spatial dimensions only.
pool_size	int or tuple/list of integers of size len(inputs_spatial_shape), specifying the size of the pooling window for each spatial dimension of the input tensor. If pool_size is int, then every spatial dimension shares the same pool_size.
strides	int or tuple/list of integers of size len(inputs_spatial_shape). The stride of the sliding window for each spatial dimension of the input tensor. If strides is int, then every spatial dimension shares the same strides.
padding	string, either "valid" or "same". "valid" means no padding is applied, and "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input when strides = 1.
data_format	A string, either "channels_last" or "channels_first". data_format determines the ordering of the dimensions in the inputs. If data_format = "channels_last", inputs is of shape (batch_size, ..., channels) while if data_format = "channels_first", inputs is of shape (batch_size, channels, ...).

**Value**

A tensor of rank N+2, the result of the max pooling operation.

**See Also**

- <https://keras.io/api/ops/nn#maxpool-function>

Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()
```

```
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```



`op_convert_to_tensor()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_ctc_loss()`  
`op_cumprod()`  
`op_cumsum()`  
`op_custom_gradient()`  
`op_depthwise_conv()`  
`op_det()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_dtype()`  
`op_eig()`  
`op_eigh()`  
`op_einsum()`  
`op_elu()`  
`op_empty()`  
`op_equal()`  
`op_erf()`  
`op_erfinv()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_extract_sequences()`  
`op_eye()`  
`op_fft()`  
`op_fft2()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_fori_loop()`  
`op_full()`  
`op_full_like()`  
`op_gelu()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hard_sigmoid()`

op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()

`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`  
`op_scatter()`  
`op_scatter_update()`  
`op_segment_max()`  
`op_segment_sum()`  
`op_select()`  
`op_selu()`  
`op_separable_conv()`  
`op_shape()`  
`op_sigmoid()`  
`op_sign()`  
`op_silu()`  
`op_sin()`

```
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_mean	<i>Compute the arithmetic mean along the specified axes.</i>
---------	--

---

**Description**

Compute the arithmetic mean along the specified axes.

**Usage**

```
op_mean(x, axis = NULL, keepdims = FALSE)
```

**Arguments**

x	Input tensor.
axis	Axis or axes along which the means are computed. The default is to compute the mean of the flattened tensor.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one.

**Value**

Output tensor containing the mean values.

**See Also**

- <https://keras.io/api/ops/numpy#mean-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()
```

```
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
```

```
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()
```

```
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()
```



```
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
```

```
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()
```

op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()

```
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
```

```
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_median	<i>Compute the median along the specified axis.</i>
-----------	---

---

### Description

Compute the median along the specified axis.

### Usage

```
op_median(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	Axis or axes along which the medians are computed. Defaults to axis = NULL which is to compute the median(s) along a flattened version of the array.
keepdims	If this is set to TRUE, the axes which are reduce are left in the result as dimensions with size one.

### Value

The output tensor.

### See Also

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
```

```
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()
```

```
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()
```

op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()



```
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
```

```
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
```

op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()

```
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
```

```

op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_meshgrid

*Creates grids of coordinates from coordinate vectors.*


---

### Description

Given  $N$  1-D tensors  $T_0, T_1, \dots, T_{N-1}$  as inputs with corresponding lengths  $S_0, S_1, \dots, S_{N-1}$ , this creates an  $N$   $N$ -dimensional tensors  $G_0, G_1, \dots, G_{N-1}$  each with shape  $(S_0, \dots, S_{N-1})$  where the output  $G_i$  is constructed by expanding  $T_i$  to the result shape.

### Usage

```
op_meshgrid(..., indexing = "xy")
```

### Arguments

...	1-D tensors representing the coordinates of a grid.
indexing	"xy" or "ij". "xy" is cartesian; "ij" is matrix indexing of output. Defaults to "xy".

### Value

Sequence of  $N$  tensors.

**Examples**

```
x <- op_array(c(1, 2, 3), "int32")
y <- op_array(c(4, 5, 6), "int32")

c(grid_x, grid_y) %<-% op_meshgrid(x, y, indexing = "ij")
grid_x

## tf.Tensor(
## [[1 1 1]
## [2 2 2]
## [3 3 3]], shape=(3, 3), dtype=int32)

# array([[1, 1, 1],
#        [2, 2, 2],
#        [3, 3, 3]])
grid_y

## tf.Tensor(
## [[4 5 6]
## [4 5 6]
## [4 5 6]], shape=(3, 3), dtype=int32)

# array([[4, 5, 6],
#        [4, 5, 6],
#        [4, 5, 6]])
```

**See Also**

- <https://keras.io/api/ops/numpy#meshgrid-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
```

`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_einsum()`  
`op_empty()`  
`op_equal()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`  
`op_full_like()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`

```
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()
```



`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`  
`op_zeros()`  
`op_zeros_like()`

**Other ops:**

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`

```
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
```

```
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
```

```
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()
```

```
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
```

```

op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_min

*Return the minimum of a tensor or minimum along an axis.*


---

### Description

Return the minimum of a tensor or minimum along an axis.

### Usage

```
op_min(x, axis = NULL, keepdims = FALSE, initial = NULL)
```

### Arguments

x	Input tensor.
axis	Axis or axes along which to operate. By default, flattened input is used.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one. Defaults to FALSE.
initial	The maximum value of an output element. Defaults to NULL.

### Value

Minimum of x.

### Examples

```
(x <- op_convert_to_tensor(rbind(c(1, 3, 5), c(1, 5, 2))))
```

```
## tf.Tensor(  
## [[1. 3. 5.]  
## [1. 5. 2.]], shape=(2, 3), dtype=float64)  
  
op_min(x)  
  
## tf.Tensor(1.0, shape=(), dtype=float64)  
  
op_min(x, axis = 1)  
  
## tf.Tensor([1. 3. 2.], shape=(3), dtype=float64)  
  
op_min(x, axis = 1, keepdims = TRUE)  
  
## tf.Tensor([[1. 3. 2.]], shape=(1, 3), dtype=float64)
```

### See Also

- <https://keras.io/api/ops/numpy#min-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()
```

op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()



```
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
```

```
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()
```

```
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()
```

```
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
```

```
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()
```

```
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
```

```
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_minimum

*Element-wise minimum of x1 and x2.*

---

### Description

Element-wise minimum of x1 and x2.

### Usage

```
op_minimum(x1, x2)
```

```
op_pmin(x1, x2)
```

### Arguments

x1	First tensor.
x2	Second tensor.

### Value

Output tensor, element-wise minimum of x1 and x2.

### See Also

- <https://keras.io/api/ops/numpy#minimum-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()
```

op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()



```
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()
```

op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()

```
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
```

```
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()
```

op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()

```
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
```

```
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_mod

*Returns the element-wise remainder of division.*

---

### Description

Note that this function is automatically called when using the R operator %% with a tensor.

```
(x <- op_arange(10))
```

```
## tf.Tensor([0. 1. 2. 3. 4. 5. 6. 7. 8. 9.], shape=(10), dtype=float32)
```

```
op_mod(x, 3)
```

```
## tf.Tensor([0. 1. 2. 0. 1. 2. 0. 1. 2. 0.], shape=(10), dtype=float32)
```

```
x %% 3
```

```
## tf.Tensor([0. 1. 2. 0. 1. 2. 0. 1. 2. 0.], shape=(10), dtype=float32)
```

### Usage

```
op_mod(x1, x2)
```

**Arguments**

x1	First tensor.
x2	Second tensor.

**Value**

Output tensor, element-wise remainder of division.

**See Also**

- <https://keras.io/api/ops/numpy#mod-function>

Other numpy ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`



op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()

```
op_minimum()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()
```

```
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()
```

```
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
```

```
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_moments()
```

```
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
```

```
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

### Description

The mean and variance are calculated by aggregating the contents of `x` across axes. If `x` is 1-D and `axes = c(1)` this is just the mean and variance of a vector.

### Usage

```
op_moments(x, axes, keepdims = FALSE, synchronized = FALSE)
```

### Arguments

<code>x</code>	Input tensor.
<code>axes</code>	A list of axes which to compute mean and variance.
<code>keepdims</code>	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one.
<code>synchronized</code>	Only applicable with the TensorFlow backend. If TRUE, synchronizes the global batch statistics (mean and variance) across all devices at each training step in a distributed training strategy. If FALSE, each replica uses its own local batch statistics.

### Value

A list containing two tensors - mean and variance.

### Examples

```
x <- op_convert_to_tensor(c(0, 1, 2, 3, 100), dtype = "float32")
op_moments(x, axes = c(1))

## [[1]]
## tf.Tensor(21.2, shape=(), dtype=float32)
##
## [[2]]
## tf.Tensor(1553.3601, shape=(), dtype=float32)
```

### See Also

Other nn ops:

- [op\\_average\\_pool\(\)](#)
- [op\\_batch\\_normalization\(\)](#)
- [op\\_binary\\_crossentropy\(\)](#)
- [op\\_categorical\\_crossentropy\(\)](#)
- [op\\_conv\(\)](#)
- [op\\_conv\\_transpose\(\)](#)
- [op\\_ctc\\_loss\(\)](#)
- [op\\_depthwise\\_conv\(\)](#)
- [op\\_elu\(\)](#)
- [op\\_gelu\(\)](#)



```
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

**Other ops:**

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()
```

```
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
```

```
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
```

```
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
```

```
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
```

```
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_moveaxis	<i>Move axes of a tensor to new positions.</i>
-------------	--

---

### Description

Other axes remain in their original order.

### Usage

```
op_moveaxis(x, source, destination)
```

### Arguments

x	Tensor whose axes should be reordered.
source	Original positions of the axes to move. These must be unique.
destination	Destinations positions for each of the original axes. These must also be unique.

### Value

Tensor with moved axes.

### See Also

- <https://keras.io/api/ops/numpy#moveaxis-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
```

op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()

```
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
```



op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()

```
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
```

```
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()
```

```
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
```

```
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
```

```
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_multiply

*Multiply arguments element-wise.*

---

### Description

Note that this function is automatically called when using the R operator \* with a tensor.

```
(x <- op_arange(4))
```

```
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)
```

```
op_multiply(x, x)
```

```
## tf.Tensor([0. 1. 4. 9.], shape=(4), dtype=float32)
```

```
x * x
```

```
## tf.Tensor([0. 1. 4. 9.], shape=(4), dtype=float32)
```

### Usage

```
op_multiply(x1, x2)
```

**Arguments**

x1	First input tensor.
x2	Second input tensor.

**Value**

Output tensor, element-wise product of x1 and x2.

**See Also**

- <https://keras.io/api/ops/numpy#multiply-function>

Other numpy ops:

- `op_abs()`
- `op_add()`
- `op_all()`
- `op_any()`
- `op_append()`
- `op_arange()`
- `op_arccos()`
- `op_arccosh()`
- `op_arcsin()`
- `op_arcsinh()`
- `op_arctan()`
- `op_arctan2()`
- `op_arctanh()`
- `op_argmax()`
- `op_argmin()`
- `op_argpartition()`
- `op_argsort()`
- `op_array()`
- `op_average()`
- `op_bincount()`
- `op_broadcast_to()`
- `op_ceil()`
- `op_clip()`
- `op_concatenate()`
- `op_conj()`
- `op_copy()`
- `op_correlate()`
- `op_cos()`
- `op_cosh()`
- `op_count_nonzero()`
- `op_cross()`
- `op_ctc_decode()`
- `op_cumprod()`
- `op_cumsum()`
- `op_diag()`
- `op_diagonal()`

```
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
```



```
op_minimum()  
op_mod()  
op_moveaxis()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()
```

```
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()
```

```
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()
```

```
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()
```

```
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqr()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()
```

```
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

## Description

This function encodes integer labels as multi-hot vectors, where each label is mapped to a binary value in the resulting vector.

## Usage

```
op_multi_hot(  
  inputs,  
  num_classes,  
  axis = -1L,  
  dtype = NULL,  
  sparse = FALSE,  
  ...  
)
```

## Arguments

inputs	Tensor of integer labels to be converted to multi-hot vectors.
num_classes	Integer, the total number of unique classes.
axis	(optional) Axis along which the multi-hot encoding should be added. Defaults to -1, which corresponds to the last dimension.
dtype	(optional) The data type of the resulting tensor. Default is backend's float type.
sparse	Whether to return a sparse tensor; for backends that support sparse tensors.
...	For forward/backwards compatibility

## Value

Tensor: The multi-hot encoded tensor.

## Examples

```
data <- op_convert_to_tensor(c(0, 4))  
op_multi_hot(data, num_classes = 5)  
  
## tf.Tensor([1. 0. 0. 0. 1.], shape=(5), dtype=float32)
```

## See Also

Other nn ops:  
[op\\_average\\_pool\(\)](#)  
[op\\_batch\\_normalization\(\)](#)  
[op\\_binary\\_crossentropy\(\)](#)  
[op\\_categorical\\_crossentropy\(\)](#)  
[op\\_conv\(\)](#)  
[op\\_conv\\_transpose\(\)](#)  
[op\\_ctc\\_loss\(\)](#)

```
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()
```



```
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
```

```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```

```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()
```

```
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
```

```

op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_nan_to_num	<i>Replace NaN with zero and infinity with large finite numbers.</i>
---------------	--

---

### Description

Replace NaN with zero and infinity with large finite numbers.

### Usage

```
op_nan_to_num(x, nan = 0, posinf = NULL, neginf = NULL)
```

### Arguments

x	Input data.
nan	Optional float or int. Value to replace NaN entries with.
posinf	Optional float or int. Value to replace positive infinity with.
neginf	Optional float or int. Value to replace negative infinity with.

### Value

x, with non-finite values replaced.

### Example

```

(x <- op_convert_to_tensor(c(1, NaN, -Inf, Inf)))

## tf.Tensor([ 1. nan -inf inf], shape=(4), dtype=float32)

op_nan_to_num(x)

## tf.Tensor([ 1.0000000e+00  0.0000000e+00 -3.4028235e+38  3.4028235e+38], shape=(4), dtype=float32)

```

```
op_nan_to_num(x, nan = -1, posinf = 2, neginf = -2)

## tf.Tensor([ 1. -1. -2.  2.], shape=(4), dtype=float32)
```

### See Also

- <https://keras.io/api/ops/numpy#nantonum-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
```

```
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
```

```
op_multiply()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()
```



op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()

```
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
```

```
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
```

```
op_multiply()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()
```

```
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_ndim

*Return the number of dimensions of a tensor.*

---

### **Description**

Return the number of dimensions of a tensor.

**Usage**

```
op_ndim(x)
```

**Arguments**

x                    Input tensor.

**Value**

The number of dimensions in x.

**See Also**

- <https://keras.io/api/ops/numpy#ndim-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()
```

op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()

```
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()
```



op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()

```
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
```

```
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()
```

```
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()
```

```
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_negative	<i>Numerical negative, element-wise.</i>
-------------	--

---

### Description

Note that this function is automatically called when using the unary R operator - with a tensor.

```
(x <- op_arange(4))  
  
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)  
  
op_negative(x)  
  
## tf.Tensor([-0. -1. -2. -3.], shape=(4), dtype=float32)  
  
-x  
  
## tf.Tensor([-0. -1. -2. -3.], shape=(4), dtype=float32)
```

### Usage

```
op_negative(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor,  $y = -x$ .

### See Also

- <https://keras.io/api/ops/numpy#negative-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()
```

op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()

op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()



`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`  
`op_zeros()`  
`op_zeros_like()`

**Other ops:**

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`

```
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
```

```
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
```

op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()

op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()

```
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_nonzero

*Return the indices of the elements that are non-zero.*

---

### Description

Return the indices of the elements that are non-zero.

### Usage

```
op_nonzero(x)
```

### Arguments

x                    Input tensor.

### Value

Indices of elements that are non-zero.

**See Also**

- <https://keras.io/api/ops/numpy#nonzero-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_not_equal()  
op_ones()
```



op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()
```

op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_norm()
op_normalize()
```

```
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_norm

*Matrix or vector norm.*

---

### Description

This function is able to return one of eight different matrix norms, or one of an infinite number of vector norms (described below), depending on the value of the `ord` parameter.

### Usage

```
op_norm(x, ord = NULL, axis = NULL, keepdims = FALSE)
```

**Arguments**

x	Input tensor.
ord	Order of the norm (see table under Notes). The default is NULL.
axis	If axis is an integer, it specifies the axis of x along which to compute the vector norms. If axis is a length 2 vector, it specifies the axes that hold 2-D matrices, and the matrix norms of these matrices are computed.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one.

**Value**

Norm of the matrix or vector(s).

**Note**

For values of ord < 1, the result is, strictly speaking, not a mathematical 'norm', but it may still be useful for various numerical purposes. The following norms can be calculated:

- For matrices:
  - ord=NULL: Frobenius norm
  - ord="fro": Frobenius norm
  - ord="nuc": nuclear norm
  - ord=Inf:  $\max(\text{sum}(\text{abs}(x), \text{axis}=2))$
  - ord=-Inf:  $\min(\text{sum}(\text{abs}(x), \text{axis}=2))$
  - ord=0: not supported
  - ord=1:  $\max(\text{sum}(\text{abs}(x), \text{axis}=1))$
  - ord=-1:  $\min(\text{sum}(\text{abs}(x), \text{axis}=1))$
  - ord=2: 2-norm (largest sing. value)
  - ord=-2: smallest singular value
  - other: not supported
- For vectors:
  - ord=NULL: 2-norm
  - ord="fro": not supported
  - ord="nuc": not supported
  - ord=Inf:  $\max(\text{abs}(x))$
  - ord=-Inf:  $\min(\text{abs}(x))$
  - ord=0:  $\text{sum}(x \neq 0)$
  - ord=1: as below
  - ord=-1: as below
  - ord=2: as below
  - ord=-2: as below
  - other:  $\text{sum}(\text{abs}(x)^{\text{ord}})^{(1/\text{ord})}$

**Examples**

```
x <- op_reshape(op_arange(9, dtype="float32") - 4, c(3, 3))
op_norm(x)

## tf.Tensor(7.745967, shape=(), dtype=float32)

# 7.7459664
```

**See Also**

Other linear algebra ops:

```
op_cholesky()
op_det()
op_eig()
op_eigh()
op_inv()
op_lstsq()
op_lu_factor()
op_slogdet()
op_solve_triangular()
op_svd()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
```



```
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
```

```
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```

```
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqr()  
op_scan()  
op_scatter()
```

```
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
```

```
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_normalize	<i>Normalizes x over the specified axis.</i>
--------------	--

---

### Description

It is defined as:  $\text{normalize}(x) = x / \max(\text{norm}(x), \text{epsilon})$ .

### Usage

```
op_normalize(x, axis = -1L, order = 2L)
```

### Arguments

x	Input tensor.
axis	The axis or axes along which to perform normalization. Default to -1.
order	The exponent value in the norm formulation. Defaults to 2.

### Value

The normalized array.

### Examples

```
x <- op_convert_to_tensor(rbind(c(1, 2, 3), c(4, 5, 6)))
x_norm <- op_normalize(x)
x_norm

## tf.Tensor(
## [[0.26726124 0.53452248 0.80178373]
## [0.45584231 0.56980288 0.68376346]], shape=(2, 3), dtype=float64)
```

**See Also**

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/ops/normalize](https://www.tensorflow.org/api_docs/python/tf/keras/ops/normalize)

Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()
```

```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```



`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_log_sigmoid()`  
`op_log_softmax()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`

```
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```

```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_not_equal	<i>Return (x1 != x2) element-wise.</i>
--------------	--

---

### Description

Note that this function is automatically called when using the R operator != with a tensor.

```
(x <- op_arange(4))
```

```
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)
```

```
op_not_equal(x, 2)
```

```
## tf.Tensor([ True  True False  True], shape=(4), dtype=bool)
```

```
x != 2
```

```
## tf.Tensor([ True  True False  True], shape=(4), dtype=bool)
```

**Usage**

```
op_not_equal(x1, x2)
```

**Arguments**

x1	First input tensor.
x2	Second input tensor.

**Value**

Output tensor, element-wise comparison of x1 and x2.

**See Also**

- <https://keras.io/api/ops/numpy#notequal-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()
```

```
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
```

```
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()
```

```
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```

```
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```



op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()

```
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
```

`op_sinh()`  
`op_size()`  
`op_slice()`  
`op_slice_update()`  
`op_slogdet()`  
`op_softmax()`  
`op_softplus()`  
`op_softsign()`  
`op_solve()`  
`op_solve_triangular()`  
`op_sort()`  
`op_sparse_categorical_crossentropy()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_stft()`  
`op_stop_gradient()`  
`op_subtract()`  
`op_sum()`  
`op_svd()`  
`op_swapaxes()`  
`op_switch()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_top_k()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_unstack()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vectorized_map()`  
`op_vstack()`  
`op_where()`  
`op_while_loop()`  
`op_zeros()`  
`op_zeros_like()`

---

`op_ones`*Return a new tensor of given shape and type, filled with ones.*

---

**Description**

Return a new tensor of given shape and type, filled with ones.

**Usage**

```
op_ones(shape, dtype = NULL)
```

**Arguments**

<code>shape</code>	Shape of the new tensor.
<code>dtype</code>	Desired data type of the tensor.

**Value**

Tensor of ones with the given shape and dtype.

**See Also**

- <https://keras.io/api/ops/numpy#ones-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()
```

```
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
```

```
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()
```

```
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
```

```
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
```



```
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
```

```
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
```

```
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
```

```
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_ones_like	<i>Return a tensor of ones with the same shape and type of x.</i>
--------------	---

---

### Description

Return a tensor of ones with the same shape and type of x.

### Usage

```
op_ones_like(x, dtype = NULL)
```

### Arguments

x	Input tensor.
dtype	Overrides the data type of the result.

### Value

A tensor of ones with the same shape and type as x.

### See Also

- <https://keras.io/api/ops/numpy#oneslike-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
```

op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()

```
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
```

`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_transpose()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`  
`op_zeros()`  
`op_zeros_like()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`

```
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
```



```
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()
```

```
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()
```

```
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()
```

```

op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_one\_hot

*Converts integer tensor x into a one-hot tensor.*


---

### Description

The one-hot encoding is a representation where each integer value is converted into a binary vector with a length equal to `num_classes`, and the index corresponding to the integer value is marked as 1, while all other indices are marked as 0.

### Usage

```
op_one_hot(x, num_classes, axis = -1L, dtype = NULL, sparse = FALSE)
```

### Arguments

<code>x</code>	Integer tensor to be encoded. The shape can be arbitrary, but the dtype should be integer. R factors are coerced to integer and offset to be 0-based, i.e., as <code>integer(x) - 1L</code> .
<code>num_classes</code>	Number of classes for the one-hot encoding.
<code>axis</code>	Axis along which the encoding is performed. Defaults to <code>-1</code> , which represents the last axis.
<code>dtype</code>	(Optional) Data type of the output tensor. If not provided, it defaults to the default data type of the backend.
<code>sparse</code>	Whether to return a sparse tensor; for backends that support sparse tensors.

**Value**

Integer tensor: One-hot encoded tensor with the same shape as `x` except for the specified axis dimension, which will have a length of `num_classes`. The dtype of the output tensor is determined by dtype or the default data type of the backend.

**Examples**

```
x <- op_array(c(1, 3, 2, 0), "int32")
op_one_hot(x, num_classes = 4)

## tf.Tensor(
## [[0. 1. 0. 0.]
## [0. 0. 0. 1.]
## [0. 0. 1. 0.]
## [1. 0. 0. 0.]], shape=(4, 4), dtype=float32)

# array([[0. 1. 0. 0.]
#        [0. 0. 0. 1.]
#        [0. 0. 1. 0.]
#        [1. 0. 0. 0.]], shape=(4, 4), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/nn#onehot-function>

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_psnr()
op_relu()
op_relu6()
```

```
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()
```

op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()

```
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
```



```
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
```

```
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

**Description**

Given two vectors  $x_1$  and  $x_2$ , the outer product is:

$$\text{out}[i, j] = x_1[i] * x_2[j]$$

**Usage**

```
op_outer(x1, x2)
```

**Arguments**

x1	First input tensor.
x2	Second input tensor.

**Value**

Outer product of  $x_1$  and  $x_2$ .

**See Also**

- <https://keras.io/api/ops/numpy#outer-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()
```

```
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```

op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()

```
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
```

```
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
```

```
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
```



```
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
```

```
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
```

```

op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_pad	<i>Pad a tensor.</i>
--------	----------------------

---

### Description

Pad a tensor.

### Usage

```
op_pad(x, pad_width, mode = "constant", constant_values = NULL)
```

### Arguments

x	Tensor to pad.
pad_width	Number of values padded to the edges of each axis. ((before_1, after_1), ... (before_N, after_N) unique pad widths for each axis. ((before, after),) yields same before and after pad for each axis. (pad,) or int is a shortcut for before = after = pad width for all axes.
mode	One of "constant", "edge", "linear_ramp", "maximum", "mean", "median", "minimum", "reflect", "symmetric", "wrap", "empty", "circular". Defaults to "constant".
constant_values	Value to pad with if mode == "constant". Defaults to 0. A ValueError is raised if not NULL and mode != "constant".

### Value

Padded tensor.

### Note

Torch backend only supports modes "constant", "reflect", "symmetric" and "circular". Only Torch backend supports "circular" mode.

Note: Tensorflow backend only supports modes "constant", "reflect" and "symmetric".

**See Also**

- <https://keras.io/api/ops/numpy#pad-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()

op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()
```

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```



```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_power

*First tensor elements raised to powers from second tensor, element-wise.*

---

### Description

Note that this function is automatically called when using the R operator ^ with a tensor.

```
(x <- op_arange(4))
```

```
## tf.Tensor([0. 1. 2. 3.], shape=(4), dtype=float32)
```

```
op_power(2, x)

## tf.Tensor([1. 2. 4. 8.], shape=(4), dtype=float32)

2 ^ x

## tf.Tensor([1. 2. 4. 8.], shape=(4), dtype=float32)
```

### Usage

```
op_power(x1, x2)
```

### Arguments

x1	The bases.
x2	The exponents.

### Value

Output tensor, the bases in x1 raised to the exponents in x2.

### See Also

- <https://keras.io/api/ops/numpy#power-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
```

op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()

```
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()
```

```
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()
```

```
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
```



```
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```

```
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()
```

```
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
```

```
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_prod	<i>Return the product of tensor elements over a given axis.</i>
---------	---

---

### Description

Return the product of tensor elements over a given axis.

### Usage

```
op_prod(x, axis = NULL, keepdims = FALSE, dtype = NULL)
```

### Arguments

x	Input tensor.
axis	Axis or axes along which a product is performed. The default, axis = NULL, will compute the product of all elements in the input tensor.
keepdims	If this is set to TRUE, the axes which are reduce are left in the result as dimensions with size one.
dtype	Data type of the returned tensor.

### Value

Product of elements of x over the given axis or axes.

### See Also

- <https://keras.io/api/ops/numpy#prod-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
```

op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()

```
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()
```

```
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

**Other ops:**

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
```

```
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
```



```
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
```

```
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_psnr()
```

```
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()
```

```
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_psnr

*Peak Signal-to-Noise Ratio (PSNR) function.*

---

### Description

This function computes the Peak Signal-to-Noise Ratio between two signals, `x1` and `x2`. PSNR is a measure of the quality of a reconstructed signal. The higher the PSNR, the closer the reconstructed signal is to the original signal. Note that it can become negative when the signal power is smaller than the noise power.

### Usage

```
op_psnr(x1, x2, max_val)
```

### Arguments

<code>x1</code>	The first input signal.
<code>x2</code>	The second input signal. Must have the same shape as <code>x1</code> .
<code>max_val</code>	The maximum possible value in the signals.

**Value**

float: The PSNR value between x1 and x2.

**Examples**

```
x1 <- random_normal(c(2, 4, 4, 3))
x2 <- random_normal(c(2, 4, 4, 3))
max_val <- 1.0
op_psnr(x1, x2, max_val)

## tf.Tensor(-3.433579, shape=(), dtype=float32)
```

**See Also**

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_relu()
op_relu6()
op_selu()
op_separable_conv()
op_sigmoid()
op_silu()
op_softmax()
op_softplus()
op_softsign()
op_sparse_categorical_crossentropy()
```

Other ops:

- op\_abs()
- op\_add()
- op\_all()
- op\_any()
- op\_append()
- op\_arange()
- op\_arccos()
- op\_arccosh()
- op\_arcsin()
- op\_arcsinh()
- op\_arctan()
- op\_arctan2()
- op\_arctanh()
- op\_argmax()
- op\_argmin()
- op\_argpartition()
- op\_argsort()
- op\_array()
- op\_average()
- op\_average\_pool()
- op\_batch\_normalization()
- op\_binary\_crossentropy()
- op\_bincount()
- op\_broadcast\_to()
- op\_cast()
- op\_categorical\_crossentropy()
- op\_ceil()
- op\_cholesky()
- op\_clip()
- op\_concatenate()
- op\_cond()
- op\_conj()
- op\_conv()
- op\_conv\_transpose()
- op\_convert\_to\_numpy()
- op\_convert\_to\_tensor()
- op\_copy()
- op\_correlate()
- op\_cos()
- op\_cosh()
- op\_count\_nonzero()
- op\_cross()
- op\_ctc\_decode()
- op\_ctc\_loss()
- op\_cumprod()
- op\_cumsum()
- op\_custom\_gradient()

```
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
```

```
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
```



```
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
```

```
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_qr

*Computes the QR decomposition of a tensor.*

---

### **Description**

Computes the QR decomposition of a tensor.

### **Usage**

```
op_qr(x, mode = "reduced")
```

**Arguments**

- `x` Input tensor of shape  $(\dots, M, N)$ .
- `mode` A string specifying the mode of the QR decomposition.
- 'reduced': Returns the reduced QR decomposition. (default)
  - 'complete': Returns the complete QR decomposition.

**Value**

A list containing two tensors. The first tensor of shape  $(\dots, M, K)$  is the orthogonal matrix  $q$  and the second tensor of shape  $(\dots, K, N)$  is the upper triangular matrix  $r$ , where  $K = \min(M, N)$ .

**Examples**

```
x <- op_convert_to_tensor(rbind(c(1, 2), c(3, 4), c(5, 6)))
op_qr(x)

## $q
## tf.Tensor(
## [[-0.16903085  0.89708523]
## [-0.50709255  0.27602622]
## [-0.84515425 -0.34503278]], shape=(3, 2), dtype=float64)
##
## $r
## tf.Tensor(
## [[-5.91607978 -7.43735744]
## [ 0.          0.82807867]], shape=(2, 2), dtype=float64)

c(q, r) %<-% op_qr(x)
```

**See Also**

- <https://keras.io/api/ops/core#qr-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
op_in_top_k()
op_irfft()
op_istft()
op_logsumexp()
op_rfft()
op_rsqr()
op_segment_max()
```

```
op_segment_sum()  
op_solve()  
op_stft()  
op_top_k()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()
```

```
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
```

```
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
```

```
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
```

```
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_quantile

*Compute the q-th quantile(s) of the data along the specified axis.*

---

**Description**

Compute the q-th quantile(s) of the data along the specified axis.



**Usage**

```
op_quantile(x, q, axis = NULL, method = "linear", keepdims = FALSE)
```

**Arguments**

x	Input tensor.
q	Probability or sequence of probabilities for the quantiles to compute. Values must be between 0 and 1 inclusive.
axis	Axis or axes along which the quantiles are computed. Defaults to axis=NULL which is to compute the quantile(s) along a flattened version of the array.
method	A string specifies the method to use for estimating the quantile. Available methods are "linear", "lower", "higher", "midpoint", and "nearest". Defaults to "linear". If the desired quantile lies between two data points $i < j$ : <ul style="list-style-type: none"> <li>• "linear": <math>i + (j - i) * \text{fraction}</math>, where fraction is the fractional part of the index surrounded by <math>i</math> and <math>j</math>.</li> <li>• "lower": <math>i</math>.</li> <li>• "higher": <math>j</math>.</li> <li>• "midpoint": <math>(i + j) / 2</math></li> <li>• "nearest": <math>i</math> or <math>j</math>, whichever is nearest.</li> </ul>
keepdims	If this is set to TRUE, the axes which are reduce are left in the result as dimensions with size one.

**Value**

The quantile(s). If  $q$  is a single probability and  $\text{axis}=\text{NULL}$ , then the result is a scalar. If multiple probabilities levels are given, first axis of the result corresponds to the quantiles. The other axes are the axes that remain after the reduction of  $x$ .

**See Also**

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
```

```
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
```

op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()

```
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
```

```
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
```

```
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
```

op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()

```
op_rfft()  
op_roll()  
op_round()  
op_rsqr()   
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()
```



```
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_ravel

*Return a contiguous flattened tensor.*

---

### Description

A 1-D tensor, containing the elements of the input, is returned.

### Usage

```
op_ravel(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor.

### See Also

- <https://keras.io/api/ops/numpy#ravel-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()
```

op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()

```
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_real()
op_reciprocal()
```

```
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
```

```
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()
```

```
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
```

```
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()
```

```
op_psnr()
op_qr()
op_quantile()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
```



```
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_real

*Return the real part of the complex argument.*

---

### **Description**

Return the real part of the complex argument.

### **Usage**

```
op_real(x)
```

### **Arguments**

x                    Input tensor.

### **Value**

The real component of the complex argument.

**See Also**

- <https://keras.io/api/ops/numpy#real-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()
```

op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```



op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()  
op\_zeros()  
op\_zeros\_like()

---

op\_reciprocal

*Return the reciprocal of the argument, element-wise.*

---

### **Description**

Calculates  $1/x$ .

### **Usage**

op\_reciprocal(x)

**Arguments**

x                    Input tensor.

**Value**

Output tensor, element-wise reciprocal of x.

**See Also**

- <https://keras.io/api/ops/numpy#reciprocal-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()

```
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
```

```
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
```

```
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()
```

```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
```

```
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
```

```
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
```



```
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

**Description**

It is defined as  $f(x) = \max(0, x)$ .

**Usage**

```
op_relu(x)
```

**Arguments**

`x` Input tensor.

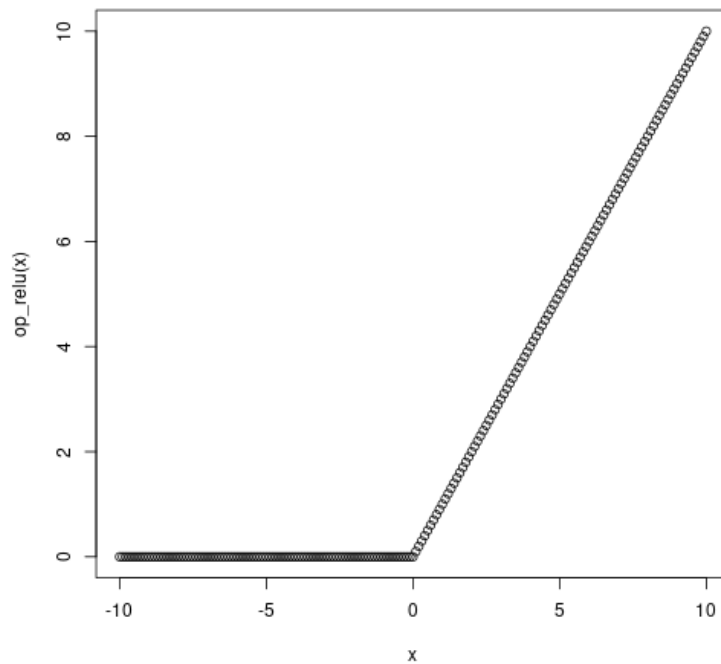
**Value**

A tensor with the same shape as `x`.

**Examples**

```
x1 <- op_convert_to_tensor(c(-1, 0, 1, 0.2))
op_relu(x1)
## tf.Tensor([0.  0.  1.  0.2], shape=(4), dtype=float32)

x <- seq(-10, 10, .1)
plot(x, op_relu(x))
```



**See Also**

- <https://keras.io/api/ops/nn#relu-function>

Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()
```

```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

```
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()
```

```
op_ravel()
op_real()
op_reciprocal()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```

```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_relu6

*Rectified linear unit activation function with upper bound of 6.*

---

### Description

It is defined as  $f(x) = \text{op\_clip}(x, 0, 6)$ .

### Usage

```
op_relu6(x)
```

### Arguments

x                    Input tensor.

### Value

A tensor with the same shape as x.

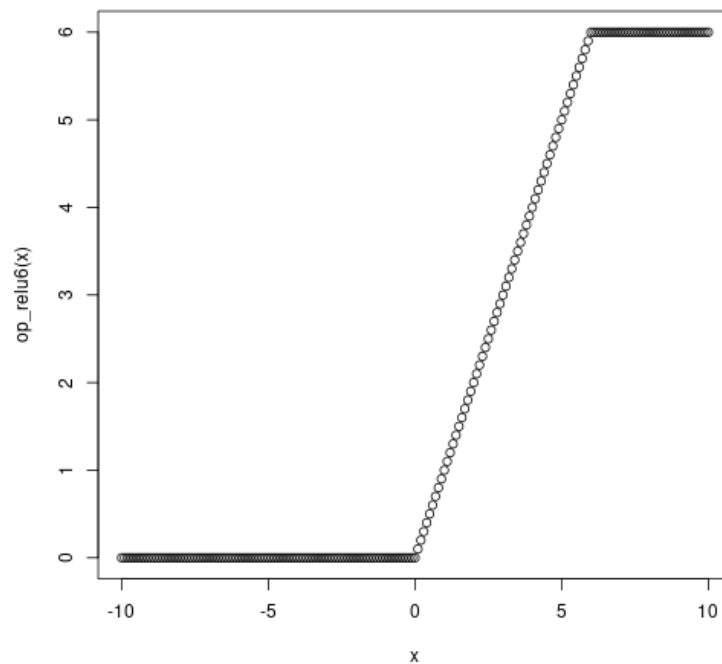


**Examples**

```
x <- op_convert_to_tensor(c(-3, -2, 0.1, 0.2, 6, 8))
op_relu6(x)

## tf.Tensor([0.  0.  0.1 0.2 6.  6. ], shape=(6), dtype=float32)

x <- seq(-10, 10, .1)
plot(x, op_relu6(x))
```

**See Also**

- <https://keras.io/api/ops/nn#relu6-function>

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
```

```
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()
```

op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()

```
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```

op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrt()  
op\_scan()  
op\_scatter()

```
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
```

```
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_repeat	<i>Repeat each element of a tensor after themselves.</i>
-----------	--

---

### Description

Repeat each element of a tensor after themselves.

### Usage

```
op_repeat(x, repeats, axis = NULL)
```

### Arguments

x	Input tensor.
repeats	The number of repetitions for each element.
axis	The axis along which to repeat values. By default, use the flattened input array, and return a flat output array.

### Value

Output tensor.

### See Also

- <https://keras.io/api/ops/numpy#repeat-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
```

op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()



`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_lstsq()`  
`op_matmul()`  
`op_max()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_reshape()`  
`op_roll()`

```
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
```

```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

```
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
```

```
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```

```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_reshape

*Gives a new shape to a tensor without changing its data.*

---

### Description

Gives a new shape to a tensor without changing its data.

### Usage

```
op_reshape(x, newshape)
```

### Arguments

x	Input tensor.
newshape	The new shape should be compatible with the original shape. One shape dimension can be -1 in which case the value is inferred from the length of the array and remaining dimensions.

### Value

The reshaped tensor.

**See Also**

- <https://keras.io/api/ops/numpy#reshape-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()



```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()
```

```
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_rfft

*Real-valued Fast Fourier Transform along the last axis of the input.*

---

### Description

Computes the 1D Discrete Fourier Transform of a real-valued signal over the inner-most dimension of input.

Since the Discrete Fourier Transform of a real-valued signal is Hermitian-symmetric, RFFT only returns the  $\text{fft\_length} / 2 + 1$  unique components of the FFT: the zero-frequency term, followed by the  $\text{fft\_length} / 2$  positive-frequency terms.

Along the axis RFFT is computed on, if `fft_length` is smaller than the corresponding dimension of the input, the dimension is cropped. If it is larger, the dimension is padded with zeros.

### Usage

```
op_rfft(x, fft_length = NULL)
```

### Arguments

<code>x</code>	Input tensor.
<code>fft_length</code>	An integer representing the number of the fft length. If not specified, it is inferred from the length of the last axis of <code>x</code> . Defaults to <code>NULL</code> .

### Value

A list containing two tensors - the real and imaginary parts of the output.

### Examples

```
x <- op_convert_to_tensor(c(0, 1, 2, 3, 4))
op_rfft(x)

## [[1]]
## tf.Tensor([10.  -2.5 -2.5], shape=(3), dtype=float32)
##
## [[2]]
## tf.Tensor([0.          3.440955  0.8122992], shape=(3), dtype=float32)

op_rfft(x, 3)

## [[1]]
## tf.Tensor([ 3.  -1.5], shape=(2), dtype=float32)
##
## [[2]]
## tf.Tensor([0.          0.8660254], shape=(2), dtype=float32)
```

### See Also

- <https://keras.io/api/ops/fft#rfft-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
op_in_top_k()
op_irfft()
```



```
op_istft()  
op_logsumexp()  
op_qr()  
op_rsqr()  
op_segment_max()  
op_segment_sum()  
op_solve()  
op_stft()  
op_top_k()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()
```

op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()

```
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
```

op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_rsqrt()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()

```
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

`op_roll`*Roll tensor elements along a given axis.*

---

**Description**

Elements that roll beyond the last position are re-introduced at the first.

**Usage**

```
op_roll(x, shift, axis = NULL)
```

**Arguments**

<code>x</code>	Input tensor.
<code>shift</code>	The number of places by which elements are shifted.
<code>axis</code>	The axis along which elements are shifted. By default, the array is flattened before shifting, after which the original shape is restored.

**Value**

Output tensor.

**See Also**

- <https://keras.io/api/ops/numpy#roll-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()
```

op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()

```
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
```



op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()

```
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
```

```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```

```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_round()  
op_rsqrtd()  
op_scan()
```

```
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
```

```
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_round

*Evenly round to the given number of decimals.*

---

### Description

Evenly round to the given number of decimals.

### Usage

```
op_round(x, decimals = 0L)
```

### Arguments

x	Input tensor.
decimals	Number of decimal places to round to. Defaults to 0.

### Value

Output tensor.

### See Also

- <https://keras.io/api/ops/numpy#round-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
```

op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()

```
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
```



op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()

```
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
```

op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()

```
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
```

```
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
```

```
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_rsqrt

*Computes reciprocal of square root of x element-wise.*

---

### Description

Computes reciprocal of square root of x element-wise.

### Usage

```
op_rsqrt(x)
```

### Arguments

x                   input tensor

### Value

A tensor with the same dtype as x.

### Examples

```
x <- op_convert_to_tensor(c(1, 10, 100))  
op_rsqrt(x)
```

```
## tf.Tensor([1.          0.31622776 0.1          ], shape=(3), dtype=float32)

# array([1, 0.31622776, 0.1], dtype=float32)
```

### See Also

- <https://keras.io/api/ops/core#rsqrt-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
op_in_top_k()
op_irfft()
op_istft()
op_logsumexp()
op_qr()
op_rfft()
op_segment_max()
op_segment_sum()
op_solve()
op_stft()
op_top_k()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
```

```
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
```



```
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
```

```
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
```

op\_round()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()

```

op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_scan

*Scan a function over leading array axes while carrying along state.*


---

### Description

When the type of `xs` is an array type or `NULL`, and the type of `ys` is an array type, the semantics of `op_scan()` are given roughly by this implementation:

```

op_scan <- function(f, init, xs = NULL, length = NULL) {
  xs <- xs %||% vector("list", length)
  if(!is.list(xs))
    xs <- op_unstack(xs)
  ys <- vector("list", length(xs))
  carry <- init
  for (i in seq_along(xs)) {
    c(carry, y) %<-% f(carry, xs[[i]])
    ys[[i]] <- y
  }
  list(carry, op_stack(ys))
}

```

The loop-carried value `carry` (`init`) must hold a fixed shape and dtype across all iterations.

In TensorFlow, `y` must match `carry` in shape and dtype. This is not required in other backends.

### Usage

```
op_scan(f, init, xs = NULL, length = NULL, reverse = FALSE, unroll = 1L)
```

**Arguments**

<code>f</code>	Callable defines the logic for each loop iteration. This accepts two arguments where the first is a value of the loop carry and the second is a slice of <code>xs</code> along its leading axis. This callable returns a pair where the first represents a new value for the loop carry and the second represents a slice of the output.
<code>init</code>	The initial loop carry value. This can be a scalar, tensor, or any nested structure. It must match the structure of the first element returned by <code>f</code> .
<code>xs</code>	Optional value to scan along its leading axis. This can be a tensor or any nested structure. If <code>xs</code> is not provided, you must specify <code>length</code> to define the number of loop iterations. Defaults to <code>NULL</code> .
<code>length</code>	Optional integer specifying the number of loop iterations. If <code>length</code> is not provided, it defaults to the sizes of leading axis of the arrays in <code>xs</code> . Defaults to <code>NULL</code> .
<code>reverse</code>	Optional boolean specifying whether to run the scan iteration forward or in reverse, equivalent to reversing the leading axes of the arrays in both <code>xs</code> and in <code>ys</code> .
<code>unroll</code>	Optional positive integer or boolean specifying how many scan iterations to unroll within a single iteration of a loop. If an integer is provided, it determines how many unrolled loop iterations to run within a single rolled iteration of the loop. If a boolean is provided, it will determine if the loop is completely unrolled ( <code>unroll=TRUE</code> ) or left completely unrolled ( <code>unroll=FALSE</code> ). Note that unrolling is only supported by JAX and TensorFlow backends.

**Value**

A pair where the first element represents the final loop carry value and the second element represents the stacked outputs of `f` when scanned over the leading axis of the inputs.

**Examples**

```
sum_fn <- function(c, x) list(c + x, c + x)
init <- op_array(0L)
xs <- op_array(1:5)
c(carry, result) %<-% op_scan(sum_fn, init, xs)
carry

## tf.Tensor(15, shape=(), dtype=int32)

result

## tf.Tensor([ 1  3  6 10 15], shape=(5), dtype=int32)
```

**See Also**

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/ops/scan](https://www.tensorflow.org/api_docs/python/tf/keras/ops/scan)

Other core ops:

```
op_cast()  
op_cond()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_custom_gradient()  
op_dtype()  
op_fori_loop()  
op_is_tensor()  
op_map()  
op_scatter()  
op_scatter_update()  
op_shape()  
op_slice()  
op_slice_update()  
op_stop_gradient()  
op_switch()  
op_unstack()  
op_vectorized_map()  
op_while_loop()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()
```

op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()

```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```



```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()
```

```
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
```

```

op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_scatter	<i>Returns a tensor of shape shape where indices are set to values.</i>
------------	---

---

### Description

At a high level, this operation does `zeros[indices] = updates` and returns the output. It is equivalent to:

```
output <- op_scatter_update(op_zeros(shape), indices, values)
```

### Usage

```
op_scatter(indices, values, shape)
```

### Arguments

indices	A tensor or list specifying indices for the values in values.
values	A tensor, the values to be set at indices.
shape	Shape of the output tensor.

### Value

A tensor of shape shape where indices are set to values.

### Examples

```

indices <- rbind(c(1, 2), c(2, 2))
values <- op_array(c(1, 1))
op_scatter(indices, values, shape= c(2, 2))

## tf.Tensor(
## [[0. 1.]
## [0. 1.]], shape=(2, 2), dtype=float32)

```

**See Also**

- <https://keras.io/api/ops/core#scatter-function>

Other core ops:

```
op_cast()
op_cond()
op_convert_to_numpy()
op_convert_to_tensor()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter_update()
op_shape()
op_slice()
op_slice_update()
op_stop_gradient()
op_switch()
op_unstack()
op_vectorized_map()
op_while_loop()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
```

op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()

```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```

```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()
```

```
op_scan()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()
```



```

op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_scatter_update	<i>Update inputs via updates at scattered (sparse) indices.</i>
-------------------	---

---

### Description

At a high level, this operation does `inputs[indices] <- updates`. Assume `inputs` is a tensor of shape  $(D_1, D_2, \dots, D_n)$ , there are 2 main usages of `scatter_update`.

1. `indices` is a 2D tensor of shape  $(\text{num\_updates}, n)$ , where `num_updates` is the number of updates to perform, and `updates` is a 1D tensor of shape  $(\text{num\_updates})$ . For example, if `inputs` is `op_zeros(c(4, 4, 4))`, and we want to update `inputs[2, 3, 4]` and `inputs[1, 2, 4]` as 1, then we can use:

```

inputs <- op_zeros(c(4, 4, 4))
indices <- rbind(c(2, 3, 4),
                c(1, 2, 4))
updates <- op_array(c(1, 1), "float32")
op_scatter_update(inputs, indices, updates)

```

```

## tf.Tensor(
## [[0. 0. 0. 0.]
##  [0. 0. 0. 1.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]]
##
## [[0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 1.]
##  [0. 0. 0. 0.]]
##
## [[0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]]

```

```
##
## [[0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]], shape=(4, 4, 4), dtype=float32)
```

2 indices is a 2D tensor of shape (num\_updates, k), where num\_updates is the number of updates to perform, and k ( $k \leq n$ ) is the size of each index in indices. updates is a  $n - k$ -D tensor of shape (num\_updates, shape(inputs) $[-(1:k)]$ ). For example, if `inputs <- op_zeros(c(4, 4, 4))`, and we want to update `inputs[1, 2, ]` and `inputs[2, 3, ]` as `[1, 1, 1, 1]`, then indices would have shape (num\_updates, 2) ( $k = 2$ ), and updates would have shape (num\_updates, 4) (`shape(inputs)[3:4] == 4`). See the code below:

```
inputs <- op_zeros(c(4, 4, 4))
indices <- rbind(c(2, 3),
                c(3, 4))
updates <- op_array(rbind(c(1, 1, 1, 1),
                          c(1, 1, 1, 1)),
                   "float32")
op_scatter_update(inputs, indices, updates)
```

```
## tf.Tensor(
## [[0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]]
##
## [[0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [1. 1. 1. 1.]
##  [0. 0. 0. 0.]]
##
## [[0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [1. 1. 1. 1.]]
##
## [[0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [0. 0. 0. 0.]
##  [1. 1. 1. 1.]]], shape=(4, 4, 4), dtype=float32)
```

### Usage

```
op_scatter_update(inputs, indices, updates)
```

**Arguments**

inputs	A tensor, the tensor to be updated.
indices	A tensor or list of shape (N, inputs.ndim), specifying indices to update. N is the number of indices to update, must be equal to the first dimension of updates.
updates	A tensor, the new values to be put to inputs at indices.

**Value**

A tensor, has the same shape and dtype as inputs.

**See Also**

- <https://keras.io/api/ops/core#scatterupdate-function>

Other core ops:

`op_cast()`  
`op_cond()`  
`op_convert_to_numpy()`  
`op_convert_to_tensor()`  
`op_custom_gradient()`  
`op_dtype()`  
`op_fori_loop()`  
`op_is_tensor()`  
`op_map()`  
`op_scan()`  
`op_scatter()`  
`op_shape()`  
`op_slice()`  
`op_slice_update()`  
`op_stop_gradient()`  
`op_switch()`  
`op_unstack()`  
`op_vectorized_map()`  
`op_while_loop()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`

```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```

```
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()
```

```
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()
```

```
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()
```

```

op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_segment_max	<i>Computes the max of segments in a tensor.</i>
----------------	--

---

### Description

Computes the max of segments in a tensor.

### Usage

```
op_segment_max(data, segment_ids, num_segments = NULL, sorted = FALSE)
```

### Arguments

data	Input tensor.
segment_ids	A 1-D tensor containing segment indices for each element in data.
num_segments	An integer representing the total number of segments. If not specified, it is inferred from the maximum value in segment_ids.
sorted	A boolean indicating whether segment_ids is sorted. Defaults to FALSE.

### Value

A tensor containing the max of segments, where each element represents the max of the corresponding segment in data.



**Examples**

```
data <- op_convert_to_tensor(c(1, 2, 10, 20, 100, 200))
segment_ids <- op_array(c(1, 1, 2, 2, 3, 3), "int32")
num_segments <- 3
op_segment_max(data, segment_ids, num_segments)

## tf.Tensor([ 2. 20. 200.], shape=(3), dtype=float32)

# array([2, 20, 200], dtype=int32)
```

**See Also**

- <https://keras.io/api/ops/core/#segmentmax-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
op_in_top_k()
op_irfft()
op_istft()
op_logsumexp()
op_qr()
op_rfft()
op_rsqr()
op_segment_sum()
op_solve()
op_stft()
op_top_k()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
```

```
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
```

op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()

```
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()
```

```
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
```

```

op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_segment_sum	<i>Computes the sum of segments in a tensor.</i>
----------------	--

---

### Description

Computes the sum of segments in a tensor.

### Usage

```
op_segment_sum(data, segment_ids, num_segments = NULL, sorted = FALSE)
```

### Arguments

data	Input tensor.
segment_ids	A 1-D tensor containing segment indices for each element in data.
num_segments	An integer representing the total number of segments. If not specified, it is inferred from the maximum value in segment_ids.
sorted	A boolean indicating whether segment_ids is sorted. Defaults to FALSE.

### Value

A tensor containing the sum of segments, where each element represents the sum of the corresponding segment in data.

**Examples**

```
data <- op_array(c(1, 2, 10, 20, 100, 200))
segment_ids <- op_array(c(1, 1, 2, 2, 3, 3), "int32")
num_segments <- 3
op_segment_sum(data, segment_ids, num_segments)

## tf.Tensor([ 3. 30. 300.], shape=(3), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/core#segmentsum-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
op_in_top_k()
op_irfft()
op_istft()
op_logsumexp()
op_qr()
op_rfft()
op_rsqr()
op_segment_max()
op_solve()
op_stft()
op_top_k()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
```

```
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
```



op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()  
op\_gelu()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hard\_sigmoid()  
op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()

```
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()
```

`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`  
`op_scatter()`  
`op_scatter_update()`  
`op_segment_max()`  
`op_select()`  
`op_selu()`  
`op_separable_conv()`  
`op_shape()`  
`op_sigmoid()`  
`op_sign()`  
`op_silu()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_slice()`  
`op_slice_update()`  
`op_slogdet()`  
`op_softmax()`  
`op_softplus()`  
`op_softsign()`  
`op_solve()`  
`op_solve_triangular()`  
`op_sort()`  
`op_sparse_categorical_crossentropy()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_stft()`  
`op_stop_gradient()`  
`op_subtract()`  
`op_sum()`  
`op_svd()`  
`op_swapaxes()`  
`op_switch()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`

```

op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_select	<i>Return elements from choicelist, based on conditions in condlist.</i>
-----------	--

---

### Description

Return elements from choicelist, based on conditions in condlist.

### Usage

```
op_select(condlist, choicelist, default = 0L)
```

### Arguments

condlist	List of boolean tensors. The list of conditions which determine from which array in choicelist the output elements are taken. When multiple conditions are satisfied, the first one encountered in condlist is used.
choicelist	List of tensors. The list of tensors from which the output elements are taken. This list has to be of the same length as condlist.
default	Optional scalar value. The element inserted in the output when all conditions evaluate to FALSE.

### Value

Tensor where the output at position  $m$  is the  $m$ -th element of the tensor in choicelist where the  $m$ -th element of the corresponding tensor in condlist is TRUE.

**Examples**

```
x <- op_arange(6L)
condlist <- list(x < 3, x > 3)
choicelist <- list(x, x^2)
op_select(condlist, choicelist, 42)

## tf.Tensor([ 0  1  2 42 16 25], shape=(6), dtype=int32)
```

**See Also**

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
```

```
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
```

```
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()
```

```
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()
```



```
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
```

```
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
```

```
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()
```

```
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

**Description**

It is defined as:

$f(x) = \text{scale} * \alpha * (\exp(x) - 1.)$  for  $x < 0$ ,  $f(x) = \text{scale} * x$  for  $x \geq 0$ .

**Usage**

```
op_selu(x)
```

**Arguments**

x                    Input tensor.

**Value**

A tensor with the same shape as x.

**Examples**

```
x <- op_array(c(-1, 0, 1))
op_selu(x)
```

```
## tf.Tensor([-1.1113307  0.          1.050701 ], shape=(3), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/nn#selu-function>

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_psnr()
```

```
op_relu()  
op_relu6()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()
```

```
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
```

```
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()
```



```
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()
```

```
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_separable\_conv      *General N-D separable convolution.*

---

### Description

This ops supports 1D and 2D separable convolution. `separable_conv` is a depthwise conv followed by a pointwise conv.

### Usage

```
op_separable_conv(
    inputs,
    depthwise_kernel,
    pointwise_kernel,
    strides = 1L,
    padding = "valid",
    data_format = NULL,
    dilation_rate = 1L
)
```

### Arguments

<code>inputs</code>	Tensor of rank N+2. <code>inputs</code> has shape <code>(batch_size, ) + inputs_spatial_shape + (num_channels, )</code> if <code>data_format="channels_last"</code> , or <code>(batch_size, num_channels) + inputs_spatial_shape</code> if <code>data_format="channels_first"</code> .
<code>depthwise_kernel</code>	Tensor of rank N+2. <code>depthwise_kernel</code> has shape <code>[kernel_spatial_shape, num_input_channels, num_input_channels]</code> . <code>depthwise_kernel</code> should match the number of channels in <code>inputs</code> .
<code>pointwise_kernel</code>	Tensor of rank N+2. <code>pointwise_kernel</code> has shape <code>(*ones_like(kernel_spatial_shape), num_input_channels, num_input_channels)</code> .
<code>strides</code>	int or int tuple/list of <code>len(inputs_spatial_shape)</code> , specifying the strides of the convolution along each spatial dimension. If <code>strides</code> is int, then every spatial dimension shares the same strides.
<code>padding</code>	string, either "valid" or "same". "valid" means no padding is applied, and "same" results in padding evenly to the left/right or up/down of the input such that output has the same height/width dimension as the input when <code>strides=1</code> .
<code>data_format</code>	A string, either "channels_last" or "channels_first". <code>data_format</code> determines the ordering of the dimensions in the inputs. If <code>data_format="channels_last"</code> , <code>inputs</code> is of shape <code>(batch_size, ..., channels)</code> while if <code>data_format="channels_first"</code> , <code>inputs</code> is of shape <code>(batch_size, channels, ...)</code> .
<code>dilation_rate</code>	int or int tuple/list of <code>len(inputs_spatial_shape)</code> , specifying the dilation rate to use for dilated convolution. If <code>dilation_rate</code> is int, then every spatial dimension shares the same <code>dilation_rate</code> .

### Value

A tensor of rank N+2, the result of the depthwise conv operation.

**See Also**

- <https://keras.io/api/ops/nn#separableconv-function>

Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()
```

```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

```
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
```

```
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```



```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_shape

*Gets the shape of the tensor input.*

---

### Description

Gets the shape of the tensor input.

### Usage

```
op_shape(x)
```

### Arguments

x                    A tensor. This function will try to access the shape attribute of the input tensor.

### Value

A list of integers or NULL values, indicating the shape of the input tensor.

### Note

On the TensorFlow backend, when x is a tf.Tensor with dynamic shape, dimensions which are dynamic in the context of a compiled function will have a tf.Tensor value instead of a static integer value.

**Examples**

```
x <- op_zeros(c(8, 12))
op_shape(x)

## shape(8, 12)
```

**See Also**

- <https://keras.io/api/ops/core#shape-function>

Other core ops:

```
op_cast()
op_cond()
op_convert_to_numpy()
op_convert_to_tensor()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_slice()
op_slice_update()
op_stop_gradient()
op_switch()
op_unstack()
op_vectorized_map()
op_while_loop()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
```

```
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
```

```
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()
```

```
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
```

```
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
```

```
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_sigmoid

*Sigmoid activation function.*

---

### Description

It is defined as  $f(x) = 1 / (1 + \exp(-x))$ .

### Usage

```
op_sigmoid(x)
```

### Arguments

x                    Input tensor.

### Value

A tensor with the same shape as x.

### Examples

```
x <- op_convert_to_tensor(c(-6, 1, 0, 1, 6))
op_sigmoid(x)
```

```
## tf.Tensor([0.00247262 0.7310586 0.5        0.7310586 0.99752736], shape=(5), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/nn#sigmoid-function>

Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_silu()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()
```



```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```

```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

```
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()
```

```
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()
```

```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_sign

*Returns a tensor with the signs of the elements of x.*

---

### Description

Returns a tensor with the signs of the elements of x.

### Usage

```
op_sign(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor of same shape as x.

**See Also**

- <https://keras.io/api/ops/numpy#sign-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
```

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()
```

```
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:



op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_silu

*Sigmoid Linear Unit (SiLU) activation function, also known as Swish.*

---

### Description

The SiLU activation function is computed by the sigmoid function multiplied by its input. It is defined as  $f(x) = x * \text{sigmoid}(x)$ .

### Usage

```
op_silu(x)
```

**Arguments**

x                    Input tensor.

**Value**

A tensor with the same shape as x.

**Examples**

```
x <- op_convert_to_tensor(c(-6, 1, 0, 1, 6))
op_sigmoid(x)

## tf.Tensor([0.00247262 0.7310586 0.5        0.7310586 0.99752736], shape=(5), dtype=float32)

op_silu(x)

## tf.Tensor([-0.01483574 0.7310586 0.        0.7310586 5.985164 ], shape=(5), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/nn#silu-function>

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
op_gelu()
op_hard_sigmoid()
op_hard_silu()
op_leaky_relu()
op_log_sigmoid()
op_log_softmax()
op_max_pool()
op_moments()
op_multi_hot()
op_normalize()
op_one_hot()
op_psnr()
op_relu()
op_relu6()
op_selu()
```

```
op_separable_conv()  
op_sigmoid()  
op_softmax()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()
```

```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
```



```
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
```

```
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
```

```
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

**Description**

Trigonometric sine, element-wise.

**Usage**

```
op_sin(x)
```

**Arguments**

x                    Input tensor.

**Value**

Output tensor of same shape as x.

**See Also**

- <https://keras.io/api/ops/numpy#sin-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()
```

```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
```

op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()

```
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()
```

```
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
```



```
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
```

```
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()
```

```
op_sigmoid()
op_sign()
op_silu()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
```

[op\\_zeros\(\)](#)  
[op\\_zeros\\_like\(\)](#)

---

op_sinh	<i>Hyperbolic sine, element-wise.</i>
---------	---------------------------------------

---

### Description

Hyperbolic sine, element-wise.

### Usage

```
op_sinh(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor of same shape as x.

### See Also

- <https://keras.io/api/ops/numpy#sinh-function>

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)  
[op\\_argmin\(\)](#)  
[op\\_argpartition\(\)](#)  
[op\\_argsort\(\)](#)  
[op\\_array\(\)](#)  
[op\\_average\(\)](#)  
[op\\_bincount\(\)](#)

op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()

```
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
```

```
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()
```

```
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
```



```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```

```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()
```

```
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()
```

```
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_size

*Return the number of elements in a tensor.*

---

### Description

Return the number of elements in a tensor.

### Usage

```
op_size(x)
```

### Arguments

x                    Input tensor.

### Value

Number of elements in x.

### See Also

- <https://keras.io/api/ops/numpy#size-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()
```

op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()

```
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
```

op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()

```
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
```



```
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
```

op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()

```
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
```

```

op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_slice

*Return a slice of an input tensor.*


---

### Description

At a high level, this operation is an explicit replacement for array slicing e.g. `inputs[start_indices:(start_indices + shape)]`. Unlike slicing via brackets, this operation will accept tensor start indices on all back-ends, which is useful when indices dynamically computed via other tensor operations.

```

(inputs <- op_arange(5*5) |> op_reshape(c(5, 5)))

## tf.Tensor(
## [[ 0.  1.  2.  3.  4.]
## [ 5.  6.  7.  8.  9.]
## [10. 11. 12. 13. 14.]
## [15. 16. 17. 18. 19.]
## [20. 21. 22. 23. 24.]], shape=(5, 5), dtype=float32)

start_indices <- c(3, 3)
shape <- c(2, 2)
op_slice(inputs, start_indices, shape)

## tf.Tensor(
## [[12. 13.]
## [17. 18.]], shape=(2, 2), dtype=float32)

```

**Usage**

```
op_slice(inputs, start_indices, shape)
```

**Arguments**

inputs	A tensor, the tensor to be sliced.
start_indices	A list of length <code>inputs.ndim</code> , specifying the starting indices for updating.
shape	The full shape of the returned slice.

**Value**

A tensor, has the same shape and dtype as inputs.

**See Also**

- <https://keras.io/api/ops/core#slice-function>

Other core ops:

```
op_cast()  
op_cond()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_custom_gradient()  
op_dtype()  
op_fori_loop()  
op_is_tensor()  
op_map()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_shape()  
op_slice_update()  
op_stop_gradient()  
op_switch()  
op_unstack()  
op_vectorized_map()  
op_while_loop()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()
```

```
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()
```

```
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
```

```
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
```



```
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
```

```

op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op\_slice\_update

*Update an input by slicing in a tensor of updated values.*


---

### Description

At a high level, this operation does `inputs[start_indices: start_indices + updates.shape] = updates`. Assume `inputs` is a tensor of shape  $(D_1, D_2, \dots, D_n)$ , `start_indices` must be a list of  $n$  integers, specifying the starting indices. `updates` must have the same rank as `inputs`, and the size of each dim must not exceed  $D_i - \text{start\_indices}[i]$ . For example, if we have 2D inputs `inputs = op_zeros(c(5, 5))`, and we want to update the intersection of last 2 rows and last 2 columns as 1, i.e., `inputs[4:5, 4:5] = op_ones(c(2, 2))`, then we can use the code below:

```

inputs <- op_zeros(c(5, 5))
start_indices <- c(3, 3)
updates <- op_ones(c(2, 2))
op_slice_update(inputs, start_indices, updates)

## tf.Tensor(
## [[0. 0. 0. 0. 0.]

```

```
## [0. 0. 0. 0. 0.]
## [0. 0. 1. 1. 0.]
## [0. 0. 1. 1. 0.]
## [0. 0. 0. 0. 0.]], shape=(5, 5), dtype=float32)
```

## Usage

```
op_slice_update(inputs, start_indices, updates)
```

## Arguments

inputs	A tensor, the tensor to be updated.
start_indices	A list of length <code>inputs.ndim</code> , specifying the starting indices for updating.
updates	A tensor, the new values to be put to inputs at indices. updates must have the same rank as inputs.

## Value

A tensor, has the same shape and dtype as inputs.

## See Also

- <https://keras.io/api/ops/core#sliceupdate-function>

Other core ops:

```
op_cast()
op_cond()
op_convert_to_numpy()
op_convert_to_tensor()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_shape()
op_slice()
op_stop_gradient()
op_switch()
op_unstack()
op_vectorized_map()
op_while_loop()
```

Other ops:

```
op_abs()
op_add()
```

```
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
```

```
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
```

```
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()
```

```
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
```

```
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_slogdet

*Compute the sign and natural logarithm of the determinant of a matrix.*

---

### **Description**

Compute the sign and natural logarithm of the determinant of a matrix.

### **Usage**

```
op_slogdet(x)
```



**Arguments**

x                      Input matrix. It must 2D and square.

**Value**

A list: (sign, logabsdet). sign is a number representing the sign of the determinant. For a real matrix, this is 1, 0, or -1. For a complex matrix, this is a complex number with absolute value 1 (i.e., it is on the unit circle), or else 0. logabsdet is the natural log of the absolute value of the determinant.

**See Also**

Other linear algebra ops:

[op\\_cholesky\(\)](#)  
[op\\_det\(\)](#)  
[op\\_eig\(\)](#)  
[op\\_eigh\(\)](#)  
[op\\_inv\(\)](#)  
[op\\_lstsq\(\)](#)  
[op\\_lu\\_factor\(\)](#)  
[op\\_norm\(\)](#)  
[op\\_solve\\_triangular\(\)](#)  
[op\\_svd\(\)](#)

Other ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)  
[op\\_argmin\(\)](#)  
[op\\_argpartition\(\)](#)  
[op\\_argsort\(\)](#)  
[op\\_array\(\)](#)  
[op\\_average\(\)](#)  
[op\\_average\\_pool\(\)](#)  
[op\\_batch\\_normalization\(\)](#)  
[op\\_binary\\_crossentropy\(\)](#)  
[op\\_bincount\(\)](#)

```
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
```

```
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
```

```
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()
```

```
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()
```

```
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op_softmax	<i>Softmax activation function.</i>
------------	-------------------------------------

---

### Description

The elements of the output vector lie within the range  $(0, 1)$ , and their total sum is exactly 1 (excluding the floating point rounding error).

Each vector is processed independently. The `axis` argument specifies the axis along which the function is applied within the input.

It is defined as:  $f(x) = \exp(x) / \sum(\exp(x))$

### Usage

```
op_softmax(x, axis = -1L)
```

### Arguments

<code>x</code>	Input tensor.
<code>axis</code>	Integer, axis along which the softmax is applied.

### Value

A tensor with the same shape as `x`.

### Examples

```
x <- op_array(c(-1, 0, 1))  
op_softmax(x)
```

```
## tf.Tensor([0.09003057 0.24472848 0.66524094], shape=(3), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/nn#softmax-function>

Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softplus()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()
```

```
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()
```



```
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
```

```
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()
```

```
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
```

```
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_softplus

*Softplus activation function.*

---

### Description

It is defined as  $f(x) = \log(\exp(x) + 1)$ , where  $\log$  is the natural logarithm and  $\exp$  is the exponential function.

### Usage

```
op_softplus(x)
```

### Arguments

x                    Input tensor.

### Value

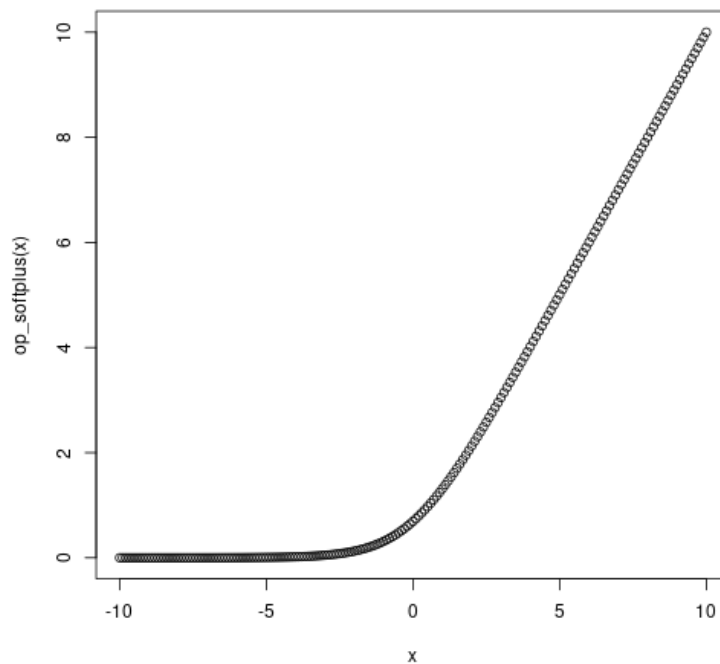
A tensor with the same shape as x.

**Examples**

```
x <- op_convert_to_tensor(c(-0.555, 0, 0.555))
op_softplus(x)

## tf.Tensor([0.45366603 0.6931472  1.008666  ], shape=(3), dtype=float32)

x <- seq(-10, 10, .1)
plot(x, op_softplus(x))
```

**See Also**

- <https://keras.io/api/ops/nn#softplus-function>

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
```

```
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()  
op_one_hot()  
op_psnr()  
op_relu()  
op_relu6()  
op_selu()  
op_separable_conv()  
op_sigmoid()  
op_silu()  
op_softmax()  
op_softsign()  
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()
```

op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()

```
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()
```



`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`

```
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
```

```
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_softsign	<i>Softsign activation function.</i>
-------------	--------------------------------------

---

### Description

It is defined as  $f(x) = x / (\text{abs}(x) + 1)$ .

### Usage

```
op_softsign(x)
```

### Arguments

x                    Input tensor.

### Value

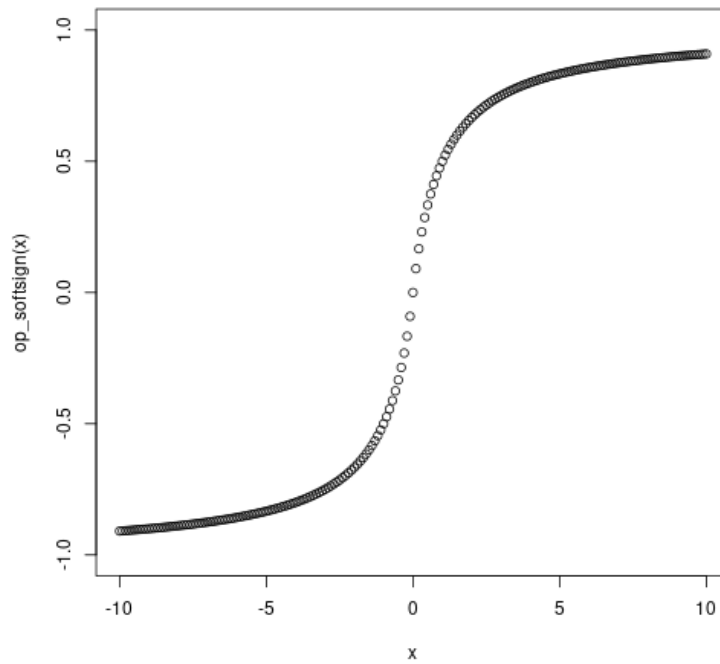
A tensor with the same shape as x.

### Examples

```
x <- op_convert_to_tensor(c(-0.100, -10.0, 1.0, 0.0, 100.0))
op_softsign(x)
```

```
## tf.Tensor([-0.09090909 -0.90909094 0.5            0.            0.990099 ], shape=(5), dtype=float32)
```

```
x <- seq(-10, 10, .1)
plot(x, op_softsign(x), ylim = c(-1, 1))
```

**See Also**

- <https://keras.io/api/ops/nn#softsign-function>

Other nn ops:

```
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_categorical_crossentropy()  
op_conv()  
op_conv_transpose()  
op_ctc_loss()  
op_depthwise_conv()  
op_elu()  
op_gelu()  
op_hard_sigmoid()  
op_hard_silu()  
op_leaky_relu()  
op_log_sigmoid()  
op_log_softmax()  
op_max_pool()  
op_moments()  
op_multi_hot()  
op_normalize()
```

```
op_one_hot()
op_psnr()
op_relu()
op_relu6()
op_selu()
op_separable_conv()
op_sigmoid()
op_silu()
op_softmax()
op_softplus()
op_sparse_categorical_crossentropy()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
```

```
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```

op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()

```
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
```



op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()  
op\_zeros()  
op\_zeros\_like()

---

`op_solve`*Solves a linear system of equations given by  $a x = b$ .*

---

**Description**

Solves for  $x$  in the equation `a %*% x == b`.

**Usage**

```
op_solve(a, b)
```

**Arguments**

`a` A tensor of shape  $(\dots, M, M)$  representing the coefficients matrix.  
`b` A tensor of shape  $(\dots, M)$  or  $(\dots, M, N)$  representing the right-hand side or "dependent variable" matrix.

**Value**

A tensor of shape  $(\dots, M)$  or  $(\dots, M, N)$  representing the solution of the linear system. Returned shape is identical to `b`.

**Examples**

```
a <- op_array(c(1, 2, 4, 5), dtype="float32") |> op_reshape(c(2, 2))
b <- op_array(c(2, 4, 8, 10), dtype="float32") |> op_reshape(c(2, 2))
op_solve(a, b)
```

```
## tf.Tensor(
## [[2. 0.]
## [0. 2.]], shape=(2, 2), dtype=float32)
```

**See Also**

Other math ops:  
[op\\_erf\(\)](#)  
[op\\_erfinv\(\)](#)  
[op\\_extract\\_sequences\(\)](#)  
[op\\_fft\(\)](#)  
[op\\_fft2\(\)](#)  
[op\\_in\\_top\\_k\(\)](#)  
[op\\_irfft\(\)](#)  
[op\\_istft\(\)](#)  
[op\\_logsumexp\(\)](#)  
[op\\_qr\(\)](#)  
[op\\_rfft\(\)](#)

```
op_rsqrt()  
op_segment_max()  
op_segment_sum()  
op_stft()  
op_top_k()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()
```

```
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
```

```
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
```

```
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
```

```
op_softmax()  
op_softplus()  
op_softsign()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_solve\_triangular     *Solves a linear system of equations given by  $a \cdot x = b$ .*

---

**Description**

Solves a linear system of equations given by  $a \cdot x = b$ .

**Usage**

```
op_solve_triangular(a, b, lower = FALSE)
```

**Arguments**

a	A tensor of shape $(\dots, M, M)$ representing the coefficients matrix.
b	A tensor of shape $(\dots, M)$ or $(\dots, M, N)$ representing the right-hand side or "dependent variable" matrix.
lower	logical. Use only data contained in the lower triangle of a. Default is to use upper triangle.

**Value**

A tensor of shape  $(\dots, M)$  or  $(\dots, M, N)$  representing the solution of the linear system. Returned shape is identical to b.

**See Also**

Other linear algebra ops:

- [op\\_cholesky\(\)](#)
- [op\\_det\(\)](#)
- [op\\_eig\(\)](#)
- [op\\_eigh\(\)](#)
- [op\\_inv\(\)](#)
- [op\\_lstsq\(\)](#)
- [op\\_lu\\_factor\(\)](#)
- [op\\_norm\(\)](#)
- [op\\_slogdet\(\)](#)
- [op\\_svd\(\)](#)

Other ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)



```
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()
```

```
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
```

`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_log_sigmoid()`  
`op_log_softmax()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`

```
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
```

```
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_sort

*Sorts the elements of x along a given axis in ascending order.*

---

### Description

Sorts the elements of `x` along a given axis in ascending order.

### Usage

```
op_sort(x, axis = -1L)
```

### Arguments

<code>x</code>	Input tensor.
<code>axis</code>	Axis along which to sort. If NULL, the tensor is flattened before sorting. Defaults to -1; the last axis.

### Value

Sorted tensor.

**See Also**

- <https://keras.io/api/ops/numpy#sort-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
```

op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:



```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
```

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sparse_categorical_crossentropy()  
op_split()
```

```
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_var()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_sparse\_categorical\_crossentropy

*Computes sparse categorical cross-entropy loss.*

---

### Description

The sparse categorical cross-entropy loss is similar to categorical cross-entropy, but it is used when the target tensor contains integer class labels instead of one-hot encoded vectors. It measures the dissimilarity between the target and output probabilities or logits.

**Usage**

```
op_sparse_categorical_crossentropy(
  target,
  output,
  from_logits = FALSE,
  axis = -1L
)
```

**Arguments**

target	The target tensor representing the true class labels as integers. Its shape should match the shape of the output tensor except for the last dimension.
output	The output tensor representing the predicted probabilities or logits. Its shape should match the shape of the target tensor except for the last dimension.
from_logits	(optional) Whether output is a tensor of logits or probabilities. Set it to TRUE if output represents logits; otherwise, set it to FALSE if output represents probabilities. Defaults to FALSE.
axis	(optional) The axis along which the sparse categorical cross-entropy is computed. Defaults to -1, which corresponds to the last dimension of the tensors.

**Value**

Integer tensor: The computed sparse categorical cross-entropy loss between target and output.

**Examples**

```
target <- op_array(c(0, 1, 2), dtype="int32")
output <- op_array(rbind(c(0.9, 0.05, 0.05),
                        c(0.1, 0.8, 0.1),
                        c(0.2, 0.3, 0.5)))
op_sparse_categorical_crossentropy(target, output)

## tf.Tensor([0.10536052 0.22314355 0.69314718], shape=(3), dtype=float64)
```

**See Also**

- [https://keras.io/api/ops/nn#sparsecategorical\\_crossentropy-function](https://keras.io/api/ops/nn#sparsecategorical_crossentropy-function)

Other nn ops:

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_categorical_crossentropy()
op_conv()
op_conv_transpose()
op_ctc_loss()
op_depthwise_conv()
op_elu()
```

`op_gelu()`  
`op_hard_sigmoid()`  
`op_hard_silu()`  
`op_leaky_relu()`  
`op_log_sigmoid()`  
`op_log_softmax()`  
`op_max_pool()`  
`op_moments()`  
`op_multi_hot()`  
`op_normalize()`  
`op_one_hot()`  
`op_psnr()`  
`op_relu()`  
`op_relu6()`  
`op_selu()`  
`op_separable_conv()`  
`op_sigmoid()`  
`op_silu()`  
`op_softmax()`  
`op_softplus()`  
`op_softsign()`

Other ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_average_pool()`  
`op_batch_normalization()`  
`op_binary_crossentropy()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_cast()`

```
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()
```



```
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()
```

`op_logsumexp()`  
`op_lstsq()`  
`op_lu_factor()`  
`op_map()`  
`op_matmul()`  
`op_max()`  
`op_max_pool()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moments()`  
`op_moveaxis()`  
`op_multi_hot()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrt()`  
`op_scan()`  
`op_scatter()`

```
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
```

```
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_split	<i>Split a tensor into chunks.</i>
----------	------------------------------------

---

### Description

Split a tensor into chunks.

### Usage

```
op_split(x, indices_or_sections, axis = 1L)
```

### Arguments

x	Input tensor.
indices_or_sections	If an integer, N, the tensor will be split into N equal sections along axis. If a 1-D array of sorted integers, the entries indicate indices at which the tensor will be split along axis.
axis	Axis along which to split. Defaults to 1, the first axis.

### Value

A list of tensors.

### Note

A split does not have to result in equal division when using Torch backend.

### See Also

- <https://keras.io/api/ops/numpy#split-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
```

op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()

```
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
```

op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()

```
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
```



```
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
```

```
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
```

```
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
```

```
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_sqrt

*Return the non-negative square root of a tensor, element-wise.*

---

### Description

Return the non-negative square root of a tensor, element-wise.

### Usage

```
op_sqrt(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor, the non-negative square root of x.

**See Also**

- <https://keras.io/api/ops/numpy#sqrt-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()
```

op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()
```



```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
```

```
op_split()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_square

*Return the element-wise square of the input.*

---

### **Description**

Return the element-wise square of the input.

### **Usage**

```
op_square(x)
```

**Arguments**

x                    Input tensor.

**Value**

Output tensor, the square of x.

**See Also**

- <https://keras.io/api/ops/numpy#square-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()

```
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
```

op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()

op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()



```
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
```

```
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
```

```
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
```

```
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

**Description**

Remove axes of length one from  $x$ .

**Usage**

```
op_squeeze(x, axis = NULL)
```

**Arguments**

<code>x</code>	Input tensor.
<code>axis</code>	Select a subset of the entries of length one in the shape.

**Value**

The input tensor with all or a subset of the dimensions of length 1 removed.

**See Also**

- <https://keras.io/api/ops/numpy#squeeze-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()
```

```
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
```

```
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
```

```
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()
```



```
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
```

```
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
```

op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrt()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()

```
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
```

[op\\_while\\_loop\(\)](#)  
[op\\_zeros\(\)](#)  
[op\\_zeros\\_like\(\)](#)

---

op\_stack

*Join a sequence of tensors along a new axis.*

---

### Description

The axis parameter specifies the index of the new axis in the dimensions of the result.

### Usage

```
op_stack(x, axis = 1L)
```

### Arguments

x	A sequence of tensors.
axis	Axis along which to stack. Defaults to 1, the first axis.

### Value

The stacked tensor.

### See Also

- <https://keras.io/api/ops/numpy#stack-function>

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)  
[op\\_argmin\(\)](#)  
[op\\_argpartition\(\)](#)  
[op\\_argsort\(\)](#)  
[op\\_array\(\)](#)

```
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_einsum()  
op_empty()  
op_equal()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()
```

```
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()
```

```
op_sqrt()  
op_square()  
op_squeeze()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()
```



```
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()
```

```
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
```

op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()

```
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
```

```
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_std

*Compute the standard deviation along the specified axis.*

---

### Description

Compute the standard deviation along the specified axis.

### Usage

```
op_std(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	Axis along which to compute standard deviation. Default is to compute the standard deviation of the flattened tensor.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one.

### Value

Output tensor containing the standard deviation values.

### See Also

- <https://keras.io/api/ops/numpy#std-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
```

op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()

op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()

op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()



```
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
```

```
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
```

```
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
```

```
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_stft()
op_stop_gradient()
op_subtract()
```

```
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_stft

*Short-Time Fourier Transform along the last axis of the input.*

---

### Description

The STFT computes the Fourier transform of short overlapping windows of the input. This giving frequency components of the signal as they change over time.

### Usage

```
op_stft(  
    x,  
    sequence_length,  
    sequence_stride,  
    fft_length,  
    window = "hann",  
    center = TRUE  
)
```

**Arguments**

x	Input tensor.
sequence_length	An integer representing the sequence length.
sequence_stride	An integer representing the sequence hop size.
fft_length	An integer representing the size of the FFT to apply. If not specified, uses the smallest power of 2 enclosing sequence_length.
window	A string, a tensor of the window or NULL. If window is a string, available values are "hann" and "hamming". If window is a tensor, it will be used directly as the window and its length must be sequence_length. If window is NULL, no windowing is used. Defaults to "hann".
center	Whether to pad x on both sides so that the t-th sequence is centered at time $t * \text{sequence\_stride}$ . Otherwise, the t-th sequence begins at time $t * \text{sequence\_stride}$ . Defaults to TRUE.

**Value**

A list containing two tensors - the real and imaginary parts of the STFT output.

**Examples**

```
x <- op_array(c(0, 1, 2, 3, 4))
op_stft(x, 3, 2, 3)

## [[1]]
## tf.Tensor(
## [[ 0.  0.]
## [ 2. -1.]
## [ 4. -2.]], shape=(3, 2), dtype=float32)
##
## [[2]]
## tf.Tensor(
## [[ 0.      0.      ]
## [ 0.      -1.7320508]
## [ 0.      -3.4641016]], shape=(3, 2), dtype=float32)
```

**See Also**

- <https://keras.io/api/ops/fft#stft-function>

Other math ops:

```
op_erf()
op_erfinv()
op_extract_sequences()
op_fft()
op_fft2()
```

```
op_in_top_k()  
op_irfft()  
op_istft()  
op_logsumexp()  
op_qr()  
op_rfft()  
op_rsqrt()  
op_segment_max()  
op_segment_sum()  
op_solve()  
op_top_k()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```

```
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```



op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()

```
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
```

```
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_stop_gradient	<i>Stops gradient computation.</i>
------------------	------------------------------------

---

**Description**

Stops gradient computation.

**Usage**

```
op_stop_gradient(variable)
```

**Arguments**

variable      A tensor variable for which the gradient computation is to be disabled.

**Value**

The variable with gradient computation disabled.

**Examples**

```
var <- op_convert_to_tensor(c(1, 2, 3), dtype="float32")
var <- op_stop_gradient(var)
```

**See Also**

- <https://keras.io/api/ops/core#stopgradient-function>

Other core ops:

```
op_cast()
op_cond()
op_convert_to_numpy()
op_convert_to_tensor()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_shape()
op_slice()
op_slice_update()
op_switch()
op_unstack()
op_vectorized_map()
```

op\_while\_loop()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()

```
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
```

```
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()
```

```
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
```



```
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_subtract

*Subtract arguments element-wise.*

---

### Description

Note that this function is automatically called when using the R operator - with a tensor.

```
x <- op_ones(c(3))
op_subtract(x, x)
```

```
## tf.Tensor([0. 0. 0.], shape=(3), dtype=float32)

x - x

## tf.Tensor([0. 0. 0.], shape=(3), dtype=float32)
```

### Usage

```
op_subtract(x1, x2)
```

### Arguments

x1	First input tensor.
x2	Second input tensor.

### Value

Output tensor, element-wise difference of x1 and x2.

### See Also

- <https://keras.io/api/ops/numpy#subtract-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
```

`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`  
`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_einsum()`  
`op_empty()`  
`op_equal()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`  
`op_full_like()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_logaddexp()`  
`op_logical_and()`

```
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_sum()
```

```
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

**Other ops:**

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()
```

```
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
```

```
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
```

```
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()
```



```
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
```

`op_vectorize()`  
`op_vectorized_map()`  
`op_vstack()`  
`op_where()`  
`op_while_loop()`  
`op_zeros()`  
`op_zeros_like()`

---

op\_sum

*Sum of a tensor over the given axes.*

---

### Description

Sum of a tensor over the given axes.

### Usage

```
op_sum(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	Axis or axes along which the sum is computed. The default is to compute the sum of the flattened tensor.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one.

### Value

Output tensor containing the sum.

### See Also

- <https://keras.io/api/ops/numpy#sum-function>

Other numpy ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`

op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()

```
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
```

```
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
```

```
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
```

```
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
```

```
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()
```



```
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
```

```
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_svd

*Computes the singular value decomposition of a matrix.*

---

### Description

Computes the singular value decomposition of a matrix.

### Usage

```
op_svd(x, full_matrices = TRUE, compute_uv = TRUE)
```

### Arguments

x	Input tensor of shape (... , M, N).
full_matrices	Logical
compute_uv	Logical

### Value

A list of three tensors:

- a tensor of shape (... , M, M) containing the left singular vectors,
- a tensor of shape (... , M, N) containing the singular values and
- a tensor of shape (... , N, N) containing the right singular vectors.

**See Also**

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/ops/sgd](https://www.tensorflow.org/api_docs/python/tf/keras/ops/sgd)

Other linear algebra ops:

```
op_cholesky()  
op_det()  
op_eig()  
op_eigh()  
op_inv()  
op_lstsq()  
op_lu_factor()  
op_norm()  
op_slogdet()  
op_solve_triangular()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()
```

```
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()
```

```
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
```

```
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()
```

```
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
```

[op\\_zeros\(\)](#)  
[op\\_zeros\\_like\(\)](#)

---

op\_swapaxes      *Interchange two axes of a tensor.*

---

### Description

Interchange two axes of a tensor.

### Usage

```
op_swapaxes(x, axis1, axis2)
```

### Arguments

x	Input tensor.
axis1	First axis.
axis2	Second axis.

### Value

A tensor with the axes swapped.

### See Also

- <https://keras.io/api/ops/numpy#swapaxes-function>

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)  
[op\\_argmin\(\)](#)  
[op\\_argpartition\(\)](#)  
[op\\_argsort\(\)](#)  
[op\\_array\(\)](#)



op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()

```
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()
```

```
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
```

```
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()
```

```
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
```

```
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
```

```
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
```

```
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_switch

*Apply exactly one of the branches given by index.*

---

### Description

If `index` is out of bounds, it is clamped to within bounds.

The semantics of `switch` are given roughly by this implementation:

```
op_switch <- function(index, branches, ...) {
  index <- op_clip(index, 1, length(branches))
  branches[[index]](...)
}
```

### Usage

```
op_switch(index, branches, ...)
```

### Arguments

<code>index</code>	An integer scalar indicating which branch function to apply (1-based).
<code>branches</code>	A list of functions to be applied based on <code>index</code> .
<code>...</code>	Inputs to whichever branch is applied.

### Value

The outputs of `branch(...)` for the branch that was selected based on `index`.



**Examples**

```
add_fn <- function(x, y) x + y
subtract_fn <- function(x, y) x - y
x <- op_array(2.0)
y <- op_array(0.5)
branches <- list(add_fn, subtract_fn)
op_switch(1, branches, x, y)

## tf.Tensor(2.5, shape=(), dtype=float32)

op_switch(2, branches, x, y)

## tf.Tensor(1.5, shape=(), dtype=float32)
```

**See Also**

Other core ops:

```
op_cast()
op_cond()
op_convert_to_numpy()
op_convert_to_tensor()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_shape()
op_slice()
op_slice_update()
op_stop_gradient()
op_unstack()
op_vectorized_map()
op_while_loop()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
```

```
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
```

```
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
```

```
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
```

```
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
```

```
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_take

*Take elements from a tensor along an axis.*

---

### Description

Take elements from a tensor along an axis.

### Usage

```
op_take(x, indices, axis = NULL)
```

### Arguments

x	Source tensor.
indices	The indices of the values to extract.
axis	The axis over which to select values. By default, the flattened input tensor is used.

**Value**

The corresponding tensor of values.

**See Also**

- <https://keras.io/api/ops/numpy#take-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()

```
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
```



```
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
```

op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()

```
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
```

```
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()
```

```
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
```

```
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_take_along_axis	Select values from x at the 1-D indices along the given axis.
--------------------	---

---

**Description**

Select values from x at the 1-D indices along the given axis.

**Usage**

```
op_take_along_axis(x, indices, axis = NULL)
```

**Arguments**

x	Source tensor.
indices	The indices of the values to extract.
axis	The axis over which to select values. By default, the flattened input tensor is used.

**Value**

The corresponding tensor of values.

**See Also**

- <https://keras.io/api/ops/numpy#takealongaxis-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()
```

```
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
```



`op_max()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`  
`op_minimum()`  
`op_mod()`  
`op_moveaxis()`  
`op_multiply()`  
`op_nan_to_num()`  
`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`

```
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()
```

```
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()
```

```
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
```

```
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()
```

```
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
```

[op\\_zeros\\_like\(\)](#)

---

op_tan	<i>Compute tangent, element-wise.</i>
--------	---------------------------------------

---

### Description

Compute tangent, element-wise.

### Usage

```
op_tan(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor of same shape as x.

### See Also

- <https://keras.io/api/ops/numpy#tan-function>

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)  
[op\\_argmin\(\)](#)  
[op\\_argpartition\(\)](#)  
[op\\_argsort\(\)](#)  
[op\\_array\(\)](#)  
[op\\_average\(\)](#)  
[op\\_bincount\(\)](#)  
[op\\_broadcast\\_to\(\)](#)

op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()



op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()

```
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()
```

```
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
```

```
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
```

op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrt()  
op\_scan()

```
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
```

```
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_tanh	<i>Hyperbolic tangent, element-wise.</i>
---------	--

---

### Description

Hyperbolic tangent, element-wise.

### Usage

```
op_tanh(x)
```

### Arguments

x                    Input tensor.

### Value

Output tensor of same shape as x.

### See Also

- <https://keras.io/api/ops/nn#tanh-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
```

op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()



op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()

op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()

```
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
```

```
op_erf()  
op_erfinv()  
op_exp()  
op_expand_dims()  
op_expm1()  
op_extract_sequences()  
op_eye()  
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()
```

op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()

```
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
```

```
op_tan()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_tensordot

*Compute the tensor dot product along specified axes.*

---

### Description

Compute the tensor dot product along specified axes.

### Usage

```
op_tensordot(x1, x2, axes = 3L)
```

### Arguments

x1	First tensor.
x2	Second tensor.
axes	<ul style="list-style-type: none"><li>• If an integer, N, sum over the last N axes of x1 and the first N axes of x2 in order. The sizes of the corresponding axes must match.</li><li>• Or, a list of axes to be summed over, first sequence applying to x1, second to x2. Both sequences must be of the same length.</li></ul>

### Value

The tensor dot product of the inputs.

**See Also**

- <https://keras.io/api/ops/numpy#tensordot-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()



```
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
```

op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()
```

```
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_tile

*Repeat x the number of times given by repeats.*

---

### **Description**

If repeats has length d, the result will have dimension of  $\max(d, x.\text{ndim})$ .

If  $x.\text{ndim} < d$ , x is promoted to be d-dimensional by prepending new axes.

If  $x.\text{ndim} > d$ , repeats is promoted to  $x.\text{ndim}$  by prepending 1's to it.

**Usage**

```
op_tile(x, repeats)
```

**Arguments**

x	Input tensor.
repeats	The number of repetitions of x along each axis.

**Value**

The tiled output tensor.

**See Also**

- <https://keras.io/api/ops/numpy#tile-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()
```



```
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
```

```
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_trace()
```

```
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()
```

```
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
```

op\_hard\_silu()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_image\_affine\_transform()  
op\_image\_crop()  
op\_image\_extract\_patches()  
op\_image\_hsv\_to\_rgb()  
op\_image\_map\_coordinates()  
op\_image\_pad()  
op\_image\_resize()  
op\_image\_rgb\_to\_grayscale()  
op\_image\_rgb\_to\_hsv()  
op\_in\_top\_k()  
op\_inv()  
op\_irfft()  
op\_is\_tensor()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_istft()  
op\_leaky\_relu()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_log\_sigmoid()  
op\_log\_softmax()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()

```
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
```

op\_sin()  
op\_sinh()  
op\_size()  
op\_slice()  
op\_slice\_update()  
op\_slogdet()  
op\_softmax()  
op\_softplus()  
op\_softsign()  
op\_solve()  
op\_solve\_triangular()  
op\_sort()  
op\_sparse\_categorical\_crossentropy()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_stft()  
op\_stop\_gradient()  
op\_subtract()  
op\_sum()  
op\_svd()  
op\_swapaxes()  
op\_switch()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_top\_k()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_unstack()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vectorized\_map()  
op\_vstack()  
op\_where()  
op\_while\_loop()  
op\_zeros()  
op\_zeros\_like()

---

op\_top\_k

*Finds the top-k values and their indices in a tensor.*


---

**Description**

Finds the top-k values and their indices in a tensor.

**Usage**

```
op_top_k(x, k, sorted = TRUE)
```

**Arguments**

x	Input tensor.
k	An integer representing the number of top elements to retrieve.
sorted	A boolean indicating whether to sort the output in descending order. Defaults to TRUE.

**Value**

A list containing two tensors. The first tensor contains the top-k values, and the second tensor contains the indices of the top-k values in the input tensor.

**Examples**

```
x <- op_array(c(5, 2, 7, 1, 9, 3), "int32")
op_top_k(x, k = 3)

## $values
## tf.Tensor([9 7 5], shape=(3), dtype=int32)
##
## $indices
## tf.Tensor([4 2 0], shape=(3), dtype=int32)

c(values, indices) %<-% op_top_k(x, k = 3)
values

## tf.Tensor([9 7 5], shape=(3), dtype=int32)

indices

## tf.Tensor([4 2 0], shape=(3), dtype=int32)
```



**See Also**

- <https://keras.io/api/ops/core#topk-function>

Other math ops:

op\_erf()  
op\_erfinv()  
op\_extract\_sequences()  
op\_fft()  
op\_fft2()  
op\_in\_top\_k()  
op\_irfft()  
op\_istft()  
op\_logsumexp()  
op\_qr()  
op\_rfft()  
op\_rsqr()  
op\_segment\_max()  
op\_segment\_sum()  
op\_solve()  
op\_stft()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()

```
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
```

```
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
```

```
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
```

```
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
```

```
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_trace

*Return the sum along diagonals of the tensor.*

---

### Description

If  $x$  is 2-D, the sum along its diagonal with the given offset is returned, i.e., the sum of elements  $x[i, i+offset]$  for all  $i$ .

If  $x$  has more than two dimensions, then the axes specified by `axis1` and `axis2` are used to determine the 2-D sub-arrays whose traces are returned.

The shape of the resulting tensor is the same as that of  $x$  with `axis1` and `axis2` removed.

### Usage

```
op_trace(x, offset = 0L, axis1 = 1L, axis2 = 2L)
```

### Arguments

<code>x</code>	Input tensor.
<code>offset</code>	Offset of the diagonal from the main diagonal. Can be both positive and negative. Defaults to 0.
<code>axis1</code>	Axis to be used as the first axis of the 2-D sub-arrays. Defaults to 1. (first axis).
<code>axis2</code>	Axis to be used as the second axis of the 2-D sub-arrays. Defaults to 2. (second axis).

### Value

If  $x$  is 2-D, the sum of the diagonal is returned. If  $x$  has larger dimensions, then a tensor of sums along diagonals is returned.

### See Also

- <https://keras.io/api/ops/numpy#trace-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
```

op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()

```
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
```



```
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
```

```
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
```

```
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
```

```
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
```

```
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
```

```
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_transpose

*Returns a tensor with axes transposed.*

---

### Description

Returns a tensor with axes transposed.

### Usage

```
op_transpose(x, axes = NULL)
```

### Arguments

x	Input tensor.
axes	Sequence of integers. Permutation of the dimensions of x. By default, the order of the axes are reversed.

**Value**

x with its axes permuted.

**See Also**

- <https://keras.io/api/ops/numpy#transpose-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_cumprod()  
op_cumsum()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()
```

```
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
```



`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_not_equal()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_repeat()`  
`op_reshape()`  
`op_roll()`  
`op_round()`  
`op_select()`  
`op_sign()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_sort()`  
`op_split()`  
`op_sqrt()`  
`op_square()`  
`op_squeeze()`  
`op_stack()`  
`op_std()`  
`op_subtract()`  
`op_sum()`  
`op_swapaxes()`  
`op_take()`  
`op_take_along_axis()`  
`op_tan()`  
`op_tanh()`  
`op_tensordot()`  
`op_tile()`  
`op_trace()`  
`op_tri()`  
`op_tril()`  
`op_triu()`  
`op_var()`  
`op_vdot()`  
`op_vectorize()`  
`op_vstack()`  
`op_where()`

op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()

```
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
```

```
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()
```

`op_ndim()`  
`op_negative()`  
`op_nonzero()`  
`op_norm()`  
`op_normalize()`  
`op_not_equal()`  
`op_one_hot()`  
`op_ones()`  
`op_ones_like()`  
`op_outer()`  
`op_pad()`  
`op_power()`  
`op_prod()`  
`op_psnr()`  
`op_qr()`  
`op_quantile()`  
`op_ravel()`  
`op_real()`  
`op_reciprocal()`  
`op_relu()`  
`op_relu6()`  
`op_repeat()`  
`op_reshape()`  
`op_rfft()`  
`op_roll()`  
`op_round()`  
`op_rsqrtd()`  
`op_scan()`  
`op_scatter()`  
`op_scatter_update()`  
`op_segment_max()`  
`op_segment_sum()`  
`op_select()`  
`op_selu()`  
`op_separable_conv()`  
`op_shape()`  
`op_sigmoid()`  
`op_sign()`  
`op_silu()`  
`op_sin()`  
`op_sinh()`  
`op_size()`  
`op_slice()`  
`op_slice_update()`  
`op_slogdet()`  
`op_softmax()`  
`op_softplus()`  
`op_softsign()`

```
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_tri

*Return a tensor with ones at and below a diagonal and zeros elsewhere.*

---

### **Description**

Return a tensor with ones at and below a diagonal and zeros elsewhere.

**Usage**

```
op_tri(N, M = NULL, k = 0L, dtype = NULL)
```

**Arguments**

N	Number of rows in the tensor.
M	Number of columns in the tensor.
k	The sub-diagonal at and below which the array is filled. $k = 0$ is the main diagonal, while $k < 0$ is below it, and $k > 0$ is above. The default is 0.
dtype	Data type of the returned tensor. The default is "float32".

**Value**

Tensor with its lower triangle filled with ones and zeros elsewhere.  $T[i, j] == 1$  for  $j \leq i + k$ , 0 otherwise.

**See Also**

- <https://keras.io/api/ops/numpy#tri-function>

Other numpy ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_bincount()  
op_broadcast_to()  
op_ceil()  
op_clip()  
op_concatenate()  
op_conj()  
op_copy()  
op_correlate()
```

op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()  
op\_get\_item()  
op\_greater()  
op\_greater\_equal()  
op\_hstack()  
op\_identity()  
op\_imag()  
op\_isclose()  
op\_isfinite()  
op\_isinf()  
op\_isnan()  
op\_less()  
op\_less\_equal()  
op\_linspace()  
op\_log()  
op\_log10()  
op\_log1p()  
op\_log2()  
op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()



op\_logspace()  
op\_lstsq()  
op\_matmul()  
op\_max()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moveaxis()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_not\_equal()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()

```
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_where()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()
```

op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_dtype()  
op\_eig()  
op\_eigh()  
op\_einsum()  
op\_elu()  
op\_empty()  
op\_equal()  
op\_erf()  
op\_erfinv()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_extract\_sequences()  
op\_eye()  
op\_fft()  
op\_fft2()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_fori\_loop()  
op\_full()  
op\_full\_like()

```
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
```

op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqr()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()

```
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
```

```
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_tril	<i>Return lower triangle of a tensor.</i>
---------	---

---

### Description

For tensors with ndim exceeding 2, tril will apply to the final two axes.

### Usage

```
op_tril(x, k = 0L)
```

### Arguments

x	Input tensor.
k	Diagonal above which to zero elements. Defaults to 0. the main diagonal. $k < 0$ is below it, and $k > 0$ is above it.

### Value

Lower triangle of x, of same shape and data type as x.

### See Also

- <https://keras.io/api/ops/numpy#tril-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
```

```
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
```



```
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_repeat()
op_reshape()
op_roll()
op_round()
op_select()
op_sign()
op_sin()
op_sinh()
op_size()
```

op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()

```
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
```

```
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
```

op\_logaddexp()  
op\_logical\_and()  
op\_logical\_not()  
op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()

```
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()  
op_stop_gradient()  
op_subtract()  
op_sum()  
op_svd()  
op_swapaxes()  
op_switch()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()
```

```
op_top_k()
op_trace()
op_transpose()
op_tri()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_triu

*Return upper triangle of a tensor.*

---

### Description

For tensors with ndim exceeding 2, triu will apply to the final two axes.

### Usage

```
op_triu(x, k = 0L)
```

### Arguments

x	Input tensor.
k	Diagonal below which to zero elements. Defaults to 0. the main diagonal. $k < 0$ is below it, and $k > 0$ is above it.

### Value

Upper triangle of x, of same shape and data type as x.

### See Also

- <https://keras.io/api/ops/numpy#triu-function>

Other numpy ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
```

op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()  
op\_floor\_divide()  
op\_full()  
op\_full\_like()



```
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_quantile()
op_ravel()
```

op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()

op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()

```
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
```

```
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
```

```
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
```

```
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op_unstack	<i>Unpacks the given dimension of a rank-R tensor into rank-(R-1) tensors.</i>
------------	--

---

### Description

Unpacks the given dimension of a rank-R tensor into rank-(R-1) tensors.

### Usage

```
op_unstack(x, num = NULL, axis = 1L)
```

### Arguments

x	The input tensor.
num	The length of the dimension axis. Automatically inferred if NULL.
axis	The axis along which to unpack.

**Value**

A list of tensors unpacked along the given axis.

**Examples**

```
x <- op_array(rbind(c(1, 2),
                    c(3, 4)))
op_unstack(x, axis=1)

## [[1]]
## tf.Tensor([1. 2.], shape=(2), dtype=float64)
##
## [[2]]
## tf.Tensor([3. 4.], shape=(2), dtype=float64)

op_unstack(x, axis=2)

## [[1]]
## tf.Tensor([1. 3.], shape=(2), dtype=float64)
##
## [[2]]
## tf.Tensor([2. 4.], shape=(2), dtype=float64)

all.equal(op_unstack(x),
          op_unstack(x, axis = 1))

## [1] TRUE

all.equal(op_unstack(x, axis = -1),
          op_unstack(x, axis = 2))

## [1] TRUE

# [array([1, 2]), array([3, 4])]
[3, 4]): R:3,%204))
```

**See Also**

Other core ops:

[op\\_cast\(\)](#)

[op\\_cond\(\)](#)

[op\\_convert\\_to\\_numpy\(\)](#)

[op\\_convert\\_to\\_tensor\(\)](#)



```
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_shape()
op_slice()
op_slice_update()
op_stop_gradient()
op_switch()
op_vectorized_map()
op_while_loop()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
```

```
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
```

```
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
```

```
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrt()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()
```

```
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
```

[op\\_while\\_loop\(\)](#)  
[op\\_zeros\(\)](#)  
[op\\_zeros\\_like\(\)](#)

---

op_var	<i>Compute the variance along the specified axes.</i>
--------	---

---

### Description

Compute the variance along the specified axes.

### Usage

```
op_var(x, axis = NULL, keepdims = FALSE)
```

### Arguments

x	Input tensor.
axis	Axis or axes along which the variance is computed. The default is to compute the variance of the flattened tensor.
keepdims	If this is set to TRUE, the axes which are reduced are left in the result as dimensions with size one.

### Value

Output tensor containing the variance.

### See Also

- <https://keras.io/api/ops/numpy#var-function>

Other numpy ops:

[op\\_abs\(\)](#)  
[op\\_add\(\)](#)  
[op\\_all\(\)](#)  
[op\\_any\(\)](#)  
[op\\_append\(\)](#)  
[op\\_arange\(\)](#)  
[op\\_arccos\(\)](#)  
[op\\_arccosh\(\)](#)  
[op\\_arcsin\(\)](#)  
[op\\_arcsinh\(\)](#)  
[op\\_arctan\(\)](#)  
[op\\_arctan2\(\)](#)  
[op\\_arctanh\(\)](#)  
[op\\_argmax\(\)](#)  
[op\\_argmin\(\)](#)

```
op_argpartition()
op_argsort()
op_array()
op_average()
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
```

```
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()
```



```
op_size()
op_sort()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_subtract()
op_sum()
op_swapaxes()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
```

```
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()  
op_det()  
op_diag()  
op_diagonal()  
op_diff()  
op_digitize()  
op_divide()  
op_divide_no_nan()  
op_dot()  
op_dtype()  
op_eig()  
op_eigh()  
op_einsum()  
op_elu()  
op_empty()  
op_equal()  
op_erf()  
op_erfinv()  
op_exp()
```

```
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
```

```
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()
```

```
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
```

```
op_tile()  
op_top_k()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_unstack()  
op_vdot()  
op_vectorize()  
op_vectorized_map()  
op_vstack()  
op_where()  
op_while_loop()  
op_zeros()  
op_zeros_like()
```

---

op\_vdot

*Return the dot product of two vectors.*

---

### Description

If the first argument is complex, the complex conjugate of the first argument is used for the calculation of the dot product.

Multidimensional tensors are flattened before the dot product is taken.

### Usage

```
op_vdot(x1, x2)
```

### Arguments

x1	First input tensor. If complex, its complex conjugate is taken before calculation of the dot product.
x2	Second input tensor.

### Value

Output tensor.

### See Also

- <https://keras.io/api/ops/numpy#vdot-function>

Other numpy ops:

```
op_abs()  
op_add()
```

op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()  
op\_expand\_dims()  
op\_expm1()  
op\_eye()  
op\_flip()  
op\_floor()

```
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moveaxis()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_not_equal()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
```



op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()

op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()  
op\_det()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()

```
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
```

```
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
```

```
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()
```

```
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_vectorize

*Turn a function into a vectorized function.*

---

### **Description**

Turn a function into a vectorized function.

### **Usage**

```
op_vectorize(func, ..., excluded = NULL, signature = NULL)
```

### **Arguments**

func	Callable of a single tensor argument.
...	For forward/backward compatability.

excluded	Optional set of integers representing positional arguments for which the function will not be vectorized. These will be passed directly to func unmodified.
signature	Optional generalized universal function signature, e.g., "(m,n),(n)->(m)" for vectorized matrix-vector multiplication. If provided, func will be called with (and expected to return) arrays with shapes given by the size of corresponding core dimensions. By default, func is assumed to take scalar tensors as input and output.

### Value

A new function that applies func to every element of its input along axis 1 (the batch axis, the first axis).

### Examples

```
# currently does not work w/ tensorflow backend
if(config_backend() != "tensorflow") {

  myfunc <- function(a, b) a + b

  vfunc <- op_vectorize(myfunc)
  y <- vfunc(c(1, 2, 3, 4), 2)
  print(y)
  # with Jax backend, y is:
  # Array([3., 4., 5., 6.], dtype=float32)
}
```

### See Also

Other numpy ops:

- [op\\_abs\(\)](#)
- [op\\_add\(\)](#)
- [op\\_all\(\)](#)
- [op\\_any\(\)](#)
- [op\\_append\(\)](#)
- [op\\_arange\(\)](#)
- [op\\_arccos\(\)](#)
- [op\\_arccosh\(\)](#)
- [op\\_arcsin\(\)](#)
- [op\\_arcsinh\(\)](#)
- [op\\_arctan\(\)](#)
- [op\\_arctan2\(\)](#)
- [op\\_arctanh\(\)](#)
- [op\\_argmax\(\)](#)
- [op\\_argmin\(\)](#)
- [op\\_argpartition\(\)](#)
- [op\\_argsort\(\)](#)
- [op\\_array\(\)](#)
- [op\\_average\(\)](#)

```
op_bincount()
op_broadcast_to()
op_ceil()
op_clip()
op_concatenate()
op_conj()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_cumprod()
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
```



```
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()
```

op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vstack()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()

```
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
```

```
op_fft()  
op_fft2()  
op_flip()  
op_floor()  
op_floor_divide()  
op_fori_loop()  
op_full()  
op_full_like()  
op_gelu()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hard_sigmoid()  
op_hard_silu()  
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()
```

op\_logical\_or()  
op\_logical\_xor()  
op\_logspace()  
op\_logsumexp()  
op\_lstsq()  
op\_lu\_factor()  
op\_map()  
op\_matmul()  
op\_max()  
op\_max\_pool()  
op\_maximum()  
op\_mean()  
op\_median()  
op\_meshgrid()  
op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()

```
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
```

```

op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()

```

---

op_vectorized_map	<i>Parallel map of function f on the first axis of tensor(s) elements.</i>
-------------------	--

---

### Description

Schematically, `op_vectorized_map()` maps over the first dimension of the provided tensors. If `elements` is a list of tensors, then each of the tensors are required to have the same size first dimension, and they are iterated over together.

### Usage

```
op_vectorized_map(elements, f)
```

### Arguments

<code>elements</code>	see description
<code>f</code>	A function taking either a tensor, or list of tensors.

### Value

A tensor or list of tensors, the result of mapping `f` across `elements`.

### Examples

```

(x <- op_arange(12L) |> op_reshape(c(3, 4)))

## tf.Tensor(
## [[ 0  1  2  3]
##  [ 4  5  6  7]
##  [ 8  9 10 11]], shape=(3, 4), dtype=int32)

x |> op_vectorized_map(\(row) {row + 10})

```

```
## tf.Tensor(
## [[10 11 12 13]
##  [14 15 16 17]
##  [18 19 20 21]], shape=(3, 4), dtype=int32)

list(x, x, x) |> op_vectorized_map(\(rows) Reduce(`+`, rows))

## tf.Tensor(
## [[ 0  3  6  9]
##  [12 15 18 21]
##  [24 27 30 33]], shape=(3, 4), dtype=int32)
```

Note that `f` may be traced and compiled. Meaning, the R function may only be evaluated once with symbolic tensors if using Jax or TensorFlow backends, and not with eager tensors. See the output from `str()` in these examples:

```
# simplest case, map f over rows of x,
# where .x is 1 row of x
input <- x
output <- op_vectorized_map(input, function(.x) {
  str(.x)
  .x + 10
})

## <tf.Tensor 'loop_body/GatherV2:0' shape=(4) dtype=int32>

output

## tf.Tensor(
## [[10 11 12 13]
##  [14 15 16 17]
##  [18 19 20 21]], shape=(3, 4), dtype=int32)

# map f over two tensors simultaneously. Here, # `.x` is a list of two
# tensors. The return values from each call of `f(row)` are stacked to form the
# final output
input <- list(x, x)
output <- op_vectorized_map(input, function(.x) {
  str(.x)
  .x[[1]] + 10
})

## List of 2
## $ :<tf.Tensor 'loop_body/GatherV2:0' shape=(4) dtype=int32>
## $ :<tf.Tensor 'loop_body/GatherV2_1:0' shape=(4) dtype=int32>
```



output

```
## tf.Tensor(
## [[10 11 12 13]
##  [14 15 16 17]
##  [18 19 20 21]], shape=(3, 4), dtype=int32)
```

# same as above, but now returning two tensors in the final output

```
output <- op_vectorized_map(input, function(.x) {
  str(.x)
  c(.x1, .x2) %<-% .x
  list(.x1+10, .x2+20)
})

## List of 2
## $ :<tf.Tensor 'loop_body/GatherV2:0' shape=(4) dtype=int32>
## $ :<tf.Tensor 'loop_body/GatherV2_1:0' shape=(4) dtype=int32>
```

output

```
## [[1]]
## tf.Tensor(
## [[10 11 12 13]
##  [14 15 16 17]
##  [18 19 20 21]], shape=(3, 4), dtype=int32)
##
## [[2]]
## tf.Tensor(
## [[20 21 22 23]
##  [24 25 26 27]
##  [28 29 30 31]], shape=(3, 4), dtype=int32)
```

# passing named lists.

# WARNING: if passing a named list, the order of elements of `.x` supplied to `f` is not stable. Only retrieve elements by name.

```
input <- list(name1 = x, name2 = x)
output <- op_vectorized_map(input, function(.x) {
  str(.x)
  list(outname1 = .x$name1 + 10,
       outname2 = .x$name2 + 20)
})
```

```
## List of 2
## $ name1:<tf.Tensor 'loop_body/GatherV2:0' shape=(4) dtype=int32>
## $ name2:<tf.Tensor 'loop_body/GatherV2_1:0' shape=(4) dtype=int32>
```

output

```
## $outname1
## tf.Tensor(
## [[10 11 12 13]
##  [14 15 16 17]
##  [18 19 20 21]], shape=(3, 4), dtype=int32)
##
## $outname2
## tf.Tensor(
## [[20 21 22 23]
##  [24 25 26 27]
##  [28 29 30 31]], shape=(3, 4), dtype=int32)

# passing a tuple() is equivalent to passing an unnamed list()
input <- tuple(x, x)
output <- op_vectorized_map(input, function(.x) {
  str(.x)
  list(.x[[1]] + 10)
})

## List of 2
## $ :<tf.Tensor 'loop_body/GatherV2:0' shape=(4) dtype=int32>
## $ :<tf.Tensor 'loop_body/GatherV2_1:0' shape=(4) dtype=int32>
```

output

```
## [[1]]
## tf.Tensor(
## [[10 11 12 13]
##  [14 15 16 17]
##  [18 19 20 21]], shape=(3, 4), dtype=int32)
```

### Debugging f

Even in eager contexts, `op_vectorized_map()` may trace `f`. In that case, if you want to eagerly debug `f` (e.g., with `browser()`), you can swap in a manual (slow) implementation of `op_vectorized_map()`. Note this example debug implementation does not handle all the same edge cases as `op_vectorized_map()`, in particular, if `f` returns a structure of multiple tensors.

```
op_vectorized_map_debug <- function(elements, fn) {
  if (!is.list(elements)) {
    # `elements` is a single tensor
    batch_size <- op_shape(elements)[[1]]
```

```

    out <- elements |>
      op_split(batch_size) |>
      lapply(fn) |>
      op_stack()
    return(out)
  }

  # `elements` is a list of tensors
  batch_size <- elements[[1]] |> op_shape() |> _[[1]]
  elements |>
    lapply(\(e) op_split(e, batch_size)) |>
    zip_lists() |>
    lapply(fn) |>
    op_stack()
}

```

### See Also

Other core ops:

```

op_cast()
op_cond()
op_convert_to_numpy()
op_convert_to_tensor()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_shape()
op_slice()
op_slice_update()
op_stop_gradient()
op_switch()
op_unstack()
op_while_loop()

```

Other ops:

```

op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()

```

```
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
```

```
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
```

```
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()
```

```
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_stft()
```

```
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vstack()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_vstack

*Stack tensors in sequence vertically (row wise).*

---

### **Description**

Stack tensors in sequence vertically (row wise).

### **Usage**

```
op_vstack(xs)
```

### **Arguments**

xs                      Sequence of tensors.

### **Value**

Tensor formed by stacking the given tensors.



**See Also**

- <https://keras.io/api/ops/numpy#vstack-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()

```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()
```

op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_where()  
op\_zeros()  
op\_zeros\_like()

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()  
op_copy()  
op_correlate()  
op_cos()  
op_cosh()  
op_count_nonzero()  
op_cross()  
op_ctc_decode()  
op_ctc_loss()  
op_cumprod()  
op_cumsum()  
op_custom_gradient()  
op_depthwise_conv()
```

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()
```

```
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_where()
op_while_loop()
op_zeros()
op_zeros_like()
```

---

op\_where

*Return elements chosen from x1 or x2 depending on condition.*

---

### **Description**

Return elements chosen from x1 or x2 depending on condition.

### **Usage**

```
op_where(condition, x1 = NULL, x2 = NULL)
```



**Arguments**

condition	Where TRUE, yield x1, otherwise yield x2.
x1	Values from which to choose when condition is TRUE.
x2	Values from which to choose when condition is FALSE.

**Value**

A tensor with elements from x1 where condition is TRUE, and elements from x2 where condition is FALSE.

**See Also**

- <https://keras.io/api/ops/numpy#where-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()

```
op_cumsum()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_einsum()
op_empty()
op_equal()
op_exp()
op_expand_dims()
op_expm1()
op_eye()
op_flip()
op_floor()
op_floor_divide()
op_full()
op_full_like()
op_get_item()
op_greater()
op_greater_equal()
op_hstack()
op_identity()
op_imag()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_lstsq()
op_matmul()
op_max()
op_maximum()
op_mean()
```

```
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()
```

```
op_transpose()  
op_tri()  
op_tril()  
op_triu()  
op_var()  
op_vdot()  
op_vectorize()  
op_vstack()  
op_zeros()  
op_zeros_like()
```

Other ops:

```
op_abs()  
op_add()  
op_all()  
op_any()  
op_append()  
op_arange()  
op_arccos()  
op_arccosh()  
op_arcsin()  
op_arcsinh()  
op_arctan()  
op_arctan2()  
op_arctanh()  
op_argmax()  
op_argmin()  
op_argpartition()  
op_argsort()  
op_array()  
op_average()  
op_average_pool()  
op_batch_normalization()  
op_binary_crossentropy()  
op_bincount()  
op_broadcast_to()  
op_cast()  
op_categorical_crossentropy()  
op_ceil()  
op_cholesky()  
op_clip()  
op_concatenate()  
op_cond()  
op_conj()  
op_conv()  
op_conv_transpose()  
op_convert_to_numpy()  
op_convert_to_tensor()
```

```
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
```

```
op_hstack()  
op_identity()  
op_imag()  
op_image_affine_transform()  
op_image_crop()  
op_image_extract_patches()  
op_image_hsv_to_rgb()  
op_image_map_coordinates()  
op_image_pad()  
op_image_resize()  
op_image_rgb_to_grayscale()  
op_image_rgb_to_hsv()  
op_in_top_k()  
op_inv()  
op_irfft()  
op_is_tensor()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_istft()  
op_leaky_relu()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()
```

op\_min()  
op\_minimum()  
op\_mod()  
op\_moments()  
op\_moveaxis()  
op\_multi\_hot()  
op\_multiply()  
op\_nan\_to\_num()  
op\_ndim()  
op\_negative()  
op\_nonzero()  
op\_norm()  
op\_normalize()  
op\_not\_equal()  
op\_one\_hot()  
op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_psnr()  
op\_qr()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_relu()  
op\_relu6()  
op\_repeat()  
op\_reshape()  
op\_rfft()  
op\_roll()  
op\_round()  
op\_rsqrtd()  
op\_scan()  
op\_scatter()  
op\_scatter\_update()  
op\_segment\_max()  
op\_segment\_sum()  
op\_select()  
op\_selu()  
op\_separable\_conv()  
op\_shape()  
op\_sigmoid()  
op\_sign()  
op\_silu()  
op\_sin()

```
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_while_loop()
op_zeros()
op_zeros_like()
```



---

op_while_loop	<i>While loop implementation.</i>
---------------	-----------------------------------

---

**Description**

While loop implementation.

**Usage**

```
op_while_loop(cond, body, loop_vars, maximum_iterations = NULL)
```

**Arguments**

cond	A callable that represents the termination condition of the loop. Must accept a loop_vars like structure as an argument. If loop_vars is a tuple or unnamed list, each element of loop_vars will be passed positionally to the callable.
body	A callable that represents the loop body. Must accept a loop_vars like structure as an argument, and return update value with the same structure. If loop_vars is a tuple or unnamed list, each element of loop_vars will be passed positionally to the callable.
loop_vars	An arbitrary nested structure of tensor state to persist across loop iterations.
maximum_iterations	Optional maximum number of iterations of the while loop to run. If provided, the cond output is AND-ed with an additional condition ensuring the number of iterations executed is no greater than maximum_iterations.

**Value**

A list of tensors, has the same shape and dtype as loop\_vars.

**Examples**

```
i <- 0
loop_vars <- list(i)

# cond() must return a scalar bool
cond <- function(i) i < 10L

# body must return same shape as loop_vars
body <- function(i) list(i + 1L)

op_while_loop(cond, body, loop_vars)

## [[1]]
## tf.Tensor(10.0, shape=(), dtype=float32)
```

```
x <- 0; y <- 1
cond <- \(x, y) x < 10
body <- \(x, y) list(x+1, y+1)
op_while_loop(cond, body, list(x, y))

## [[1]]
## tf.Tensor(10.0, shape=(), dtype=float32)
##
## [[2]]
## tf.Tensor(11.0, shape=(), dtype=float32)
```

### See Also

- <https://keras.io/api/ops/core#whileloop-function>

Other core ops:

```
op_cast()
op_cond()
op_convert_to_numpy()
op_convert_to_tensor()
op_custom_gradient()
op_dtype()
op_fori_loop()
op_is_tensor()
op_map()
op_scan()
op_scatter()
op_scatter_update()
op_shape()
op_slice()
op_slice_update()
op_stop_gradient()
op_switch()
op_unstack()
op_vectorized_map()
```

Other ops:

```
op_abs()
op_add()
op_all()
op_any()
op_append()
op_arange()
op_arccos()
op_arccosh()
op_arcsin()
op_arcsinh()
op_arctan()
```

```
op_arctan2()
op_arctanh()
op_argmax()
op_argmin()
op_argpartition()
op_argsort()
op_array()
op_average()
op_average_pool()
op_batch_normalization()
op_binary_crossentropy()
op_bincount()
op_broadcast_to()
op_cast()
op_categorical_crossentropy()
op_ceil()
op_cholesky()
op_clip()
op_concatenate()
op_cond()
op_conj()
op_conv()
op_conv_transpose()
op_convert_to_numpy()
op_convert_to_tensor()
op_copy()
op_correlate()
op_cos()
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
```

```
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
```

```
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_log_sigmoid()  
op_log_softmax()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_logsumexp()  
op_lstsq()  
op_lu_factor()  
op_map()  
op_matmul()  
op_max()  
op_max_pool()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moments()  
op_moveaxis()  
op_multi_hot()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_norm()  
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()
```

```
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqrt()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
```

```
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_zeros()
op_zeros_like()
```

---

op\_zeros

*Return a new tensor of given shape and type, filled with zeros.*

---

### Description

Return a new tensor of given shape and type, filled with zeros.

### Usage

```
op_zeros(shape, dtype = NULL)
```

### Arguments

shape	Shape of the new tensor.
dtype	Desired data type of the tensor.

### Value

Tensor of zeros with the given shape and dtype.

**See Also**

- <https://keras.io/api/ops/numpy#zeros-function>

Other numpy ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_bincount()  
op\_broadcast\_to()  
op\_ceil()  
op\_clip()  
op\_concatenate()  
op\_conj()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_cumprod()  
op\_cumsum()  
op\_diag()  
op\_diagonal()  
op\_diff()  
op\_digitize()  
op\_divide()  
op\_divide\_no\_nan()  
op\_dot()  
op\_einsum()  
op\_empty()  
op\_equal()  
op\_exp()



```
op_expand_dims()  
op_expm1()  
op_eye()  
op_flip()  
op_floor()  
op_floor_divide()  
op_full()  
op_full_like()  
op_get_item()  
op_greater()  
op_greater_equal()  
op_hstack()  
op_identity()  
op_imag()  
op_isclose()  
op_isfinite()  
op_isinf()  
op_isnan()  
op_less()  
op_less_equal()  
op_linspace()  
op_log()  
op_log10()  
op_log1p()  
op_log2()  
op_logaddexp()  
op_logical_and()  
op_logical_not()  
op_logical_or()  
op_logical_xor()  
op_logspace()  
op_lstsq()  
op_matmul()  
op_max()  
op_maximum()  
op_mean()  
op_median()  
op_meshgrid()  
op_min()  
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()
```

op\_ones()  
op\_ones\_like()  
op\_outer()  
op\_pad()  
op\_power()  
op\_prod()  
op\_quantile()  
op\_ravel()  
op\_real()  
op\_reciprocal()  
op\_repeat()  
op\_reshape()  
op\_roll()  
op\_round()  
op\_select()  
op\_sign()  
op\_sin()  
op\_sinh()  
op\_size()  
op\_sort()  
op\_split()  
op\_sqrt()  
op\_square()  
op\_squeeze()  
op\_stack()  
op\_std()  
op\_subtract()  
op\_sum()  
op\_swapaxes()  
op\_take()  
op\_take\_along\_axis()  
op\_tan()  
op\_tanh()  
op\_tensordot()  
op\_tile()  
op\_trace()  
op\_transpose()  
op\_tri()  
op\_tril()  
op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros\_like()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()  
op\_cosh()  
op\_count\_nonzero()  
op\_cross()  
op\_ctc\_decode()  
op\_ctc\_loss()  
op\_cumprod()  
op\_cumsum()  
op\_custom\_gradient()  
op\_depthwise\_conv()

```
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
```

```
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
```

```
op_normalize()  
op_not_equal()  
op_one_hot()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_psnr()  
op_qr()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_relu()  
op_relu6()  
op_repeat()  
op_reshape()  
op_rfft()  
op_roll()  
op_round()  
op_rsqrtd()  
op_scan()  
op_scatter()  
op_scatter_update()  
op_segment_max()  
op_segment_sum()  
op_select()  
op_selu()  
op_separable_conv()  
op_shape()  
op_sigmoid()  
op_sign()  
op_silu()  
op_sin()  
op_sinh()  
op_size()  
op_slice()  
op_slice_update()  
op_slogdet()  
op_softmax()  
op_softplus()  
op_softsign()  
op_solve()  
op_solve_triangular()  
op_sort()  
op_sparse_categorical_crossentropy()
```

```
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros_like()
```

---

op\_zeros\_like

*Return a tensor of zeros with the same shape and type as x.*

---

### Description

Return a tensor of zeros with the same shape and type as x.

### Usage

```
op_zeros_like(x, dtype = NULL)
```

**Arguments**

x	Input tensor.
dtype	Overrides the data type of the result.

**Value**

A tensor of zeros with the same shape and type as x.

**See Also**

- <https://keras.io/api/ops/numpy#zeroslike-function>

Other numpy ops:

`op_abs()`  
`op_add()`  
`op_all()`  
`op_any()`  
`op_append()`  
`op_arange()`  
`op_arccos()`  
`op_arccosh()`  
`op_arcsin()`  
`op_arcsinh()`  
`op_arctan()`  
`op_arctan2()`  
`op_arctanh()`  
`op_argmax()`  
`op_argmin()`  
`op_argpartition()`  
`op_argsort()`  
`op_array()`  
`op_average()`  
`op_bincount()`  
`op_broadcast_to()`  
`op_ceil()`  
`op_clip()`  
`op_concatenate()`  
`op_conj()`  
`op_copy()`  
`op_correlate()`  
`op_cos()`  
`op_cosh()`  
`op_count_nonzero()`  
`op_cross()`  
`op_ctc_decode()`  
`op_cumprod()`  
`op_cumsum()`  
`op_diag()`  
`op_diagonal()`



`op_diff()`  
`op_digitize()`  
`op_divide()`  
`op_divide_no_nan()`  
`op_dot()`  
`op_einsum()`  
`op_empty()`  
`op_equal()`  
`op_exp()`  
`op_expand_dims()`  
`op_expm1()`  
`op_eye()`  
`op_flip()`  
`op_floor()`  
`op_floor_divide()`  
`op_full()`  
`op_full_like()`  
`op_get_item()`  
`op_greater()`  
`op_greater_equal()`  
`op_hstack()`  
`op_identity()`  
`op_imag()`  
`op_isclose()`  
`op_isfinite()`  
`op_isinf()`  
`op_isnan()`  
`op_less()`  
`op_less_equal()`  
`op_linspace()`  
`op_log()`  
`op_log10()`  
`op_log1p()`  
`op_log2()`  
`op_logaddexp()`  
`op_logical_and()`  
`op_logical_not()`  
`op_logical_or()`  
`op_logical_xor()`  
`op_logspace()`  
`op_lstsq()`  
`op_matmul()`  
`op_max()`  
`op_maximum()`  
`op_mean()`  
`op_median()`  
`op_meshgrid()`  
`op_min()`

```
op_minimum()  
op_mod()  
op_moveaxis()  
op_multiply()  
op_nan_to_num()  
op_ndim()  
op_negative()  
op_nonzero()  
op_not_equal()  
op_ones()  
op_ones_like()  
op_outer()  
op_pad()  
op_power()  
op_prod()  
op_quantile()  
op_ravel()  
op_real()  
op_reciprocal()  
op_repeat()  
op_reshape()  
op_roll()  
op_round()  
op_select()  
op_sign()  
op_sin()  
op_sinh()  
op_size()  
op_sort()  
op_split()  
op_sqrt()  
op_square()  
op_squeeze()  
op_stack()  
op_std()  
op_subtract()  
op_sum()  
op_swapaxes()  
op_take()  
op_take_along_axis()  
op_tan()  
op_tanh()  
op_tensordot()  
op_tile()  
op_trace()  
op_transpose()  
op_tri()  
op_tril()
```

op\_triu()  
op\_var()  
op\_vdot()  
op\_vectorize()  
op\_vstack()  
op\_where()  
op\_zeros()

Other ops:

op\_abs()  
op\_add()  
op\_all()  
op\_any()  
op\_append()  
op\_arange()  
op\_arccos()  
op\_arccosh()  
op\_arcsin()  
op\_arcsinh()  
op\_arctan()  
op\_arctan2()  
op\_arctanh()  
op\_argmax()  
op\_argmin()  
op\_argpartition()  
op\_argsort()  
op\_array()  
op\_average()  
op\_average\_pool()  
op\_batch\_normalization()  
op\_binary\_crossentropy()  
op\_bincount()  
op\_broadcast\_to()  
op\_cast()  
op\_categorical\_crossentropy()  
op\_ceil()  
op\_cholesky()  
op\_clip()  
op\_concatenate()  
op\_cond()  
op\_conj()  
op\_conv()  
op\_conv\_transpose()  
op\_convert\_to\_numpy()  
op\_convert\_to\_tensor()  
op\_copy()  
op\_correlate()  
op\_cos()

```
op_cosh()
op_count_nonzero()
op_cross()
op_ctc_decode()
op_ctc_loss()
op_cumprod()
op_cumsum()
op_custom_gradient()
op_depthwise_conv()
op_det()
op_diag()
op_diagonal()
op_diff()
op_digitize()
op_divide()
op_divide_no_nan()
op_dot()
op_dtype()
op_eig()
op_eigh()
op_einsum()
op_elu()
op_empty()
op_equal()
op_erf()
op_erfinv()
op_exp()
op_expand_dims()
op_expm1()
op_extract_sequences()
op_eye()
op_fft()
op_fft2()
op_flip()
op_floor()
op_floor_divide()
op_fori_loop()
op_full()
op_full_like()
op_gelu()
op_get_item()
op_greater()
op_greater_equal()
op_hard_sigmoid()
op_hard_silu()
op_hstack()
op_identity()
op_imag()
```

```
op_image_affine_transform()
op_image_crop()
op_image_extract_patches()
op_image_hsv_to_rgb()
op_image_map_coordinates()
op_image_pad()
op_image_resize()
op_image_rgb_to_grayscale()
op_image_rgb_to_hsv()
op_in_top_k()
op_inv()
op_irfft()
op_is_tensor()
op_isclose()
op_isfinite()
op_isinf()
op_isnan()
op_istft()
op_leaky_relu()
op_less()
op_less_equal()
op_linspace()
op_log()
op_log10()
op_log1p()
op_log2()
op_log_sigmoid()
op_log_softmax()
op_logaddexp()
op_logical_and()
op_logical_not()
op_logical_or()
op_logical_xor()
op_logspace()
op_logsumexp()
op_lstsq()
op_lu_factor()
op_map()
op_matmul()
op_max()
op_max_pool()
op_maximum()
op_mean()
op_median()
op_meshgrid()
op_min()
op_minimum()
op_mod()
```

```
op_moments()
op_moveaxis()
op_multi_hot()
op_multiply()
op_nan_to_num()
op_ndim()
op_negative()
op_nonzero()
op_norm()
op_normalize()
op_not_equal()
op_one_hot()
op_ones()
op_ones_like()
op_outer()
op_pad()
op_power()
op_prod()
op_psnr()
op_qr()
op_quantile()
op_ravel()
op_real()
op_reciprocal()
op_relu()
op_relu6()
op_repeat()
op_reshape()
op_rfft()
op_roll()
op_round()
op_rsqr()
op_scan()
op_scatter()
op_scatter_update()
op_segment_max()
op_segment_sum()
op_select()
op_selu()
op_separable_conv()
op_shape()
op_sigmoid()
op_sign()
op_silu()
op_sin()
op_sinh()
op_size()
op_slice()
```

```
op_slice_update()
op_slogdet()
op_softmax()
op_softplus()
op_softsign()
op_solve()
op_solve_triangular()
op_sort()
op_sparse_categorical_crossentropy()
op_split()
op_sqrt()
op_square()
op_squeeze()
op_stack()
op_std()
op_stft()
op_stop_gradient()
op_subtract()
op_sum()
op_svd()
op_swapaxes()
op_switch()
op_take()
op_take_along_axis()
op_tan()
op_tanh()
op_tensordot()
op_tile()
op_top_k()
op_trace()
op_transpose()
op_tri()
op_tril()
op_triu()
op_unstack()
op_var()
op_vdot()
op_vectorize()
op_vectorized_map()
op_vstack()
op_where()
op_while_loop()
op_zeros()
```

**Description**

This function transforms a list (of length `num_samples`) of sequences (lists of integers) into a 2D NumPy array of shape `(num_samples, num_timesteps)`. `num_timesteps` is either the `maxlen` argument if provided, or the length of the longest sequence in the list.

Sequences that are shorter than `num_timesteps` are padded with `value` until they are `num_timesteps` long.

Sequences longer than `num_timesteps` are truncated so that they fit the desired length.

The position where padding or truncation happens is determined by the arguments `padding` and `truncating`, respectively. Pre-padding or removing values from the beginning of the sequence is the default.

```
sequence <- list(c(1), c(2, 3), c(4, 5, 6))
pad_sequences(sequence)
```

```
##      [,1] [,2] [,3]
## [1,]  0  0  1
## [2,]  0  2  3
## [3,]  4  5  6
```

```
pad_sequences(sequence, value=-1)
```

```
##      [,1] [,2] [,3]
## [1,] -1 -1  1
## [2,] -1  2  3
## [3,]  4  5  6
```

```
pad_sequences(sequence, padding='post')
```

```
##      [,1] [,2] [,3]
## [1,]  1  0  0
## [2,]  2  3  0
## [3,]  4  5  6
```

```
pad_sequences(sequence, maxlen=2)
```

```
##      [,1] [,2]
## [1,]  0  1
## [2,]  2  3
## [3,]  5  6
```



**Usage**

```
pad_sequences(  
    sequences,  
    maxlen = NULL,  
    dtype = "int32",  
    padding = "pre",  
    truncating = "pre",  
    value = 0  
)
```

**Arguments**

sequences	List of sequences (each sequence is a list of integers).
maxlen	Optional Int, maximum length of all sequences. If not provided, sequences will be padded to the length of the longest individual sequence.
dtype	(Optional, defaults to "int32"). Type of the output sequences. To pad sequences with variable length strings, you can use object.
padding	String, "pre" or "post" (optional, defaults to "pre"): pad either before or after each sequence.
truncating	String, "pre" or "post" (optional, defaults to "pre"): remove values from sequences larger than maxlen, either at the beginning or at the end of the sequences.
value	Float or String, padding value. (Optional, defaults to 0.)

**Value**

Array with shape (len(sequences), maxlen)

**See Also**

- [https://keras.io/api/data\\_loading/timeseries#padsequences-function](https://keras.io/api/data_loading/timeseries#padsequences-function)

Other utils:

```
audio_dataset_from_directory()  
clear_session()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_is_interactive_logging_enabled()  
config_is_traceback_filtering_enabled()  
get_file()  
get_source_inputs()  
image_array_save()  
image_dataset_from_directory()  
image_from_array()  
image_load()  
image_smart_resize()
```

```

image_to_array()
layer_feature_space()
normalize()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()

```

---

```
plot.keras.src.models.model.Model
```

*Plot a Keras model*

---

## Description

Plot a Keras model

## Usage

```

## S3 method for class 'keras.src.models.model.Model'
plot(
  x,
  show_shapes = FALSE,
  show_dtype = FALSE,
  show_layer_names = FALSE,
  ...,
  rankdir = "TB",
  expand_nested = FALSE,
  dpi = 200,
  layer_range = NULL,
  show_layer_activations = FALSE,
  show_trainable = NA,
  to_file = NULL
)

```

## Arguments

x	A Keras model instance
show_shapes	whether to display shape information.
show_dtype	whether to display layer dtypes.
show_layer_names	whether to display layer names.
...	passed on to Python <code>keras.utils.model_to_dot()</code> . Used for forward and backward compatibility.

rankdir	a string specifying the format of the plot: 'TB' creates a vertical plot; 'LR' creates a horizontal plot. (argument passed to PyDot)
expand_nested	Whether to expand nested models into clusters.
dpi	Dots per inch. Increase this value if the image text appears excessively pixelated.
layer_range	list containing two character strings, which is the starting layer name and ending layer name (both inclusive) indicating the range of layers for which the plot will be generated. It also accepts regex patterns instead of exact name. In such case, start predicate will be the first element it matches to layer_range[1] and the end predicate will be the last element it matches to layer_range[2]. By default NULL which considers all layers of model. Note that you must pass range such that the resultant subgraph must be complete.
show_layer_activations	Display layer activations (only for layers that have an activation property).
show_trainable	whether to display if a layer is trainable.
to_file	File name of the plot image. If NULL (the default), the model is drawn on the default graphics device. Otherwise, a file is saved.

**Value**

Nothing, called for it's side effects.

**Raises**

ValueError: if plot(model) is called before the model is built, unless a input\_shape = argument was supplied to keras\_model\_sequential().

**Requirements**

This function requires pydot and graphviz. pydot is by default installed by install\_keras(), but if you installed keras by other means, you can install pydot directly with :

```
reticulate::py_install("pydot", pip = TRUE)
```

You can install graphviz directly from here: <https://graphviz.gitlab.io/download/>

On most Linux platforms, can install graphviz via the package manager. For example, on Ubuntu/Debian you can install with

```
sudo apt install graphviz
```

In a conda environment, you can install graphviz with:

```
reticulate::conda_install(packages = "graphviz")
# Restart the R session after install.
```

---

```
plot.keras_training_history
```

*Plot training history*

---

## Description

Plots metrics recorded during training.

## Usage

```
## S3 method for class 'keras_training_history'
plot(
  x,
  y,
  metrics = NULL,
  method = c("auto", "ggplot2", "base"),
  smooth = getOption("keras.plot.history.smooth", TRUE),
  theme_bw = getOption("keras.plot.history.theme_bw", FALSE),
  ...
)
```

## Arguments

x	Training history object returned from <code>fit.keras.src.models.model.Model()</code> .
y	Unused.
metrics	One or more metrics to plot (e.g. <code>c('loss', 'accuracy')</code> ). Defaults to plotting all captured metrics.
method	Method to use for plotting. The default "auto" will use <b>ggplot2</b> if available, and otherwise will use base graphics.
smooth	Whether a loess smooth should be added to the plot, only available for the ggplot2 method. If the number of epochs is smaller than ten, it is forced to false.
theme_bw	Use <code>ggplot2::theme_bw()</code> to plot the history in black and white.
...	Additional parameters to pass to the <code>plot()</code> method.

## Value

if `method == "ggplot2"`, the ggplot object is returned. If `method == "base"`, then this function will draw to the graphics device and return `NULL`, invisibly.

---

pop\_layer

*Remove the last layer in a Sequential model*

---

**Description**

Remove the last layer in a Sequential model

**Usage**

```
pop_layer(object)
```

**Arguments**

object            Sequential keras model object

**Value**

The input object, invisibly.

**See Also**

Other model functions:

[get\\_config\(\)](#)

[get\\_layer\(\)](#)

[keras\\_model\(\)](#)

[keras\\_model\\_sequential\(\)](#)

[summary.keras.src.models.model.Model\(\)](#)

---

`predict.keras.src.models.model.Model`

*Generates output predictions for the input samples.*

---

**Description**

Generates output predictions for the input samples.

**Usage**

```
## S3 method for class 'keras.src.models.model.Model'  
predict(  
  object,  
  x,  
  ...,  
  batch_size = NULL,  
  verbose = getOption("keras.verbose", default = "auto"),
```

```

    steps = NULL,
    callbacks = NULL
  )

```

### Arguments

object	Keras model object
x	Input samples. It could be: <ul style="list-style-type: none"> <li>• A array (or array-like), or a list of arrays (in case the model has multiple inputs).</li> <li>• A tensor, or a list of tensors (in case the model has multiple inputs).</li> <li>• A TF Dataset.</li> </ul>
...	For forward/backward compatability.
batch_size	Integer or NULL. Number of samples per batch. If unspecified, batch_size will default to 32. Do not specify the batch_size if your data is in the form of a TF Dataset or a generator (since they generate batches).
verbose	"auto", 0, 1, or 2. Verbosity mode. 0 = silent, 1 = progress bar, 2 = one line per epoch. "auto" becomes 1 for most cases, 2 if in a knitr render or running on a distributed training server. Note that the progress bar is not particularly useful when logged to a file, so verbose=2 is recommended when not running interactively (e.g., in a production environment). Defaults to "auto".
steps	Total number of steps (batches of samples) before declaring the prediction round finished. Ignored with the default value of NULL. If x is a TF Dataset and steps is NULL, predict() will run until the input dataset is exhausted.
callbacks	List of Callback instances. List of callbacks to apply during prediction.

### Details

Computation is done in batches. This method is designed for batch processing of large numbers of inputs. It is not intended for use inside of loops that iterate over your data and process small numbers of inputs at a time.

For small numbers of inputs that fit in one batch, directly call the model `model$call` for faster execution, e.g., `model(x)`, or `model(x, training = FALSE)` if you have layers such as `BatchNormalization` that behave differently during inference.

### Value

R array(s) of predictions.

### Note

See [this FAQ entry](#) for more details about the difference between Model methods `predict()` and `call()`.

**See Also**

- [https://keras.io/api/models/model\\_training\\_apis#predict-method](https://keras.io/api/models/model_training_apis#predict-method)

Other model training:

```
compile.keras.src.models.model.Model()  
evaluate.keras.src.models.model.Model()  
predict_on_batch()  
test_on_batch()  
train_on_batch()
```

---

predict_on_batch	<i>Returns predictions for a single batch of samples.</i>
------------------	---

---

**Description**

Returns predictions for a single batch of samples.

**Usage**

```
predict_on_batch(object, x)
```

**Arguments**

object	Keras model object
x	Input data. It must be array-like.

**Value**

Array(s) of predictions.

**See Also**

- [https://keras.io/api/models/model\\_training\\_apis#predictionbatch-method](https://keras.io/api/models/model_training_apis#predictionbatch-method)

Other model training:

```
compile.keras.src.models.model.Model()  
evaluate.keras.src.models.model.Model()  
predict.keras.src.models.model.Model()  
test_on_batch()  
train_on_batch()
```

**Description**

These functions are used to preprocess and postprocess inputs and outputs of Keras applications.

**Usage**

```
application_preprocess_inputs(model, x, ..., data_format = NULL)
```

```
application_decode_predictions(model, preds, top = 5L, ...)
```

**Arguments**

model	A Keras model initialized using any application_ function.
x	A batch of inputs to the model.
...	Additional arguments passed to the preprocessing or decoding function.
data_format	Optional data format of the image tensor/array. NULL means the global setting config_image_data_format() is used (unless you changed it, it uses "channels_last"). Defaults to NULL.
preds	A batch of outputs from the model.
top	The number of top predictions to return.

**Value**

- A list of decoded predictions in case of application\_decode\_predictions().
- A batch of preprocessed inputs in case of application\_preprocess\_inputs().

**Functions**

- application\_preprocess\_inputs(): Pre-process inputs to be used in the model
- application\_decode\_predictions(): Decode predictions from the model

**Examples**

```
## Not run:
model <- application_convnext_tiny()

inputs <- random_normal(c(32, 224, 224, 3))
processed_inputs <- application_preprocess_inputs(model, inputs)

preds <- random_normal(c(32, 1000))
decoded_preds <- application_decode_predictions(model, preds)

## End(Not run)
```



---

quantize_weights	<i>Quantize the weights of a model.</i>
------------------	---

---

**Description**

Note that the model must be built first before calling this method. `quantize_weights()` will recursively call `layer$quantize(mode)` in all layers and will be skipped if the layer doesn't implement the function.

Currently only Dense and EinsumDense layers support quantization.

**Usage**

```
quantize_weights(object, mode)
```

**Arguments**

object	A Keras Model or Layer.
mode	The mode of the quantization. Only 'int8' is supported at this time.

**Value**

model, invisibly. Note this is just a convenience for usage with `|>`, the model is modified in-place.

**See Also**

Other layer methods:

```
count_params()  
get_config()  
get_weights()  
reset_state()
```

---

random_beta	<i>Draw samples from a Beta distribution.</i>
-------------	---

---

**Description**

The values are drawn from a Beta distribution parametrized by alpha and beta.

**Usage**

```
random_beta(shape, alpha, beta, dtype = NULL, seed = NULL)
```

**Arguments**

shape	The shape of the random values to generate.
alpha	Float or an array of floats representing the first parameter alpha. Must be broadcastable with beta and shape.
beta	Float or an array of floats representing the second parameter beta. Must be broadcastable with alpha and shape.
dtype	Optional dtype of the tensor. Only floating point types are supported. If not specified, <code>config_floatx()</code> is used, which defaults to "float32" unless you configured it otherwise (via <code>config_set_floatx(float_dtype)</code> ).
seed	An integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .

**Value**

A tensor of random values.

**See Also**

Other random:

[random\\_binomial\(\)](#)  
[random\\_categorical\(\)](#)  
[random\\_dropout\(\)](#)  
[random\\_gamma\(\)](#)  
[random\\_integer\(\)](#)  
[random\\_normal\(\)](#)  
[random\\_seed\\_generator\(\)](#)  
[random\\_shuffle\(\)](#)  
[random\\_truncated\\_normal\(\)](#)  
[random\\_uniform\(\)](#)

---

random_binomial	<i>Draw samples from a Binomial distribution.</i>
-----------------	---

---

**Description**

The values are drawn from a Binomial distribution with specified trial count and probability of success.

**Usage**

```
random_binomial(shape, counts, probabilities, dtype = NULL, seed = NULL)
```

**Arguments**

shape	The shape of the random values to generate.
counts	A number or array of numbers representing the number of trials. It must be broadcastable with probabilities.
probabilities	A float or array of floats representing the probability of success of an individual event. It must be broadcastable with counts.
dtype	Optional dtype of the tensor. Only floating point types are supported. If not specified, <code>config_floatx()</code> is used, which defaults to "float32" unless you configured it otherwise (via <code>config_set_floatx(float_dtype)</code> ).
seed	A Python integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or None (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .

**Value**

A tensor of random values.

**See Also**

- [https://www.tensorflow.org/api\\_docs/python/tf/keras/random/binomial](https://www.tensorflow.org/api_docs/python/tf/keras/random/binomial)

Other random:

`random_beta()`  
`random_categorical()`  
`random_dropout()`  
`random_gamma()`  
`random_integer()`  
`random_normal()`  
`random_seed_generator()`  
`random_shuffle()`  
`random_truncated_normal()`  
`random_uniform()`

---

`random_categorical`     *Draws samples from a categorical distribution.*

---

**Description**

This function takes as input `logits`, a 2-D input tensor with shape `(batch_size, num_classes)`. Each row of the input represents a categorical distribution, with each column index containing the log-probability for a given class.

The function will output a 2-D tensor with shape `(batch_size, num_samples)`, where each row contains samples from the corresponding row in `logits`. Each column index contains an independent samples drawn from the input distribution.

**Usage**

```
random_categorical(logits, num_samples, dtype = "int32", seed = NULL)
```

**Arguments**

logits	2-D Tensor with shape (batch_size, num_classes). Each row should define a categorical distribution with the unnormalized log-probabilities for all classes.
num_samples	Int, the number of independent samples to draw for each row of the input. This will be the second dimension of the output tensor's shape.
dtype	Optional dtype of the output tensor.
seed	An R integer or instance of <a href="#">random_seed_generator()</a> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <a href="#">random_seed_generator()</a> .

**Value**

A 2-D tensor with (batch\_size, num\_samples).

**See Also**

Other random:  
[random\\_beta\(\)](#)  
[random\\_binomial\(\)](#)  
[random\\_dropout\(\)](#)  
[random\\_gamma\(\)](#)  
[random\\_integer\(\)](#)  
[random\\_normal\(\)](#)  
[random\\_seed\\_generator\(\)](#)  
[random\\_shuffle\(\)](#)  
[random\\_truncated\\_normal\(\)](#)  
[random\\_uniform\(\)](#)

---

random\_dropout

*Randomly set some values in a tensor to 0.*

---

**Description**

Randomly set some portion of values in the tensor to 0.

**Usage**

```
random_dropout(inputs, rate, noise_shape = NULL, seed = NULL)
```

**Arguments**

inputs	A tensor
rate	numeric
noise_shape	A <code>shape()</code> value
seed	Initial seed for the random number generator

**Value**

A tensor that is a copy of `inputs` with some values set to 0.

**See Also**

Other random:  
[random\\_beta\(\)](#)  
[random\\_binomial\(\)](#)  
[random\\_categorical\(\)](#)  
[random\\_gamma\(\)](#)  
[random\\_integer\(\)](#)  
[random\\_normal\(\)](#)  
[random\\_seed\\_generator\(\)](#)  
[random\\_shuffle\(\)](#)  
[random\\_truncated\\_normal\(\)](#)  
[random\\_uniform\(\)](#)

---

random\_gamma

*Draw random samples from the Gamma distribution.*


---

**Description**

Draw random samples from the Gamma distribution.

**Usage**

```
random_gamma(shape, alpha, dtype = NULL, seed = NULL)
```

**Arguments**

shape	The shape of the random values to generate.
alpha	Float, the parameter of the distribution.
dtype	Optional dtype of the tensor. Only floating point types are supported. If not specified, <a href="#">config_floatx()</a> is used, which defaults to <code>float32</code> unless you configured it otherwise (via <code>config_set_floatx(float_dtype)</code> ).
seed	An R integer or instance of <a href="#">random_seed_generator()</a> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or <code>NULL</code> (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <a href="#">random_seed_generator()</a> .

**Value**

A tensor of random values.

**See Also**

Other random:

[random\\_beta\(\)](#)  
[random\\_binomial\(\)](#)  
[random\\_categorical\(\)](#)  
[random\\_dropout\(\)](#)  
[random\\_integer\(\)](#)  
[random\\_normal\(\)](#)  
[random\\_seed\\_generator\(\)](#)  
[random\\_shuffle\(\)](#)  
[random\\_truncated\\_normal\(\)](#)  
[random\\_uniform\(\)](#)

---

random\_integer

*Draw random integers from a uniform distribution.*

---

**Description**

The generated values follow a uniform distribution in the range `[minval, maxval)`. The lower bound `minval` is included in the range, while the upper bound `maxval` is excluded.

`dtype` must be an integer type.

**Usage**

```
random_integer(shape, minval, maxval, dtype = "int32", seed = NULL)
```

**Arguments**

<code>shape</code>	The shape of the random values to generate.
<code>minval</code>	integer, lower bound of the range of random values to generate (inclusive).
<code>maxval</code>	integer, upper bound of the range of random values to generate (exclusive).
<code>dtype</code>	Optional dtype of the tensor. Only integer types are supported. If not specified, "int32" is used.
<code>seed</code>	An R integer or instance of <a href="#">random_seed_generator()</a> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <a href="#">random_seed_generator()</a> .

**Value**

A tensor of random values.

**See Also**

Other random:

[random\\_beta\(\)](#)  
[random\\_binomial\(\)](#)  
[random\\_categorical\(\)](#)  
[random\\_dropout\(\)](#)  
[random\\_gamma\(\)](#)  
[random\\_normal\(\)](#)  
[random\\_seed\\_generator\(\)](#)  
[random\\_shuffle\(\)](#)  
[random\\_truncated\\_normal\(\)](#)  
[random\\_uniform\(\)](#)

---

random_normal	<i>Draw random samples from a normal (Gaussian) distribution.</i>
---------------	---

---

**Description**

Draw random samples from a normal (Gaussian) distribution.

**Usage**

```
random_normal(shape, mean = 0, stddev = 1, dtype = NULL, seed = NULL)
```

**Arguments**

shape	The shape of the random values to generate.
mean	Float, defaults to 0. Mean of the random values to generate.
stddev	Float, defaults to 1. Standard deviation of the random values to generate.
dtype	Optional dtype of the tensor. Only floating point types are supported. If not specified, <a href="#">config_floatx()</a> is used, which defaults to float32 unless you configured it otherwise (via <a href="#">config_set_floatx(float_dtype)</a> ).
seed	An R integer or instance of <a href="#">random_seed_generator()</a> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <a href="#">random_seed_generator()</a> .

**Value**

A tensor of random values.

**See Also**

Other random:

```
random_beta()  
random_binomial()  
random_categorical()  
random_dropout()  
random_gamma()  
random_integer()  
random_seed_generator()  
random_shuffle()  
random_truncated_normal()  
random_uniform()
```

---

random\_seed\_generator *Generates variable seeds upon each call to a RNG-using function.*

---

**Description**

In Keras, all RNG-using methods (such as `random_normal()`) are stateless, meaning that if you pass an integer seed to them (such as `seed = 42`), they will return the same values at each call. In order to get different values at each call, you must use a `SeedGenerator` instead as the seed argument. The `SeedGenerator` object is stateful.

**Usage**

```
random_seed_generator(seed = NULL, name = NULL, ...)
```

**Arguments**

seed	Initial seed for the random number generator
name	String, name for the object
...	For forward/backward compatibility.

**Value**

A `SeedGenerator` instance, which can be passed as the `seed =` argument to other random tensor generators.

**Examples**

```
seed_gen <- random_seed_generator(seed = 42)  
values <- random_normal(shape = c(2, 3), seed = seed_gen)  
new_values <- random_normal(shape = c(2, 3), seed = seed_gen)
```

Usage in a layer:



```
layer_dropout2 <- new_layer_class(  
  "dropout2",  
  initialize = function(...) {  
    super$initialize(...)  
    self$seed_generator <- random_seed_generator(seed = 1337)  
  },  
  call = function(x, training = FALSE) {  
    if (training) {  
      return(random_dropout(x, rate = 0.5, seed = self$seed_generator))  
    }  
    return(x)  
  }  
)  
  
out <- layer_dropout(rate = 0.8)  
out(op_ones(10), training = TRUE)  
  
## tf.Tensor([0. 5. 5. 0. 0. 0. 0. 0. 0. 0.], shape=(10), dtype=float32)
```

### See Also

Other random:  
[random\\_beta\(\)](#)  
[random\\_binomial\(\)](#)  
[random\\_categorical\(\)](#)  
[random\\_dropout\(\)](#)  
[random\\_gamma\(\)](#)  
[random\\_integer\(\)](#)  
[random\\_normal\(\)](#)  
[random\\_shuffle\(\)](#)  
[random\\_truncated\\_normal\(\)](#)  
[random\\_uniform\(\)](#)

---

random\_shuffle

*Shuffle the elements of a tensor uniformly at random along an axis.*

---

### Description

Shuffle the elements of a tensor uniformly at random along an axis.

### Usage

```
random_shuffle(x, axis = 1L, seed = NULL)
```

**Arguments**

x	The tensor to be shuffled.
axis	An integer specifying the axis along which to shuffle. Defaults to 0.
seed	An R integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .

**Value**

A tensor, a copy of x with the axis axis shuffled.

**See Also**

Other random:

`random_beta()`  
`random_binomial()`  
`random_categorical()`  
`random_dropout()`  
`random_gamma()`  
`random_integer()`  
`random_normal()`  
`random_seed_generator()`  
`random_truncated_normal()`  
`random_uniform()`

---

random\_truncated\_normal

*Draw samples from a truncated normal distribution.*

---

**Description**

The values are drawn from a normal distribution with specified mean and standard deviation, discarding and re-drawing any samples that are more than two standard deviations from the mean.

**Usage**

```
random_truncated_normal(shape, mean = 0, stddev = 1, dtype = NULL, seed = NULL)
```

**Arguments**

shape	The shape of the random values to generate.
mean	Float, defaults to 0. Mean of the random values to generate.
stddev	Float, defaults to 1. Standard deviation of the random values to generate.
dtype	Optional dtype of the tensor. Only floating point types are supported. If not specified, <code>config_floatx()</code> is used, which defaults to <code>float32</code> unless you configured it otherwise (via <code>config_set_floatx(float_dtype)</code> )
seed	An R integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .

**Value**

A tensor of random values.

**See Also**

Other random:  
`random_beta()`  
`random_binomial()`  
`random_categorical()`  
`random_dropout()`  
`random_gamma()`  
`random_integer()`  
`random_normal()`  
`random_seed_generator()`  
`random_shuffle()`  
`random_uniform()`

---

random\_uniform

*Draw samples from a uniform distribution.*

---

**Description**

The generated values follow a uniform distribution in the range  $[\text{minval}, \text{maxval})$ . The lower bound `minval` is included in the range, while the upper bound `maxval` is excluded.

`dtype` must be a floating point type, the default range is  $[0, 1)$ .

**Usage**

```
random_uniform(shape, minval = 0, maxval = 1, dtype = NULL, seed = NULL)
```

**Arguments**

shape	The shape of the random values to generate.
minval	Float, defaults to 0. Lower bound of the range of random values to generate (inclusive).
maxval	Float, defaults to 1. Upper bound of the range of random values to generate (exclusive).
dtype	Optional dtype of the tensor. Only floating point types are supported. If not specified, <code>config_floatx()</code> is used, which defaults to <code>float32</code> unless you configured it otherwise (via <code>config_set_floatx(float_dtype)</code> )
seed	An R integer or instance of <code>random_seed_generator()</code> . Used to make the behavior of the initializer deterministic. Note that an initializer seeded with an integer or NULL (unseeded) will produce the same random values across multiple calls. To get different random values across multiple calls, use as seed an instance of <code>random_seed_generator()</code> .

**Value**

A tensor of random values.

**See Also**

Other random:

`random_beta()`  
`random_binomial()`  
`random_categorical()`  
`random_dropout()`  
`random_gamma()`  
`random_integer()`  
`random_normal()`  
`random_seed_generator()`  
`random_shuffle()`  
`random_truncated_normal()`

---

register\_keras\_serializable

*Registers a custom object with the Keras serialization framework.*

---

**Description**

This function registers a custom class or function with the Keras custom object registry, so that it can be serialized and deserialized without needing an entry in the user-provided `custom_objects` argument. It also injects a function that Keras will call to get the object's serializable string key.

Note that to be serialized and deserialized, classes must implement the `get_config()` method. Functions do not have this requirement.

The object will be registered under the key `'package>name'` where `name`, defaults to the object name if not passed.

**Usage**

```
register_keras_serializable(object, name = NULL, package = NULL)
```

**Arguments**

object	A keras object.
name	The name to serialize this class under in this package.
package	The package that this class belongs to. This is used for the key (which is "package>name") to identify the class. Defaults to the current package name, or "Custom" outside of a package.

**Value**

object is returned invisibly, for convenient piping. This is primarily called for side effects.

**Examples**

```
# Note that `my_package` is used as the `package` argument here, and since
# the `name` argument is not provided, `MyDense` is used as the `name`.
layer_my_dense <- Layer("MyDense")
register_keras_serializable(layer_my_dense, package = "my_package")

MyDense <- environment(layer_my_dense)$`__class__` # the python class obj
stopifnot(exprs = {
  get_registered_object('my_package>MyDense') == MyDense
  get_registered_name(MyDense) == 'my_package>MyDense'
})
```

**See Also**

Other saving and loading functions:

```
export_savedmodel.keras.src.models.model.Model()
layer_t fsm()
load_model()
load_model_weights()
save_model()
save_model_config()
save_model_weights()
with_custom_object_scope()
```

Other serialization utilities:

```
deserialize_keras_object()
get_custom_objects()
get_registered_name()
get_registered_object()
serialize_keras_object()
with_custom_object_scope()
```

---

regularizer\_l1      *A regularizer that applies a L1 regularization penalty.*

---

**Description**

The L1 regularization penalty is computed as:  $\text{loss} = l1 * \text{reduce\_sum}(\text{abs}(x))$

L1 may be passed to a layer as a string identifier:

```
dense <- layer_dense(units = 3, kernel_regularizer = 'l1')
```

In this case, the default value used is  $l1=0.01$ .

**Usage**

```
regularizer_l1(l1 = 0.01)
```

**Arguments**

l1                      float, L1 regularization factor.

**Value**

A Regularizer instance that can be passed to layer constructors or used as a standalone object.

**See Also**

- <https://keras.io/api/layers/regularizers#l1-class>

Other regularizers:

[regularizer\\_l1\\_l2\(\)](#)

[regularizer\\_l2\(\)](#)

[regularizer\\_orthogonal\(\)](#)

---

regularizer\_l1\_l2      *A regularizer that applies both L1 and L2 regularization penalties.*

---

**Description**

The L1 regularization penalty is computed as:  $\text{loss} = l1 * \text{reduce\_sum}(\text{abs}(x))$

The L2 regularization penalty is computed as  $\text{loss} = l2 * \text{reduce\_sum}(\text{square}(x))$

L1L2 may be passed to a layer as a string identifier:

```
dense <- layer_dense(units = 3, kernel_regularizer = 'L1L2')
```

In this case, the default values used are  $l1=0.01$  and  $l2=0.01$ .

**Usage**

```
regularizer_l1_l2(l1 = 0, l2 = 0)
```

**Arguments**

l1                    float, L1 regularization factor.  
l2                    float, L2 regularization factor.

**Value**

A Regularizer instance that can be passed to layer constructors or used as a standalone object.

**See Also**

- <https://keras.io/api/layers/regularizers#l1l2-class>

Other regularizers:

[regularizer\\_l1\(\)](#)

[regularizer\\_l2\(\)](#)

[regularizer\\_orthogonal\(\)](#)

---

regularizer_l2	<i>A regularizer that applies a L2 regularization penalty.</i>
----------------	--

---

**Description**

The L2 regularization penalty is computed as: `loss = l2 * reduce_sum(square(x))`

L2 may be passed to a layer as a string identifier:

```
dense <- layer_dense(units = 3, kernel_regularizer='l2')
```

In this case, the default value used is `l2=0.01`.

**Usage**

```
regularizer_l2(l2 = 0.01)
```

**Arguments**

l2                    float, L2 regularization factor.

**Value**

A Regularizer instance that can be passed to layer constructors or used as a standalone object.

**See Also**

- <https://keras.io/api/layers/regularizers#l2-class>

Other regularizers:

`regularizer_l1()`

`regularizer_l1_l2()`

`regularizer_orthogonal()`

---

regularizer\_orthogonal

*Regularizer that encourages input vectors to be orthogonal to each other.*

---

**Description**

It can be applied to either the rows of a matrix (mode="rows") or its columns (mode="columns"). When applied to a Dense kernel of shape (input\_dim, units), rows mode will seek to make the feature vectors (i.e. the basis of the output space) orthogonal to each other.

**Usage**

```
regularizer_orthogonal(factor = 0.01, mode = "rows")
```

**Arguments**

factor	Float. The regularization factor. The regularization penalty will be proportional to factor times the mean of the dot products between the L2-normalized rows (if mode="rows", or columns if mode="columns") of the inputs, excluding the product of each row/column with itself. Defaults to 0.01.
mode	String, one of {"rows", "columns"}. Defaults to "rows". In rows mode, the regularization effect seeks to make the rows of the input orthogonal to each other. In columns mode, it seeks to make the columns of the input orthogonal to each other.

**Value**

A Regularizer instance that can be passed to layer constructors or used as a standalone object.

**Examples**

```
regularizer <- regularizer_orthogonal(factor=0.01)
layer <- layer_dense(units=4, kernel_regularizer=regularizer)
```



**See Also**

- <https://keras.io/api/layers/regularizers#orthogonalregularizer-class>

Other regularizers:

`regularizer_l1()`

`regularizer_l1_l2()`

`regularizer_l2()`

---

reset\_state

*Reset the state for a model, layer or metric.*

---

**Description**

Reset the state for a model, layer or metric.

**Usage**

```
reset_state(object)
```

**Arguments**

object      Model, Layer, or Metric instance

Not all Layers have resettable state (E.g., `adapt()`-able preprocessing layers and rnn layers have resettable state, but a `layer_dense()` does not). Calling this on a Layer instance without any resettable-state will error.

**Value**

object, invisibly.

**See Also**

Other layer methods:

`count_params()`

`get_config()`

`get_weights()`

`quantize_weights()`

---

rnn_cells_stack	<i>Wrapper allowing a stack of RNN cells to behave as a single cell.</i>
-----------------	--

---

### Description

Used to implement efficient stacked RNNs.

### Usage

```
rnn_cells_stack(cells, ...)
```

### Arguments

cells	List of RNN cell instances.
...	Unnamed arguments are treated as additional cells. Named arguments are passed on to the underlying layer.

### Value

A Layer instance, which is intended to be used with `layer_rnn()`.

### Example

```
batch_size <- 3
sentence_length <- 5
num_features <- 2
new_shape <- c(batch_size, sentence_length, num_features)
x <- array(1:30, dim = new_shape)

rnn_cells <- lapply(1:2, function(x) rnn_cell_lstm(units = 128))
stacked_lstm <- rnn_cells_stack(rnn_cells)
lstm_layer <- layer_rnn(cell = stacked_lstm)

result <- lstm_layer(x)
str(result)

## <tf.Tensor: shape=(3, 128), dtype=float32, numpy=...>
```

### See Also

Other rnn layers:  
[layer\\_bidirectional\(\)](#)  
[layer\\_conv\\_lstm\\_1d\(\)](#)  
[layer\\_conv\\_lstm\\_2d\(\)](#)  
[layer\\_conv\\_lstm\\_3d\(\)](#)  
[layer\\_gru\(\)](#)

```
layer_lstm()  
layer_rnn()  
layer_simple_rnn()  
layer_time_distributed()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()
```

```
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()  
layer_reshape()  
layer_resizing()  
layer_rnn()  
layer_separable_conv_1d()
```

```
layer_separable_conv_2d()  
layer_simple_rnn()  
layer_spatial_dropout_1d()  
layer_spatial_dropout_2d()  
layer_spatial_dropout_3d()  
layer_spectral_normalization()  
layer_string_lookup()  
layer_subtract()  
layer_text_vectorization()  
layer_tfsn()  
layer_time_distributed()  
layer_torch_module_wrapper()  
layer_unit_normalization()  
layer_upsampling_1d()  
layer_upsampling_2d()  
layer_upsampling_3d()  
layer_zero_padding_1d()  
layer_zero_padding_2d()  
layer_zero_padding_3d()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cell_simple()
```

---

rnn\_cell\_gru

*Cell class for the GRU layer.*

---

### Description

This class processes one step within the whole time sequence input, whereas `layer_gru()` processes the whole sequence.

### Usage

```
rnn_cell_gru(  
    units,  
    activation = "tanh",  
    recurrent_activation = "sigmoid",  
    use_bias = TRUE,  
    kernel_initializer = "glorot_uniform",  
    recurrent_initializer = "orthogonal",  
    bias_initializer = "zeros",  
    kernel_regularizer = NULL,  
    recurrent_regularizer = NULL,  
    bias_regularizer = NULL,  
    kernel_constraint = NULL,  
    recurrent_constraint = NULL,
```

```

    bias_constraint = NULL,
    dropout = 0,
    recurrent_dropout = 0,
    reset_after = TRUE,
    seed = NULL,
    ...
)

```

### Arguments

<code>units</code>	Positive integer, dimensionality of the output space.
<code>activation</code>	Activation function to use. Default: hyperbolic tangent (tanh). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
<code>recurrent_activation</code>	Activation function to use for the recurrent step. Default: sigmoid (sigmoid). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
<code>use_bias</code>	Boolean, (default TRUE), whether the layer should use a bias vector.
<code>kernel_initializer</code>	Initializer for the kernel weights matrix, used for the linear transformation of the inputs. Default: "glorot_uniform".
<code>recurrent_initializer</code>	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state. Default: "orthogonal".
<code>bias_initializer</code>	Initializer for the bias vector. Default: "zeros".
<code>kernel_regularizer</code>	Regularizer function applied to the kernel weights matrix. Default: NULL.
<code>recurrent_regularizer</code>	Regularizer function applied to the recurrent_kernel weights matrix. Default: NULL.
<code>bias_regularizer</code>	Regularizer function applied to the bias vector. Default: NULL.
<code>kernel_constraint</code>	Constraint function applied to the kernel weights matrix. Default: NULL.
<code>recurrent_constraint</code>	Constraint function applied to the recurrent_kernel weights matrix. Default: NULL.
<code>bias_constraint</code>	Constraint function applied to the bias vector. Default: NULL.
<code>dropout</code>	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs. Default: 0.
<code>recurrent_dropout</code>	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state. Default: 0.
<code>reset_after</code>	GRU convention (whether to apply reset gate after or before matrix multiplication). FALSE = "before", TRUE = "after" (default and cuDNN compatible).
<code>seed</code>	Random seed for dropout.
<code>...</code>	For forward/backward compatibility.

**Value**

A Layer instance, which is intended to be used with `layer_rnn()`.

**Call Arguments**

- `inputs`: A 2D tensor, with shape (batch, features).
- `states`: A 2D tensor with shape (batch, units), which is the state from the previous time step.
- `training`: Python boolean indicating whether the layer should behave in training mode or in inference mode. Only relevant when `dropout` or `recurrent_dropout` is used.

**Examples**

```
inputs <- random_uniform(c(32, 10, 8))
outputs <- inputs |> layer_rnn(rnn_cell_gru(4))
shape(outputs)

## shape(32, 4)

rnn <- layer_rnn(
  cell = rnn_cell_gru(4),
  return_sequences=TRUE,
  return_state=TRUE)
c(whole_sequence_output, final_state) %<-% rnn(inputs)
shape(whole_sequence_output)

## shape(32, 10, 4)

shape(final_state)

## shape(32, 4)
```

**See Also**

Other rnn cells:

[layer\\_rnn\(\)](#)

[rnn\\_cell\\_lstm\(\)](#)

[rnn\\_cell\\_simple\(\)](#)

Other gru rnn layers:

[layer\\_gru\(\)](#)

Other rnn layers:

[layer\\_bidirectional\(\)](#)

```
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_gru()  
layer_lstm()  
layer_rnn()  
layer_simple_rnn()  
layer_time_distributed()  
rnn_cell_lstm()  
rnn_cell_simple()  
rnn_cells_stack()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()
```



```
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()
```

```
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_lstm()
rnn_cell_simple()
rnn_cells_stack()
```

---

rnn\_cell\_lstm

*Cell class for the LSTM layer.*

---

### Description

This class processes one step within the whole time sequence input, whereas `layer_lstm()` processes the whole sequence.

### Usage

```
rnn_cell_lstm(
    units,
    activation = "tanh",
    recurrent_activation = "sigmoid",
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    recurrent_initializer = "orthogonal",
    bias_initializer = "zeros",
    unit_forget_bias = TRUE,
```

```

    kernel_regularizer = NULL,
    recurrent_regularizer = NULL,
    bias_regularizer = NULL,
    kernel_constraint = NULL,
    recurrent_constraint = NULL,
    bias_constraint = NULL,
    dropout = 0,
    recurrent_dropout = 0,
    seed = NULL,
    ...
)

```

### Arguments

<code>units</code>	Positive integer, dimensionality of the output space.
<code>activation</code>	Activation function to use. Default: hyperbolic tangent (tanh). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
<code>recurrent_activation</code>	Activation function to use for the recurrent step. Default: sigmoid (sigmoid). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
<code>use_bias</code>	Boolean, (default TRUE), whether the layer should use a bias vector.
<code>kernel_initializer</code>	Initializer for the kernel weights matrix, used for the linear transformation of the inputs. Default: "glorot_uniform".
<code>recurrent_initializer</code>	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state. Default: "orthogonal".
<code>bias_initializer</code>	Initializer for the bias vector. Default: "zeros".
<code>unit_forget_bias</code>	Boolean (default TRUE). If TRUE, add 1 to the bias of the forget gate at initialization. Setting it to TRUE will also force <code>bias_initializer="zeros"</code> . This is recommended in <a href="#">Jozefowicz et al.</a>
<code>kernel_regularizer</code>	Regularizer function applied to the kernel weights matrix. Default: NULL.
<code>recurrent_regularizer</code>	Regularizer function applied to the recurrent_kernel weights matrix. Default: NULL.
<code>bias_regularizer</code>	Regularizer function applied to the bias vector. Default: NULL.
<code>kernel_constraint</code>	Constraint function applied to the kernel weights matrix. Default: NULL.
<code>recurrent_constraint</code>	Constraint function applied to the recurrent_kernel weights matrix. Default: NULL.
<code>bias_constraint</code>	Constraint function applied to the bias vector. Default: NULL.

dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs. Default: 0.
recurrent_dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state. Default: 0.
seed	Random seed for dropout.
...	For forward/backward compatability.

**Value**

A Layer instance, which is intended to be used with `layer_rnn()`.

**Call Arguments**

- `inputs`: A 2D tensor, with shape (batch, features).
- `states`: A 2D tensor with shape (batch, units), which is the state from the previous time step.
- `training`: Boolean indicating whether the layer should behave in training mode or in inference mode. Only relevant when dropout or recurrent\_dropout is used.

**Examples**

```
inputs <- random_uniform(c(32, 10, 8))
output <- inputs |>
  layer_rnn(cell = rnn_cell_lstm(4))
shape(output)

## shape(32, 4)

rnn <- layer_rnn(cell = rnn_cell_lstm(4),
  return_sequences = T,
  return_state = T)
c(whole_sequence_output, ...final_state) %<-% rnn(inputs)
str(whole_sequence_output)

## <tf.Tensor: shape=(32, 10, 4), dtype=float32, numpy=... >

str(final_state)

## List of 2
## $ :<tf.Tensor: shape=(32, 4), dtype=float32, numpy=... >
## $ :<tf.Tensor: shape=(32, 4), dtype=float32, numpy=... >
```

**See Also**

Other rnn cells:

[layer\\_rnn\(\)](#)  
[rnn\\_cell\\_gru\(\)](#)  
[rnn\\_cell\\_simple\(\)](#)

Other lstm rnn layers:

[layer\\_lstm\(\)](#)

Other rnn layers:

[layer\\_bidirectional\(\)](#)  
[layer\\_conv\\_lstm\\_1d\(\)](#)  
[layer\\_conv\\_lstm\\_2d\(\)](#)  
[layer\\_conv\\_lstm\\_3d\(\)](#)  
[layer\\_gru\(\)](#)  
[layer\\_lstm\(\)](#)  
[layer\\_rnn\(\)](#)  
[layer\\_simple\\_rnn\(\)](#)  
[layer\\_time\\_distributed\(\)](#)  
[rnn\\_cell\\_gru\(\)](#)  
[rnn\\_cell\\_simple\(\)](#)  
[rnn\\_cells\\_stack\(\)](#)

Other layers:

[Layer\(\)](#)  
[layer\\_activation\(\)](#)  
[layer\\_activation\\_elu\(\)](#)  
[layer\\_activation\\_leaky\\_relu\(\)](#)  
[layer\\_activation\\_parametric\\_relu\(\)](#)  
[layer\\_activation\\_relu\(\)](#)  
[layer\\_activation\\_softmax\(\)](#)  
[layer\\_activity\\_regularization\(\)](#)  
[layer\\_add\(\)](#)  
[layer\\_additive\\_attention\(\)](#)  
[layer\\_alpha\\_dropout\(\)](#)  
[layer\\_attention\(\)](#)  
[layer\\_average\(\)](#)  
[layer\\_average\\_pooling\\_1d\(\)](#)  
[layer\\_average\\_pooling\\_2d\(\)](#)  
[layer\\_average\\_pooling\\_3d\(\)](#)  
[layer\\_batch\\_normalization\(\)](#)  
[layer\\_bidirectional\(\)](#)  
[layer\\_category\\_encoding\(\)](#)  
[layer\\_center\\_crop\(\)](#)  
[layer\\_concatenate\(\)](#)  
[layer\\_conv\\_1d\(\)](#)  
[layer\\_conv\\_1d\\_transpose\(\)](#)

```
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()  
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()
```

```
layer_multiply()
layer_normalization()
layer_permute()
layer_random_brightness()
layer_random_contrast()
layer_random_crop()
layer_random_flip()
layer_random_rotation()
layer_random_translation()
layer_random_zoom()
layer_repeat_vector()
layer_rescaling()
layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_simple()
rnn_cells_stack()
```

---

rnn\_cell\_simple

*Cell class for SimpleRNN.*

---

### **Description**

This class processes one step within the whole time sequence input, whereas [layer\\_simple\\_rnn\(\)](#) processes the whole sequence.

**Usage**

```

rnn_cell_simple(
    units,
    activation = "tanh",
    use_bias = TRUE,
    kernel_initializer = "glorot_uniform",
    recurrent_initializer = "orthogonal",
    bias_initializer = "zeros",
    kernel_regularizer = NULL,
    recurrent_regularizer = NULL,
    bias_regularizer = NULL,
    kernel_constraint = NULL,
    recurrent_constraint = NULL,
    bias_constraint = NULL,
    dropout = 0,
    recurrent_dropout = 0,
    seed = NULL,
    ...
)

```

**Arguments**

<code>units</code>	Positive integer, dimensionality of the output space.
<code>activation</code>	Activation function to use. Default: hyperbolic tangent (tanh). If you pass NULL, no activation is applied (ie. "linear" activation: $a(x) = x$ ).
<code>use_bias</code>	Boolean, (default TRUE), whether the layer should use a bias vector.
<code>kernel_initializer</code>	Initializer for the kernel weights matrix, used for the linear transformation of the inputs. Default: "glorot_uniform".
<code>recurrent_initializer</code>	Initializer for the recurrent_kernel weights matrix, used for the linear transformation of the recurrent state. Default: "orthogonal".
<code>bias_initializer</code>	Initializer for the bias vector. Default: "zeros".
<code>kernel_regularizer</code>	Regularizer function applied to the kernel weights matrix. Default: NULL.
<code>recurrent_regularizer</code>	Regularizer function applied to the recurrent_kernel weights matrix. Default: NULL.
<code>bias_regularizer</code>	Regularizer function applied to the bias vector. Default: NULL.
<code>kernel_constraint</code>	Constraint function applied to the kernel weights matrix. Default: NULL.
<code>recurrent_constraint</code>	Constraint function applied to the recurrent_kernel weights matrix. Default: NULL.



bias_constraint	Constraint function applied to the bias vector. Default: NULL.
dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the inputs. Default: 0.
recurrent_dropout	Float between 0 and 1. Fraction of the units to drop for the linear transformation of the recurrent state. Default: 0.
seed	Random seed for dropout.
...	For forward/backward compatability.

**Value**

A Layer instance, which is intended to be used with `layer_rnn()`.

**Call Arguments**

- `sequence`: A 2D tensor, with shape `(batch, features)`.
- `states`: A 2D tensor with shape `(batch, units)`, which is the state from the previous time step.
- `training`: Python boolean indicating whether the layer should behave in training mode or in inference mode. Only relevant when `dropout` or `recurrent_dropout` is used.

**Examples**

```
inputs <- random_uniform(c(32, 10, 8))
rnn <- layer_rnn(cell = rnn_cell_simple(units = 4))
output <- rnn(inputs) # The output has shape `(32, 4)`.
rnn <- layer_rnn(
  cell = rnn_cell_simple(units = 4),
  return_sequences=TRUE,
  return_state=TRUE
)
# whole_sequence_output has shape `(32, 10, 4)`.
# final_state has shape `(32, 4)`.
c(whole_sequence_output, final_state) %<-% rnn(inputs)
```

**See Also**

Other rnn cells:

[layer\\_rnn\(\)](#)  
[rnn\\_cell\\_gru\(\)](#)  
[rnn\\_cell\\_lstm\(\)](#)

Other simple rnn layers:

[layer\\_simple\\_rnn\(\)](#)

Other rnn layers:

[layer\\_bidirectional\(\)](#)

```
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_gru()  
layer_lstm()  
layer_rnn()  
layer_simple_rnn()  
layer_time_distributed()  
rnn_cell_gru()  
rnn_cell_lstm()  
rnn_cells_stack()
```

Other layers:

```
Layer()  
layer_activation()  
layer_activation_elu()  
layer_activation_leaky_relu()  
layer_activation_parametric_relu()  
layer_activation_relu()  
layer_activation_softmax()  
layer_activity_regularization()  
layer_add()  
layer_additive_attention()  
layer_alpha_dropout()  
layer_attention()  
layer_average()  
layer_average_pooling_1d()  
layer_average_pooling_2d()  
layer_average_pooling_3d()  
layer_batch_normalization()  
layer_bidirectional()  
layer_category_encoding()  
layer_center_crop()  
layer_concatenate()  
layer_conv_1d()  
layer_conv_1d_transpose()  
layer_conv_2d()  
layer_conv_2d_transpose()  
layer_conv_3d()  
layer_conv_3d_transpose()  
layer_conv_lstm_1d()  
layer_conv_lstm_2d()  
layer_conv_lstm_3d()  
layer_cropping_1d()  
layer_cropping_2d()  
layer_cropping_3d()  
layer_dense()  
layer_depthwise_conv_1d()
```

```
layer_depthwise_conv_2d()  
layer_discretization()  
layer_dot()  
layer_dropout()  
layer_einsum_dense()  
layer_embedding()  
layer_feature_space()  
layer_flatten()  
layer_flax_module_wrapper()  
layer_gaussian_dropout()  
layer_gaussian_noise()  
layer_global_average_pooling_1d()  
layer_global_average_pooling_2d()  
layer_global_average_pooling_3d()  
layer_global_max_pooling_1d()  
layer_global_max_pooling_2d()  
layer_global_max_pooling_3d()  
layer_group_normalization()  
layer_group_query_attention()  
layer_gru()  
layer_hashed_crossing()  
layer_hashing()  
layer_identity()  
layer_integer_lookup()  
layer_jax_model_wrapper()  
layer_lambda()  
layer_layer_normalization()  
layer_lstm()  
layer_masking()  
layer_max_pooling_1d()  
layer_max_pooling_2d()  
layer_max_pooling_3d()  
layer_maximum()  
layer_mel_spectrogram()  
layer_minimum()  
layer_multi_head_attention()  
layer_multiply()  
layer_normalization()  
layer_permute()  
layer_random_brightness()  
layer_random_contrast()  
layer_random_crop()  
layer_random_flip()  
layer_random_rotation()  
layer_random_translation()  
layer_random_zoom()  
layer_repeat_vector()  
layer_rescaling()
```

```

layer_reshape()
layer_resizing()
layer_rnn()
layer_separable_conv_1d()
layer_separable_conv_2d()
layer_simple_rnn()
layer_spatial_dropout_1d()
layer_spatial_dropout_2d()
layer_spatial_dropout_3d()
layer_spectral_normalization()
layer_string_lookup()
layer_subtract()
layer_text_vectorization()
layer_tfsn()
layer_time_distributed()
layer_torch_module_wrapper()
layer_unit_normalization()
layer_upsampling_1d()
layer_upsampling_2d()
layer_upsampling_3d()
layer_zero_padding_1d()
layer_zero_padding_2d()
layer_zero_padding_3d()
rnn_cell_gru()
rnn_cell_lstm()
rnn_cells_stack()

```

---

save_model	<i>Saves a model as a .keras file.</i>
------------	--

---

### Description

Saves a model as a .keras file.

### Usage

```
save_model(model, filepath = NULL, overwrite = FALSE, zipped = TRUE, ...)
```

### Arguments

model	A keras model.
filepath	string, Path where to save the model. Must end in .keras.
overwrite	Whether we should overwrite any existing model at the target location, or instead ask the user via an interactive prompt.
zipped	Whether to save the model as a zipped .keras archive (default), or as an unzipped directory.
...	For forward/backward compatability.

**Value**

If filepath is provided, then this function is called primarily for side effects, and model is returned invisibly. If filepath is not provided or NULL, then the serialized model is returned as an R raw vector.

**Examples**

```
model <- keras_model_sequential(input_shape = c(3)) |>
  layer_dense(5) |>
  layer_activation_softmax()

model |> save_model("model.keras")
loaded_model <- load_model("model.keras")

x <- random_uniform(c(10, 3))
stopifnot(all.equal(
  model |> predict(x),
  loaded_model |> predict(x)
))
```

The saved .keras file is a zip archive that contains:

- The model's configuration (architecture)
- The model's weights
- The model's optimizer's state (if any)

Thus models can be reinstantiated in the exact same state.

```
zip::zip_list("model.keras")[, "filename"]
```

```
## [1] "metadata.json"      "config.json"       "model.weights.h5"
```

**See Also**

[load\\_model\(\)](#)

Other saving and loading functions:

[export\\_savedmodel.keras.src.models.model.Model\(\)](#)

[layer\\_tfsn\(\)](#)

[load\\_model\(\)](#)

[load\\_model\\_weights\(\)](#)

[register\\_keras\\_serializable\(\)](#)

[save\\_model\\_config\(\)](#)

[save\\_model\\_weights\(\)](#)

[with\\_custom\\_object\\_scope\(\)](#)

---

save\_model\_config      *Save and load model configuration as JSON*

---

### Description

Save and re-load models configurations as JSON. Note that the representation does not include the weights, only the architecture.

### Usage

```
save_model_config(model, filepath = NULL, overwrite = FALSE)
```

```
load_model_config(filepath, custom_objects = NULL)
```

### Arguments

model	Model object to save
filepath	path to json file with the model config.
overwrite	Whether we should overwrite any existing model configuration json at filepath, or instead ask the user via an interactive prompt.
custom_objects	Optional named list mapping names to custom classes or functions to be considered during deserialization.

### Details

Note: `save_model_config()` serializes the model to JSON using `serialize_keras_object()`, not `get_config()`. `serialize_keras_object()` returns a superset of `get_config()`, with additional information needed to create the class object needed to restore the model. See example for how to extract the `get_config()` value from a saved model.

### Value

This is called primarily for side effects. `model` is returned, invisibly, to enable usage with the pipe.

### Example

```
model <- keras_model_sequential(input_shape = 10) |> layer_dense(10)
file <- tempfile("model-config-", fileext = ".json")
save_model_config(model, file)

# load a new model instance with the same architecture but different weights
model2 <- load_model_config(file)

stopifnot(exprs = {
  all.equal(get_config(model), get_config(model2))

  # To extract the `get_config()` value from a saved model config:
```

```
    all.equal(
      get_config(model),
      structure(jsonlite::read_json(file)$config,
                "__class__" = keras_model_sequential()`__class__`)
    )
  })
```

### See Also

Other saving and loading functions:

```
export_savedmodel.keras.src.models.model.Model()
layer_tfsn()
load_model()
load_model_weights()
register_keras_serializable()
save_model()
save_model_weights()
with_custom_object_scope()
```

---

save\_model\_weights      *Saves all layer weights to a .weights.h5 file.*

---

### Description

Saves all layer weights to a .weights.h5 file.

### Usage

```
save_model_weights(model, filepath, overwrite = FALSE)
```

### Arguments

model	A keras Model object
filepath	string. Path where to save the model. Must end in .weights.h5.
overwrite	Whether we should overwrite any existing model at the target location, or instead ask the user via an interactive prompt.

### Value

This is called primarily for side effects. model is returned, invisibly, to enable usage with the pipe.

**See Also**

- [https://keras.io/api/models/model\\_saving\\_apis/weights\\_saving\\_and\\_loading#saveweights-method](https://keras.io/api/models/model_saving_apis/weights_saving_and_loading#saveweights-method)

Other saving and loading functions:

```
export_savedmodel.keras.src.models.model.Model()
layer_tfsn()
load_model()
load_model_weights()
register_keras_serializable()
save_model()
save_model_config()
with_custom_object_scope()
```

---

serialize\_keras\_object

*Retrieve the full config by serializing the Keras object.*

---

**Description**

serialize\_keras\_object() serializes a Keras object to a named list that represents the object, and is a reciprocal function of deserialize\_keras\_object(). See deserialize\_keras\_object() for more information about the full config format.

**Usage**

```
serialize_keras_object(obj)
```

**Arguments**

obj                    the Keras object to serialize.

**Value**

A named list that represents the object config. The config is expected to contain simple types only, and can be saved as json. The object can be deserialized from the config via deserialize\_keras\_object().

**See Also**

- [https://keras.io/api/models/model\\_saving\\_apis/serialization\\_utils#serializekerasobject-function](https://keras.io/api/models/model_saving_apis/serialization_utils#serializekerasobject-function)

Other serialization utilities:

```
deserialize_keras_object()
get_custom_objects()
get_registered_name()
get_registered_object()
register_keras_serializable()
with_custom_object_scope()
```



---

set_random_seed	<i>Sets all random seeds (Python, NumPy, and backend framework, e.g. TF).</i>
-----------------	---

---

### Description

You can use this utility to make almost any Keras program fully deterministic. Some limitations apply in cases where network communications are involved (e.g. parameter server distribution), which creates additional sources of randomness, or when certain non-deterministic cuDNN ops are involved.

This sets:

- the R session seed: `set.seed()`
- the Python session seed: `import random; random.seed(seed)`
- the Python NumPy seed: `import numpy; numpy.random.seed(seed)`
- the TensorFlow seed: `tf.random.set_seed(seed)` (only if TF is installed)
- The Torch seed: `import("torch").manual_seed(seed)` (only if the backend is torch)
- and disables Python hash randomization.

Note that the TensorFlow seed is set even if you're not using TensorFlow as your backend framework, since many workflows leverage `tf.data` pipelines (which feature random shuffling). Likewise many workflows might leverage NumPy APIs.

### Usage

```
set_random_seed(seed)
```

### Arguments

seed	Integer, the random seed to use.
------	----------------------------------

### Value

No return value, called for side effects.

### See Also

- [https://keras.io/api/utils/python\\_utils#setrandomseed-function](https://keras.io/api/utils/python_utils#setrandomseed-function)

Other utils:

```
audio_dataset_from_directory()  
clear_session()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_is_interactive_logging_enabled()
```

```
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()
```

---

shape

*Tensor shape utility*

---

## Description

This function can be used to get or create a tensor shape.

## Usage

```
shape(...)
```

```
## S3 method for class 'keras_shape'
format(x, ..., prefix = TRUE)
```

```
## S3 method for class 'keras_shape'
print(x, ...)
```

```
## S3 method for class 'keras_shape'
x[...]
```

```
## S3 method for class 'keras_shape'
as.integer(x, ...)
```

```
## S3 method for class 'keras_shape'
as.list(x, ...)
```

```
## S3 method for class 'keras_shape'
x == y
```

```
## S3 method for class 'keras_shape'
x != y
```

### Arguments

... A shape specification. Numerics, NULL and tensors are valid. NULL, NA, and -1L can be used to specify an unspecified dim size. Tensors are dispatched to `op_shape()` to extract the tensor shape. Values wrapped in `I()` are used as is (see examples). All other objects are coerced via `as.integer()`.

x, y A `keras_shape` object.

prefix Whether to format the shape object with a prefix. Defaults to "shape".

### Value

A list with a "keras\_shape" class attribute. Each element of the list will be either a) NULL, b) an R integer or c) a scalar integer tensor (e.g., when supplied a TF tensor with an unspecified dimension in a function being traced).

### Examples

```
shape(1, 2, 3)
```

```
## shape(1, 2, 3)
```

3 ways to specify an unknown dimension

```
shape(NA, 2, 3)
```

```
shape(NULL, 2, 3)
```

```
shape(-1, 2, 3)
```

```
## shape(NA, 2, 3)
```

```
## shape(NA, 2, 3)
```

```
## shape(NA, 2, 3)
```

Most functions that take a 'shape' argument also coerce with `shape()`

```
layer_input(c(1, 2, 3))
```

```
layer_input(shape(1, 2, 3))
```

```
## <KerasTensor shape=(None, 1, 2, 3), dtype=float32, sparse=None, name=keras_tensor>
```

```
## <KerasTensor shape=(None, 1, 2, 3), dtype=float32, sparse=None, name=keras_tensor_1>
```

You can also use `shape()` to get the shape of a tensor (excepting scalar integer tensors).

```
symbolic_tensor <- layer_input(shape(1, 2, 3))
shape(symbolic_tensor)
```

```
## shape(NA, 1, 2, 3)
```

```
eager_tensor <- op_ones(c(1,2,3))
shape(eager_tensor)
```

```
## shape(1, 2, 3)
```

```
op_shape(eager_tensor)
```

```
## shape(1, 2, 3)
```

Combine or expand shapes

```
shape(symbolic_tensor, 4)
```

```
## shape(NA, 1, 2, 3, 4)
```

```
shape(5, symbolic_tensor, 4)
```

```
## shape(5, NA, 1, 2, 3, 4)
```

Scalar integer tensors are treated as axis values. These are most commonly encountered when tracing a function in graph mode, where an axis size might be unknown.

```
tfn <- tensorflow::tf_function(function(x) {
  print(op_shape(x))
  x
},
input_signature = list(tensorflow::tf$TensorSpec(shape(1, NA, 3))))
invisible(tfn(op_ones(shape(1, 2, 3))))
```

```
## shape(1, Tensor("strided_slice:0", shape=(), dtype=int32), 3)
```

A useful pattern is to unpack the shape() with %<-%, like this:

```

c(batch_size, seq_len, channels) %<-% shape(x)

# `%<-%` also has support for skipping values
# during unpacking with `.` and `...`. For example,
# To retrieve just the first and/or last dim:
c(batch_size, ...) %<-% shape(x)
c(batch_size, ., .) %<-% shape(x)
c(..., channels) %<-% shape(x)
c(batch_size, ..., channels) %<-% shape(x)
c(batch_size, ., channels) %<-% shape(x)

echo_print <- function(x) {
  message("> ", deparse(substitute(x)));
  if(!is.null(x)) print(x)
}
tfn <- tensorflow::tf_function(function(x) {
  c(axis1, axis2, axis3) %<-% shape(x)
  echo_print(str(list(axis1 = axis1, axis2 = axis2, axis3 = axis3)))

  echo_print(shape(axis1))          # use axis1 tensor as axis value
  echo_print(shape(axis1, axis2, axis3)) # use axis1 tensor as axis value

  # use shape() to compose a new shape, e.g., in multihead attention
  n_heads <- 4
  echo_print(shape(axis1, axis2, n_heads, axis3/n_heads))

  x
},
input_signature = list(tensorflow::tf$TensorSpec(shape(NA, 4, 16))))
invisible(tfn(op_ones(shape(2, 4, 16))))

## > str(list(axis1 = axis1, axis2 = axis2, axis3 = axis3))

## List of 3
## $ axis1:<tf.Tensor 'strided_slice:0' shape=() dtype=int32>
## $ axis2: int 4
## $ axis3: int 16

## > shape(axis1)

## shape(Tensor("strided_slice:0", shape=(), dtype=int32))

## > shape(axis1, axis2, axis3)

## shape(Tensor("strided_slice:0", shape=(), dtype=int32), 4, 16)

```

```
## > shape(axis1, axis2, n_heads, axis3/n_heads)

## shape(Tensor("strided_slice:0", shape=(), dtype=int32), 4, 4, 4)
```

If you want to resolve the shape of a tensor that can potentially be a scalar integer, you can wrap the tensor in `I()`, or use `op_shape()`.

```
(x <- op_convert_to_tensor(2L))

## tf.Tensor(2, shape=(), dtype=int32)

# by default, shape() treats scalar integer tensors as axis values
shape(x)

## shape(tf.Tensor(2, shape=(), dtype=int32))

# to access the shape of a scalar integer,
# call `op_shape()`, or protect with `I()`
op_shape(x)

## shape()

shape(I(x))

## shape()
```

### See Also

[op\\_shape\(\)](#)

---

split\_dataset

*Splits a dataset into a left half and a right half (e.g. train / test).*

---

### Description

Splits a dataset into a left half and a right half (e.g. train / test).

**Usage**

```
split_dataset(
  dataset,
  left_size = NULL,
  right_size = NULL,
  shuffle = FALSE,
  seed = NULL
)
```

**Arguments**

dataset	A <code>tf\$data\$Dataset</code> , a <code>torch\$utils\$data\$Dataset</code> object, or a list of arrays with the same length.
left_size	If float (in the range $[0, 1]$ ), it signifies the fraction of the data to pack in the left dataset. If integer, it signifies the number of samples to pack in the left dataset. If NULL, defaults to the complement to <code>right_size</code> . Defaults to NULL.
right_size	If float (in the range $[0, 1]$ ), it signifies the fraction of the data to pack in the right dataset. If integer, it signifies the number of samples to pack in the right dataset. If NULL, defaults to the complement to <code>left_size</code> . Defaults to NULL.
shuffle	Boolean, whether to shuffle the data before splitting it.
seed	A random seed for shuffling.

**Value**

A list of two `tf$data$Dataset` objects: the left and right splits.

**Examples**

```
data <- random_uniform(c(1000, 4))
c(left_ds, right_ds) %<-% split_dataset(list(data$numpy()), left_size = 0.8)
left_ds$cardinality()

## tf.Tensor(800, shape=(), dtype=int64)

right_ds$cardinality()

## tf.Tensor(200, shape=(), dtype=int64)
```

**See Also**

- [https://keras.io/api/utils/python\\_utils#splitdataset-function](https://keras.io/api/utils/python_utils#splitdataset-function)

Other dataset utils:

```
audio_dataset_from_directory()
image_dataset_from_directory()
text_dataset_from_directory()
```

```
timeseries_dataset_from_array()
```

Other utils:

```
audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
zip_lists()
```

---

```
summary.keras.src.models.model.Model
```

```
Print a summary of a Keras Model
```

---

## Description

Print a summary of a Keras Model

## Usage

```
## S3 method for class 'keras.src.models.model.Model'
summary(object, ...)
```

```
## S3 method for class 'keras.src.models.model.Model'
format(
  x,
  line_length = getOption("width"),
  positions = NULL,
```



```

    expand_nested = FALSE,
    show_trainable = NA,
    ...,
    layer_range = NULL,
    compact = TRUE
)

## S3 method for class 'keras.src.models.model.Model'
print(x, ...)

```

### Arguments

object, x	Keras model instance
...	for <code>summary()</code> and <code>print()</code> , passed on to <code>format()</code> . For <code>format()</code> , passed on to <code>model\$summary()</code> .
line_length	Total length of printed lines
positions	Relative or absolute positions of log elements in each line. If not provided, defaults to <code>c(0.33, 0.55, 0.67, 1.0)</code> .
expand_nested	Whether to expand the nested models. If not provided, defaults to <code>FALSE</code> .
show_trainable	Whether to show if a layer is trainable. If not provided, defaults to <code>FALSE</code> .
layer_range	a list, tuple, or vector of 2 strings, which is the starting layer name and ending layer name (both inclusive) indicating the range of layers to be printed in summary. It also accepts regex patterns instead of exact name. In such case, start predicate will be the first element it matches to <code>layer_range[[1]]</code> and the end predicate will be the last element it matches to <code>layer_range[[2]]</code> . By default <code>NULL</code> which considers all layers of model.
compact	Whether to remove white-space only lines from the model summary. (Default <code>TRUE</code> )

### Value

`format()` returns a length 1 character vector. `print()` returns the model object invisibly. `summary()` returns the output of `format()` invisibly after printing it.

### Enabling color output in Knitr (RMarkdown, Quarto)

In order to enable color output in a quarto or rmarkdown document with an html output format (include revealjs presentations), then you will need to do the following in a setup chunk:

```

```{r setup, include = FALSE}
options(cli.num_colors = 256)
fansi::set_knit_hooks(knitr::knit_hooks)
options(width = 75) # adjust as needed for format
```

```

**See Also**

Other model functions:

[get\\_config\(\)](#)  
[get\\_layer\(\)](#)  
[keras\\_model\(\)](#)  
[keras\\_model\\_sequential\(\)](#)  
[pop\\_layer\(\)](#)

---

|               |   |
|---------------|---|
| test_on_batch | <i>Test the model on a single batch of samples.</i> |
|---------------|---|

---

**Description**

Test the model on a single batch of samples.

**Usage**

```
test_on_batch(object, x, y = NULL, sample_weight = NULL, ...)
```

**Arguments**

|               |  |
|---------------|--|
| object        | Keras model object   |
| x             | Input data. Must be array-like.  |
| y             | Target data. Must be array-like.   |
| sample_weight | Optional array of the same length as x, containing weights to apply to the model's loss for each sample. In the case of temporal data, you can pass a 2D array with shape (samples, sequence_length), to apply a different weight to every timestep of every sample. |
| ...           | for forward/backward compatability   |

**Value**

A scalar loss value (when no metrics), or a named list of loss and metric values (if there are metrics).

**See Also**

- [https://keras.io/api/models/model\\_training\\_apis#testonbatch-method](https://keras.io/api/models/model_training_apis#testonbatch-method)

Other model training:

[compile.keras.src.models.model.Model\(\)](#)  
[evaluate.keras.src.models.model.Model\(\)](#)  
[predict.keras.src.models.model.Model\(\)](#)  
[predict\\_on\\_batch\(\)](#)  
[train\\_on\\_batch\(\)](#)

---

`text_dataset_from_directory`*Generates a `tf.data.Dataset` from text files in a directory.*

---

### Description

If your directory structure is:

```
main_directory/  
...class_a/  
.....a_text_1.txt  
.....a_text_2.txt  
...class_b/  
.....b_text_1.txt  
.....b_text_2.txt
```

Then calling `text_dataset_from_directory(main_directory, labels='inferred')` will return a `tf.data.Dataset` that yields batches of texts from the subdirectories `class_a` and `class_b`, together with labels 0 and 1 (0 corresponding to `class_a` and 1 corresponding to `class_b`).

Only `.txt` files are supported at this time.

### Usage

```
text_dataset_from_directory(  
    directory,  
    labels = "inferred",  
    label_mode = "int",  
    class_names = NULL,  
    batch_size = 32L,  
    max_length = NULL,  
    shuffle = TRUE,  
    seed = NULL,  
    validation_split = NULL,  
    subset = NULL,  
    follow_links = FALSE,  
    verbose = TRUE  
)
```

### Arguments

|                        |  |
|------------------------|--|
| <code>directory</code> | Directory where the data is located. If <code>labels</code> is "inferred", it should contain subdirectories, each containing text files for a class. Otherwise, the directory structure is ignored.  |
| <code>labels</code>    | Either "inferred" (labels are generated from the directory structure), NULL (no labels), or a list/tuple of integer labels of the same size as the number of text files found in the directory. Labels should be sorted according to the alphanumeric order of the text file paths (obtained via <code>os.walk(directory)</code> in Python). |

|                  |  |
|------------------|--|
| label_mode       | String describing the encoding of labels. Options are: <ul style="list-style-type: none"> <li>• "int": means that the labels are encoded as integers (e.g. for sparse_categorical_crossentropy loss).</li> <li>• "categorical" means that the labels are encoded as a categorical vector (e.g. for categorical_crossentropy loss).</li> <li>• "binary" means that the labels (there can be only 2) are encoded as float32 scalars with values 0 or 1 (e.g. for binary_crossentropy).</li> <li>• NULL (no labels).</li> </ul> |
| class_names      | Only valid if "labels" is "inferred". This is the explicit list of class names (must match names of subdirectories). Used to control the order of the classes (otherwise alphanumerical order is used).  |
| batch_size       | Size of the batches of data. Defaults to 32. If NULL, the data will not be batched (the dataset will yield individual samples).  |
| max_length       | Maximum size of a text string. Texts longer than this will be truncated to max_length.   |
| shuffle          | Whether to shuffle the data. Defaults to TRUE. If set to FALSE, sorts the data in alphanumeric order.  |
| seed             | Optional random seed for shuffling and transformations.  |
| validation_split | Optional float between 0 and 1, fraction of data to reserve for validation.  |
| subset           | Subset of the data to return. One of "training", "validation" or "both". Only used if validation_split is set. When subset="both", the utility returns a tuple of two datasets (the training and validation datasets respectively).  |
| follow_links     | Whether to visits subdirectories pointed to by symlinks. Defaults to FALSE.  |
| verbose          | Whether to display number information on classes and number of files found. Defaults to TRUE.  |

## Value

A `tf.data.Dataset` object.

- If `label_mode` is NULL, it yields string tensors of shape `(batch_size,)`, containing the contents of a batch of text files.
- Otherwise, it yields a tuple `(texts, labels)`, where `texts` has shape `(batch_size,)` and `labels` follows the format described below.

Rules regarding labels format:

- if `label_mode` is `int`, the labels are an `int32` tensor of shape `(batch_size,)`.
- if `label_mode` is `binary`, the labels are a `float32` tensor of 1s and 0s of shape `(batch_size, 1)`.
- if `label_mode` is `categorical`, the labels are a `float32` tensor of shape `(batch_size, num_classes)`, representing a one-hot encoding of the class index.

**See Also**

- [https://keras.io/api/data\\_loading/text#textdatasetfromdirectory-function](https://keras.io/api/data_loading/text#textdatasetfromdirectory-function)

Other dataset utils:

```
audio_dataset_from_directory()  
image_dataset_from_directory()  
split_dataset()  
timeseries_dataset_from_array()
```

Other utils:

```
audio_dataset_from_directory()  
clear_session()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_is_interactive_logging_enabled()  
config_is_traceback_filtering_enabled()  
get_file()  
get_source_inputs()  
image_array_save()  
image_dataset_from_directory()  
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
layer_feature_space()  
normalize()  
pad_sequences()  
set_random_seed()  
split_dataset()  
timeseries_dataset_from_array()  
to_categorical()  
zip_lists()
```

Other preprocessing:

```
image_dataset_from_directory()  
image_smart_resize()  
timeseries_dataset_from_array()
```

---

timeseries\_dataset\_from\_array

*Creates a dataset of sliding windows over a timeseries provided as array.*

---

**Description**

This function takes in a sequence of data-points gathered at equal intervals, along with time series parameters such as length of the sequences/windows, spacing between two sequence/windows, etc., to produce batches of timeseries inputs and targets.

**Usage**

```
timeseries_dataset_from_array(
    data,
    targets,
    sequence_length,
    sequence_stride = 1L,
    sampling_rate = 1L,
    batch_size = 128L,
    shuffle = FALSE,
    seed = NULL,
    start_index = NULL,
    end_index = NULL
)
```

**Arguments**

|                              |   |
|------------------------------|---|
| <code>data</code>            | array or eager tensor containing consecutive data points (timesteps). The first dimension is expected to be the time dimension.   |
| <code>targets</code>         | Targets corresponding to timesteps in <code>data</code> . <code>targets[i]</code> should be the target corresponding to the window that starts at index <code>i</code> (see example 2 below). Pass <code>NULL</code> if you don't have target data (in this case the dataset will only yield the input data). |
| <code>sequence_length</code> | Length of the output sequences (in number of timesteps).  |
| <code>sequence_stride</code> | Period between successive output sequences. For stride <code>s</code> , output samples would start at index <code>data[i]</code> , <code>data[i + s]</code> , <code>data[i + 2 * s]</code> , etc.   |
| <code>sampling_rate</code>   | Period between successive individual timesteps within sequences. For rate <code>r</code> , timesteps <code>data[i]</code> , <code>data[i + r]</code> , ... <code>data[i + sequence_length]</code> are used for creating a sample sequence.  |
| <code>batch_size</code>      | Number of timeseries samples in each batch (except maybe the last one). If <code>NULL</code> , the data will not be batched (the dataset will yield individual samples).  |
| <code>shuffle</code>         | Whether to shuffle output samples, or instead draw them in chronological order.   |
| <code>seed</code>            | Optional int; random seed for shuffling.  |
| <code>start_index</code>     | Optional int; data points earlier (exclusive) than <code>start_index</code> will not be used in the output sequences. This is useful to reserve part of the data for test or validation.  |
| <code>end_index</code>       | Optional int; data points later (exclusive) than <code>end_index</code> will not be used in the output sequences. This is useful to reserve part of the data for test or validation.  |

**Value**

A `tf$dataset$Dataset` instance. If `targets` was passed, the dataset yields list (`batch_of_sequences`, `batch_of_targets`). If not, the dataset yields only `batch_of_sequences`.

Example 1:

Consider indices `[0, 1, ... 98]`. With `sequence_length=10`, `sampling_rate=2`, `sequence_stride=3`, `shuffle=FALSE`, the dataset will yield batches of sequences composed of the following indices:

```
First sequence: [0  2  4  6  8 10 12 14 16 18]
Second sequence: [3  5  7  9 11 13 15 17 19 21]
Third sequence:  [6  8 10 12 14 16 18 20 22 24]
...
Last sequence:   [78 80 82 84 86 88 90 92 94 96]
```

In this case the last 2 data points are discarded since no full sequence can be generated to include them (the next sequence would have started at index 81, and thus its last step would have gone over 98).

Example 2: Temporal regression.

Consider an array `data` of scalar values, of shape `(steps,)`. To generate a dataset that uses the past 10 timesteps to predict the next timestep, you would use:

```
data <- op_array(1:20)
input_data <- data[1:10]
targets <- data[11:20]
dataset <- timeseries_dataset_from_array(
  input_data, targets, sequence_length=10)
iter <- reticulate::as_iterator(dataset)
reticulate::iter_next(iter)

## [[1]]
## tf.Tensor([[ 1  2  3  4  5  6  7  8  9 10]], shape=(1, 10), dtype=int32)
##
## [[2]]
## tf.Tensor([11], shape=(1), dtype=int32)
```

Example 3: Temporal regression for many-to-many architectures.

Consider two arrays of scalar values `X` and `Y`, both of shape `(100,)`. The resulting dataset should consist samples with 20 timestamps each. The samples should not overlap. To generate a dataset that uses the current timestamp to predict the corresponding target timestep, you would use:

```
X <- op_array(1:100)
Y <- X*2

sample_length <- 20
input_dataset <- timeseries_dataset_from_array(
  X, NULL, sequence_length=sample_length, sequence_stride=sample_length)
```

```
target_dataset <- timeseries_dataset_from_array(  
  Y, NULL, sequence_length=sample_length, sequence_stride=sample_length)  
  
inputs <- reticulate::as_iterator(input_dataset) %>% reticulate::iter_next()  
targets <- reticulate::as_iterator(target_dataset) %>% reticulate::iter_next()
```

### See Also

- [https://keras.io/api/data\\_loading/timeseries#timeseriesdatasetfromarray-function](https://keras.io/api/data_loading/timeseries#timeseriesdatasetfromarray-function)

Other dataset utils:

```
audio_dataset_from_directory()  
image_dataset_from_directory()  
split_dataset()  
text_dataset_from_directory()
```

Other utils:

```
audio_dataset_from_directory()  
clear_session()  
config_disable_interactive_logging()  
config_disable_traceback_filtering()  
config_enable_interactive_logging()  
config_enable_traceback_filtering()  
config_is_interactive_logging_enabled()  
config_is_traceback_filtering_enabled()  
get_file()  
get_source_inputs()  
image_array_save()  
image_dataset_from_directory()  
image_from_array()  
image_load()  
image_smart_resize()  
image_to_array()  
layer_feature_space()  
normalize()  
pad_sequences()  
set_random_seed()  
split_dataset()  
text_dataset_from_directory()  
to_categorical()  
zip_lists()
```

Other preprocessing:

```
image_dataset_from_directory()  
image_smart_resize()  
text_dataset_from_directory()
```



---

|                |   |
|----------------|---|
| to_categorical | <i>Converts a class vector (integers) to binary class matrix.</i> |
|----------------|---|

---

**Description**

E.g. for use with `loss_categorical_crossentropy()`.

**Usage**

```
to_categorical(x, num_classes = NULL)
```

**Arguments**

|             |   |
|-------------|---|
| x           | Array-like with class values to be converted into a matrix (integers from 0 to num_classes - 1). R factors are coerced to integer and offset to be 0-based, i.e., as <code>integer(x) - 1L</code> . |
| num_classes | Total number of classes. If NULL, this would be inferred as <code>max(x) + 1</code> . Defaults to NULL.   |

**Value**

A binary matrix representation of the input as an R array. The class axis is placed last.

**Examples**

```
a <- to_categorical(c(0, 1, 2, 3), num_classes=4)
print(a)

##      [,1] [,2] [,3] [,4]
## [1,]  1   0   0   0
## [2,]  0   1   0   0
## [3,]  0   0   1   0
## [4,]  0   0   0   1

b <- array(c(.9, .04, .03, .03,
            .3, .45, .15, .13,
            .04, .01, .94, .05,
            .12, .21, .5, .17),
          dim = c(4, 4))
loss <- op_categorical_crossentropy(a, b)
loss

## tf.Tensor([0.41284522 0.45601739 0.54430155 0.80437282], shape=(4), dtype=float64)
```

```
loss <- op_categorical_crossentropy(a, a)
loss

## tf.Tensor([1.00000005e-07 1.00000005e-07 1.00000005e-07 1.00000005e-07], shape=(4), dtype=float64)
```

### See Also

- [op\\_one\\_hot\(\)](#), which does the same operation as `to_categorical()`, but operating on tensors.
- [loss\\_sparse\\_categorical\\_crossentropy\(\)](#), which can accept labels (`y_true`) as an integer vector, instead of as a dense one-hot matrix.
- [https://keras.io/api/utils/python\\_utils#tocategorical-function](https://keras.io/api/utils/python_utils#tocategorical-function)

Other numerical utils:

[normalize\(\)](#)

Other utils:

[audio\\_dataset\\_from\\_directory\(\)](#)  
[clear\\_session\(\)](#)  
[config\\_disable\\_interactive\\_logging\(\)](#)  
[config\\_disable\\_traceback\\_filtering\(\)](#)  
[config\\_enable\\_interactive\\_logging\(\)](#)  
[config\\_enable\\_traceback\\_filtering\(\)](#)  
[config\\_is\\_interactive\\_logging\\_enabled\(\)](#)  
[config\\_is\\_traceback\\_filtering\\_enabled\(\)](#)  
[get\\_file\(\)](#)  
[get\\_source\\_inputs\(\)](#)  
[image\\_array\\_save\(\)](#)  
[image\\_dataset\\_from\\_directory\(\)](#)  
[image\\_from\\_array\(\)](#)  
[image\\_load\(\)](#)  
[image\\_smart\\_resize\(\)](#)  
[image\\_to\\_array\(\)](#)  
[layer\\_feature\\_space\(\)](#)  
[normalize\(\)](#)  
[pad\\_sequences\(\)](#)  
[set\\_random\\_seed\(\)](#)  
[split\\_dataset\(\)](#)  
[text\\_dataset\\_from\\_directory\(\)](#)  
[timeseries\\_dataset\\_from\\_array\(\)](#)  
[zip\\_lists\(\)](#)

---

|                |   |
|----------------|---|
| train_on_batch | <i>Runs a single gradient update on a single batch of data.</i> |
|----------------|---|

---

### Description

Runs a single gradient update on a single batch of data.

### Usage

```
train_on_batch(object, x, y = NULL, sample_weight = NULL, class_weight = NULL)
```

### Arguments

|               |  |
|---------------|--|
| object        | Keras model object   |
| x             | Input data. Must be array-like.  |
| y             | Target data. Must be array-like.   |
| sample_weight | Optional array of the same length as x, containing weights to apply to the model's loss for each sample. In the case of temporal data, you can pass a 2D array with shape (samples, sequence_length), to apply a different weight to every timestep of every sample.   |
| class_weight  | Optional named list mapping class indices (integers, 0-based) to a weight (float) to apply to the model's loss for the samples from this class during training. This can be useful to tell the model to "pay more attention" to samples from an under-represented class. When class_weight is specified and targets have a rank of 2 or greater, either y must be one-hot encoded, or an explicit final dimension of 1 must be included for sparse class labels. |

### Value

A scalar loss value (when no metrics), or a named list of loss and metric values (if there are metrics). The property `model$metrics_names` will give you the display labels for the scalar outputs.

### See Also

- [https://keras.io/api/models/model\\_training\\_apis#trainonbatch-method](https://keras.io/api/models/model_training_apis#trainonbatch-method)

Other model training:

```
compile.keras.src.models.model.Model()
evaluate.keras.src.models.model.Model()
predict.keras.src.models.model.Model()
predict_on_batch()
test_on_batch()
```

---

use\_backend *Configure a Keras backend*

---

**Description**

Configure a Keras backend

**Usage**

```
use_backend(backend)
```

**Arguments**

backend            string, can be "tensorflow", "jax", "numpy", or "torch".

**Details**

These functions allow configuring which backend keras will use. Note that only one backend can be configured at a time.

The function should be called after `library(keras3)` and before calling other functions within the package (see below for an example).

There is experimental support for changing the backend after keras has initialized. using `config_set_backend()`.

```
library(keras3)
use_backend("tensorflow")
```

**Value**

Called primarily for side effects. Returns the provided backend, invisibly.

---

with\_custom\_object\_scope  
*Provide a scope with mappings of names to custom objects*

---

**Description**

Provide a scope with mappings of names to custom objects

**Usage**

```
with_custom_object_scope(objects, expr)
```

**Arguments**

objects            Named list of objects  
expr                Expression to evaluate

**Details**

There are many elements of Keras models that can be customized with user objects (e.g. losses, metrics, regularizers, etc.). When loading saved models that use these functions you typically need to explicitly map names to user objects via the `custom_objects` parameter.

The `with_custom_object_scope()` function provides an alternative that lets you create a named alias for a user object that applies to an entire block of code, and is automatically recognized when loading saved models.

**Value**

The result from evaluating `expr` within the custom object scope.

**Examples**

```
# define custom metric
metric_top_3_categorical_accuracy <-
  custom_metric("top_3_categorical_accuracy", function(y_true, y_pred) {
    metric_top_k_categorical_accuracy(y_true, y_pred, k = 3)
  })

with_custom_object_scope(c(top_k_acc = sparse_top_k_cat_acc), {

  # ...define model...

  # compile model (refer to "top_k_acc" by name)
  model |> compile(
    loss = "binary_crossentropy",
    optimizer = optimizer_nadam(),
    metrics = c("top_k_acc")
  )

  # save the model
  model |> save_model("my_model.keras")

  # loading the model within the custom object scope doesn't
  # require explicitly providing the custom_object
  reloaded_model <- load_model("my_model.keras")
})
```

**See Also**

Other saving and loading functions:

```
export_savedmodel.keras.src.models.model.Model()
layer_tfsn()
load_model()
load_model_weights()
register_keras_serializable()
save_model()
```

```
save_model_config()
save_model_weights()
```

Other serialization utilities:

```
deserialize_keras_object()
get_custom_objects()
get_registered_name()
get_registered_object()
register_keras_serializable()
serialize_keras_object()
```

---

zip\_lists

*Zip lists*

---

### Description

This is conceptually similar to `zip()` in Python, or R functions `purrr:::transpose()` and `data.table:::transpose()` (albeit, accepting elements in `...` instead of a single list), with one crucial difference: if the provided objects are named, then matching is done by names, not positions.

### Usage

```
zip_lists(...)
```

### Arguments

`...` R lists or atomic vectors, optionally named.

### Details

All arguments supplied must be of the same length. If positional matching is required, then all arguments provided must be unnamed. If matching by names, then all arguments must have the same set of names, but they can be in different orders.

### Value

A inverted list

### See Also

Other utils:

```
audio_dataset_from_directory()
clear_session()
config_disable_interactive_logging()
config_disable_traceback_filtering()
config_enable_interactive_logging()
```

```
config_enable_traceback_filtering()
config_is_interactive_logging_enabled()
config_is_traceback_filtering_enabled()
get_file()
get_source_inputs()
image_array_save()
image_dataset_from_directory()
image_from_array()
image_load()
image_smart_resize()
image_to_array()
layer_feature_space()
normalize()
pad_sequences()
set_random_seed()
split_dataset()
text_dataset_from_directory()
timeseries_dataset_from_array()
to_categorical()
```

## Examples

```
gradients <- list("grad_for_wt_1", "grad_for_wt_2", "grad_for_wt_3")
weights <- list("weight_1", "weight_2", "weight_3")
str(zip_lists(gradients, weights))
str(zip_lists(gradient = gradients, weight = weights))

names(gradients) <- names(weights) <- paste0("layer_", 1:3)
str(zip_lists(gradients, weights[c(3, 1, 2)]))

names(gradients) <- paste0("gradient_", 1:3)
try(zip_lists(gradients, weights)) # error, names don't match
# call unname directly for positional matching
str(zip_lists(unname(gradients), unname(weights)))
```

# Index

- !=.keras\_shape (shape), [2742](#)
- \* **accuracy metrics**
  - metric\_binary\_accuracy, [810](#)
  - metric\_categorical\_accuracy, [822](#)
  - metric\_sparse\_categorical\_accuracy, [915](#)
  - metric\_sparse\_top\_k\_categorical\_accuracy, [921](#)
  - metric\_top\_k\_categorical\_accuracy, [932](#)
- \* **activation layers**
  - layer\_activation, [255](#)
  - layer\_activation\_elu, [258](#)
  - layer\_activation\_leaky\_relu, [262](#)
  - layer\_activation\_parametric\_relu, [265](#)
  - layer\_activation\_relu, [269](#)
  - layer\_activation\_softmax, [272](#)
- \* **activations**
  - activation\_elu, [14](#)
  - activation\_exponential, [16](#)
  - activation\_gelu, [17](#)
  - activation\_hard\_sigmoid, [18](#)
  - activation\_leaky\_relu, [20](#)
  - activation\_linear, [21](#)
  - activation\_log\_softmax, [22](#)
  - activation\_mish, [23](#)
  - activation\_relu, [24](#)
  - activation\_relu6, [25](#)
  - activation\_selu, [26](#)
  - activation\_sigmoid, [27](#)
  - activation\_silu, [28](#)
  - activation\_softmax, [29](#)
  - activation\_softplus, [30](#)
  - activation\_softsign, [31](#)
  - activation\_tanh, [32](#)
- \* **add merging layers**
  - layer\_add, [279](#)
- \* **attention layers**
  - layer\_additive\_attention, [283](#)
  - layer\_attention, [290](#)
  - layer\_group\_query\_attention, [486](#)
  - layer\_multi\_head\_attention, [575](#)
- \* **audio preprocessing layers**
  - layer\_mel\_spectrogram, [563](#)
- \* **average merging layers**
  - layer\_average, [294](#)
- \* **backend**
  - clear\_session, [132](#)
  - config\_backend, [139](#)
  - config\_epsilon, [148](#)
  - config\_floatx, [149](#)
  - config\_image\_data\_format, [150](#)
  - config\_set\_epsilon, [156](#)
  - config\_set\_floatx, [157](#)
  - config\_set\_image\_data\_format, [159](#)
- \* **callbacks**
  - Callback, [106](#)
  - callback\_backup\_and\_restore, [111](#)
  - callback\_csv\_logger, [113](#)
  - callback\_early\_stopping, [114](#)
  - callback\_lambda, [117](#)
  - callback\_learning\_rate\_scheduler, [119](#)
  - callback\_model\_checkpoint, [120](#)
  - callback\_reduce\_lr\_on\_plateau, [124](#)
  - callback\_remote\_monitor, [125](#)
  - callback\_swap\_ema\_weights, [126](#)
  - callback\_tensorboard, [128](#)
  - callback\_terminate\_on\_nan, [131](#)
- \* **categorical features preprocessing layers**
  - layer\_category\_encoding, [323](#)
  - layer\_hashed\_crossing, [496](#)
  - layer\_hashing, [501](#)
  - layer\_integer\_lookup, [510](#)
  - layer\_string\_lookup, [674](#)
- \* **concatenate merging layers**
  - layer\_concatenate, [332](#)



- \* **config backend**
  - config\_backend, 139
  - config\_epsilon, 148
  - config\_floatx, 149
  - config\_image\_data\_format, 150
  - config\_set\_epsilon, 156
  - config\_set\_floatx, 157
  - config\_set\_image\_data\_format, 159
- \* **config**
  - config\_backend, 139
  - config\_disable\_interactive\_logging, 141
  - config\_disable\_traceback\_filtering, 142
  - config\_enable\_interactive\_logging, 144
  - config\_enable\_traceback\_filtering, 145
  - config\_enable\_unsafe\_deserialization, 147
  - config\_epsilon, 148
  - config\_floatx, 149
  - config\_image\_data\_format, 150
  - config\_is\_interactive\_logging\_enabled, 151
  - config\_is\_traceback\_filtering\_enabled, 153
  - config\_set\_backend, 154
  - config\_set\_epsilon, 156
  - config\_set\_floatx, 157
  - config\_set\_image\_data\_format, 159
- \* **confusion metrics**
  - metric\_auc, 806
  - metric\_false\_negatives, 840
  - metric\_false\_positives, 842
  - metric\_precision, 895
  - metric\_precision\_at\_recall, 898
  - metric\_recall, 903
  - metric\_recall\_at\_precision, 907
  - metric\_sensitivity\_at\_specificity, 912
  - metric\_specificity\_at\_sensitivity, 924
  - metric\_true\_negatives, 935
  - metric\_true\_positives, 937
- \* **constant initializers**
  - initializer\_constant, 215
  - initializer\_identity, 222
  - initializer\_ones, 227
  - initializer\_zeros, 236
- \* **constraints**
  - Constraint, 161
  - constraint\_maxnorm, 163
  - constraint\_minmaxnorm, 163
  - constraint\_nonneg, 164
  - constraint\_unitnorm, 165
- \* **convolutional layers**
  - layer\_conv\_1d, 336
  - layer\_conv\_1d\_transpose, 341
  - layer\_conv\_2d, 346
  - layer\_conv\_2d\_transpose, 350
  - layer\_conv\_3d, 355
  - layer\_conv\_3d\_transpose, 360
  - layer\_depthwise\_conv\_1d, 400
  - layer\_depthwise\_conv\_2d, 405
  - layer\_separable\_conv\_1d, 643
  - layer\_separable\_conv\_2d, 648
- \* **core layers**
  - layer\_dense, 395
  - layer\_einsum\_dense, 423
  - layer\_embedding, 428
  - layer\_identity, 507
  - layer\_lambda, 526
  - layer\_masking, 541
- \* **core ops**
  - op\_cast, 1173
  - op\_cond, 1215
  - op\_convert\_to\_numpy, 1237
  - op\_convert\_to\_tensor, 1242
  - op\_custom\_gradient, 1336
  - op\_dtype, 1416
  - op\_fori\_loop, 1553
  - op\_is\_tensor, 1761
  - op\_map, 1914
  - op\_scan, 2248
  - op\_scatter, 2255
  - op\_scatter\_update, 2261
  - op\_shape, 2301
  - op\_slice, 2352
  - op\_slice\_update, 2358
  - op\_stop\_gradient, 2472
  - op\_switch, 2508
  - op\_unstack, 2611
  - op\_vectorized\_map, 2643
  - op\_while\_loop, 2669
- \* **data utils**

- zip\_lists, 2762
- \* **dataset utils**
  - audio\_dataset\_from\_directory, 103
  - image\_dataset\_from\_directory, 204
  - split\_dataset, 2746
  - text\_dataset\_from\_directory, 2751
  - timeseries\_dataset\_from\_array, 2753
- \* **datasets**
  - dataset\_boston\_housing, 168
  - dataset\_cifar10, 169
  - dataset\_cifar100, 170
  - dataset\_fashion\_mnist, 170
  - dataset\_imdb, 171
  - dataset\_mnist, 173
  - dataset\_reuters, 174
  - keras, 238
- \* **dot merging layers**
  - layer\_dot, 415
- \* **f score metrics**
  - metric\_f1\_score, 837
  - metric\_fbeta\_score, 845
- \* **gru rnn layers**
  - layer\_gru, 490
  - rnn\_cell\_gru, 2721
- \* **hinge metrics**
  - metric\_categorical\_hinge, 832
  - metric\_hinge, 848
  - metric\_squared\_hinge, 927
- \* **image augmentation layers**
  - layer\_random\_brightness, 589
  - layer\_random\_contrast, 594
  - layer\_random\_crop, 598
  - layer\_random\_flip, 602
  - layer\_random\_rotation, 606
  - layer\_random\_translation, 611
  - layer\_random\_zoom, 616
- \* **image dataset utils**
  - image\_dataset\_from\_directory, 204
- \* **image ops**
  - op\_image\_affine\_transform, 1645
  - op\_image\_crop, 1652
  - op\_image\_extract\_patches, 1658
  - op\_image\_hsv\_to\_rgb, 1665
  - op\_image\_map\_coordinates, 1671
  - op\_image\_pad, 1678
  - op\_image\_resize, 1684
  - op\_image\_rgb\_to\_grayscale, 1691
  - op\_image\_rgb\_to\_hsv, 1697
- \* **image preprocessing layers**
  - layer\_center\_crop, 328
  - layer\_rescaling, 624
  - layer\_resizing, 632
- \* **image utils**
  - image\_array\_save, 202
  - image\_from\_array, 207
  - image\_load, 209
  - image\_smart\_resize, 211
  - image\_to\_array, 213
  - op\_image\_affine\_transform, 1645
  - op\_image\_crop, 1652
  - op\_image\_extract\_patches, 1658
  - op\_image\_hsv\_to\_rgb, 1665
  - op\_image\_map\_coordinates, 1671
  - op\_image\_pad, 1678
  - op\_image\_resize, 1684
  - op\_image\_rgb\_to\_grayscale, 1691
  - op\_image\_rgb\_to\_hsv, 1697
- \* **initializers**
  - initializer\_constant, 215
  - initializer\_glorot\_normal, 216
  - initializer\_glorot\_uniform, 218
  - initializer\_he\_normal, 219
  - initializer\_he\_uniform, 221
  - initializer\_identity, 222
  - initializer\_lecun\_normal, 224
  - initializer\_lecun\_uniform, 225
  - initializer\_ones, 227
  - initializer\_orthogonal, 228
  - initializer\_random\_normal, 229
  - initializer\_random\_uniform, 231
  - initializer\_truncated\_normal, 232
  - initializer\_variance\_scaling, 234
  - initializer\_zeros, 236
- \* **io utils**
  - config\_disable\_interactive\_logging, 141
  - config\_enable\_interactive\_logging, 144
  - config\_is\_interactive\_logging\_enabled, 151
- \* **iou metrics**
  - metric\_binary\_iou, 819
  - metric\_iou, 853
  - metric\_mean\_iou, 874
  - metric\_one\_hot\_iou, 885

- metric\_one\_hot\_mean\_iou, 888
- \* **layer methods**
  - count\_params, 166
  - get\_config, 193
  - get\_weights, 201
  - quantize\_weights, 2701
  - reset\_state, 2717
- \* **layers**
  - Layer, 243
  - layer\_activation, 255
  - layer\_activation\_elu, 258
  - layer\_activation\_leaky\_relu, 262
  - layer\_activation\_parametric\_relu, 265
  - layer\_activation\_relu, 269
  - layer\_activation\_softmax, 272
  - layer\_activity\_regularization, 276
  - layer\_add, 279
  - layer\_additive\_attention, 283
  - layer\_alpha\_dropout, 287
  - layer\_attention, 290
  - layer\_average, 294
  - layer\_average\_pooling\_1d, 298
  - layer\_average\_pooling\_2d, 303
  - layer\_average\_pooling\_3d, 308
  - layer\_batch\_normalization, 312
  - layer\_bidirectional, 318
  - layer\_category\_encoding, 323
  - layer\_center\_crop, 328
  - layer\_concatenate, 332
  - layer\_conv\_1d, 336
  - layer\_conv\_1d\_transpose, 341
  - layer\_conv\_2d, 346
  - layer\_conv\_2d\_transpose, 350
  - layer\_conv\_3d, 355
  - layer\_conv\_3d\_transpose, 360
  - layer\_conv\_lstm\_1d, 365
  - layer\_conv\_lstm\_2d, 371
  - layer\_conv\_lstm\_3d, 377
  - layer\_cropping\_1d, 383
  - layer\_cropping\_2d, 387
  - layer\_cropping\_3d, 391
  - layer\_dense, 395
  - layer\_depthwise\_conv\_1d, 400
  - layer\_depthwise\_conv\_2d, 405
  - layer\_discretization, 410
  - layer\_dot, 415
  - layer\_dropout, 419
  - layer\_einsum\_dense, 423
  - layer\_embedding, 428
  - layer\_feature\_space, 433
  - layer\_flatten, 442
  - layer\_flax\_module\_wrapper, 446
  - layer\_gaussian\_dropout, 451
  - layer\_gaussian\_noise, 454
  - layer\_global\_average\_pooling\_1d, 457
  - layer\_global\_average\_pooling\_2d, 462
  - layer\_global\_average\_pooling\_3d, 466
  - layer\_global\_max\_pooling\_1d, 470
  - layer\_global\_max\_pooling\_2d, 473
  - layer\_global\_max\_pooling\_3d, 477
  - layer\_group\_normalization, 481
  - layer\_group\_query\_attention, 486
  - layer\_gru, 490
  - layer\_hashed\_crossing, 496
  - layer\_hashing, 501
  - layer\_identity, 507
  - layer\_integer\_lookup, 510
  - layer\_jax\_model\_wrapper, 520
  - layer\_lambda, 526
  - layer\_layer\_normalization, 530
  - layer\_lstm, 535
  - layer\_masking, 541
  - layer\_max\_pooling\_1d, 548
  - layer\_max\_pooling\_2d, 553
  - layer\_max\_pooling\_3d, 559
  - layer\_maximum, 545
  - layer\_mel\_spectrogram, 563
  - layer\_minimum, 568
  - layer\_multi\_head\_attention, 575
  - layer\_multiply, 571
  - layer\_normalization, 580
  - layer\_permute, 585
  - layer\_random\_brightness, 589
  - layer\_random\_contrast, 594
  - layer\_random\_crop, 598
  - layer\_random\_flip, 602
  - layer\_random\_rotation, 606
  - layer\_random\_translation, 611
  - layer\_random\_zoom, 616
  - layer\_repeat\_vector, 621
  - layer\_rescaling, 624
  - layer\_reshape, 628

- layer\_resizing, 632
- layer\_rnn, 636
- layer\_separable\_conv\_1d, 643
- layer\_separable\_conv\_2d, 648
- layer\_simple\_rnn, 653
- layer\_spatial\_dropout\_1d, 658
- layer\_spatial\_dropout\_2d, 662
- layer\_spatial\_dropout\_3d, 666
- layer\_spectral\_normalization, 670
- layer\_string\_lookup, 674
- layer\_subtract, 683
- layer\_text\_vectorization, 686
- layer\_tfsn, 694
- layer\_time\_distributed, 698
- layer\_torch\_module\_wrapper, 702
- layer\_unit\_normalization, 706
- layer\_upsampling\_1d, 710
- layer\_upsampling\_2d, 714
- layer\_upsampling\_3d, 718
- layer\_zero\_padding\_1d, 722
- layer\_zero\_padding\_2d, 726
- layer\_zero\_padding\_3d, 731
- rnn\_cell\_gru, 2721
- rnn\_cell\_lstm, 2726
- rnn\_cell\_simple, 2731
- rnn\_cells\_stack, 2718
- \* **linear algebra ops**
  - op\_cholesky, 1193
  - op\_det, 1349
  - op\_eig, 1422
  - op\_eigh, 1427
  - op\_inv, 1704
  - op\_lstsq, 1900
  - op\_lu\_factor, 1909
  - op\_norm, 2066
  - op\_slogdet, 2364
  - op\_solve\_triangular, 2395
  - op\_svd, 2494
- \* **losses**
  - Loss, 751
  - loss\_binary\_crossentropy, 754
  - loss\_binary\_focal\_crossentropy, 758
  - loss\_categorical\_crossentropy, 762
  - loss\_categorical\_focal\_crossentropy, 765
  - loss\_categorical\_hinge, 769
  - loss\_cosine\_similarity, 771
  - loss\_ctc, 773
  - loss\_dice, 775
  - loss\_hinge, 777
  - loss\_huber, 779
  - loss\_kl\_divergence, 781
  - loss\_log\_cosh, 783
  - loss\_mean\_absolute\_error, 785
  - loss\_mean\_absolute\_percentage\_error, 787
  - loss\_mean\_squared\_error, 789
  - loss\_mean\_squared\_logarithmic\_error, 790
  - loss\_poisson, 792
  - loss\_sparse\_categorical\_crossentropy, 794
  - loss\_squared\_hinge, 797
  - loss\_tversky, 799
  - metric\_binary\_crossentropy, 813
  - metric\_binary\_focal\_crossentropy, 816
  - metric\_categorical\_crossentropy, 825
  - metric\_categorical\_focal\_crossentropy, 829
  - metric\_categorical\_hinge, 832
  - metric\_hinge, 848
  - metric\_huber, 851
  - metric\_kl\_divergence, 856
  - metric\_log\_cosh, 860
  - metric\_mean\_absolute\_error, 867
  - metric\_mean\_absolute\_percentage\_error, 870
  - metric\_mean\_squared\_error, 877
  - metric\_mean\_squared\_logarithmic\_error, 880
  - metric\_poisson, 891
  - metric\_sparse\_categorical\_crossentropy, 918
  - metric\_squared\_hinge, 927
- \* **lstm rnn layers**
  - layer\_lstm, 535
  - rnn\_cell\_lstm, 2726
- \* **math ops**
  - op\_erf, 1465
  - op\_erfinv, 1471
  - op\_extract\_sequences, 1501
  - op\_fft, 1516
  - op\_fft2, 1522

- op\_in\_top\_k, 1709
- op\_irfft, 1715
- op\_istft, 1754
- op\_logsumexp, 1882
- op\_qr, 2150
- op\_rfft, 2219
- op\_rsqr, 2242
- op\_segment\_max, 2268
- op\_segment\_sum, 2274
- op\_solve, 2390
- op\_stft, 2465
- op\_top\_k, 2564
- \* **maximum merging layers**
  - layer\_maximum, 545
- \* **merging layers**
  - layer\_add, 279
  - layer\_average, 294
  - layer\_concatenate, 332
  - layer\_dot, 415
  - layer\_maximum, 545
  - layer\_minimum, 568
  - layer\_multiply, 571
  - layer\_subtract, 683
- \* **metrics**
  - custom\_metric, 166
  - Metric, 801
  - metric\_auc, 806
  - metric\_binary\_accuracy, 810
  - metric\_binary\_crossentropy, 813
  - metric\_binary\_focal\_crossentropy, 816
  - metric\_binary\_iou, 819
  - metric\_categorical\_accuracy, 822
  - metric\_categorical\_crossentropy, 825
  - metric\_categorical\_focal\_crossentropy, 829
  - metric\_categorical\_hinge, 832
  - metric\_cosine\_similarity, 835
  - metric\_f1\_score, 837
  - metric\_false\_negatives, 840
  - metric\_false\_positives, 842
  - metric\_fbeta\_score, 845
  - metric\_hinge, 848
  - metric\_huber, 851
  - metric\_iou, 853
  - metric\_kl\_divergence, 856
  - metric\_log\_cosh, 860
  - metric\_log\_cosh\_error, 862
  - metric\_mean, 865
  - metric\_mean\_absolute\_error, 867
  - metric\_mean\_absolute\_percentage\_error, 870
  - metric\_mean\_iou, 874
  - metric\_mean\_squared\_error, 877
  - metric\_mean\_squared\_logarithmic\_error, 880
  - metric\_mean\_wrapper, 883
  - metric\_one\_hot\_iou, 885
  - metric\_one\_hot\_mean\_iou, 888
  - metric\_poisson, 891
  - metric\_precision, 895
  - metric\_precision\_at\_recall, 898
  - metric\_r2\_score, 901
  - metric\_recall, 903
  - metric\_recall\_at\_precision, 907
  - metric\_root\_mean\_squared\_error, 910
  - metric\_sensitivity\_at\_specificity, 912
  - metric\_sparse\_categorical\_accuracy, 915
  - metric\_sparse\_categorical\_crossentropy, 918
  - metric\_sparse\_top\_k\_categorical\_accuracy, 921
  - metric\_specificity\_at\_sensitivity, 924
  - metric\_squared\_hinge, 927
  - metric\_sum, 930
  - metric\_top\_k\_categorical\_accuracy, 932
  - metric\_true\_negatives, 935
  - metric\_true\_positives, 937
- \* **minimum merging layers**
  - layer\_minimum, 568
- \* **model creation**
  - keras\_input, 238
  - keras\_model, 240
  - keras\_model\_sequential, 241
- \* **model functions**
  - get\_config, 193
  - get\_layer, 198
  - keras\_model, 240
  - keras\_model\_sequential, 241
  - pop\_layer, 2697

- summary.keras.src.models.model.Model, 2748
- \* **model persistence**
  - get\_weights, 201
- \* **model training**
  - compile.keras.src.models.model.Model, 137
  - evaluate.keras.src.models.model.Model, 178
  - predict.keras.src.models.model.Model, 2697
  - predict\_on\_batch, 2699
  - test\_on\_batch, 2750
  - train\_on\_batch, 2759
- \* **multiply merging layers**
  - layer\_multiply, 571
- \* **nn ops**
  - op\_average\_pool, 1136
  - op\_batch\_normalization, 1143
  - op\_binary\_crossentropy, 1149
  - op\_categorical\_crossentropy, 1179
  - op\_conv, 1230
  - op\_conv\_transpose, 1249
  - op\_ctc\_loss, 1314
  - op\_depthwise\_conv, 1343
  - op\_elu, 1443
  - op\_gelu, 1575
  - op\_hard\_sigmoid, 1607
  - op\_hard\_silu, 1614
  - op\_leaky\_relu, 1766
  - op\_log\_sigmoid, 1888
  - op\_log\_softmax, 1894
  - op\_max\_pool, 1946
  - op\_moments, 2003
  - op\_multi\_hot, 2026
  - op\_normalize, 2073
  - op\_one\_hot, 2104
  - op\_psnr, 2144
  - op\_relu, 2189
  - op\_relu6, 2196
  - op\_selu, 2288
  - op\_separable\_conv, 2295
  - op\_sigmoid, 2307
  - op\_silu, 2321
  - op\_softmax, 2370
  - op\_softplus, 2376
  - op\_softsign, 2383
  - op\_sparse\_categorical\_crossentropy, 2409
- \* **normalization layers**
  - layer\_batch\_normalization, 312
  - layer\_group\_normalization, 481
  - layer\_layer\_normalization, 530
  - layer\_spectral\_normalization, 670
  - layer\_unit\_normalization, 706
- \* **numerical features preprocessing layers**
  - layer\_discretization, 410
  - layer\_normalization, 580
- \* **numerical utils**
  - normalize, 941
  - to\_categorical, 2757
- \* **numpy ops**
  - op\_abs, 971
  - op\_add, 979
  - op\_all, 988
  - op\_any, 997
  - op\_append, 1006
  - op\_arange, 1015
  - op\_arccos, 1024
  - op\_arccosh, 1033
  - op\_arcsin, 1041
  - op\_arcsinh, 1049
  - op\_arctan, 1058
  - op\_arctan2, 1066
  - op\_arctanh, 1075
  - op\_argmax, 1083
  - op\_argmin, 1092
  - op\_argpartition, 1101
  - op\_argsort, 1109
  - op\_array, 1118
  - op\_average, 1127
  - op\_bincount, 1156
  - op\_broadcast\_to, 1164
  - op\_ceil, 1185
  - op\_clip, 1199
  - op\_concatenate, 1207
  - op\_conj, 1222
  - op\_copy, 1255
  - op\_correlate, 1263
  - op\_cos, 1272
  - op\_cosh, 1280
  - op\_count\_nonzero, 1288
  - op\_cross, 1297
  - op\_ctc\_decode, 1305
  - op\_cumprod, 1320
  - op\_cumsum, 1328

op\_diag, 1355  
op\_diagonal, 1364  
op\_diff, 1373  
op\_digitize, 1382  
op\_divide, 1391  
op\_divide\_no\_nan, 1399  
op\_dot, 1407  
op\_einsum, 1433  
op\_empty, 1449  
op\_equal, 1457  
op\_exp, 1477  
op\_expand\_dims, 1485  
op\_expm1, 1493  
op\_eye, 1507  
op\_flip, 1528  
op\_floor, 1536  
op\_floor\_divide, 1544  
op\_full, 1559  
op\_full\_like, 1567  
op\_get\_item, 1582  
op\_greater, 1590  
op\_greater\_equal, 1599  
op\_hstack, 1620  
op\_identity, 1628  
op\_imag, 1637  
op\_isclose, 1722  
op\_isfinite, 1730  
op\_isinf, 1738  
op\_isnan, 1746  
op\_less, 1774  
op\_less\_equal, 1782  
op\_linspace, 1791  
op\_log, 1799  
op\_log10, 1807  
op\_log1p, 1816  
op\_log2, 1824  
op\_logaddexp, 1832  
op\_logical\_and, 1840  
op\_logical\_not, 1849  
op\_logical\_or, 1857  
op\_logical\_xor, 1865  
op\_logspace, 1873  
op\_lstsq, 1900  
op\_matmul, 1921  
op\_max, 1929  
op\_maximum, 1938  
op\_mean, 1953  
op\_median, 1961  
op\_meshgrid, 1969  
op\_min, 1978  
op\_minimum, 1987  
op\_mod, 1995  
op\_moveaxis, 2010  
op\_multiply, 2018  
op\_nan\_to\_num, 2033  
op\_ndim, 2041  
op\_negative, 2050  
op\_nonzero, 2058  
op\_not\_equal, 2079  
op\_ones, 2088  
op\_ones\_like, 2096  
op\_outer, 2111  
op\_pad, 2119  
op\_power, 2127  
op\_prod, 2136  
op\_quantile, 2156  
op\_ravel, 2165  
op\_real, 2173  
op\_reciprocal, 2181  
op\_repeat, 2203  
op\_reshape, 2211  
op\_roll, 2226  
op\_round, 2234  
op\_select, 2280  
op\_sign, 2313  
op\_sin, 2327  
op\_sinh, 2336  
op\_size, 2344  
op\_sort, 2401  
op\_split, 2416  
op\_sqrt, 2424  
op\_square, 2432  
op\_squeeze, 2440  
op\_stack, 2449  
op\_std, 2457  
op\_subtract, 2477  
op\_sum, 2486  
op\_swapaxes, 2500  
op\_take, 2514  
op\_take\_along\_axis, 2522  
op\_tan, 2531  
op\_tanh, 2539  
op\_tensordot, 2547  
op\_tile, 2555  
op\_trace, 2570  
op\_transpose, 2578

- op\_tri, 2586
- op\_tril, 2595
- op\_triu, 2603
- op\_var, 2618
- op\_vdot, 2626
- op\_vectorize, 2634
- op\_vstack, 2652
- op\_where, 2660
- op\_zeros, 2675
- op\_zeros\_like, 2683
- \* ops**
  - op\_abs, 971
  - op\_add, 979
  - op\_all, 988
  - op\_any, 997
  - op\_append, 1006
  - op\_arange, 1015
  - op\_arccos, 1024
  - op\_arccosh, 1033
  - op\_arcsin, 1041
  - op\_arcsinh, 1049
  - op\_arctan, 1058
  - op\_arctan2, 1066
  - op\_arctanh, 1075
  - op\_argmax, 1083
  - op\_argmin, 1092
  - op\_argpartition, 1101
  - op\_argsort, 1109
  - op\_array, 1118
  - op\_average, 1127
  - op\_average\_pool, 1136
  - op\_batch\_normalization, 1143
  - op\_binary\_crossentropy, 1149
  - op\_bincount, 1156
  - op\_broadcast\_to, 1164
  - op\_cast, 1173
  - op\_categorical\_crossentropy, 1179
  - op\_ceil, 1185
  - op\_cholesky, 1193
  - op\_clip, 1199
  - op\_concatenate, 1207
  - op\_cond, 1215
  - op\_conj, 1222
  - op\_conv, 1230
  - op\_conv\_transpose, 1249
  - op\_convert\_to\_numpy, 1237
  - op\_convert\_to\_tensor, 1242
  - op\_copy, 1255
  - op\_correlate, 1263
  - op\_cos, 1272
  - op\_cosh, 1280
  - op\_count\_nonzero, 1288
  - op\_cross, 1297
  - op\_ctc\_decode, 1305
  - op\_ctc\_loss, 1314
  - op\_cumprod, 1320
  - op\_cumsum, 1328
  - op\_custom\_gradient, 1336
  - op\_depthwise\_conv, 1343
  - op\_det, 1349
  - op\_diag, 1355
  - op\_diagonal, 1364
  - op\_diff, 1373
  - op\_digitize, 1382
  - op\_divide, 1391
  - op\_divide\_no\_nan, 1399
  - op\_dot, 1407
  - op\_dtype, 1416
  - op\_eig, 1422
  - op\_eigh, 1427
  - op\_einsum, 1433
  - op\_elu, 1443
  - op\_empty, 1449
  - op\_equal, 1457
  - op\_erf, 1465
  - op\_erfinv, 1471
  - op\_exp, 1477
  - op\_expand\_dims, 1485
  - op\_expm1, 1493
  - op\_extract\_sequences, 1501
  - op\_eye, 1507
  - op\_fft, 1516
  - op\_fft2, 1522
  - op\_flip, 1528
  - op\_floor, 1536
  - op\_floor\_divide, 1544
  - op\_fori\_loop, 1553
  - op\_full, 1559
  - op\_full\_like, 1567
  - op\_gelu, 1575
  - op\_get\_item, 1582
  - op\_greater, 1590
  - op\_greater\_equal, 1599
  - op\_hard\_sigmoid, 1607
  - op\_hard\_silu, 1614
  - op\_hstack, 1620



op\_identity, 1628  
op\_imag, 1637  
op\_image\_affine\_transform, 1645  
op\_image\_crop, 1652  
op\_image\_extract\_patches, 1658  
op\_image\_hsv\_to\_rgb, 1665  
op\_image\_map\_coordinates, 1671  
op\_image\_pad, 1678  
op\_image\_resize, 1684  
op\_image\_rgb\_to\_grayscale, 1691  
op\_image\_rgb\_to\_hsv, 1697  
op\_in\_top\_k, 1709  
op\_inv, 1704  
op\_irfft, 1715  
op\_is\_tensor, 1761  
op\_isclose, 1722  
op\_isfinite, 1730  
op\_isinf, 1738  
op\_isnan, 1746  
op\_istft, 1754  
op\_leaky\_relu, 1766  
op\_less, 1774  
op\_less\_equal, 1782  
op\_linspace, 1791  
op\_log, 1799  
op\_log10, 1807  
op\_log1p, 1816  
op\_log2, 1824  
op\_log\_sigmoid, 1888  
op\_log\_softmax, 1894  
op\_logaddexp, 1832  
op\_logical\_and, 1840  
op\_logical\_not, 1849  
op\_logical\_or, 1857  
op\_logical\_xor, 1865  
op\_logspace, 1873  
op\_logsumexp, 1882  
op\_lstsq, 1900  
op\_lu\_factor, 1909  
op\_map, 1914  
op\_matmul, 1921  
op\_max, 1929  
op\_max\_pool, 1946  
op\_maximum, 1938  
op\_mean, 1953  
op\_median, 1961  
op\_meshgrid, 1969  
op\_min, 1978  
op\_minimum, 1987  
op\_mod, 1995  
op\_moments, 2003  
op\_moveaxis, 2010  
op\_multi\_hot, 2026  
op\_multiply, 2018  
op\_nan\_to\_num, 2033  
op\_ndim, 2041  
op\_negative, 2050  
op\_nonzero, 2058  
op\_norm, 2066  
op\_normalize, 2073  
op\_not\_equal, 2079  
op\_one\_hot, 2104  
op\_ones, 2088  
op\_ones\_like, 2096  
op\_outer, 2111  
op\_pad, 2119  
op\_power, 2127  
op\_prod, 2136  
op\_psnr, 2144  
op\_qr, 2150  
op\_quantile, 2156  
op\_ravel, 2165  
op\_real, 2173  
op\_reciprocal, 2181  
op\_relu, 2189  
op\_relu6, 2196  
op\_repeat, 2203  
op\_reshape, 2211  
op\_rfft, 2219  
op\_roll, 2226  
op\_round, 2234  
op\_sqrt, 2242  
op\_scan, 2248  
op\_scatter, 2255  
op\_scatter\_update, 2261  
op\_segment\_max, 2268  
op\_segment\_sum, 2274  
op\_select, 2280  
op\_selu, 2288  
op\_separable\_conv, 2295  
op\_shape, 2301  
op\_sigmoid, 2307  
op\_sign, 2313  
op\_silu, 2321  
op\_sin, 2327  
op\_sinh, 2336

- op\_size, 2344
- op\_slice, 2352
- op\_slice\_update, 2358
- op\_slogdet, 2364
- op\_softmax, 2370
- op\_softplus, 2376
- op\_softsign, 2383
- op\_solve, 2390
- op\_solve\_triangular, 2395
- op\_sort, 2401
- op\_sparse\_categorical\_crossentropy, 2409
- op\_split, 2416
- op\_sqrt, 2424
- op\_square, 2432
- op\_squeeze, 2440
- op\_stack, 2449
- op\_std, 2457
- op\_stft, 2465
- op\_stop\_gradient, 2472
- op\_subtract, 2477
- op\_sum, 2486
- op\_svd, 2494
- op\_swapaxes, 2500
- op\_switch, 2508
- op\_take, 2514
- op\_take\_along\_axis, 2522
- op\_tan, 2531
- op\_tanh, 2539
- op\_tensordot, 2547
- op\_tile, 2555
- op\_top\_k, 2564
- op\_trace, 2570
- op\_transpose, 2578
- op\_tri, 2586
- op\_tril, 2595
- op\_triu, 2603
- op\_unstack, 2611
- op\_var, 2618
- op\_vdot, 2626
- op\_vectorize, 2634
- op\_vectorized\_map, 2643
- op\_vstack, 2652
- op\_where, 2660
- op\_while\_loop, 2669
- op\_zeros, 2675
- op\_zeros\_like, 2683
- \* **optimizer learning rate schedules**
  - learning\_rate\_schedule\_cosine\_decay, 738
  - learning\_rate\_schedule\_cosine\_decay\_restarts, 740
  - learning\_rate\_schedule\_exponential\_decay, 742
  - learning\_rate\_schedule\_inverse\_time\_decay, 743
  - learning\_rate\_schedule\_piecewise\_constant\_decay, 745
  - learning\_rate\_schedule\_polynomial\_decay, 747
  - LearningRateSchedule, 735
- \* **optimizers**
  - optimizer\_adadelta, 942
  - optimizer\_adafactor, 944
  - optimizer\_adagrad, 947
  - optimizer\_adam, 949
  - optimizer\_adam\_w, 954
  - optimizer\_adamax, 951
  - optimizer\_ftrl, 956
  - optimizer\_lion, 959
  - optimizer\_loss\_scale, 961
  - optimizer\_nadam, 964
  - optimizer\_rmsprop, 966
  - optimizer\_sgd, 969
- \* **pooling layers**
  - layer\_average\_pooling\_1d, 298
  - layer\_average\_pooling\_2d, 303
  - layer\_average\_pooling\_3d, 308
  - layer\_global\_average\_pooling\_1d, 457
  - layer\_global\_average\_pooling\_2d, 462
  - layer\_global\_average\_pooling\_3d, 466
  - layer\_global\_max\_pooling\_1d, 470
  - layer\_global\_max\_pooling\_2d, 473
  - layer\_global\_max\_pooling\_3d, 477
  - layer\_max\_pooling\_1d, 548
  - layer\_max\_pooling\_2d, 553
  - layer\_max\_pooling\_3d, 559
- \* **preprocessing layer methods**
  - adapt, 34
- \* **preprocessing layers**
  - layer\_category\_encoding, 323
  - layer\_center\_crop, 328
  - layer\_discretization, 410

- layer\_feature\_space, 433
- layer\_hashed\_crossing, 496
- layer\_hashing, 501
- layer\_integer\_lookup, 510
- layer\_mel\_spectrogram, 563
- layer\_normalization, 580
- layer\_random\_brightness, 589
- layer\_random\_contrast, 594
- layer\_random\_crop, 598
- layer\_random\_flip, 602
- layer\_random\_rotation, 606
- layer\_random\_translation, 611
- layer\_random\_zoom, 616
- layer\_rescaling, 624
- layer\_resizing, 632
- layer\_string\_lookup, 674
- layer\_text\_vectorization, 686
- \* preprocessing**
  - image\_dataset\_from\_directory, 204
  - image\_smart\_resize, 211
  - text\_dataset\_from\_directory, 2751
  - timeseries\_dataset\_from\_array, 2753
- \* probabilistic metrics**
  - metric\_binary\_crossentropy, 813
  - metric\_categorical\_crossentropy, 825
  - metric\_kl\_divergence, 856
  - metric\_poisson, 891
  - metric\_sparse\_categorical\_crossentropy, 918
- \* random initializers**
  - initializer\_glorot\_normal, 216
  - initializer\_glorot\_uniform, 218
  - initializer\_he\_normal, 219
  - initializer\_he\_uniform, 221
  - initializer\_lecun\_normal, 224
  - initializer\_lecun\_uniform, 225
  - initializer\_orthogonal, 228
  - initializer\_random\_normal, 229
  - initializer\_random\_uniform, 231
  - initializer\_truncated\_normal, 232
  - initializer\_variance\_scaling, 234
- \* random**
  - random\_beta, 2701
  - random\_binomial, 2702
  - random\_categorical, 2703
  - random\_dropout, 2704
  - random\_gamma, 2705
  - random\_integer, 2706
  - random\_normal, 2707
  - random\_seed\_generator, 2708
  - random\_shuffle, 2709
  - random\_truncated\_normal, 2710
  - random\_uniform, 2711
- \* reduction metrics**
  - metric\_mean, 865
  - metric\_mean\_wrapper, 883
  - metric\_sum, 930
- \* regression metrics**
  - metric\_cosine\_similarity, 835
  - metric\_log\_cosh\_error, 862
  - metric\_mean\_absolute\_error, 867
  - metric\_mean\_absolute\_percentage\_error, 870
  - metric\_mean\_squared\_error, 877
  - metric\_mean\_squared\_logarithmic\_error, 880
  - metric\_r2\_score, 901
  - metric\_root\_mean\_squared\_error, 910
- \* regularization layers**
  - layer\_activity\_regularization, 276
  - layer\_alpha\_dropout, 287
  - layer\_dropout, 419
  - layer\_gaussian\_dropout, 451
  - layer\_gaussian\_noise, 454
  - layer\_spatial\_dropout\_1d, 658
  - layer\_spatial\_dropout\_2d, 662
  - layer\_spatial\_dropout\_3d, 666
- \* regularizers**
  - regularizer\_l1, 2714
  - regularizer\_l1\_l2, 2714
  - regularizer\_l2, 2715
  - regularizer\_orthogonal, 2716
- \* reshaping layers**
  - layer\_cropping\_1d, 383
  - layer\_cropping\_2d, 387
  - layer\_cropping\_3d, 391
  - layer\_flatten, 442
  - layer\_permute, 585
  - layer\_repeat\_vector, 621
  - layer\_reshape, 628
  - layer\_upsampling\_1d, 710
  - layer\_upsampling\_2d, 714
  - layer\_upsampling\_3d, 718

- layer\_zero\_padding\_1d, [722](#)
- layer\_zero\_padding\_2d, [726](#)
- layer\_zero\_padding\_3d, [731](#)
- \* **rnn cells**
  - layer\_rnn, [636](#)
  - rnn\_cell\_gru, [2721](#)
  - rnn\_cell\_lstm, [2726](#)
  - rnn\_cell\_simple, [2731](#)
- \* **rnn layers**
  - layer\_bidirectional, [318](#)
  - layer\_conv\_lstm\_1d, [365](#)
  - layer\_conv\_lstm\_2d, [371](#)
  - layer\_conv\_lstm\_3d, [377](#)
  - layer\_gru, [490](#)
  - layer\_lstm, [535](#)
  - layer\_rnn, [636](#)
  - layer\_simple\_rnn, [653](#)
  - layer\_time\_distributed, [698](#)
  - rnn\_cell\_gru, [2721](#)
  - rnn\_cell\_lstm, [2726](#)
  - rnn\_cell\_simple, [2731](#)
  - rnn\_cells\_stack, [2718](#)
- \* **saving and loading functions**
  - export\_savedmodel.keras.src.models.model.Model, [142](#)
  - [180](#)
  - layer\_t fsm, [694](#)
  - load\_model, [749](#)
  - load\_model\_weights, [750](#)
  - register\_keras\_serializable, [2712](#)
  - save\_model, [2736](#)
  - save\_model\_config, [2738](#)
  - save\_model\_weights, [2739](#)
  - with\_custom\_object\_scope, [2760](#)
- \* **saving**
  - config\_enable\_unsafe\_deserialization, [147](#)
- \* **serialization utilities**
  - deserialize\_keras\_object, [175](#)
  - get\_custom\_objects, [194](#)
  - get\_registered\_name, [198](#)
  - get\_registered\_object, [199](#)
  - register\_keras\_serializable, [2712](#)
  - serialize\_keras\_object, [2740](#)
  - with\_custom\_object\_scope, [2760](#)
- \* **simple rnn layers**
  - layer\_simple\_rnn, [653](#)
  - rnn\_cell\_simple, [2731](#)
- \* **spatial dropout regularization layers**
  - layer\_spatial\_dropout\_1d, [658](#)
  - layer\_spatial\_dropout\_2d, [662](#)
  - layer\_spatial\_dropout\_3d, [666](#)
- \* **subtract merging layers**
  - layer\_subtract, [683](#)
- \* **text dataset utils**
  - text\_dataset\_from\_directory, [2751](#)
- \* **timesery dataset utils**
  - timeseries\_dataset\_from\_array, [2753](#)
- \* **traceback utils**
  - config\_disable\_traceback\_filtering, [142](#)
  - config\_enable\_traceback\_filtering, [145](#)
  - config\_is\_traceback\_filtering\_enabled, [153](#)
- \* **utils**
  - audio\_dataset\_from\_directory, [103](#)
  - clear\_session, [132](#)
  - config\_disable\_interactive\_logging, [141](#)
  - config\_disable\_traceback\_filtering, [142](#)
  - config\_enable\_interactive\_logging, [144](#)
  - config\_enable\_traceback\_filtering, [145](#)
  - config\_is\_interactive\_logging\_enabled, [151](#)
  - config\_is\_traceback\_filtering\_enabled, [153](#)
  - get\_file, [196](#)
  - get\_source\_inputs, [200](#)
  - image\_array\_save, [202](#)
  - image\_dataset\_from\_directory, [204](#)
  - image\_from\_array, [207](#)
  - image\_load, [209](#)
  - image\_smart\_resize, [211](#)
  - image\_to\_array, [213](#)
  - layer\_feature\_space, [433](#)
  - normalize, [941](#)
  - pad\_sequences, [2691](#)
  - set\_random\_seed, [2741](#)
  - split\_dataset, [2746](#)
  - text\_dataset\_from\_directory, [2751](#)
  - timeseries\_dataset\_from\_array, [2753](#)

- to\_categorical, 2757
- zip\_lists, 2762
- \* **wrapping layers**
  - layer\_flax\_module\_wrapper, 446
  - layer\_jax\_model\_wrapper, 520
  - layer\_torch\_module\_wrapper, 702
- ==.keras\_shape (shape), 2742
- [.keras\_shape (shape), 2742
- activation\_elu, 14, 16–18, 20–23, 25, 27–32
- activation\_exponential, 15, 16, 17, 18, 20–23, 25, 27–33
- activation\_gelu, 15, 16, 17, 18, 20–23, 25–33
- activation\_hard\_sigmoid, 15–17, 18, 20–23, 25–33
- activation\_hard\_silu, 19
- activation\_hard\_swish
  - (activation\_hard\_silu), 19
- activation\_leaky\_relu, 15–18, 20, 21–23, 25–33
- activation\_linear, 15–18, 20, 21, 22, 23, 25–33
- activation\_log\_softmax, 15–18, 20, 21, 22, 23, 25–33
- activation\_mish, 15–18, 20–22, 23, 25–33
- activation\_relu, 15–18, 20–23, 24, 26–33
- activation\_relu6, 15–18, 20–23, 25, 25, 27–33
- activation\_selu, 15–18, 20–23, 25, 26, 26, 28–33
- activation\_sigmoid, 15–18, 20–23, 25–27, 27, 29–33
- activation\_silu, 15–18, 20–23, 25–28, 28, 30–33
- activation\_softmax, 15–18, 20–23, 25–29, 29, 31–33
- activation\_softplus, 15–17, 19–23, 25–30, 30, 32, 33
- activation\_softsign, 15–17, 19–23, 25–31, 31, 33
- activation\_tanh, 16, 17, 19–23, 25–32, 32
- active\_property, 33
- active\_property(), 941
- adapt, 34
- application\_convnext\_base, 36
- application\_convnext\_large, 37
- application\_convnext\_small, 39
- application\_convnext\_tiny, 41
- application\_convnext\_xlarge, 43
- application\_decode\_predictions
  - (process\_utils), 2700
- application\_densenet121, 44
- application\_densenet169, 46
- application\_densenet201, 47
- application\_efficientnet\_b0, 49
- application\_efficientnet\_b1, 51
- application\_efficientnet\_b2, 52
- application\_efficientnet\_b3, 54
- application\_efficientnet\_b4, 56
- application\_efficientnet\_b5, 57
- application\_efficientnet\_b6, 59
- application\_efficientnet\_b7, 61
- application\_efficientnet\_v2b0, 62
- application\_efficientnet\_v2b1, 64
- application\_efficientnet\_v2b2, 66
- application\_efficientnet\_v2b3, 68
- application\_efficientnet\_v2l, 69
- application\_efficientnet\_v2m, 71
- application\_efficientnet\_v2s, 73
- application\_inception\_resnet\_v2, 75
- application\_inception\_v3, 76
- application\_mobilenet, 78
- application\_mobilenet\_v2, 80
- application\_mobilenet\_v3\_large, 82
- application\_mobilenet\_v3\_small, 84
- application\_nasnet\_large, 87
- application\_nasnet\_mobile, 88
- application\_preprocess\_inputs
  - (process\_utils), 2700
- application\_preprocess\_inputs(), 46, 47, 49, 50, 52, 54, 55, 57, 59, 60, 62, 64, 66, 67, 69, 71, 73, 74, 76, 78, 79, 81, 84, 86, 88, 89, 91, 92, 94, 95, 97, 98, 100, 101, 103
- application\_resnet101, 90
- application\_resnet101\_v2, 91
- application\_resnet152, 93
- application\_resnet152\_v2, 94
- application\_resnet50, 96
- application\_resnet50\_v2, 97
- application\_vgg16, 99
- application\_vgg19, 100
- application\_xception, 102
- as.integer.keras\_shape (shape), 2742
- as.list.keras\_shape (shape), 2742

- audio\_dataset\_from\_directory, [103](#), [133](#),  
[141](#), [143](#), [144](#), [146](#), [152](#), [153](#), [197](#),  
[201](#), [203](#), [206](#), [208](#), [210](#), [212](#), [214](#),  
[441](#), [941](#), [2693](#), [2741](#), [2747](#), [2748](#),  
[2753](#), [2756](#), [2758](#), [2762](#)
- Callback, [106](#), [113](#), [114](#), [116](#), [119](#), [120](#), [123](#),  
[125–127](#), [131](#)
- Callback(), [117](#)
- callback\_backup\_and\_restore, [111](#), [111](#),  
[114](#), [116](#), [119](#), [120](#), [123](#), [125–127](#),  
[131](#)
- callback\_csv\_logger, [111](#), [113](#), [113](#), [116](#),  
[119](#), [120](#), [123](#), [125–127](#), [131](#)
- callback\_early\_stopping, [111](#), [113](#), [114](#),  
[114](#), [119](#), [120](#), [123](#), [125–127](#), [131](#)
- callback\_lambda, [111](#), [113](#), [114](#), [116](#), [117](#),  
[120](#), [123](#), [125–127](#), [131](#)
- callback\_learning\_rate\_scheduler, [111](#),  
[113](#), [114](#), [116](#), [119](#), [119](#), [123](#),  
[125–127](#), [131](#)
- callback\_model\_checkpoint, [111](#), [113](#), [114](#),  
[116](#), [119](#), [120](#), [120](#), [125–127](#), [131](#)
- callback\_reduce\_lr\_on\_plateau, [111](#), [113](#),  
[114](#), [116](#), [119](#), [120](#), [123](#), [124](#), [126](#),  
[127](#), [131](#)
- callback\_remote\_monitor, [111](#), [113](#), [114](#),  
[116](#), [119](#), [120](#), [123](#), [125](#), [125](#), [127](#),  
[131](#)
- callback\_swap\_ema\_weights, [111](#), [113](#), [114](#),  
[116](#), [119](#), [120](#), [123](#), [125](#), [126](#), [126](#),  
[131](#)
- callback\_tensorboard, [111](#), [113](#), [114](#), [116](#),  
[119](#), [120](#), [124–127](#), [128](#), [132](#)
- callback\_terminate\_on\_nan, [111](#), [113](#), [114](#),  
[116](#), [119](#), [120](#), [124–127](#), [131](#), [131](#)
- clear\_session, [105](#), [132](#), [140](#), [141](#), [143](#), [144](#),  
[146](#), [148](#), [150–153](#), [157](#), [158](#), [160](#),  
[197](#), [201](#), [203](#), [206](#), [208](#), [210](#), [212](#),  
[214](#), [441](#), [941](#), [2693](#), [2741](#), [2748](#),  
[2753](#), [2756](#), [2758](#), [2762](#)
- clone\_model, [134](#)
- compile(), [184](#)
- compile.keras.src.models.model.Model,  
[137](#), [179](#), [2699](#), [2750](#), [2759](#)
- config\_backend, [133](#), [139](#), [142](#), [143](#),  
[145–152](#), [154](#), [155](#), [157–160](#)
- config\_disable\_interactive\_logging,  
[105](#), [133](#), [140](#), [141](#), [143–148](#),  
[150–155](#), [157](#), [159](#), [160](#), [197](#), [201](#),  
[203](#), [206](#), [208](#), [210](#), [212](#), [214](#), [441](#),  
[941](#), [2693](#), [2741](#), [2748](#), [2753](#), [2756](#),  
[2758](#), [2762](#)
- config\_disable\_interactive\_logging(),  
[151](#)
- config\_disable\_traceback\_filtering,  
[105](#), [133](#), [140–142](#), [142](#), [144–148](#),  
[150–155](#), [157](#), [159](#), [160](#), [197](#), [201](#),  
[203](#), [206](#), [208](#), [210](#), [212](#), [214](#), [441](#),  
[941](#), [2693](#), [2741](#), [2748](#), [2753](#), [2756](#),  
[2758](#), [2762](#)
- config\_disable\_traceback\_filtering(),  
[142](#), [145](#), [153](#)
- config\_dtype\_policy, [143](#)
- config\_enable\_interactive\_logging, [105](#),  
[133](#), [140–143](#), [144](#), [146](#), [147](#),  
[149–155](#), [157](#), [159](#), [160](#), [197](#), [201](#),  
[203](#), [206](#), [208](#), [210](#), [212](#), [214](#), [441](#),  
[941](#), [2693](#), [2741](#), [2748](#), [2753](#), [2756](#),  
[2758](#), [2762](#)
- config\_enable\_interactive\_logging(),  
[151](#)
- config\_enable\_traceback\_filtering, [105](#),  
[133](#), [140–145](#), [145](#), [147](#), [149–155](#),  
[157](#), [159](#), [160](#), [197](#), [201](#), [203](#), [207](#),  
[208](#), [210](#), [213](#), [214](#), [442](#), [941](#), [2693](#),  
[2741](#), [2748](#), [2753](#), [2756](#), [2758](#), [2763](#)
- config\_enable\_traceback\_filtering(),  
[142](#), [145](#), [153](#)
- config\_enable\_unsafe\_deserialization,  
[140](#), [142](#), [143](#), [145](#), [146](#), [147](#),  
[149–152](#), [154](#), [155](#), [157](#), [159](#), [160](#)
- config\_epsilon, [133](#), [140](#), [142](#), [143](#),  
[145–147](#), [148](#), [149–152](#), [154](#), [155](#),  
[157–160](#)
- config\_floatx, [133](#), [140](#), [142](#), [143](#), [145–149](#),  
[149](#), [151](#), [152](#), [154](#), [155](#), [157–160](#)
- config\_floatx(), [2705](#), [2707](#), [2711](#), [2712](#)
- config\_image\_data\_format, [133](#), [140](#), [142](#),  
[143](#), [145–150](#), [150](#), [153–155](#),  
[157–160](#)
- config\_image\_data\_format(), [206](#)
- config\_is\_interactive\_logging\_enabled,  
[105](#), [133](#), [140–147](#), [149–151](#), [151](#),  
[153–155](#), [157](#), [159](#), [160](#), [197](#), [201](#),  
[203](#), [207](#), [208](#), [210](#), [213](#), [214](#), [442](#),  
[941](#), [2693](#), [2741](#), [2748](#), [2753](#), [2756](#),

- 2758, 2763
- config\_is\_traceback\_filtering\_enabled,
  - 105, 133, 140–147, 149–153, 153, 155, 157, 159, 160, 197, 201, 203, 207, 208, 210, 213, 214, 442, 941, 2693, 2742, 2748, 2753, 2756, 2758, 2763
- config\_is\_traceback\_filtering\_enabled(),
  - 142, 145
- config\_set\_backend, 140, 142, 143,
  - 145–147, 149–151, 153, 154, 154, 157, 159, 160
- config\_set\_dtype\_policy, 155
- config\_set\_epsilon, 133, 140, 142, 143,
  - 145–151, 153–155, 156, 158–160
- config\_set\_floatx, 133, 140, 142, 143, 145,
  - 147–151, 153–155, 157, 157, 160
- config\_set\_image\_data\_format, 133, 140,
  - 142, 143, 145, 147–151, 153–155, 157–159, 159
- Constraint, 161, 163–165
- constraint\_maxnorm, 162, 163, 164, 165
- constraint\_minmaxnorm, 162, 163, 163, 165
- constraint\_nonneg, 162–164, 164, 165
- constraint\_unitnorm, 162–165, 165
- count\_params, 166, 194, 202, 2701, 2717
- custom\_metric, 166, 805, 809, 812, 815, 818,
  - 821, 824, 828, 831, 834, 836, 839, 841, 844, 847, 850, 852, 855, 858, 861, 864, 866, 869, 872, 876, 879, 882, 884, 887, 890, 893, 897, 900, 902, 906, 909, 911, 914, 917, 920, 923, 926, 929, 931, 934, 936, 938
- custom\_metric(), 751
  
- dataset\_boston\_housing, 168, 169–171,
  - 173, 175
- dataset\_cifar10, 169, 169, 170, 171, 173,
  - 175
- dataset\_cifar100, 169, 170, 171, 173, 175
- dataset\_fashion\_mnist, 169, 170, 170, 173,
  - 175
- dataset\_imdb, 169–171, 171, 173, 175
- dataset\_imdb(), 174
- dataset\_imdb\_word\_index (dataset\_imdb),
  - 171
- dataset\_mnist, 169–171, 173, 173, 175
- dataset\_reuters, 169–171, 173, 174
  
- dataset\_reuters\_word\_index
  - (dataset\_reuters), 174
- deserialize\_keras\_object, 175, 195, 199,
  - 200, 2713, 2740, 2762
- evaluate.keras.src.models.model.Model,
  - 139, 178, 2699, 2750, 2759
- export\_savedmodel.keras.src.models.model.Model,
  - 180, 698, 750, 751, 2713, 2737, 2739, 2740, 2761
  
- feature\_cross (layer\_feature\_space), 433
- feature\_custom (layer\_feature\_space),
  - 433
- feature\_float (layer\_feature\_space), 433
- feature\_float\_discretized
  - (layer\_feature\_space), 433
- feature\_float\_normalized
  - (layer\_feature\_space), 433
- feature\_float\_rescaled
  - (layer\_feature\_space), 433
- feature\_integer\_categorical
  - (layer\_feature\_space), 433
- feature\_integer\_hashed
  - (layer\_feature\_space), 433
- feature\_string\_categorical
  - (layer\_feature\_space), 433
- feature\_string\_hashed
  - (layer\_feature\_space), 433
- fit.keras.src.models.model.Model, 181
- fit.keras.src.models.model.Model(),
  - 112, 114, 116, 117, 119, 122, 125–127, 129, 131, 2696
- format.keras.src.models.model.Model
  - (summary.keras.src.models.model.Model), 2748
- format.keras\_shape (shape), 2742
- freeze\_weights, 184
- freeze\_weights(), 242
- from\_config (get\_config), 193
  
- get\_config, 166, 193, 198, 202, 241, 243,
  - 2697, 2701, 2717, 2750
- get\_custom\_objects, 178, 194, 199, 200,
  - 2713, 2740, 2762
- get\_file, 105, 133, 141, 143, 144, 146, 152,
  - 153, 196, 201, 203, 207, 208, 210, 213, 214, 442, 941, 2693, 2742, 2748, 2753, 2756, 2758, 2763



- `get_layer`, [194](#), [198](#), [241](#), [243](#), [2697](#), [2750](#)
- `get_registered_name`, [178](#), [195](#), [198](#), [200](#), [2713](#), [2740](#), [2762](#)
- `get_registered_object`, [178](#), [195](#), [199](#), [199](#), [2713](#), [2740](#), [2762](#)
- `get_source_inputs`, [106](#), [133](#), [141](#), [143](#), [144](#), [146](#), [152](#), [153](#), [197](#), [200](#), [203](#), [207](#), [208](#), [210](#), [213](#), [214](#), [442](#), [942](#), [2693](#), [2742](#), [2748](#), [2753](#), [2756](#), [2758](#), [2763](#)
- `get_vocabulary`  
(`layer_text_vectorization`), [686](#)
- `get_weights`, [166](#), [194](#), [201](#), [2701](#), [2717](#)
- `image_array_save`, [106](#), [133](#), [141](#), [143](#), [144](#), [146](#), [152](#), [154](#), [197](#), [201](#), [202](#), [207](#), [208](#), [210](#), [212–214](#), [442](#), [942](#), [1647](#), [1653](#), [1660](#), [1666](#), [1672](#), [1679](#), [1686](#), [1692](#), [1699](#), [2693](#), [2742](#), [2748](#), [2753](#), [2756](#), [2758](#), [2763](#)
- `image_dataset_from_directory`, [105](#), [106](#), [133](#), [141](#), [143](#), [144](#), [146](#), [152](#), [154](#), [197](#), [201](#), [203](#), [204](#), [208](#), [211](#), [213](#), [214](#), [442](#), [942](#), [2693](#), [2742](#), [2747](#), [2748](#), [2753](#), [2756](#), [2758](#), [2763](#)
- `image_from_array`, [106](#), [133](#), [141](#), [143](#), [144](#), [146](#), [152](#), [154](#), [197](#), [201](#), [203](#), [207](#), [207](#), [210–215](#), [442](#), [942](#), [1647](#), [1653](#), [1660](#), [1666](#), [1672](#), [1679](#), [1686](#), [1692](#), [1699](#), [2693](#), [2742](#), [2748](#), [2753](#), [2756](#), [2758](#), [2763](#)
- `image_load`, [106](#), [133](#), [141](#), [143](#), [145](#), [146](#), [152](#), [154](#), [197](#), [201](#), [203](#), [207](#), [208](#), [209](#), [212–215](#), [442](#), [942](#), [1647](#), [1653](#), [1660](#), [1666](#), [1673](#), [1679](#), [1686](#), [1692](#), [1699](#), [2693](#), [2742](#), [2748](#), [2753](#), [2756](#), [2758](#), [2763](#)
- `image_smart_resize`, [106](#), [133](#), [141](#), [143](#), [145](#), [146](#), [152](#), [154](#), [197](#), [201](#), [203](#), [207](#), [208](#), [210](#), [211](#), [211](#), [214](#), [215](#), [442](#), [942](#), [1647](#), [1653](#), [1660](#), [1666](#), [1673](#), [1679](#), [1686](#), [1692](#), [1699](#), [2693](#), [2742](#), [2748](#), [2753](#), [2756](#), [2758](#), [2763](#)
- `image_to_array`, [106](#), [134](#), [141](#), [143](#), [145](#), [146](#), [152](#), [154](#), [197](#), [201](#), [203](#), [207](#), [208](#), [210–213](#), [213](#), [442](#), [942](#), [1647](#), [1653](#), [1660](#), [1666](#), [1673](#), [1679](#), [1686](#), [1692](#), [1699](#), [2694](#), [2742](#), [2748](#), [2753](#), [2756](#), [2758](#), [2763](#)
- `initializer_constant`, [215](#), [217](#), [219](#), [220](#), [222](#), [223](#), [225–227](#), [229](#), [230](#), [232](#), [234–237](#)
- `initializer_glorot_normal`, [216](#), [216](#), [219](#), [220](#), [222](#), [223](#), [225–227](#), [229](#), [230](#), [232–235](#), [237](#)
- `initializer_glorot_uniform`, [216](#), [217](#), [218](#), [220](#), [222](#), [223](#), [225–227](#), [229](#), [230](#), [232–235](#), [237](#)
- `initializer_he_normal`, [216](#), [217](#), [219](#), [219](#), [222](#), [223](#), [225](#), [226](#), [228–237](#)
- `initializer_he_uniform`, [216](#), [217](#), [219](#), [220](#), [221](#), [223](#), [225](#), [226](#), [228–237](#)
- `initializer_identity`, [216](#), [217](#), [219](#), [220](#), [222](#), [222](#), [225–229](#), [231](#), [232](#), [234](#), [236](#), [237](#)
- `initializer_lecun_normal`, [216](#), [217](#), [219](#), [220](#), [222](#), [223](#), [224](#), [226](#), [228–237](#)
- `initializer_lecun_normal()`, [26](#), [27](#)
- `initializer_lecun_uniform`, [216](#), [217](#), [219–223](#), [225](#), [225](#), [228–237](#)
- `initializer_ones`, [216](#), [217](#), [219](#), [221–223](#), [225](#), [227](#), [227](#), [229](#), [231](#), [232](#), [234](#), [236](#), [237](#)
- `initializer_orthogonal`, [216](#), [217](#), [219–223](#), [225–228](#), [228](#), [230–237](#)
- `initializer_random_normal`, [216](#), [217](#), [219–223](#), [225–229](#), [229](#), [232–237](#)
- `initializer_random_uniform`, [216](#), [217](#), [219–223](#), [225–231](#), [231](#), [233–237](#)
- `initializer_truncated_normal`, [216](#), [217](#), [219–223](#), [225–232](#), [232](#), [235–237](#)
- `initializer_variance_scaling`, [216](#), [217](#), [219–223](#), [225–234](#), [234](#), [237](#)
- `initializer_zeros`, [216](#), [218](#), [219](#), [221–223](#), [225](#), [227–229](#), [231](#), [232](#), [234](#), [236](#), [236](#)
- `install_keras`, [237](#)
- `keras`, [238](#)
- `keras_input`, [238](#), [241](#), [243](#)
- `keras_input()`, [240](#)
- `keras_model`, [194](#), [198](#), [240](#), [240](#), [243](#), [2697](#), [2750](#)
- `keras_model()`, [239](#), [940](#)
- `keras_model_sequential`, [194](#), [198](#), [240](#), [241](#), [241](#), [2697](#), [2750](#)
- `keras_model_sequential()`, [940](#)
- `Layer`, [243](#), [256](#), [259](#), [263](#), [266](#), [270](#), [273](#), [277](#),



- 280, 284, 288, 292, 296, 301, 306,  
310, 315, 320, 325, 330, 333, 338,  
343, 348, 353, 358, 363, 369, 375,  
381, 385, 389, 393, 397, 403, 408,  
413, 417, 420, 426, 430, 439, 443,  
448, 452, 455, 459, 463, 467, 471,  
475, 479, 483, 488, 494, 498, 504,  
507, 517, 524, 528, 532, 539, 542,  
546, 551, 556, 560, 566, 569, 573,  
578, 583, 587, 591, 595, 600, 604,  
608, 613, 618, 622, 626, 629, 634,  
640, 645, 651, 656, 660, 664, 668,  
671, 681, 684, 691, 695, 699, 704,  
707, 711, 716, 720, 724, 728, 733,  
2719, 2724, 2729, 2734
- Layer(), 318, 940
- layer\_activation, 252, 255, 259, 263, 266,  
270, 273, 277, 281, 284, 288, 292,  
296, 301, 306, 310, 315, 320, 326,  
330, 333, 338, 343, 348, 353, 358,  
363, 369, 375, 381, 385, 389, 393,  
397, 403, 408, 413, 417, 420, 426,  
430, 439, 443, 448, 452, 455, 459,  
463, 467, 471, 475, 479, 483, 488,  
494, 498, 504, 507, 517, 524, 528,  
532, 539, 542, 546, 551, 556, 560,  
566, 569, 573, 578, 583, 587, 591,  
595, 600, 604, 608, 613, 618, 622,  
626, 629, 634, 640, 645, 651, 656,  
660, 664, 668, 671, 681, 684, 691,  
695, 699, 704, 707, 711, 716, 720,  
724, 728, 733, 2719, 2724, 2729,  
2734
- layer\_activation\_elu, 252, 256, 258, 263,  
266, 270, 273, 277, 281, 284, 288,  
292, 296, 301, 306, 310, 316, 320,  
326, 330, 333, 338, 343, 348, 353,  
358, 363, 369, 375, 381, 385, 389,  
393, 398, 403, 408, 413, 417, 420,  
426, 430, 439, 443, 448, 452, 455,  
459, 463, 467, 471, 475, 479, 483,  
488, 494, 498, 504, 508, 517, 524,  
528, 532, 539, 542, 546, 551, 556,  
560, 566, 569, 573, 578, 583, 587,  
591, 595, 600, 604, 608, 613, 618,  
622, 626, 629, 634, 640, 646, 651,  
656, 660, 664, 668, 671, 681, 684,  
691, 695, 699, 704, 707, 711, 716,  
720, 724, 728, 733, 2719, 2724,  
2729, 2734
- layer\_activation\_leaky\_relu, 253, 256,  
259, 262, 266, 270, 273, 277, 281,  
285, 288, 292, 296, 301, 306, 310,  
316, 320, 326, 330, 333, 338, 343,  
348, 353, 358, 363, 369, 375, 381,  
385, 389, 393, 398, 403, 408, 413,  
417, 420, 426, 430, 439, 443, 448,  
452, 455, 459, 463, 467, 471, 475,  
479, 483, 488, 494, 499, 504, 508,  
517, 524, 528, 533, 539, 542, 546,  
551, 556, 560, 566, 569, 573, 578,  
583, 587, 591, 595, 600, 604, 608,  
613, 618, 622, 626, 629, 634, 640,  
646, 651, 656, 660, 664, 668, 672,  
681, 684, 691, 695, 700, 704, 707,  
711, 716, 720, 724, 728, 733, 2719,  
2724, 2729, 2734
- layer\_activation\_parametric\_relu, 253,  
256, 259, 263, 265, 270, 273, 277,  
281, 285, 288, 292, 296, 301, 306,  
310, 316, 320, 326, 330, 333, 338,  
343, 348, 353, 358, 363, 369, 375,  
381, 385, 389, 393, 398, 403, 408,  
413, 417, 420, 426, 430, 439, 443,  
448, 452, 455, 459, 463, 467, 471,  
475, 479, 483, 488, 494, 499, 504,  
508, 517, 524, 528, 533, 539, 543,  
546, 551, 556, 560, 566, 569, 573,  
578, 583, 587, 591, 596, 600, 604,  
608, 613, 618, 622, 626, 629, 634,  
640, 646, 651, 656, 660, 664, 668,  
672, 681, 684, 691, 695, 700, 704,  
707, 711, 716, 720, 724, 729, 733,  
2719, 2724, 2729, 2734
- layer\_activation\_relu, 253, 256, 259, 263,  
266, 269, 273, 277, 281, 285, 288,  
292, 296, 301, 306, 310, 316, 320,  
326, 330, 333, 338, 343, 348, 353,  
358, 363, 369, 375, 381, 385, 389,  
393, 398, 403, 408, 413, 417, 420,  
426, 430, 439, 443, 448, 452, 455,  
459, 463, 467, 471, 475, 479, 483,  
488, 494, 499, 504, 508, 517, 524,  
528, 533, 539, 543, 546, 551, 556,  
560, 566, 569, 573, 578, 583, 587,  
591, 596, 600, 604, 608, 613, 618,

- 622, 626, 630, 634, 640, 646, 651, 656, 660, 664, 668, 672, 681, 684, 691, 695, 700, 704, 707, 711, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_activation\_softmax, 253, 256, 259, 263, 266, 270, 272, 277, 281, 285, 288, 292, 296, 301, 306, 310, 316, 320, 326, 330, 333, 338, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 420, 426, 431, 439, 443, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 640, 646, 651, 656, 660, 664, 668, 672, 681, 684, 691, 695, 700, 704, 707, 711, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_activity\_regularization, 253, 256, 259, 263, 266, 270, 273, 276, 281, 285, 288, 292, 296, 301, 306, 310, 316, 320, 326, 330, 333, 338, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 420, 426, 431, 439, 443, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 640, 646, 651, 656, 659, 660, 664, 668, 672, 681, 684, 691, 695, 700, 704, 707, 711, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_add, 253, 256, 259, 263, 266, 270, 274, 277, 279, 285, 288, 292, 295, 296, 301, 306, 310, 316, 320, 326, 330, 333, 338, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 691, 695, 700, 704, 707, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_alpha\_dropout, 253, 256, 259, 263, 266, 270, 274, 277, 281, 285, 287, 292, 296, 301, 306, 310, 316, 320, 326, 330, 333, 338, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 420, 421, 426, 431, 439, 444, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 691, 695, 700, 704, 707, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_attention, 253, 256, 259, 263, 266, 270, 274, 277, 281, 284, 285, 288, 290, 296, 301, 306, 310, 316, 320, 326, 330, 334, 338, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 539, 543, 546, 551, 556, 561, 566, 569, 572, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 691, 695, 700, 704, 707, 711, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_additive\_attention, 253, 256, 259, 263, 266, 270, 274, 277, 281, 283, 288, 292, 296, 301, 306, 310, 316, 320, 326, 330, 333, 338, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 487, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 691, 695, 700, 704, 707, 711, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734

- 426, 431, 439, 444, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 691, 696, 700, 704, 707, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_average, 253, 256, 259, 263, 267, 270, 274, 277, 280, 281, 285, 288, 292, 294, 301, 306, 310, 316, 320, 326, 330, 333, 334, 338, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 561, 566, 569, 572, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 692, 696, 700, 704, 707, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_average\_pooling\_1d, 253, 256, 259, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 298, 306, 310, 316, 320, 326, 330, 334, 338, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 560, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 608, 613, 618, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 692, 696, 700, 704, 707, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_average\_pooling\_2d, 253, 256, 259, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 300, 301, 303, 310, 316, 320, 326, 330, 334, 339, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 459, 463, 467, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 532, 533, 539, 543, 546, 551, 556, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 671, 672, 681, 684, 692, 696, 700, 704, 707, 708, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_average\_pooling\_3d, 253, 256, 259, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 300, 301, 306, 308, 316, 320, 326, 330, 334, 339, 343, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 459, 460, 463, 464, 467, 468, 471, 475, 479, 483, 488, 494, 499, 505, 508, 517, 524, 528, 533, 539, 543, 546, 551, 556, 560, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 692, 696, 700, 704, 708, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_batch\_normalization, 253, 256, 260, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 301, 306, 310, 312, 321, 326, 330, 334, 339, 344, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 460, 464, 468, 471, 475, 479, 483, 488, 494, 499, 505, 508, 518, 524, 528, 532, 533, 539, 543, 546, 551, 556, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 671, 672, 681, 684, 692, 696, 700, 704, 707, 708, 712, 716, 720, 724, 729,

- 733, 2719, 2724, 2729, 2734
- layer\_bidirectional, 253, 256, 260, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 301, 306, 310, 316, 318, 326, 330, 334, 339, 344, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 460, 464, 468, 471, 475, 479, 484, 488, 493, 494, 499, 505, 508, 518, 524, 528, 533, 538, 539, 543, 546, 551, 557, 561, 566, 569, 573, 578, 583, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 640, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 692, 696, 699, 700, 704, 708, 712, 716, 720, 724, 729, 733, 2718, 2719, 2723, 2724, 2729, 2733, 2734
- layer\_category\_encoding, 253, 256, 260, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 301, 306, 310, 316, 321, 323, 329, 330, 334, 339, 344, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 412, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 460, 464, 468, 471, 475, 479, 484, 488, 494, 498, 499, 504, 505, 508, 517, 518, 524, 528, 533, 539, 543, 546, 551, 557, 561, 565, 566, 570, 573, 578, 583, 587, 591, 592, 595, 596, 599, 600, 603, 604, 608, 609, 613, 614, 618, 619, 622, 625, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 680, 681, 684, 691, 692, 696, 700, 704, 708, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_center\_crop, 253, 256, 260, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 301, 306, 310, 316, 321, 325, 326, 328, 334, 339, 344, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 412, 413, 417, 421, 426, 431, 439, 444, 449, 452, 455, 460, 464, 468, 471, 475, 479, 484, 488, 494, 498, 499, 504, 505, 508, 517, 518, 524, 528, 533, 539, 543, 546, 551, 557, 561, 566, 570, 573, 578, 583, 587, 591, 592, 595, 596, 599, 600, 603, 604, 608, 609, 613, 614, 618, 619, 622, 625, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 680, 681, 684, 691, 692, 696, 700, 704, 708, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- 543, 546, 551, 557, 561, 565, 566, 570, 573, 578, 583, 587, 591, 592, 595, 596, 599, 600, 603, 604, 608, 609, 613, 614, 618, 619, 622, 625, 626, 630, 633, 634, 641, 646, 651, 656, 660, 664, 668, 672, 680, 681, 685, 691, 692, 696, 700, 704, 708, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_concatenate, 253, 256, 260, 263, 267, 270, 274, 277, 280, 281, 285, 288, 292, 295, 296, 301, 306, 311, 316, 321, 326, 330, 332, 339, 344, 348, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 440, 444, 449, 452, 456, 460, 464, 468, 471, 475, 479, 484, 488, 494, 499, 505, 508, 518, 524, 528, 533, 539, 543, 546, 551, 557, 561, 566, 569, 570, 572, 573, 578, 584, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 646, 651, 656, 660, 664, 668, 672, 681, 684, 685, 692, 696, 700, 704, 708, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_conv\_1d, 253, 256, 260, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 301, 306, 311, 316, 321, 326, 330, 334, 336, 343, 344, 348, 349, 353, 358, 363, 369, 375, 381, 385, 389, 393, 398, 402, 403, 408, 413, 417, 421, 426, 431, 440, 444, 449, 452, 456, 460, 464, 468, 471, 475, 479, 484, 488, 494, 499, 505, 508, 518, 524, 528, 533, 539, 543, 546, 551, 557, 561, 566, 570, 573, 578, 584, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 645, 646, 650, 651, 656, 660, 664, 668, 672, 681, 685, 692, 696, 700, 704, 708, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_conv\_1d\_transpose, 253, 256, 260, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 301, 306, 311, 316, 321, 326, 330, 334, 338, 339, 341, 348, 349, 353, 354, 358, 363, 369,

- 375, 381, 385, 389, 393, 398, 402, 403, 408, 413, 417, 421, 426, 431, 440, 444, 449, 452, 456, 460, 464, 468, 472, 475, 479, 484, 488, 494, 499, 505, 508, 518, 524, 528, 533, 539, 543, 546, 551, 557, 561, 566, 570, 573, 578, 584, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 645, 646, 650, 651, 656, 660, 664, 668, 672, 681, 685, 692, 696, 700, 704, 708, 712, 716, 720, 724, 729, 733, 2719, 2724, 2729, 2734
- layer\_conv\_2d, 253, 257, 260, 263, 267, 270, 274, 277, 281, 285, 288, 292, 296, 301, 306, 311, 316, 321, 326, 330, 334, 338, 339, 343, 344, 346, 353, 354, 358, 363, 369, 375, 381, 385, 389, 393, 398, 402, 403, 408, 413, 417, 421, 426, 431, 440, 444, 449, 452, 456, 460, 464, 468, 472, 475, 479, 484, 488, 494, 499, 505, 508, 518, 524, 528, 533, 539, 543, 546, 551, 557, 561, 566, 570, 573, 578, 584, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 645, 646, 650, 651, 656, 660, 664, 668, 672, 681, 685, 692, 696, 700, 704, 708, 712, 716, 720, 725, 729, 733, 2719, 2724, 2730, 2734
- layer\_conv\_2d\_transpose, 253, 257, 260, 263, 267, 270, 274, 277, 281, 285, 288, 293, 296, 301, 306, 311, 316, 321, 326, 330, 334, 338, 339, 343, 344, 348, 349, 350, 358, 363, 369, 375, 381, 385, 389, 393, 398, 402, 403, 408, 413, 417, 421, 426, 431, 440, 444, 449, 452, 456, 460, 464, 468, 472, 475, 479, 484, 488, 494, 499, 505, 508, 518, 524, 528, 533, 539, 543, 546, 551, 557, 561, 566, 570, 573, 578, 584, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 645, 646, 650, 651, 656, 660, 664, 668, 672, 681, 685, 692, 696, 700, 704, 708, 712, 716, 720, 725, 729, 733, 2719, 2724, 2730, 2734
- layer\_conv\_3d, 253, 257, 260, 263, 267, 270, 274, 277, 281, 285, 288, 293, 296, 301, 306, 311, 316, 321, 326, 330, 334, 338, 339, 343, 344, 348, 349, 353, 354, 355, 363, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 440, 444, 449, 452, 456, 460, 464, 468, 472, 475, 479, 484, 488, 494, 499, 505, 508, 518, 524, 528, 533, 539, 543, 546, 551, 557, 561, 566, 570, 573, 578, 584, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 634, 641, 645, 646, 650, 651, 656, 660, 664, 668, 672, 681, 685, 692, 696, 700, 704, 708, 712, 716, 720, 725, 729, 733, 2719, 2724, 2730, 2734
- layer\_conv\_3d\_transpose, 253, 257, 260, 263, 267, 271, 274, 277, 281, 285, 288, 293, 296, 301, 306, 311, 316, 321, 326, 330, 334, 338, 339, 343, 344, 348, 349, 353, 354, 358, 360, 369, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 440, 444, 449, 452, 456, 460, 464, 468, 472, 475, 479, 484, 488, 494, 499, 505, 508, 518, 524, 528, 533, 539, 543, 547, 551, 557, 561, 566, 570, 573, 578, 584, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 635, 641, 645, 646, 650, 651, 656, 660, 664, 668, 672, 681, 685, 692, 696, 700, 704, 708, 712, 716, 720, 725, 729, 733, 2719, 2724, 2730, 2734
- layer\_conv\_lstm\_1d, 253, 257, 260, 263, 267, 271, 274, 277, 281, 285, 288, 293, 296, 301, 306, 311, 316, 320, 321, 326, 330, 334, 339, 344, 349, 354, 358, 363, 365, 375, 381, 385, 389, 393, 398, 403, 408, 413, 417, 421, 426, 431, 440, 444, 449, 452, 456, 460, 464, 468, 472, 475, 479, 484, 488, 493, 494, 499, 505, 508, 518, 524, 528, 533, 538, 539, 543, 547, 551, 557, 561, 566, 570, 573, 578, 584, 587, 592, 596, 600, 604, 609, 614, 619, 622, 626, 630, 635,

- 640, 641, 646, 651, 656, 657, 660,  
664, 668, 672, 681, 685, 692, 696,  
699, 700, 704, 708, 712, 716, 720,  
725, 729, 733, 2718, 2719, 2724,  
2729, 2730, 2734
- layer\_conv\_lstm2d, 253, 257, 260, 263,  
267, 271, 274, 277, 281, 285, 288,  
293, 296, 301, 306, 311, 316, 320,  
321, 326, 330, 334, 339, 344, 349,  
354, 358, 363, 369, 371, 381, 385,  
389, 393, 398, 403, 408, 413, 417,  
421, 426, 431, 440, 444, 449, 452,  
456, 460, 464, 468, 472, 475, 479,  
484, 488, 493, 494, 499, 505, 508,  
518, 524, 528, 533, 538, 539, 543,  
547, 551, 557, 561, 566, 570, 573,  
578, 584, 587, 592, 596, 600, 604,  
609, 614, 619, 622, 626, 630, 635,  
640, 641, 646, 651, 656, 657, 660,  
664, 668, 672, 681, 685, 692, 696,  
699, 700, 704, 708, 712, 716, 720,  
725, 729, 733, 2718, 2719, 2724,  
2729, 2730, 2734
- layer\_conv\_lstm3d, 253, 257, 260, 263,  
267, 271, 274, 277, 281, 285, 288,  
293, 296, 301, 306, 311, 316, 320,  
321, 326, 330, 334, 339, 344, 349,  
354, 358, 363, 369, 375, 377, 385,  
389, 393, 398, 403, 408, 414, 417,  
421, 426, 431, 440, 444, 449, 452,  
456, 460, 464, 468, 472, 475, 479,  
484, 488, 493, 494, 499, 505, 508,  
518, 524, 528, 533, 538, 539, 543,  
547, 551, 557, 561, 566, 570, 573,  
578, 584, 587, 592, 596, 600, 604,  
609, 614, 619, 622, 626, 630, 635,  
640, 641, 646, 651, 656, 657, 660,  
664, 668, 672, 681, 685, 692, 696,  
699, 700, 704, 708, 712, 716, 720,  
725, 729, 733, 2718, 2719, 2724,  
2729, 2730, 2734
- layer\_cropping\_1d, 253, 257, 260, 263, 267,  
271, 274, 277, 281, 285, 289, 293,  
296, 301, 306, 311, 316, 321, 326,  
330, 334, 339, 344, 349, 354, 358,  
363, 369, 375, 381, 383, 389, 390,  
393, 394, 398, 403, 408, 414, 417,  
421, 426, 431, 440, 443, 444, 449,  
452, 456, 460, 464, 468, 472, 475,  
479, 484, 488, 494, 499, 505, 508,  
518, 524, 528, 533, 539, 543, 547,  
551, 557, 561, 566, 570, 573, 578,  
584, 586, 587, 592, 596, 600, 604,  
609, 614, 619, 622, 623, 626, 629,  
630, 635, 641, 646, 651, 657, 660,  
664, 668, 672, 681, 685, 692, 696,  
700, 704, 708, 711, 712, 716, 717,  
720, 721, 724, 725, 728, 729, 733,  
734, 2719, 2724, 2730, 2734
- layer\_cropping\_2d, 253, 257, 260, 263, 267,  
271, 274, 277, 281, 285, 289, 293,  
296, 301, 306, 311, 316, 321, 326,  
330, 334, 339, 344, 349, 354, 358,  
363, 370, 376, 382, 385, 386, 387,  
393, 394, 398, 403, 408, 414, 417,  
421, 426, 431, 440, 443, 444, 449,  
452, 456, 460, 464, 468, 472, 476,  
480, 484, 488, 494, 499, 505, 508,  
518, 524, 528, 533, 539, 543, 547,  
552, 557, 561, 566, 570, 573, 578,  
584, 586, 587, 592, 596, 600, 604,  
609, 614, 619, 622, 623, 626, 629,  
630, 635, 641, 646, 651, 657, 660,  
664, 668, 672, 681, 685, 692, 696,  
700, 704, 708, 711, 712, 716, 717,  
720, 721, 724, 725, 728, 729, 733,  
734, 2719, 2724, 2730, 2734
- layer\_cropping\_3d, 253, 257, 260, 263, 267,  
271, 274, 277, 281, 285, 289, 293,  
296, 301, 306, 311, 316, 321, 326,  
330, 334, 339, 344, 349, 354, 358,  
363, 370, 376, 382, 385, 386, 389,  
390, 391, 398, 403, 408, 414, 417,  
421, 426, 431, 440, 443, 444, 449,  
452, 456, 460, 464, 468, 472, 476,  
480, 484, 488, 494, 499, 505, 508,  
518, 525, 528, 533, 539, 543, 547,  
552, 557, 561, 566, 570, 573, 579,  
584, 586, 587, 592, 596, 600, 604,  
609, 614, 619, 622, 623, 626, 629,  
630, 635, 641, 646, 651, 657, 660,  
664, 668, 672, 681, 685, 692, 696,  
700, 705, 708, 711, 712, 716, 717,  
720, 721, 724, 725, 728, 729, 733,  
734, 2719, 2724, 2730, 2734
- layer\_dense, 253, 257, 260, 263, 267, 271,

- 274, 277, 281, 285, 289, 293, 296,  
301, 306, 311, 316, 321, 326, 330,  
334, 339, 344, 349, 354, 358, 363,  
370, 376, 382, 386, 390, 394, 395,  
403, 409, 414, 417, 421, 426, 430,  
431, 440, 444, 449, 452, 456, 460,  
464, 468, 472, 476, 480, 484, 488,  
494, 499, 505, 507, 508, 518, 525,  
527, 528, 533, 539, 542, 543, 547,  
552, 557, 561, 566, 570, 573, 579,  
584, 587, 592, 596, 600, 604, 609,  
614, 619, 623, 626, 630, 635, 641,  
646, 651, 657, 660, 664, 668, 672,  
681, 685, 692, 696, 700, 705, 708,  
712, 717, 721, 725, 729, 734, 2719,  
2724, 2730, 2734
- layer\_depthwise\_conv\_1d, 253, 257, 260,  
263, 267, 271, 274, 277, 281, 285,  
289, 293, 296, 301, 306, 311, 316,  
321, 326, 330, 334, 338, 339, 343,  
344, 348, 349, 353, 354, 358, 359,  
363, 364, 370, 376, 382, 386, 390,  
394, 398, 400, 408, 409, 414, 417,  
421, 426, 431, 440, 444, 449, 452,  
456, 460, 464, 468, 472, 476, 480,  
484, 488, 494, 499, 505, 508, 518,  
525, 528, 533, 539, 543, 547, 552,  
557, 561, 566, 570, 573, 579, 584,  
587, 592, 596, 600, 604, 609, 614,  
619, 623, 626, 630, 635, 641, 645,  
646, 651, 657, 660, 664, 668, 672,  
681, 685, 692, 696, 700, 705, 708,  
712, 717, 721, 725, 729, 734, 2719,  
2724, 2730, 2734
- layer\_depthwise\_conv\_2d, 253, 257, 260,  
263, 267, 271, 274, 277, 281, 285,  
289, 293, 296, 301, 307, 311, 316,  
321, 326, 330, 334, 338, 339, 343,  
344, 348, 349, 353, 354, 358, 359,  
363, 364, 370, 376, 382, 386, 390,  
394, 398, 403, 405, 414, 418, 421,  
426, 431, 440, 444, 449, 453, 456,  
460, 464, 468, 472, 476, 480, 484,  
488, 494, 499, 505, 508, 518, 525,  
528, 533, 539, 543, 547, 552, 557,  
561, 566, 570, 573, 579, 584, 587,  
592, 596, 600, 604, 609, 614, 619,  
623, 626, 630, 635, 641, 645, 646,  
651, 657, 660, 664, 668, 672, 681,  
685, 692, 696, 700, 705, 708,  
712, 717, 721, 725, 729, 734, 2719,  
2725, 2730, 2735
- layer\_discretization, 253, 257, 260, 263,  
267, 271, 274, 278, 281, 285, 289,  
293, 296, 301, 307, 311, 316, 321,  
325, 326, 329, 330, 334, 339, 344,  
349, 354, 359, 364, 370, 376, 382,  
386, 390, 394, 398, 403, 409, 410,  
418, 421, 426, 431, 439, 440, 444,  
449, 453, 456, 460, 464, 468, 472,  
476, 480, 484, 488, 494, 498, 499,  
504, 505, 508, 517, 518, 525, 528,  
533, 539, 543, 547, 552, 557, 561,  
565, 566, 570, 573, 579, 583, 584,  
587, 591, 592, 595, 596, 599, 600,  
603, 604, 608, 609, 613, 614, 618,  
619, 623, 625, 626, 630, 634, 635,  
641, 646, 651, 657, 660, 664, 668,  
672, 680, 681, 685, 691, 692, 696,  
700, 705, 708, 712, 717, 721, 725,  
729, 734, 2719, 2725, 2730, 2735
- layer\_discretization(), 436
- layer\_dot, 253, 257, 260, 263, 267, 271, 274,  
278, 280, 281, 285, 289, 293, 296,  
301, 307, 311, 316, 321, 326, 330,  
333, 334, 339, 344, 349, 354, 359,  
364, 370, 376, 382, 386, 390, 394,  
398, 403, 409, 414, 415, 421, 426,  
431, 440, 444, 449, 453, 456, 460,  
464, 468, 472, 476, 480, 484, 488,  
494, 499, 505, 508, 518, 525, 528,  
533, 539, 543, 546, 547, 552, 557,  
561, 566, 569, 570, 572, 573, 579,  
584, 588, 592, 596, 600, 604, 609,  
614, 619, 623, 626, 630, 635, 641,  
646, 651, 657, 660, 664, 668, 672,  
681, 684, 685, 692, 696, 700, 705,  
708, 712, 717, 721, 725, 729, 734,  
2719, 2725, 2730, 2735
- layer\_dropout, 253, 257, 260, 264, 267, 271,  
274, 277, 278, 281, 285, 288, 289,  
293, 296, 301, 307, 311, 316, 321,  
326, 330, 334, 339, 344, 349, 354,  
359, 364, 370, 376, 382, 386, 390,  
394, 398, 403, 409, 414, 418, 419,  
426, 431, 440, 444, 449, 452, 453,



- 455, 456, 460, 464, 468, 472, 476,  
480, 484, 488, 495, 499, 505, 508,  
518, 525, 528, 533, 539, 543, 547,  
552, 557, 561, 566, 570, 573, 579,  
584, 588, 592, 596, 600, 604, 609,  
614, 619, 623, 626, 630, 635, 641,  
646, 651, 657, 660, 664, 665, 668,  
669, 672, 681, 685, 692, 696, 700,  
705, 708, 712, 717, 721, 725, 729,  
734, 2719, 2725, 2730, 2735
- `layer_einsum_dense`, 253, 257, 260, 264,  
267, 271, 274, 278, 281, 285, 289,  
293, 296, 301, 307, 311, 316, 321,  
326, 330, 334, 339, 344, 349, 354,  
359, 364, 370, 376, 382, 386, 390,  
394, 397, 398, 403, 409, 414, 418,  
421, 423, 430, 431, 440, 444, 449,  
453, 456, 460, 464, 468, 472, 476,  
480, 484, 488, 495, 499, 505, 507,  
508, 518, 525, 527, 528, 533, 539,  
542, 543, 547, 552, 557, 561, 566,  
570, 573, 579, 584, 588, 592, 596,  
600, 604, 609, 614, 619, 623, 626,  
630, 635, 641, 646, 651, 657, 660,  
665, 669, 672, 681, 685, 692, 696,  
700, 705, 708, 712, 717, 721, 725,  
729, 734, 2720, 2725, 2730, 2735
- `layer_embedding`, 253, 257, 260, 264, 267,  
271, 274, 278, 281, 285, 289, 293,  
296, 301, 307, 311, 316, 321, 326,  
330, 334, 339, 344, 349, 354, 359,  
364, 370, 376, 382, 386, 390, 394,  
397, 398, 403, 409, 414, 418, 421,  
426, 427, 428, 440, 444, 449, 453,  
456, 460, 464, 468, 472, 476, 480,  
484, 488, 495, 499, 505, 507, 508,  
518, 525, 527, 528, 533, 539, 542,  
543, 547, 552, 557, 561, 566, 570,  
573, 579, 584, 588, 592, 596, 601,  
604, 609, 614, 619, 623, 627, 630,  
635, 641, 646, 651, 657, 661, 665,  
669, 672, 681, 685, 692, 696, 700,  
705, 708, 712, 717, 721, 725, 729,  
734, 2720, 2725, 2730, 2735
- `layer_embedding()`, 638
- `layer_feature_space`, 106, 134, 141, 143,  
145, 146, 152, 154, 197, 201, 203,  
207, 208, 211, 213, 215, 253, 257,  
260, 264, 267, 271, 274, 278, 281,  
285, 289, 293, 296, 301, 307, 311,  
316, 321, 326, 329, 330, 334,  
339, 344, 349, 354, 359, 364, 370,  
376, 382, 386, 390, 394, 398, 403,  
409, 413, 414, 418, 421, 427, 431,  
433, 444, 449, 453, 456, 460, 464,  
468, 472, 476, 480, 484, 488, 495,  
498, 499, 504, 505, 508, 517, 518,  
525, 528, 533, 539, 543, 547, 552,  
557, 561, 565, 566, 570, 573, 579,  
583, 584, 588, 591, 592, 595, 596,  
599, 601, 603, 604, 608, 609, 613,  
614, 618, 619, 623, 625, 627, 630,  
634, 635, 641, 646, 651, 657, 661,  
665, 669, 672, 680, 682, 685, 691,  
692, 696, 700, 705, 708, 712, 717,  
721, 725, 729, 734, 942, 2694, 2720,  
2725, 2730, 2735, 2742, 2748, 2753,  
2756, 2758, 2763
- `layer_flatten`, 253, 257, 260, 264, 267, 271,  
274, 278, 281, 285, 289, 293, 297,  
302, 307, 311, 316, 321, 326, 330,  
334, 339, 344, 349, 354, 359, 364,  
370, 376, 382, 385, 386, 389, 390,  
393, 394, 398, 404, 409, 414, 418,  
421, 427, 431, 440, 442, 449, 453,  
456, 460, 464, 468, 472, 476, 480,  
484, 488, 495, 499, 505, 508, 518,  
525, 528, 533, 540, 543, 547, 552,  
557, 561, 566, 570, 573, 579, 584,  
587, 588, 592, 596, 601, 604, 609,  
614, 619, 622, 623, 627, 629, 630,  
635, 641, 646, 651, 657, 661, 665,  
669, 672, 682, 685, 692, 696, 700,  
705, 708, 711, 712, 716, 717, 720,  
721, 724, 725, 728, 729, 733, 734,  
2720, 2725, 2730, 2735
- `layer_flax_module_wrapper`, 253, 257, 260,  
264, 267, 271, 274, 278, 281, 285,  
289, 293, 297, 302, 307, 311, 316,  
321, 326, 331, 334, 339, 344, 349,  
354, 359, 364, 370, 376, 382, 386,  
390, 394, 398, 404, 409, 414, 418,  
421, 427, 431, 440, 444, 446, 453,  
456, 460, 464, 468, 472, 476, 480,  
484, 488, 495, 499, 505, 508, 518,  
524, 525, 528, 533, 540, 543, 547,



- 552, 557, 561, 567, 570, 573, 579,  
584, 588, 592, 596, 601, 604, 609,  
614, 619, 623, 627, 630, 635, 641,  
646, 652, 657, 661, 665, 669, 672,  
682, 685, 692, 696, 700, 704, 705,  
708, 712, 717, 721, 725, 729, 734,  
2720, 2725, 2730, 2735
- layer\_gaussian\_dropout, 253, 257, 260,  
264, 267, 271, 274, 277, 278, 281,  
285, 288, 289, 293, 297, 302, 307,  
311, 316, 321, 326, 331, 334, 339,  
344, 349, 354, 359, 364, 370, 376,  
382, 386, 390, 394, 398, 404, 409,  
414, 418, 420, 421, 427, 431, 440,  
444, 449, 451, 455, 456, 460, 464,  
468, 472, 476, 480, 484, 489, 495,  
499, 505, 508, 518, 525, 528, 533,  
540, 543, 547, 552, 557, 561, 567,  
570, 574, 579, 584, 588, 592, 596,  
601, 605, 609, 614, 619, 623, 627,  
630, 635, 641, 646, 652, 657, 660,  
661, 664, 665, 668, 669, 672, 682,  
685, 692, 696, 700, 705, 708, 712,  
717, 721, 725, 729, 734, 2720, 2725,  
2730, 2735
- layer\_gaussian\_noise, 253, 257, 260, 264,  
267, 271, 274, 277, 278, 281, 285,  
288, 289, 293, 297, 302, 307, 311,  
316, 321, 326, 331, 334, 339, 344,  
349, 354, 359, 364, 370, 376, 382,  
386, 390, 394, 398, 404, 409, 414,  
418, 420, 421, 427, 431, 440, 444,  
449, 452, 453, 454, 460, 464, 468,  
472, 476, 480, 484, 489, 495, 499,  
505, 508, 518, 525, 528, 533, 540,  
543, 547, 552, 557, 561, 567, 570,  
574, 579, 584, 588, 592, 596, 601,  
605, 609, 614, 619, 623, 627, 630,  
635, 641, 646, 652, 657, 660, 661,  
664, 665, 668, 669, 672, 682, 685,  
692, 696, 700, 705, 708, 712, 717,  
721, 725, 729, 734, 2720, 2725,  
2730, 2735
- layer\_global\_average\_pooling\_1d, 253,  
257, 260, 264, 267, 271, 274, 278,  
281, 285, 289, 293, 297, 300, 302,  
306, 307, 310, 311, 316, 321, 326,  
331, 334, 339, 344, 349, 354, 359,  
364, 370, 376, 382, 386, 390, 394,  
398, 404, 409, 414, 418, 421, 427,  
431, 440, 444, 449, 453, 456, 459,  
460, 463, 464, 466, 471, 472, 475,  
476, 479, 480, 484, 489, 495, 499,  
505, 508, 518, 525, 529, 533, 540,  
543, 547, 551, 552, 556, 557, 560,  
561, 567, 570, 574, 579, 584, 588,  
592, 596, 601, 605, 609, 614, 619,  
623, 627, 630, 635, 641, 646, 652,  
364, 370, 376, 382, 386, 390, 394,  
398, 404, 409, 414, 418, 421, 427,  
431, 440, 444, 449, 453, 456, 459,  
460, 462, 467, 468, 471, 472, 475,  
476, 479, 480, 484, 489, 495, 499,  
505, 508, 518, 525, 529, 533, 540,  
543, 547, 551, 552, 556, 557, 560,  
561, 567, 570, 574, 579, 584, 588,  
592, 596, 601, 605, 609, 614, 619,  
623, 627, 630, 635, 641, 646, 652,
- layer\_global\_average\_pooling\_2d, 253,  
257, 260, 264, 267, 271, 274, 278,  
281, 285, 289, 293, 297, 300, 302,  
306, 307, 310, 311, 316, 321, 326,  
331, 334, 339, 344, 349, 354, 359,  
364, 370, 376, 382, 386, 390, 394,  
398, 404, 409, 414, 418, 421, 427,  
431, 440, 444, 449, 453, 456, 459,  
460, 462, 467, 468, 471, 472, 475,  
476, 479, 480, 484, 489, 495, 499,  
505, 508, 518, 525, 529, 533, 540,  
543, 547, 551, 552, 556, 557, 560,  
561, 567, 570, 574, 579, 584, 588,  
592, 596, 601, 605, 609, 614, 619,  
623, 627, 630, 635, 641, 646, 652,  
657, 661, 665, 669, 672, 682, 685,  
692, 696, 700, 705, 708, 712, 717,  
721, 725, 729, 734, 2720, 2725,  
2730, 2735
- layer\_global\_average\_pooling\_3d, 253,  
257, 260, 264, 267, 271, 274, 278,  
281, 285, 289, 293, 297, 300, 302,  
306, 307, 310, 311, 316, 321, 326,  
331, 334, 339, 344, 349, 354, 359,  
364, 370, 376, 382, 386, 390, 394,  
398, 404, 409, 414, 418, 421, 427,  
431, 440, 444, 449, 453, 456, 459,  
460, 463, 464, 466, 471, 472, 475,  
476, 479, 480, 484, 489, 495, 499,  
505, 508, 518, 525, 529, 533, 540,  
543, 547, 551, 552, 556, 557, 560,  
561, 567, 570, 574, 579, 584, 588,  
592, 596, 601, 605, 609, 614, 619,  
623, 627, 630, 635, 641, 646, 652,

- 657, 661, 665, 669, 672, 682, 685,  
692, 696, 700, 705, 708, 712, 717,  
721, 725, 729, 734, 2720, 2725,  
2730, 2735
- layer\_global\_max\_pooling\_1d, 253, 257,  
260, 264, 267, 271, 274, 278, 281,  
285, 289, 293, 297, 300, 302, 306,  
307, 310, 311, 316, 321, 326, 331,  
334, 339, 344, 349, 354, 359, 364,  
370, 376, 382, 386, 390, 394, 398,  
404, 409, 414, 418, 421, 427, 431,  
440, 444, 449, 453, 456, 459, 460,  
463, 464, 467, 468, 470, 475, 476,  
479, 480, 484, 489, 495, 499, 505,  
508, 518, 525, 529, 533, 540, 543,  
547, 551, 552, 556, 557, 560, 561,  
567, 570, 574, 579, 584, 588, 592,  
596, 601, 605, 609, 614, 619, 623,  
627, 630, 635, 641, 646, 652, 657,  
661, 665, 669, 672, 682, 685, 692,  
696, 700, 705, 708, 712, 717, 721,  
725, 729, 734, 2720, 2725, 2730,  
2735
- layer\_global\_max\_pooling\_2d, 253, 257,  
260, 264, 267, 271, 274, 278, 282,  
285, 289, 293, 297, 301, 302, 306,  
307, 310, 311, 316, 321, 327, 331,  
334, 339, 344, 349, 354, 359, 364,  
370, 376, 382, 386, 390, 394, 398,  
404, 409, 414, 418, 421, 427, 431,  
440, 444, 449, 453, 456, 459, 460,  
463, 464, 467, 468, 471, 472, 473,  
479, 480, 484, 489, 495, 499, 505,  
509, 518, 525, 529, 533, 540, 543,  
547, 551, 552, 556, 557, 560, 561,  
567, 570, 574, 579, 584, 588, 592,  
596, 601, 605, 609, 614, 619, 623,  
627, 630, 635, 641, 647, 652, 657,  
661, 665, 669, 672, 682, 685, 692,  
696, 700, 705, 708, 712, 717, 721,  
725, 729, 734, 2720, 2725, 2730,  
2735
- layer\_global\_max\_pooling\_3d, 254, 257,  
260, 264, 267, 271, 274, 278, 282,  
285, 289, 293, 297, 301, 302, 306,  
307, 310, 311, 317, 321, 327, 331,  
334, 339, 344, 349, 354, 359, 364,  
370, 376, 382, 386, 390, 394, 399,
- 404, 409, 414, 418, 421, 427, 431,  
440, 444, 449, 453, 456, 459, 460,  
463, 464, 467, 468, 471, 472, 475,  
476, 477, 484, 489, 495, 500, 505,  
509, 518, 525, 529, 534, 540, 543,  
547, 551, 552, 556, 557, 560, 561,  
567, 570, 574, 579, 584, 588, 592,  
596, 601, 605, 609, 614, 619, 623,  
627, 630, 635, 641, 647, 652, 657,  
661, 665, 669, 673, 682, 685, 692,  
696, 701, 705, 708, 712, 717, 721,  
725, 729, 734, 2720, 2725, 2730,  
2735
- layer\_group\_normalization, 254, 257, 260,  
264, 267, 271, 274, 278, 282, 286,  
289, 293, 297, 302, 307, 311, 315,  
317, 321, 327, 331, 334, 339, 344,  
349, 354, 359, 364, 370, 376, 382,  
386, 390, 394, 399, 404, 409, 414,  
418, 421, 427, 431, 440, 444, 449,  
453, 456, 460, 464, 468, 472, 476,  
480, 481, 489, 495, 500, 505, 509,  
518, 525, 529, 532, 534, 540, 544,  
547, 552, 557, 561, 567, 570, 574,  
579, 584, 588, 592, 597, 601, 605,  
609, 614, 619, 623, 627, 630, 635,  
641, 647, 652, 657, 661, 665, 669,  
671, 673, 682, 685, 692, 696, 701,  
705, 707, 708, 712, 717, 721, 725,  
730, 734, 2720, 2725, 2730, 2735
- layer\_group\_query\_attention, 254, 257,  
260, 264, 267, 271, 274, 278, 282,  
284, 286, 289, 292, 293, 297, 302,  
307, 311, 317, 321, 327, 331, 334,  
339, 344, 349, 354, 359, 364, 370,  
376, 382, 386, 390, 394, 399, 404,  
409, 414, 418, 421, 427, 431, 440,  
444, 449, 453, 456, 460, 464, 468,  
472, 476, 480, 484, 485, 495, 500,  
505, 509, 518, 525, 529, 534, 540,  
544, 547, 552, 557, 561, 567, 570,  
574, 578, 579, 584, 588, 592, 597,  
601, 605, 609, 614, 619, 623, 627,  
631, 635, 641, 647, 652, 657, 661,  
665, 669, 673, 682, 685, 692, 696,  
701, 705, 708, 712, 717, 721, 725,  
730, 734, 2720, 2725, 2730, 2735
- layer\_gru, 254, 257, 260, 264, 267, 271, 274,

- 278, 282, 286, 289, 293, 297, 302, 307, 311, 317, 320, 321, 327, 331, 334, 339, 344, 349, 354, 359, 364, 369, 370, 375, 376, 381, 382, 386, 390, 394, 399, 404, 409, 414, 418, 421, 427, 431, 440, 444, 449, 453, 456, 460, 464, 468, 472, 476, 480, 484, 489, 490, 500, 506, 509, 518, 525, 529, 534, 538, 540, 544, 547, 552, 557, 562, 567, 570, 574, 579, 584, 588, 593, 597, 601, 605, 609, 614, 619, 623, 627, 631, 635, 640, 641, 647, 652, 656, 657, 661, 665, 669, 673, 682, 685, 692, 696, 699, 701, 705, 708, 712, 717, 721, 725, 730, 734, 2718, 2720, 2723–2725, 2729, 2730, 2734, 2735
- `layer_gru()`, 318, 2721
- `layer_hashed_crossing`, 254, 257, 260, 264, 267, 271, 274, 278, 282, 286, 289, 293, 297, 302, 307, 311, 317, 321, 325, 327, 329, 331, 334, 339, 344, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 413, 414, 418, 421, 427, 432, 439, 440, 444, 450, 453, 456, 460, 464, 468, 472, 476, 480, 484, 489, 495, 496, 504, 506, 509, 517, 518, 525, 529, 534, 540, 544, 547, 552, 557, 562, 565, 567, 570, 574, 579, 583, 584, 588, 591, 593, 595, 597, 599, 601, 603, 605, 608, 609, 613, 614, 618, 619, 623, 625, 627, 631, 634, 635, 641, 647, 652, 657, 661, 665, 669, 673, 680, 682, 685, 691, 692, 696, 701, 705, 708, 712, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- `layer_hashing`, 254, 257, 260, 264, 267, 271, 275, 278, 282, 286, 289, 293, 297, 302, 307, 311, 317, 321, 325, 327, 329, 331, 334, 339, 344, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 413, 414, 418, 421, 427, 432, 439, 440, 444, 450, 453, 456, 460, 464, 468, 472, 476, 480, 484, 489, 495, 498, 500, 501, 509, 517, 518, 525, 529, 534, 540, 544, 547, 552, 557, 562, 565, 567, 570, 574, 579, 583, 584, 588, 591, 593, 595, 597, 599, 601, 603, 605, 608, 609, 613, 614, 618, 619, 623, 625, 627, 631, 634, 635, 642, 647, 652, 657, 661, 665, 669, 673, 680, 682, 685, 691, 692, 696, 701, 705, 708, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- `layer_integer_lookup`, 254, 257, 260, 264, 267, 271, 275, 278, 282, 286, 289, 293, 297, 302, 307, 311, 317, 321, 325, 327, 329, 331, 334, 339, 344, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 413, 414, 418, 422, 427, 432, 439, 440, 445, 450, 453, 456, 460, 464, 468, 472, 476, 480, 484, 489, 495, 498, 500, 504, 506, 509, 510, 525, 529, 534, 540, 544, 547, 552, 557, 562, 565, 567, 570, 574, 579, 583, 584, 588, 591, 593, 595, 597, 599, 601, 603, 605, 608, 609, 613, 614, 618, 619, 623, 625, 627, 631, 634, 635, 642, 647, 652, 657, 661, 665, 669, 673, 680, 682, 685, 691, 692, 696, 701, 705, 708, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- `layer_integer_lookup()`, 436
- `layer_jax_model_wrapper`, 254, 257, 260, 264, 267, 271, 275, 278, 282, 286, 289, 293, 297, 302, 307, 311, 317,

- 321, 327, 331, 334, 339, 344, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 414, 418, 422, 427, 432, 440, 445, 448, 450, 453, 456, 460, 464, 468, 472, 476, 480, 484, 489, 495, 500, 506, 509, 518, 520, 529, 534, 540, 544, 547, 552, 557, 562, 567, 570, 574, 579, 584, 588, 593, 597, 601, 605, 609, 614, 619, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 685, 692, 697, 701, 704, 705, 708, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_lambda, 254, 257, 260, 264, 268, 271, 275, 278, 282, 286, 289, 293, 297, 302, 307, 311, 317, 321, 327, 331, 335, 339, 344, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 397, 399, 404, 409, 414, 418, 422, 426, 427, 430, 432, 440, 445, 450, 453, 456, 460, 464, 468, 472, 476, 480, 484, 489, 495, 500, 506, 507, 509, 518, 525, 526, 534, 540, 542, 544, 547, 552, 557, 562, 567, 570, 574, 579, 584, 588, 593, 597, 601, 605, 609, 614, 619, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 685, 693, 697, 701, 705, 708, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_layer\_normalization, 254, 257, 260, 264, 268, 271, 275, 278, 282, 286, 289, 293, 297, 302, 307, 311, 315, 317, 321, 327, 331, 335, 339, 344, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 414, 418, 422, 427, 432, 440, 445, 450, 453, 456, 460, 464, 468, 472, 476, 480, 483, 484, 489, 495, 500, 506, 509, 518, 525, 529, 530, 540, 544, 547, 552, 557, 562, 567, 570, 574, 579, 584, 588, 593, 597, 601, 605, 609, 614, 619, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 671, 673, 682, 685, 693, 697, 701, 705, 707, 708, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_lstm, 254, 257, 260, 264, 268, 271, 275, 278, 282, 286, 289, 293, 297, 302, 307, 311, 317, 320, 321, 327, 331, 335, 339, 344, 349, 354, 359, 364, 369, 370, 375, 376, 381, 382, 386, 390, 394, 399, 404, 409, 414, 418, 422, 427, 432, 440, 445, 450, 453, 456, 460, 464, 468, 472, 476, 480, 484, 489, 494, 495, 500, 506, 509, 518, 525, 529, 534, 535, 544, 547, 552, 557, 562, 567, 570, 574, 579, 584, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 640, 642, 647, 652, 656, 657, 661, 665, 669, 673, 682, 685, 693, 697, 699, 701, 705, 708, 713, 717, 721, 725, 730, 734, 2719, 2720, 2724, 2725, 2729, 2730, 2734, 2735
- layer\_lstm(), 318, 2726
- layer\_masking, 254, 257, 260, 264, 268, 271, 275, 278, 282, 286, 289, 293, 297, 302, 307, 311, 317, 321, 327, 331, 335, 340, 344, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 397, 399, 404, 409, 414, 418, 422, 426, 427, 430, 432, 440, 445, 450, 453, 456, 460, 464, 468, 472, 476, 480, 484, 489, 495, 500, 506, 507, 509, 518, 525, 527, 529, 534, 540, 541, 547, 552, 557, 562, 567, 570, 574, 579, 584, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 685, 693, 697, 701, 705, 709, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_max\_pooling\_1d, 254, 257, 261, 264, 268, 271, 275, 278, 282, 286, 289, 293, 297, 301, 302, 306, 307, 310, 311, 317, 321, 327, 331, 335, 340, 344, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 414, 418, 422, 427, 432, 440, 445, 450, 453, 456, 459, 461, 463, 465, 467, 469, 471, 472, 475, 476, 479, 480, 484, 489, 495, 500, 506, 509, 518, 525, 529, 534, 540, 544, 547, 548, 556, 557, 560, 562, 567, 570,

- 574, 579, 584, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 685, 693, 697, 701, 705, 709, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_max\_pooling\_2d, 254, 257, 261, 264, 268, 271, 275, 278, 282, 286, 289, 293, 297, 301, 302, 306, 307, 310, 311, 317, 322, 327, 331, 335, 340, 345, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 414, 418, 422, 427, 432, 440, 445, 450, 453, 456, 459, 461, 463, 465, 467, 469, 471, 472, 475, 476, 479, 480, 484, 489, 495, 500, 506, 509, 519, 525, 529, 534, 540, 544, 547, 551, 552, 553, 560, 562, 567, 570, 574, 579, 584, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 685, 693, 697, 701, 705, 709, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_max\_pooling\_3d, 254, 257, 261, 264, 268, 271, 275, 278, 282, 286, 289, 293, 297, 301, 302, 306, 307, 310, 311, 317, 322, 327, 331, 335, 340, 345, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 414, 418, 422, 427, 432, 440, 445, 450, 453, 456, 459, 461, 463, 465, 467, 469, 471, 472, 475, 476, 479, 480, 485, 489, 495, 500, 506, 509, 519, 525, 529, 534, 540, 544, 547, 551, 552, 556, 558, 558, 567, 571, 574, 579, 584, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 685, 693, 697, 701, 705, 709, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_maximum, 254, 257, 261, 264, 268, 271, 275, 278, 280, 282, 286, 289, 293, 296, 297, 302, 307, 311, 317, 322, 327, 331, 333, 335, 340, 345, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 414, 417, 418, 422, 427, 432, 441, 445, 450, 453, 457, 461, 465, 469, 472, 476, 480, 485, 489, 495, 500, 506, 509, 519, 525, 529, 534, 540, 544, 546, 547, 552, 558, 562, 567, 568, 573, 574, 579, 585, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 684, 686, 693, 697, 701, 705, 709, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_multi\_head\_attention, 254, 257, 418, 422, 427, 432, 440, 445, 450, 453, 456, 461, 465, 469, 472, 476, 480, 485, 489, 495, 500, 506, 509, 519, 525, 529, 534, 540, 544, 545, 552, 558, 562, 567, 569, 571, 572, 574, 579, 584, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 684, 686, 693, 697, 701, 705, 709, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_mel\_spectrogram, 254, 257, 261, 264, 268, 271, 275, 278, 282, 286, 289, 293, 297, 302, 307, 312, 317, 322, 325, 327, 329, 331, 335, 340, 345, 349, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 413, 414, 418, 422, 427, 432, 439, 440, 445, 450, 453, 456, 461, 465, 469, 472, 476, 480, 485, 489, 495, 498, 500, 504, 506, 509, 517, 519, 525, 529, 534, 540, 544, 547, 552, 558, 562, 563, 571, 574, 579, 583, 585, 588, 591, 593, 595, 597, 599, 601, 603, 605, 608, 610, 613, 615, 618, 620, 623, 625, 627, 631, 634, 635, 642, 647, 652, 657, 661, 665, 669, 673, 680, 682, 686, 691, 693, 697, 701, 705, 709, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735

- 261, 264, 268, 271, 275, 278, 282, 284, 286, 289, 292, 293, 297, 302, 307, 312, 317, 322, 327, 331, 335, 340, 345, 350, 354, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 414, 418, 422, 427, 432, 441, 445, 450, 453, 457, 461, 465, 469, 472, 476, 480, 485, 488, 489, 495, 500, 506, 509, 519, 525, 529, 534, 540, 544, 547, 552, 558, 562, 567, 571, 574, 575, 585, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 686, 693, 697, 701, 705, 709, 713, 717, 721, 725, 730, 734, 2720, 2725, 2730, 2735
- layer\_multiply, 254, 258, 261, 264, 268, 271, 275, 278, 280, 282, 286, 289, 293, 296, 297, 302, 307, 312, 317, 322, 327, 331, 333, 335, 340, 345, 350, 355, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 414, 417, 418, 422, 427, 432, 441, 445, 450, 453, 457, 461, 465, 469, 473, 476, 480, 485, 489, 495, 500, 506, 509, 519, 525, 529, 534, 540, 544, 546, 547, 552, 558, 562, 567, 569, 571, 571, 579, 585, 588, 593, 597, 601, 605, 610, 615, 620, 623, 627, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 684, 686, 693, 697, 701, 705, 709, 713, 717, 721, 726, 730, 734, 2720, 2725, 2731, 2735
- layer\_normalization, 254, 258, 261, 264, 268, 271, 275, 278, 282, 286, 289, 294, 297, 302, 307, 312, 317, 322, 325, 327, 329, 331, 335, 340, 345, 350, 355, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 412–414, 418, 422, 427, 432, 439, 441, 445, 450, 453, 457, 461, 465, 469, 473, 476, 480, 485, 489, 495, 498, 500, 504, 506, 509, 517, 519, 525, 529, 534, 540, 544, 547, 552, 558, 562, 565, 567, 571, 574, 579, 580, 588, 591, 593, 595, 597, 599, 601, 603, 605, 608, 610, 613, 615, 618, 620, 623, 625, 627, 631, 634, 636, 642, 647, 652, 657, 661, 665, 669, 673, 680, 682, 686, 691, 693, 697, 701, 705, 709, 713, 717, 721, 726, 730, 734, 2720, 2725, 2731, 2735
- layer\_permute, 254, 258, 261, 264, 268, 271, 275, 278, 282, 286, 289, 294, 297, 302, 307, 312, 317, 322, 327, 331, 335, 340, 345, 350, 355, 359, 364, 370, 376, 382, 385, 386, 389, 390, 393, 394, 399, 404, 409, 414, 418, 422, 427, 432, 441, 443, 445, 450, 453, 457, 461, 465, 469, 473, 476, 480, 485, 489, 495, 500, 506, 509, 519, 525, 529, 534, 540, 544, 547, 552, 558, 562, 567, 571, 574, 579, 585, 585, 593, 597, 601, 605, 610, 615, 620, 622, 623, 627, 629, 631, 635, 642, 647, 652, 657, 661, 665, 669, 673, 682, 686, 693, 697, 701, 705, 709, 711, 713, 716, 717, 720, 721, 724, 726, 728, 730, 733, 734, 2720, 2725, 2731, 2735
- layer\_random\_brightness, 254, 258, 261, 264, 268, 272, 275, 278, 282, 286, 289, 294, 297, 302, 307, 312, 317, 322, 325, 327, 329, 331, 335, 340, 345, 350, 355, 359, 364, 370, 376, 382, 386, 390, 394, 399, 404, 409, 413, 414, 418, 422, 427, 432, 439, 441, 445, 450, 453, 457, 461, 465, 469, 473, 476, 480, 485, 489, 495, 498, 500, 504, 506, 509, 517, 519, 525, 529, 534, 540, 544, 547, 552, 558, 562, 565, 567, 571, 574, 579, 583, 585, 588, 589, 595, 597, 599, 601, 603, 605, 608, 610, 613, 615, 618, 620, 623, 625, 627, 631, 634, 636, 642, 647, 652, 657, 661, 665, 669, 673, 680, 682, 686, 691, 693, 697, 701, 705, 709, 713, 717, 721, 726, 730, 734, 2720, 2725, 2731, 2735
- layer\_random\_contrast, 254, 258, 261, 264, 268, 272, 275, 278, 282, 286, 289, 294, 297, 302, 307, 312, 317, 322, 325, 327, 329, 331, 335, 340, 345,

- 350, 355, 359, 364, 370, 376, 382,  
386, 390, 394, 399, 404, 409, 413,  
414, 418, 422, 427, 432, 439, 441,  
445, 450, 453, 457, 461, 465, 469,  
473, 476, 480, 485, 489, 495, 498,  
500, 504, 506, 509, 517, 519, 525,  
529, 534, 540, 544, 548, 552, 558,  
562, 565, 567, 571, 574, 579, 583,  
585, 588, 591, 593, 594, 599, 601,  
603, 605, 608, 610, 613, 615, 618,  
620, 623, 625, 627, 631, 634, 636,  
642, 647, 652, 658, 661, 665, 669,  
673, 680, 682, 686, 691, 693, 697,  
701, 705, 709, 713, 717, 721, 726,  
730, 734, 2720, 2725, 2731, 2735
- layer\_random\_crop, 254, 258, 261, 264, 268,  
272, 275, 278, 282, 286, 289, 294,  
297, 302, 307, 312, 317, 322, 325,  
327, 329, 331, 335, 340, 345, 350,  
355, 359, 364, 370, 376, 382, 386,  
390, 394, 399, 404, 409, 413, 414,  
418, 422, 427, 432, 439, 441, 445,  
450, 453, 457, 461, 465, 469, 473,  
476, 480, 485, 489, 495, 498, 500,  
504, 506, 509, 517, 519, 525, 529,  
534, 540, 544, 548, 552, 558, 562,  
565, 567, 571, 574, 579, 583, 585,  
588, 591, 593, 595, 597, 598, 603,  
605, 608, 610, 613, 615, 618, 620,  
623, 625, 627, 631, 634, 636, 642,  
647, 652, 658, 661, 665, 669, 673,  
680, 682, 686, 691, 693, 697, 701,  
705, 709, 713, 717, 721, 726, 730,  
734, 2720, 2725, 2731, 2735
- layer\_random\_flip, 254, 258, 261, 264, 268,  
272, 275, 278, 282, 286, 289, 294,  
297, 302, 307, 312, 317, 322, 325,  
327, 329, 331, 335, 340, 345, 350,  
355, 359, 364, 370, 376, 382, 386,  
390, 394, 399, 404, 409, 413, 414,  
418, 422, 427, 432, 439, 441, 445,  
450, 453, 457, 461, 465, 469, 473,  
476, 480, 485, 489, 495, 498, 500,  
504, 506, 509, 517, 519, 525, 529,  
534, 540, 544, 548, 552, 558, 562,  
565, 567, 571, 574, 579, 583, 585,  
588, 591, 593, 595, 597, 599, 601,  
602, 608, 610, 613, 615, 618, 620,  
623, 625, 627, 631, 634, 636, 642,  
647, 652, 658, 661, 665, 669, 673,  
680, 682, 686, 691, 693, 697, 701,  
705, 709, 713, 717, 721, 726, 730,  
734, 2720, 2725, 2731, 2735
- layer\_random\_rotation, 254, 258, 261, 264,  
268, 272, 275, 278, 282, 286, 290,  
294, 297, 302, 307, 312, 317, 322,  
325, 327, 329, 331, 335, 340, 345,  
350, 355, 359, 364, 370, 376, 382,  
386, 390, 394, 399, 404, 409, 413,  
415, 418, 422, 427, 432, 439, 441,  
445, 450, 453, 457, 461, 465, 469,  
473, 476, 480, 485, 489, 495, 498,  
500, 504, 506, 509, 517, 519, 525,  
529, 534, 540, 544, 548, 552, 558,  
562, 565, 567, 571, 574, 579, 583,  
585, 588, 591, 593, 595, 597, 599,  
601, 603, 605, 606, 613, 615, 618,  
620, 624, 626, 627, 631, 634, 636,  
642, 647, 652, 658, 661, 665, 669,  
673, 680, 682, 686, 691, 693, 697,  
701, 705, 709, 713, 718, 722, 726,  
730, 735, 2720, 2725, 2731, 2735
- layer\_random\_translation, 254, 258, 261,  
264, 268, 272, 275, 278, 282, 286,  
290, 294, 297, 302, 307, 312, 317,  
322, 325, 327, 329, 331, 335, 340,  
345, 350, 355, 359, 364, 371, 377,  
383, 387, 391, 395, 399, 404, 409,  
413, 415, 418, 422, 427, 432, 439,  
441, 445, 450, 453, 457, 461, 465,  
469, 473, 476, 480, 485, 489, 495,  
498, 500, 504, 506, 509, 517, 519,  
525, 529, 534, 540, 544, 548, 552,  
558, 562, 565, 567, 571, 574, 579,  
583, 585, 588, 591, 593, 595, 597,  
599–601, 603, 605, 608, 610, 611,  
618, 620, 624, 626, 627, 631, 634,  
636, 642, 647, 652, 658, 661, 665,  
669, 673, 681, 682, 686, 691, 693,  
697, 701, 705, 709, 713, 718, 722,  
726, 730, 735, 2720, 2725, 2731,  
2735
- layer\_random\_zoom, 254, 258, 261, 264, 268,  
272, 275, 278, 282, 286, 290, 294,  
297, 302, 307, 312, 317, 322, 325,  
327, 329, 331, 335, 340, 345, 350,



- 355, 359, 364, 371, 377, 383, 387,  
391, 395, 399, 404, 409, 413, 415,  
418, 422, 427, 432, 439, 441, 445,  
450, 453, 457, 461, 465, 469, 473,  
477, 481, 485, 489, 495, 498, 500,  
504, 506, 509, 517, 519, 525, 529,  
534, 540, 544, 548, 553, 558, 562,  
565, 567, 571, 574, 579, 583, 585,  
588, 591, 593, 595, 597, 599–601,  
603, 605, 608, 610, 613, 615, 616,  
624, 626, 627, 631, 634, 636, 642,  
647, 652, 658, 661, 665, 669, 673,  
681, 682, 686, 691, 693, 697, 701,  
706, 709, 713, 718, 722, 726, 730,  
735, 2720, 2725, 2731, 2735
- `layer_repeat_vector`, 254, 258, 261, 264,  
268, 272, 275, 278, 282, 286, 290,  
294, 297, 302, 307, 312, 317, 322,  
327, 331, 335, 340, 345, 350, 355,  
359, 364, 371, 377, 383, 385, 387,  
389, 391, 393, 395, 399, 404, 409,  
415, 418, 422, 427, 432, 441, 443,  
445, 450, 453, 457, 461, 465, 469,  
473, 477, 481, 485, 489, 495, 500,  
506, 509, 519, 526, 529, 534, 540,  
544, 548, 553, 558, 562, 567, 571,  
574, 580, 585, 587, 588, 593, 597,  
601, 605, 610, 615, 620, 621, 627,  
629, 631, 636, 642, 647, 652, 658,  
661, 665, 669, 673, 682, 686, 693,  
697, 701, 706, 709, 711, 713, 716,  
718, 720, 722, 724, 726, 728, 730,  
733, 735, 2720, 2725, 2731, 2735
- `layer_rescaling`, 254, 258, 261, 264, 268,  
272, 275, 278, 282, 286, 290, 294,  
297, 302, 307, 312, 317, 322, 325,  
327, 329–331, 335, 340, 345, 350,  
355, 360, 365, 371, 377, 383, 387,  
391, 395, 399, 404, 410, 413, 415,  
418, 422, 427, 432, 439, 441, 445,  
450, 453, 457, 461, 465, 469, 473,  
477, 481, 485, 489, 495, 498, 500,  
504, 506, 509, 517, 519, 526, 529,  
534, 540, 544, 548, 553, 558, 562,  
566, 567, 571, 574, 580, 583, 585,  
588, 591, 593, 595, 597, 600, 601,  
603, 605, 608, 610, 613, 615, 618,  
620, 624–627, 631, 632, 642, 647,  
652, 658, 661, 665, 669, 673, 681,  
682, 686, 691, 693, 697, 701, 706,  
709, 713, 718, 722, 726, 730, 735,  
2720, 2726, 2731, 2736
- `layer_rnn`, 254, 258, 261, 264, 268, 272, 275,  
279, 282, 286, 290, 294, 297, 302,  
308, 312, 317, 320, 322, 327, 331,  
335, 340, 345, 350, 355, 360, 365,  
369, 371, 375, 377, 381, 383, 387,  
391, 395, 399, 404, 410, 415, 419,  
642, 647, 652, 658, 661, 665, 669,  
673, 681, 682, 686, 691, 693, 697,  
701, 706, 709, 713, 718, 722, 726,  
730, 735, 2720, 2725, 2731, 2735
- `layer_rescaling()`, 435
- `layer_reshape`, 254, 258, 261, 264, 268, 272,  
275, 278, 282, 286, 290, 294, 297,  
302, 308, 312, 317, 322, 327, 331,  
335, 340, 345, 350, 355, 360, 365,  
371, 377, 383, 385, 387, 389, 391,  
393, 395, 399, 404, 410, 415, 418,  
422, 427, 432, 441, 443, 445, 450,  
453, 457, 461, 465, 469, 473, 477,  
481, 485, 489, 495, 500, 506, 509,  
519, 526, 529, 534, 540, 544, 548,  
553, 558, 562, 567, 571, 574, 580,  
585, 587, 588, 593, 597, 601, 605,  
610, 615, 620, 622, 624, 627, 628,  
636, 642, 647, 652, 658, 661, 665,  
669, 673, 682, 686, 693, 697, 701,  
706, 709, 711, 713, 716, 718, 720,  
722, 724, 726, 728, 730, 733, 735,  
2720, 2726, 2731, 2736
- `layer_resizing`, 254, 258, 261, 264, 268,  
272, 275, 279, 282, 286, 290, 294,  
297, 302, 308, 312, 317, 322, 325,  
327, 329–331, 335, 340, 345, 350,  
355, 360, 365, 371, 377, 383, 387,  
391, 395, 399, 404, 410, 413, 415,  
419, 422, 427, 432, 439, 441, 445,  
450, 454, 457, 461, 465, 469, 473,  
477, 481, 485, 489, 495, 498, 500,  
504, 506, 509, 517, 519, 526, 529,  
534, 540, 544, 548, 553, 558, 562,  
566, 567, 571, 574, 580, 583, 585,  
588, 591, 593, 595, 597, 600, 601,  
603, 605, 608, 610, 613, 615, 618,  
620, 624–627, 631, 632, 642, 647,  
652, 658, 661, 665, 669, 673, 681,  
682, 686, 691, 693, 697, 701, 706,  
709, 713, 718, 722, 726, 730, 735,  
2720, 2726, 2731, 2736



- 422, 427, 432, 441, 445, 450, 454,  
457, 461, 465, 469, 473, 477, 481,  
485, 489, 494, 495, 500, 506, 509,  
519, 526, 529, 534, 538, 540, 544,  
548, 553, 558, 562, 567, 571, 574,  
580, 585, 588, 593, 597, 601, 605,  
610, 615, 620, 624, 627, 631, 636,  
636, 647, 652, 656, 658, 661, 665,  
669, 673, 682, 686, 693, 697, 699,  
701, 706, 709, 713, 718, 722, 726,  
730, 735, 2719, 2720, 2723, 2724,  
2726, 2729, 2731, 2733, 2734, 2736
- `layer_rnn()`, 318
- `layer_separable_conv_1d`, 254, 258, 261,  
265, 268, 272, 275, 279, 282, 286,  
290, 294, 297, 302, 308, 312, 317,  
322, 327, 331, 335, 338, 340, 343,  
345, 348, 350, 353, 355, 358, 360,  
363, 365, 371, 377, 383, 387, 391,  
395, 399, 403, 404, 408, 410, 415,  
419, 422, 427, 432, 441, 445, 450,  
454, 457, 461, 465, 469, 473, 477,  
481, 485, 489, 495, 500, 506, 509,  
519, 526, 529, 534, 540, 544, 548,  
553, 558, 562, 567, 571, 574, 580,  
585, 589, 593, 597, 601, 605, 610,  
615, 620, 624, 627, 631, 636, 642,  
643, 651, 652, 658, 661, 666, 670,  
673, 682, 686, 693, 697, 701, 706,  
709, 713, 718, 722, 726, 730, 735,  
2720, 2726, 2731, 2736
- `layer_separable_conv_2d`, 254, 258, 261,  
265, 268, 272, 275, 279, 282, 286,  
290, 294, 297, 302, 308, 312, 317,  
322, 327, 331, 335, 338, 340, 343,  
345, 348, 350, 353, 355, 358, 360,  
363, 365, 371, 377, 383, 387, 391,  
395, 399, 403, 404, 408, 410, 415,  
419, 422, 427, 432, 441, 445, 450,  
454, 457, 461, 465, 469, 473, 477,  
481, 485, 489, 496, 500, 506, 509,  
519, 526, 529, 534, 540, 544, 548,  
553, 558, 562, 567, 571, 574, 580,  
585, 589, 593, 597, 601, 605, 610,  
615, 620, 624, 627, 631, 636, 642,  
645, 647, 648, 658, 661, 666, 670,  
673, 682, 686, 693, 697, 701, 706,  
709, 713, 718, 722, 726, 730, 735,
- 2721, 2726, 2731, 2736
- `layer_simple_rnn`, 254, 258, 261, 265, 268,  
272, 275, 279, 282, 286, 290, 294,  
297, 302, 308, 312, 317, 320, 322,  
327, 331, 335, 340, 345, 350, 355,  
360, 365, 369, 371, 375, 377, 381,  
383, 387, 391, 395, 399, 404, 410,  
415, 419, 422, 428, 432, 441, 445,  
450, 454, 457, 461, 465, 469, 473,  
477, 481, 485, 489, 494, 496, 500,  
506, 509, 519, 526, 529, 534, 538,  
540, 544, 548, 553, 558, 562, 567,  
571, 574, 580, 585, 589, 593, 597,  
601, 605, 610, 615, 620, 624, 627,  
631, 636, 640, 642, 647, 652, 653,  
662, 666, 670, 673, 682, 686, 693,  
697, 699, 701, 706, 709, 713, 718,  
722, 726, 730, 735, 2719, 2721,  
2724, 2726, 2729, 2731, 2733, 2734,  
2736
- `layer_simple_rnn()`, 2731
- `layer_spatial_dropout_1d`, 254, 258, 261,  
265, 268, 272, 275, 277, 279, 282,  
286, 288, 290, 294, 297, 302, 308,  
312, 317, 322, 327, 331, 335, 340,  
345, 350, 355, 360, 365, 371, 377,  
383, 387, 391, 395, 399, 404, 410,  
415, 419, 420, 422, 428, 432, 441,  
445, 450, 452, 454, 455, 457, 461,  
465, 469, 473, 477, 481, 485, 489,  
496, 500, 506, 509, 519, 526, 529,  
534, 540, 544, 548, 553, 558, 562,  
567, 571, 574, 580, 585, 589, 593,  
597, 602, 605, 610, 615, 620, 624,  
628, 631, 636, 642, 647, 652, 658,  
658, 663, 664, 666–668, 670, 673,  
683, 686, 693, 697, 701, 706, 709,  
713, 718, 722, 726, 730, 735, 2721,  
2726, 2731, 2736
- `layer_spatial_dropout_2d`, 254, 258, 261,  
265, 268, 272, 275, 277, 279, 282,  
286, 288, 290, 294, 298, 303, 308,  
312, 317, 322, 327, 331, 335, 340,  
345, 350, 355, 360, 365, 371, 377,  
383, 387, 391, 395, 399, 405, 410,  
415, 419, 420, 422, 428, 432, 441,  
445, 450, 452, 454, 455, 457, 461,  
465, 469, 473, 477, 481, 485, 489,

- 496, 500, 506, 509, 519, 526, 529, 534, 540, 544, 548, 553, 558, 562, 567, 571, 574, 580, 585, 589, 593, 597, 602, 605, 610, 615, 620, 624, 628, 631, 636, 642, 647, 652, 658–660, 662, 662, 667, 668, 670, 673, 683, 686, 693, 697, 701, 706, 709, 713, 718, 722, 726, 730, 735, 2721, 2726, 2731, 2736
- `layer_spatial_dropout_3d`, 254, 258, 261, 265, 268, 272, 275, 277, 279, 282, 286, 288, 290, 294, 298, 303, 308, 312, 317, 322, 327, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 387, 391, 395, 399, 405, 410, 415, 419, 420, 422, 428, 432, 441, 445, 450, 452, 454, 455, 457, 461, 465, 469, 473, 477, 481, 485, 489, 496, 500, 506, 509, 519, 526, 529, 534, 541, 544, 548, 553, 558, 562, 567, 571, 574, 580, 585, 589, 593, 597, 602, 605, 610, 615, 620, 624, 628, 631, 636, 642, 647, 652, 658–660, 662–664, 666, 666, 673, 683, 686, 693, 697, 701, 706, 709, 713, 718, 722, 726, 730, 735, 2721, 2726, 2731, 2736
- `layer_spectral_normalization`, 254, 258, 261, 265, 268, 272, 275, 279, 282, 286, 290, 294, 298, 303, 308, 312, 315, 317, 322, 327, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 387, 391, 395, 399, 405, 410, 415, 419, 422, 428, 432, 441, 445, 450, 454, 457, 461, 465, 469, 473, 477, 481, 483, 485, 489, 496, 500, 506, 509, 519, 526, 529, 532, 534, 541, 544, 548, 553, 558, 562, 568, 571, 574, 580, 585, 589, 593, 597, 602, 605, 610, 615, 620, 624, 628, 631, 636, 642, 647, 653, 658, 662, 666, 670, 670, 683, 686, 693, 697, 701, 706, 707, 709, 713, 718, 722, 726, 730, 735, 2721, 2726, 2731, 2736
- `layer_string_lookup`, 254, 258, 261, 265, 268, 272, 275, 279, 282, 286, 290, 294, 298, 303, 308, 312, 317, 322, 325, 327, 330, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 387, 391, 395, 399, 405, 410, 413, 415, 419, 422, 428, 432, 439, 441, 445, 450, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 496, 498, 500, 504, 506, 509, 517, 519, 526, 529, 534, 541, 544, 548, 553, 558, 562, 566, 568, 571, 575, 580, 583, 585, 589, 591, 593, 595, 597, 600, 602, 604, 606, 608, 610, 613, 615, 618, 620, 624, 626, 628, 631, 634, 636, 642, 647, 653, 658, 662, 666, 670, 673, 674, 686, 691, 693, 697, 701, 706, 709, 713, 718, 722, 726, 730, 735, 2721, 2726, 2731, 2736
- `layer_string_lookup()`, 436
- `layer_subtract`, 254, 258, 261, 265, 268, 272, 275, 279, 280, 282, 286, 290, 294, 296, 298, 303, 308, 312, 317, 322, 327, 332, 333, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 387, 391, 395, 399, 405, 410, 415, 417, 419, 422, 428, 432, 441, 445, 450, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 496, 500, 506, 509, 519, 526, 529, 534, 541, 544, 546, 548, 553, 558, 562, 568, 569, 571, 573, 575, 580, 585, 589, 593, 597, 602, 606, 610, 615, 620, 624, 628, 631, 636, 642, 647, 653, 658, 662, 666, 670, 673, 683, 683, 693, 697, 701, 706, 709, 713, 718, 722, 726, 730, 735, 2721, 2726, 2731, 2736
- `layer_text_vectorization`, 254, 258, 261, 265, 268, 272, 275, 279, 282, 286, 290, 294, 298, 303, 308, 312, 317, 322, 325, 327, 330, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 387, 391, 395, 399, 405, 410, 413, 415, 419, 422, 428, 432, 439, 441, 445, 450, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 496, 498, 500, 504, 506, 509, 517, 519, 526, 529, 534, 541, 544, 548, 553, 558, 562, 566, 568, 571, 575, 580, 583, 585, 589, 591, 593, 595, 597,

- 600, 602, 604, 606, 608, 610, 613,  
615, 618, 620, 624, 626, 628, 631,  
634, 636, 642, 647, 653, 658, 662,  
666, 670, 673, 681, 683, 686, 686,  
697, 701, 706, 709, 713, 718, 722,  
726, 730, 735, 2721, 2726, 2731,  
2736
- layer\_tfsn, 181, 254, 258, 261, 265, 268,  
272, 275, 279, 282, 286, 290, 294,  
298, 303, 308, 312, 317, 322, 327,  
332, 335, 340, 345, 350, 355, 360,  
365, 371, 377, 383, 387, 391, 395,  
399, 405, 410, 415, 419, 422, 428,  
432, 441, 445, 450, 454, 457, 461,  
465, 469, 473, 477, 481, 485, 490,  
496, 500, 506, 509, 519, 526, 530,  
534, 541, 544, 548, 553, 558, 562,  
568, 571, 575, 580, 585, 589, 593,  
597, 602, 606, 610, 615, 620, 624,  
628, 631, 636, 642, 647, 653, 658,  
662, 666, 670, 673, 683, 686, 693,  
694, 701, 706, 709, 713, 718, 722,  
726, 730, 735, 750, 751, 2713, 2721,  
2726, 2731, 2736, 2737, 2739, 2740,  
2761
- layer\_time\_distributed, 254, 258, 261,  
265, 268, 272, 275, 279, 282, 286,  
290, 294, 298, 303, 308, 312, 317,  
320, 322, 327, 332, 335, 340, 345,  
350, 355, 360, 365, 369, 371, 375,  
377, 381, 383, 387, 391, 395, 399,  
405, 410, 415, 419, 422, 428, 432,  
441, 445, 450, 454, 457, 461, 465,  
469, 473, 477, 481, 485, 490, 494,  
496, 500, 506, 509, 519, 526, 530,  
534, 538, 541, 544, 548, 553, 558,  
562, 568, 571, 575, 580, 585, 589,  
593, 597, 602, 606, 610, 615, 620,  
624, 628, 631, 636, 640, 642, 647,  
653, 656, 658, 662, 666, 670, 673,  
683, 686, 693, 697, 698, 706, 709,  
713, 718, 722, 726, 730, 735, 2719,  
2721, 2724, 2726, 2729, 2731, 2734,  
2736
- layer\_torch\_module\_wrapper, 254, 258,  
261, 265, 268, 272, 275, 279, 283,  
286, 290, 294, 298, 303, 308, 312,  
317, 322, 328, 332, 335, 340, 345,  
350, 355, 360, 365, 371, 377, 383,  
387, 391, 395, 399, 405, 410, 415,  
419, 422, 428, 432, 441, 445, 448,  
450, 454, 457, 461, 465, 469, 473,  
477, 481, 485, 490, 496, 500, 506,  
509, 519, 524, 526, 530, 534, 541,  
544, 548, 553, 558, 562, 568, 571,  
575, 580, 585, 589, 593, 597, 602,  
606, 610, 615, 620, 624, 628, 631,  
636, 642, 647, 653, 658, 662, 666,  
670, 673, 683, 686, 693, 697, 701,  
702, 709, 713, 718, 722, 726, 730,  
735, 2721, 2726, 2731, 2736
- layer\_torch\_module\_wrapper(), 703
- layer\_unit\_normalization, 255, 258, 261,  
265, 268, 272, 275, 279, 283, 286,  
290, 294, 298, 303, 308, 312, 315,  
318, 322, 328, 332, 335, 340, 345,  
350, 355, 360, 365, 371, 377, 383,  
387, 391, 395, 400, 405, 410, 415,  
419, 422, 428, 432, 441, 445, 450,  
454, 457, 461, 465, 469, 473, 477,  
481, 483, 485, 490, 496, 500, 506,  
510, 519, 526, 530, 532, 534, 541,  
544, 548, 553, 558, 562, 568, 571,  
575, 580, 585, 589, 593, 597, 602,  
606, 610, 615, 620, 624, 628, 631,  
636, 642, 648, 653, 658, 662, 666,  
670, 671, 673, 683, 686, 693, 697,  
701, 706, 706, 713, 718, 722, 726,  
730, 735, 2721, 2726, 2731, 2736
- layer\_upsampling\_1d, 255, 258, 261, 265,  
268, 272, 275, 279, 283, 287, 290,  
294, 298, 303, 308, 312, 318, 322,  
328, 332, 335, 340, 345, 350, 355,  
360, 365, 371, 377, 383, 385, 387,  
389, 391, 393, 395, 400, 405, 410,  
415, 419, 422, 428, 432, 441, 443,  
445, 450, 454, 457, 461, 465, 469,  
473, 477, 481, 485, 490, 496, 501,  
506, 510, 519, 526, 530, 535, 541,  
544, 548, 553, 558, 562, 568, 571,  
575, 580, 585, 587, 589, 593, 597,  
602, 606, 610, 615, 620, 622, 624,  
628, 629, 631, 636, 642, 648, 653,  
658, 662, 666, 670, 674, 683, 686,  
693, 697, 702, 706, 709, 710, 716,  
718, 720, 722, 724, 726, 728, 731,

- 733, 735, 2721, 2726, 2731, 2736
- layer\_upsampling\_2d, 255, 258, 261, 265, 268, 272, 275, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 322, 328, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 385, 387, 389, 391, 393, 395, 400, 405, 410, 415, 419, 422, 428, 432, 441, 443, 445, 450, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 496, 501, 506, 510, 519, 526, 530, 535, 541, 545, 548, 553, 558, 562, 568, 571, 575, 580, 585, 587, 589, 593, 598, 602, 606, 610, 615, 620, 622, 624, 628, 629, 631, 636, 642, 648, 653, 658, 662, 666, 670, 674, 683, 686, 693, 697, 702, 706, 709, 711, 713, 714, 720, 722, 724, 726, 728, 731, 733, 735, 2721, 2726, 2731, 2736
- layer\_upsampling\_3d, 255, 258, 261, 265, 268, 272, 275, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 322, 328, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 385, 387, 389, 391, 393, 395, 400, 405, 410, 415, 419, 422, 428, 432, 441, 443, 445, 450, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 496, 501, 506, 510, 519, 526, 530, 535, 541, 545, 548, 553, 558, 562, 568, 571, 575, 580, 585, 587, 589, 593, 598, 602, 606, 610, 615, 620, 622, 624, 628, 629, 632, 636, 642, 648, 653, 658, 662, 666, 670, 674, 683, 686, 693, 697, 702, 706, 709, 711, 713, 716, 718, 718, 724, 726, 728, 731, 733, 735, 2721, 2726, 2731, 2736
- layer\_zero\_padding\_1d, 255, 258, 261, 265, 268, 272, 275, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 322, 328, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 385, 387, 389, 391, 393, 395, 400, 405, 410, 415, 419, 422, 428, 433, 441, 443, 445, 451, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 496, 501, 507, 510, 519, 526, 530, 535, 541, 545, 548, 553, 558, 563, 568, 571, 575, 580, 585, 587, 589, 594, 598, 602, 606, 610, 615, 620, 622, 624, 628, 629, 632, 636, 643, 648, 653, 658, 662, 666, 670, 674, 683, 686, 693, 697, 702, 706, 709, 711, 713, 716, 718, 720, 722, 724, 726, 728, 731, 731, 731, 2721, 2726, 2731, 2736
- 575, 580, 585, 587, 589, 594, 598, 602, 606, 610, 615, 620, 622, 624, 628, 629, 632, 636, 642, 648, 653, 658, 662, 666, 670, 674, 683, 686, 693, 697, 702, 706, 709, 711, 713, 716, 718, 720, 722, 722, 728, 731, 733, 735, 2721, 2726, 2731, 2736
- layer\_zero\_padding\_2d, 255, 258, 261, 265, 268, 272, 276, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 322, 328, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 385, 387, 389, 391, 393, 395, 400, 405, 410, 415, 419, 422, 428, 433, 441, 443, 445, 451, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 496, 501, 507, 510, 519, 526, 530, 535, 541, 545, 548, 553, 558, 563, 568, 571, 575, 580, 585, 587, 589, 594, 598, 602, 606, 610, 615, 620, 622, 624, 628, 629, 632, 636, 642, 648, 653, 658, 662, 666, 670, 674, 683, 686, 693, 697, 702, 706, 709, 711, 713, 716, 718, 720, 722, 724, 726, 726, 733, 735, 2721, 2726, 2731, 2736
- layer\_zero\_padding\_3d, 255, 258, 261, 265, 268, 272, 276, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 322, 328, 332, 335, 340, 345, 350, 355, 360, 365, 371, 377, 383, 385, 387, 389, 391, 393, 395, 400, 405, 410, 415, 419, 423, 428, 433, 441, 443, 446, 451, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 496, 501, 507, 510, 519, 526, 530, 535, 541, 545, 548, 553, 558, 563, 568, 571, 575, 580, 585, 587, 589, 594, 598, 602, 606, 610, 615, 620, 622, 624, 628, 629, 632, 636, 643, 648, 653, 658, 662, 666, 670, 674, 683, 686, 693, 697, 702, 706, 709, 711, 713, 716, 718, 720, 722, 724, 726, 728, 731, 731, 2721, 2726, 2731, 2736
- learning\_rate\_schedule\_cosine\_decay, 738, 738, 741, 743, 745, 746, 748
- learning\_rate\_schedule\_cosine\_decay\_restarts, 738, 740, 740, 743, 745, 746, 748
- learning\_rate\_schedule\_exponential\_decay,

- [738, 740, 741, 742, 745, 746, 749](#)
- `learning_rate_schedule_exponential_decay()`, [735](#)
- `learning_rate_schedule_inverse_time_decay`, [738, 740, 741, 743, 743, 746, 749](#)
- `learning_rate_schedule_piecwise_constant_decay`, [738, 740, 741, 743, 745, 745, 749](#)
- `learning_rate_schedule_piecwise_constant_decay`, [735](#)
- `learning_rate_schedule_polynomial_decay`, [738, 740, 741, 743, 745, 746, 747](#)
- `LearningRateSchedule`, [735, 740, 741, 743, 745, 746, 748](#)
- `LearningRateSchedule()`, [945, 947, 950, 952, 954, 957, 960, 964](#)
- `load_model`, [181, 698, 749, 751, 2713, 2737, 2739, 2740, 2761](#)
- `load_model()`, [167, 2737](#)
- `load_model_config (save_model_config)`, [2738](#)
- `load_model_weights`, [181, 698, 750, 750, 2713, 2737, 2739, 2740, 2761](#)
- `Loss`, [137, 751, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 791, 793, 796, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 860, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_binary_crossentropy`, [753, 754, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 791, 793, 796, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 860, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_binary_focal_crossentropy`, [753, 757, 758, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 791, 793, 796, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 860, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_categorical_crossentropy`, [753, 757, 762, 762, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 793, 797, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 860, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_categorical_crossentropy()`, [2757](#)
- `loss_categorical_focal_crossentropy`, [753, 757, 762, 765, 765, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 793, 797, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 860, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_categorical_hinge`, [753, 757, 762, 765, 768, 769, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 793, 797, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 860, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_cosine_similarity`, [753, 757, 762, 765, 768, 770, 771, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 793, 797, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 860, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_ctc`, [753, 757, 762, 765, 768, 770, 772, 773, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 797, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 860, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_dice`, [753, 757, 762, 765, 768, 770, 772, 774, 775, 778, 780, 782, 784, 786, 788, 790, 792, 794, 797, 798, 800, 814, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 881, 893, 919, 928](#)
- `loss_hinge`, [753, 757, 762, 765, 768, 770, 772, 774, 776, 777, 780, 782, 784, 786, 788, 790, 792, 794, 797, 799, 800, 814, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 881, 893, 920, 928](#)
- `loss_huber`, [753, 757, 762, 765, 768, 770, 772, 774, 776, 778, 779, 782, 784, 786, 788, 790, 792, 794, 797, 799, 800, 814, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 881, 893, 920, 928](#)
- `loss_kl_divergence`, [753, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 781, 784, 786, 788, 790, 792, 794, 797, 799, 800, 814, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872,](#)

- 878, 881, 893, 920, 928
- `loss_log_cosh`, 753, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 783, 786, 788, 790, 792, 794, 797, 799, 800, 815, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 882, 893, 920, 928
- `loss_mean_absolute_error`, 753, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 785, 788, 790, 792, 794, 797, 799, 800, 815, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 882, 893, 920, 928
- `loss_mean_absolute_percentage_error`, 753, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 787, 790, 792, 794, 797, 799, 801, 815, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 882, 893, 920, 928
- `loss_mean_squared_error`, 754, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 789, 792, 794, 797, 799, 801, 815, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 882, 893, 920, 928
- `loss_mean_squared_logarithmic_error`, 754, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 790, 794, 797, 799, 801, 815, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 882, 893, 920, 928
- `loss_poisson`, 754, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 792, 797, 799, 801, 815, 818, 827, 830, 833, 849, 852, 858, 861, 868, 872, 878, 882, 893, 920, 928
- `loss_sparse_categorical_crossentropy`, 754, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 794, 799, 801, 815, 818, 827, 830, 833, 849, 852, 858, 861, 869, 872, 878, 882, 893, 920, 928
- `loss_sparse_categorical_crossentropy()`, 2758
- `loss_squared_hinge`, 754, 757, 762, 765, 768, 770, 772, 774, 776, 778, 780, 783, 784, 786, 788, 790, 792, 794, 797, 797, 801, 815, 818, 827, 830, 833, 849, 852, 858, 861, 869, 872, 878, 882, 893, 920, 928
- `loss_tversky`, 754, 757, 762, 765, 769, 770, 772, 774, 776, 778, 781, 783, 784, 786, 788, 790, 792, 794, 797, 799, 799, 815, 818, 827, 830, 833, 849, 852, 858, 861, 869, 872, 878, 882, 893, 920, 928
- `Metric`, 167, 801, 809, 812, 815, 818, 821, 824, 828, 831, 834, 836, 839, 841, 844, 847, 850, 852, 855, 858, 861, 864, 866, 869, 872, 876, 879, 882, 884, 887, 890, 893, 897, 900, 902, 906, 909, 911, 914, 917, 920, 923, 926, 929, 931, 934, 936, 938
- `Metric()`, 138, 167
- `metric_auc`, 167, 805, 806, 812, 815, 818, 821, 824, 828, 831, 834, 836, 839, 841, 844, 847, 850, 852, 855, 858, 861, 864, 866, 869, 872, 876, 879, 882, 884, 887, 890, 893, 897, 900, 902, 905, 906, 908, 909, 911, 914, 917, 920, 923, 926, 929, 931, 934, 936, 938
- `metric_binary_accuracy`, 167, 805, 809, 810, 815, 818, 821, 824, 828, 831, 834, 836, 839, 841, 844, 847, 850, 852, 855, 858, 861, 864, 866, 869, 872, 876, 879, 882, 884, 887, 890, 893, 897, 900, 902, 906, 909, 911, 914, 916, 917, 920, 923, 926, 929, 931, 933, 934, 936, 938
- `metric_binary_crossentropy`, 167, 754, 757, 762, 765, 769, 770, 772, 774, 776, 778, 781, 783, 784, 786, 788, 790, 792, 794, 797, 799, 801, 805, 809, 812, 813, 818, 821, 824, 827–831, 833, 834, 837, 839, 841, 844, 847, 849, 850, 852, 855, 858, 859, 861, 864, 866, 869, 872, 876, 878, 879, 882, 884, 887, 890, 893, 894, 897, 900, 902, 906, 909, 911, 914, 917, 920, 921, 923, 926, 928, 929, 931, 934, 936, 938



- metric\_binary\_focal\_crossentropy*, 167, 754, 757, 762, 765, 769, 770, 772, 774, 776, 778, 781, 783, 785, 786, 788, 790, 792, 794, 797, 799, 801, 805, 809, 812, 815, 816, 821, 824, 827, 828, 830, 831, 833, 834, 837, 839, 841, 844, 847, 849, 850, 852, 855, 858, 861, 864, 866, 869, 872, 876, 878, 879, 882, 884, 887, 890, 893, 897, 900, 902, 906, 909, 911, 914, 917, 920, 923, 926, 928, 929, 931, 934, 936, 938
- metric\_binary\_iou*, 167, 805, 809, 812, 815, 818, 819, 824, 828, 831, 834, 837, 839, 841, 844, 847, 850, 852, 855, 859, 861, 864, 866, 869, 873, 876, 879, 882, 884, 887, 890, 894, 897, 900, 902, 906, 909, 911, 914, 917, 920, 923, 926, 929, 931, 934, 936, 938
- metric\_categorical\_accuracy*, 167, 805, 809, 812, 815, 818, 821, 822, 828, 831, 834, 837, 839, 842, 844, 847, 850, 852, 855, 859, 861, 864, 866, 869, 873, 876, 879, 882, 884, 887, 890, 894, 897, 900, 903, 906, 909, 911, 914, 916, 917, 920, 923, 926, 929, 931, 934, 936, 938
- metric\_categorical\_crossentropy*, 167, 754, 757, 762, 765, 769, 770, 773, 774, 776, 778, 781, 783, 785, 786, 788, 790, 792, 794, 797, 799, 801, 805, 809, 812, 815, 816, 818, 821, 824, 825, 830, 831, 833, 834, 837, 839, 842, 844, 847, 849, 850, 852, 853, 856, 858, 859, 861, 864, 866, 869, 872, 873, 876, 878, 879, 882, 884, 888, 890, 893, 894, 897, 900, 903, 906, 909, 911, 914, 917, 920, 921, 923, 926, 928, 929, 931, 934, 936, 938
- metric\_categorical\_focal\_crossentropy*, 167, 754, 757, 762, 765, 769, 770, 773, 774, 776, 778, 781, 783, 785, 786, 788, 790, 792, 794, 797, 799, 801, 805, 809, 812, 815, 818, 819, 821, 824, 827, 828, 829, 833, 834, 837, 839, 842, 844, 847, 849, 850, 852, 853, 856, 858, 859, 861, 864, 866, 869, 873, 876, 879, 882, 885, 888, 890, 893, 894, 897, 900, 903, 906, 909, 911, 914, 917, 920, 923, 926, 929, 931, 934, 936, 938
- metric\_categorical\_hinge*, 167, 754, 757, 762, 765, 769, 770, 773, 774, 777, 778, 781, 783, 785, 786, 788, 790, 792, 794, 797, 799, 801, 805, 809, 812, 815, 818, 819, 822, 824, 827, 828, 830, 831, 832, 837, 839, 842, 844, 847, 849–853, 856, 858, 859, 861, 864, 866, 869, 872, 873, 876, 878, 879, 882, 884, 888, 890, 893, 894, 897, 900, 903, 906, 909, 911, 914, 917, 920, 923, 926, 928–931, 934, 936, 939
- metric\_cosine\_similarity*, 167, 805, 809, 812, 815, 819, 822, 824, 828, 831, 834, 835, 839, 842, 844, 847, 850, 853, 856, 859, 861, 863, 864, 866, 869, 870, 873, 876, 879, 880, 882–884, 888, 890, 894, 897, 900, 902, 903, 906, 909, 911, 914, 917, 920, 923, 926, 929, 931, 934, 936, 939
- metric\_f1\_score*, 167, 805, 809, 812, 815, 819, 822, 824, 828, 831, 834, 837, 837, 842, 844, 846, 847, 850, 853, 856, 859, 861, 864, 866, 869, 873, 876, 879, 882, 884, 888, 891, 894, 897, 900, 903, 906, 909, 911, 914, 917, 920, 923, 926, 929, 931, 934, 936, 939
- metric\_false\_negatives*, 167, 805, 809, 812, 815, 819, 822, 824, 828, 831, 834, 837, 839, 840, 844, 847, 850, 853, 856, 859, 861, 864, 866, 869, 873, 876, 879, 882, 884, 888, 891, 894, 897, 900, 903, 905, 906, 908, 909, 911, 914, 917, 920, 923, 926, 929, 931, 934, 936, 938, 939
- metric\_false\_positives*, 167, 805, 809, 812, 815, 819, 822, 824, 828, 831, 834, 837, 839, 841, 842, 842, 847, 850, 853, 856, 859, 861, 864, 866, 869, 873, 876, 879, 882, 885, 888,

- 891, 894, 897, 900, 903, 905, 906,  
908, 909, 911, 914, 917, 920, 923,  
926, 929, 931, 934, 936, 938, 939
- metric\_fbeta\_score*, 167, 805, 809, 812,  
815, 819, 822, 824, 828, 831, 834,  
837, 839, 842, 844, 845, 850, 853,  
856, 859, 861, 864, 866, 869, 873,  
876, 879, 882, 885, 888, 891, 894,  
897, 900, 903, 906, 909, 911, 914,  
917, 920, 923, 926, 929, 931, 934,  
936, 939
- metric\_hinge*, 167, 754, 757, 762, 765, 769,  
770, 773, 774, 777, 779, 781, 783,  
785, 786, 788, 790, 792, 794, 797,  
799, 801, 805, 809, 812, 815, 818,  
819, 822, 824, 827, 828, 830, 831,  
833–835, 837, 839, 842, 844, 847,  
848, 852, 853, 856, 858, 859, 861,  
864, 866, 869, 872, 873, 876, 878,  
879, 882, 885, 888, 891, 893, 894,  
897, 900, 903, 906, 909, 911, 914,  
917, 920, 923, 926, 929–931, 934,  
936, 939
- metric\_huber*, 167, 754, 757, 762, 765, 769,  
771, 773, 774, 777, 779, 781, 783,  
785, 786, 788, 790, 792, 794, 797,  
799, 801, 805, 809, 812, 815, 818,  
819, 822, 824, 827, 828, 831, 834,  
837, 839, 842, 844, 847, 849, 850,  
851, 856, 858, 859, 861, 864, 866,  
869, 872, 873, 876, 878, 879, 882,  
885, 888, 891, 893, 894, 897, 900,  
903, 906, 909, 911, 914, 917, 920,  
923, 926, 929, 931, 934, 936, 939
- metric\_iou*, 167, 805, 809, 812, 815, 819,  
821, 822, 824, 828, 831, 834, 837,  
839, 842, 844, 847, 850, 853, 853,  
859, 862, 864, 866, 869, 873, 876,  
879, 882, 885, 887, 888, 890, 891,  
894, 897, 900, 903, 906, 909, 911,  
914, 917, 920, 923, 926, 929, 931,  
934, 936, 939
- metric\_kl\_divergence*, 167, 754, 757, 762,  
765, 769, 771, 773, 774, 777, 779,  
781, 783, 785, 786, 788, 790, 792,  
794, 797, 799, 801, 805, 809, 812,  
815, 816, 818, 819, 822, 824,  
827–829, 831, 834, 837, 839, 842,  
844, 847, 849, 850, 852, 853, 856,  
861, 862, 864, 866, 869, 872, 873, 876,  
878, 879, 882, 885, 888, 891, 893, 894, 897,  
900, 903, 906, 909, 911, 914, 917, 920,  
921, 923, 926, 929, 931, 934, 936, 939
- metric\_log\_cosh*, 167, 754, 757, 762, 765,  
769, 771, 773, 774, 777, 779, 781,  
783, 785, 786, 788, 790, 792, 794,  
797, 799, 801, 805, 809, 812, 815,  
818, 819, 822, 824, 827, 828, 831,  
834, 837, 839, 842, 844, 847, 849,  
850, 852, 853, 856, 858, 859, 860,  
864, 866, 869, 872, 873, 876, 878,  
879, 882, 885, 888, 891, 893, 894,  
897, 900, 903, 906, 909, 911, 914,  
917, 920, 921, 923, 926, 929, 931,  
934, 936, 939
- metric\_log\_cosh\_error*, 167, 805, 809, 812,  
815, 819, 822, 824, 828, 831, 834,  
836, 837, 839, 842, 844, 847, 850,  
853, 856, 859, 862, 862, 866, 869,  
870, 873, 876, 879, 880, 882, 883,  
885, 888, 891, 894, 897, 900, 902,  
903, 906, 909, 911, 914, 917, 921,  
923, 926, 929, 931, 934, 936, 939
- metric\_mean*, 167, 805, 809, 812, 815, 819,  
822, 824, 828, 831, 834, 837, 839,  
842, 844, 847, 850, 853, 856, 859,  
862, 864, 865, 869, 873, 876, 879,  
883–885, 888, 891, 894, 897, 900,  
903, 906, 909, 911, 914, 917, 921,  
923, 926, 929, 931, 934, 936, 939
- metric\_mean\_absolute\_error*, 167, 754,  
757, 762, 765, 769, 771, 773, 774,  
777, 779, 781, 783, 785, 786, 788,  
790, 792, 794, 797, 799, 801, 805,  
810, 812, 815, 816, 818, 819, 822,  
824, 827, 828, 831, 834, 836, 837,  
839, 842, 844, 847, 849, 850, 852,  
853, 856, 858, 859, 861–864, 866,  
867, 872, 873, 876, 878–880, 882,  
883, 885, 888, 891, 893, 894, 897,  
900, 902, 903, 906, 909, 911, 914,  
917, 920, 921, 923, 926, 929, 931,  
934, 936, 939
- metric\_mean\_absolute\_percentage\_error*,  
167, 754, 757, 762, 765, 769, 771,



- 773, 774, 777, 779, 781, 783, 785,  
787, 788, 790, 792, 794, 797, 799,  
801, 805, 810, 812, 815, 816, 818,  
819, 822, 824, 827, 828, 831, 834,  
836, 837, 839, 842, 844, 847, 849,  
850, 852, 853, 856, 858, 859,  
861–864, 866, 869, 870, 870, 876,  
878–880, 882, 883, 885, 888, 891,  
893, 894, 898, 900, 902, 903, 906,  
909, 911, 914, 917, 920, 921, 923,  
926, 929, 931, 934, 936, 939
- `metric_mean_iou`, 168, 805, 810, 812, 816,  
819, 821, 822, 824, 828, 831, 834,  
837, 839, 842, 844, 847, 850, 853,  
855, 856, 859, 862, 864, 866, 869,  
873, 874, 879, 883, 885, 887, 888,  
890, 891, 894, 898, 900, 903, 906,  
909, 912, 914, 917, 921, 923, 926,  
929, 931, 934, 937, 939
- `metric_mean_squared_error`, 168, 754, 757,  
762, 765, 769, 771, 773, 774, 777,  
779, 781, 783, 785, 787, 788, 790,  
792, 794, 797, 799, 801, 805, 810,  
812, 815, 816, 818, 819, 822, 824,  
827, 828, 831, 834, 836, 837, 839,  
842, 844, 847, 849, 850, 852, 853,  
856, 858, 859, 861–864, 866, 869,  
870, 872, 873, 876, 877, 882, 883,  
885, 888, 891, 893, 894, 898, 900,  
902, 903, 906, 909, 911, 912, 915,  
917, 920, 921, 923, 926, 929, 932,  
934, 937, 939
- `metric_mean_squared_logarithmic_error`,  
168, 754, 757, 762, 765, 769, 771,  
773, 774, 777, 779, 781, 783, 785,  
787, 788, 790, 792, 794, 797, 799,  
801, 805, 810, 812, 815, 816, 818,  
819, 822, 824, 827, 828, 831, 834,  
836, 837, 839, 842, 844, 847, 849,  
850, 852, 853, 856, 858, 859,  
861–864, 866, 869, 870, 872, 873,  
876, 878–880, 880, 885, 888, 891,  
893, 894, 898, 900, 902, 903, 906,  
909, 911, 912, 915, 917, 920, 921,  
923, 926, 929, 932, 934, 937, 939
- `metric_mean_wrapper`, 168, 805, 810, 812,  
816, 819, 822, 825, 828, 831, 834,  
837, 839, 842, 844, 847, 850, 853,  
856, 859, 862, 864, 866, 869, 873,  
876, 879, 883, 883, 888, 891, 894,  
898, 900, 903, 906, 909, 912, 915,  
917, 921, 923, 926, 929, 931, 932,  
934, 937, 939
- `metric_mean_wrapper()`, 167
- `metric_one_hot_iou`, 168, 805, 810, 812,  
816, 819, 821, 822, 825, 828, 831,  
834, 837, 839, 842, 844, 847, 850,  
853, 855, 856, 859, 862, 864, 866,  
870, 873, 876, 879, 883, 885, 885,  
890, 891, 894, 898, 900, 903, 906,  
909, 912, 915, 917, 921, 924, 926,  
929, 932, 934, 937, 939
- `metric_one_hot_mean_iou`, 168, 805, 810,  
812, 816, 819, 821, 822, 825, 828,  
831, 834, 837, 840, 842, 844, 847,  
850, 853, 855, 856, 859, 862, 864,  
866, 870, 873, 876, 879, 883, 885,  
887, 888, 888, 894, 898, 900, 903,  
906, 909, 912, 915, 917, 921, 924,  
926, 929, 932, 934, 937, 939
- `metric_poisson`, 168, 754, 757, 762, 765,  
769, 771, 773, 774, 777, 779, 781,  
783, 785, 787, 788, 790, 792, 794,  
797, 799, 801, 805, 810, 812, 815,  
816, 818, 819, 822, 825, 827–829,  
831, 834, 837, 840, 842, 844, 847,  
849, 850, 852, 853, 856, 858, 859,  
861, 862, 864, 866, 869, 870, 872,  
873, 876, 878, 879, 882, 883, 885,  
888, 891, 891, 898, 900, 903, 906,  
909, 912, 915, 917, 920, 921, 924,  
926, 929, 932, 934, 937, 939
- `metric_precision`, 168, 805, 809, 810, 812,  
816, 819, 822, 825, 828, 831, 834,  
837, 840–842, 844, 847, 850, 853,  
856, 859, 862, 864, 866, 870, 873,  
876, 879, 883, 885, 888, 891, 894,  
895, 900, 901, 903, 905, 906, 908,  
909, 912, 914, 915, 917, 921, 924,  
926, 927, 929, 932, 934, 936–939
- `metric_precision_at_recall`, 168, 805,  
809, 810, 812, 816, 819, 822, 825,  
828, 831, 834, 837, 840–842, 844,  
845, 847, 850, 853, 856, 859, 862,  
864, 866, 870, 873, 876, 879, 883,  
885, 888, 891, 894, 897, 898, 898,

- 903, 905, 906, 908, 909, 912, 914, 915, 917, 921, 924, 926, 927, 929, 932, 934, 936–939
- `metric_r2_score`, 168, 805, 810, 812, 816, 819, 822, 825, 828, 831, 834, 836, 837, 840, 842, 845, 847, 850, 853, 856, 859, 862–864, 866, 870, 873, 874, 876, 879, 880, 883, 885, 888, 891, 894, 898, 901, 901, 906, 909, 911, 912, 915, 917, 921, 924, 927, 929, 932, 934, 937, 939
- `metric_recall`, 168, 805, 809, 810, 812, 816, 819, 822, 825, 828, 831, 834, 837, 840–842, 844, 845, 847, 850, 853, 856, 859, 862, 864, 866, 870, 873, 876, 879, 883, 885, 888, 891, 894, 897, 898, 900, 901, 903, 903, 908, 909, 912, 914, 915, 917, 921, 924, 926, 927, 929, 932, 934, 936–939
- `metric_recall_at_precision`, 168, 805, 809, 810, 812, 816, 819, 822, 825, 828, 831, 834, 837, 840–842, 844, 845, 847, 850, 853, 856, 859, 862, 864, 866, 870, 873, 876, 879, 883, 885, 888, 891, 894, 897, 898, 900, 901, 903, 905, 906, 907, 912, 914, 915, 917, 921, 924, 926, 927, 930, 932, 934, 936–939
- `metric_root_mean_squared_error`, 168, 806, 810, 812, 816, 819, 822, 825, 828, 832, 835–837, 840, 842, 845, 847, 850, 853, 856, 859, 862–864, 866, 870, 873, 874, 876, 879, 880, 883, 885, 888, 891, 894, 898, 901–903, 906, 909, 910, 915, 917, 921, 924, 927, 930, 932, 934, 937, 939
- `metric_sensitivity_at_specificity`, 168, 806, 809, 810, 812, 816, 819, 822, 825, 828, 832, 835, 837, 840–842, 844, 845, 847, 850, 853, 856, 859, 862, 864, 866, 870, 873, 876, 879, 883, 885, 888, 891, 894, 897, 898, 900, 901, 903, 905, 906, 908, 909, 912, 912, 917, 921, 924, 926, 927, 930, 932, 934, 936–939
- `metric_sparse_categorical_accuracy`, 168, 806, 810, 812, 813, 816, 819, 822, 824, 825, 828, 832, 835, 837, 840, 842, 845, 847, 850, 853, 856, 859, 862, 864, 866, 870, 873, 877, 879, 883, 885, 888, 891, 894, 898, 901, 903, 906, 909, 912, 915, 915, 915, 921, 923, 924, 927, 930, 932, 934, 937, 939
- `metric_sparse_categorical_crossentropy`, 168, 754, 757, 762, 765, 769, 771, 773, 774, 777, 779, 781, 783, 785, 787, 788, 790, 792, 794, 797, 799, 801, 806, 810, 813, 815, 816, 818, 819, 822, 825, 828, 829, 831, 832, 834, 835, 837, 840, 842, 845, 847, 849, 850, 852, 853, 856, 858, 859, 861, 862, 864, 866, 869, 870, 872, 873, 877–879, 882, 883, 885, 888, 891, 893, 894, 898, 901, 903, 906, 909, 912, 915, 917, 918, 924, 927, 929, 930, 932, 934, 937, 939
- `metric_sparse_top_k_categorical_accuracy`, 168, 806, 810, 812, 813, 816, 819, 822, 824, 825, 828, 832, 835, 837, 840, 842, 845, 847, 850, 853, 856, 859, 862, 864, 866, 870, 873, 877, 879, 883, 885, 888, 891, 894, 898, 901, 903, 906, 909, 912, 915, 917, 921, 924, 924, 930, 932, 934, 937, 939
- `metric_specificity_at_sensitivity`, 168, 806, 809, 810, 813, 816, 819, 822, 825, 828, 832, 835, 837, 840–842, 844, 845, 847, 850, 853, 856, 859, 862, 864, 866, 870, 873, 877, 879, 883, 885, 888, 891, 894, 897, 898, 900, 901, 903, 906, 908, 909, 912, 914, 915, 917, 921, 924, 924, 930, 932, 934, 936–939
- `metric_squared_hinge`, 168, 754, 757, 762, 765, 769, 771, 773, 774, 777, 779, 781, 783, 785, 787, 789, 790, 792, 794, 797, 799, 801, 806, 810, 813, 815, 816, 818, 819, 822, 825, 828, 831, 832, 834, 835, 837, 840, 842, 845, 847, 849–853, 856, 858, 859, 861, 862, 864, 867, 869, 870, 872, 873, 877, 879, 882, 883, 885, 888, 891, 893, 894, 898, 901, 903, 906,

- 909, 912, 915, 917, 920, 921, 924,  
 927, 927, 932, 935, 937, 939  
 metric\_sum, 168, 806, 810, 813, 816, 819,  
 822, 825, 828, 832, 835, 837, 840,  
 842, 845, 847, 850, 853, 856, 859,  
 862, 864, 866, 867, 870, 873, 877,  
 879, 883–885, 888, 891, 894, 898,  
 901, 903, 907, 909, 912, 915, 917,  
 921, 924, 927, 930, 930, 935, 937,  
 939  
 metric\_top\_k\_categorical\_accuracy, 168,  
 806, 810, 812, 813, 816, 819, 822,  
 824, 825, 829, 832, 835, 837, 840,  
 842, 845, 847, 850, 853, 856, 859,  
 862, 864, 867, 870, 873, 877, 879,  
 883, 885, 888, 891, 894, 898, 901,  
 903, 907, 909, 912, 915–917, 921,  
 923, 924, 927, 930, 932, 932, 937,  
 939  
 metric\_true\_negatives, 168, 806, 809, 810,  
 813, 816, 819, 822, 825, 829, 832,  
 835, 837, 840–842, 844, 845, 847,  
 850, 853, 856, 859, 862, 864, 867,  
 870, 873, 877, 880, 883, 885, 888,  
 891, 894, 897, 898, 900, 901, 903,  
 906–909, 912, 914, 915, 917, 921,  
 924, 926, 927, 930, 932, 935, 935,  
 938, 939  
 metric\_true\_positives, 168, 806, 809, 810,  
 813, 816, 819, 822, 825, 829, 832,  
 835, 837, 840–842, 844, 845, 847,  
 850, 853, 856, 859, 862, 864, 867,  
 870, 873, 877, 880, 883, 885, 888,  
 891, 894, 897, 898, 900, 901, 903,  
 906–909, 912, 914, 915, 917, 921,  
 924, 926, 927, 930, 932, 935–937,  
 937  
 Model, 939  
 new\_layer\_class(), 526  
 normalize, 106, 134, 141, 143, 145, 146, 152,  
 154, 197, 201, 203, 207, 208, 211,  
 213, 215, 442, 941, 2694, 2742,  
 2748, 2753, 2756, 2758, 2763  
 op\_abs, 971, 980, 983, 989, 992, 999, 1002,  
 1007, 1010, 1017, 1020, 1025, 1028,  
 1033, 1036, 1042, 1045, 1050, 1053,  
 1058, 1061, 1067, 1070, 1075, 1078,  
 1084, 1087, 1093, 1096, 1102, 1104,  
 1110, 1113, 1119, 1122, 1128, 1131,  
 1138, 1144, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1199, 1202, 1208, 1211, 1217, 1223,  
 1226, 1232, 1238, 1244, 1250, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1297, 1300, 1306,  
 1309, 1315, 1320, 1323, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1374, 1377, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,  
 1422, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1466, 1472, 1477,  
 1480, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1536, 1539, 1545, 1548, 1554, 1559,  
 1562, 1567, 1570, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1615,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1647, 1654, 1660, 1666, 1673, 1679,  
 1686, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1730, 1733, 1738, 1741,  
 1747, 1750, 1756, 1762, 1769, 1774,  
 1777, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1824,  
 1827, 1833, 1836, 1841, 1844, 1849,  
 1852, 1857, 1860, 1865, 1868, 1874,  
 1877, 1883, 1889, 1895, 1901, 1904,  
 1909, 1916, 1921, 1924, 1930, 1933,  
 1938, 1941, 1948, 1953, 1956, 1961,  
 1964, 1970, 1973, 1979, 1982, 1987,  
 1990, 1996, 1999, 2005, 2010, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2050, 2053, 2059, 2062, 2068,  
 2074, 2080, 2083, 2088, 2091, 2096,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2136, 2139, 2146, 2152,  
 2157, 2160, 2165, 2168, 2174, 2177,  
 2182, 2185, 2191, 2198, 2203, 2206,  
 2212, 2215, 2221, 2226, 2229, 2234,  
 2237, 2243, 2250, 2256, 2263, 2269,  
 2275, 2281, 2284, 2290, 2296, 2302,  
 2308, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2344, 2347, 2353, 2359,  
 2365, 2371, 2378, 2385, 2391, 2396,  
 2402, 2405, 2411, 2416, 2419, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,

- 2452, 2457, 2460, 2467, 2473, 2478,  
 2481, 2486, 2489, 2495, 2500, 2503,  
 2509, 2515, 2518, 2523, 2526, 2531,  
 2534, 2539, 2542, 2548, 2551, 2556,  
 2559, 2565, 2570, 2573, 2579, 2582,  
 2587, 2590, 2595, 2598, 2603, 2606,  
 2613, 2618, 2621, 2626, 2629, 2635,  
 2638, 2647, 2653, 2656, 2661, 2664,  
 2670, 2676, 2679, 2684, 2687
- op\_add*, 971, 974, 979, 989, 992, 999, 1002,  
 1007, 1010, 1017, 1020, 1025, 1028,  
 1033, 1036, 1042, 1045, 1050, 1053,  
 1058, 1061, 1067, 1070, 1075, 1078,  
 1084, 1087, 1093, 1096, 1102, 1105,  
 1110, 1113, 1119, 1122, 1128, 1131,  
 1138, 1144, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1199, 1202, 1208, 1211, 1217, 1223,  
 1226, 1232, 1238, 1244, 1250, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1297, 1300, 1306,  
 1309, 1315, 1320, 1323, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1374, 1377, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,  
 1423, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1466, 1472, 1477,  
 1480, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1536, 1539, 1545, 1548, 1554, 1559,  
 1562, 1567, 1570, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1615,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1647, 1654, 1660, 1666, 1673, 1679,  
 1686, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1730, 1733, 1738, 1741,  
 1747, 1750, 1756, 1762, 1769, 1774,  
 1777, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1824,  
 1827, 1833, 1836, 1841, 1844, 1849,  
 1852, 1857, 1860, 1865, 1868, 1874,  
 1877, 1883, 1889, 1895, 1901, 1904,  
 1910, 1916, 1921, 1924, 1930, 1933,  
 1938, 1941, 1948, 1953, 1956, 1961,  
 1964, 1970, 1973, 1979, 1982, 1987,  
 1990, 1996, 1999, 2005, 2010, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2050, 2053, 2059, 2062, 2068,  
 2074, 2080, 2083, 2088, 2091, 2096,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2136, 2139, 2146, 2152,  
 2157, 2160, 2165, 2168, 2174, 2177,  
 2182, 2185, 2191, 2198, 2203, 2206,  
 2212, 2215, 2221, 2226, 2229, 2234,  
 2237, 2243, 2250, 2256, 2263, 2269,  
 2275, 2281, 2284, 2290, 2296, 2302,  
 2308, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2344, 2347, 2353, 2359,  
 2365, 2371, 2378, 2385, 2391, 2396,  
 2402, 2405, 2411, 2416, 2419, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2457, 2460, 2467, 2473, 2478,  
 2481, 2486, 2489, 2495, 2500, 2503,  
 2509, 2515, 2518, 2523, 2526, 2531,  
 2534, 2539, 2542, 2548, 2551, 2556,  
 2559, 2565, 2570, 2573, 2579, 2582,  
 2587, 2590, 2595, 2598, 2603, 2606,  
 2613, 2618, 2621, 2626, 2629, 2635,  
 2638, 2647, 2653, 2656, 2661, 2664,  
 2670, 2676, 2679, 2684, 2687
- op\_all*, 971, 974, 980, 983, 988, 999, 1002,  
 1007, 1010, 1017, 1020, 1025, 1028,  
 1033, 1036, 1042, 1045, 1050, 1053,  
 1058, 1061, 1067, 1070, 1075, 1078,  
 1084, 1087, 1093, 1096, 1102, 1105,  
 1110, 1113, 1119, 1122, 1128, 1131,  
 1138, 1145, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1199, 1202, 1208, 1211, 1217, 1223,  
 1226, 1232, 1238, 1244, 1250, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1297, 1300, 1306,  
 1309, 1315, 1320, 1323, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1374, 1377, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,  
 1423, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1466, 1472, 1477,  
 1480, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1536, 1539, 1545, 1548, 1554, 1559,  
 1562, 1567, 1570, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1615,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1647, 1654, 1660, 1666, 1673, 1679,  
 1686, 1693, 1699, 1705, 1711, 1717,

- 1722, 1725, 1730, 1733, 1738, 1741,  
 1747, 1750, 1756, 1762, 1769, 1774,  
 1777, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1824,  
 1827, 1833, 1836, 1841, 1844, 1849,  
 1852, 1857, 1860, 1865, 1868, 1874,  
 1877, 1883, 1889, 1895, 1901, 1904,  
 1910, 1916, 1921, 1924, 1930, 1933,  
 1938, 1941, 1948, 1953, 1956, 1961,  
 1964, 1970, 1973, 1979, 1982, 1987,  
 1990, 1996, 1999, 2005, 2010, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2050, 2053, 2059, 2062, 2068,  
 2074, 2080, 2083, 2088, 2091, 2096,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2136, 2139, 2146, 2152,  
 2157, 2160, 2165, 2168, 2174, 2177,  
 2182, 2185, 2191, 2198, 2203, 2206,  
 2212, 2215, 2221, 2226, 2229, 2234,  
 2237, 2243, 2250, 2256, 2263, 2269,  
 2275, 2281, 2284, 2290, 2296, 2302,  
 2308, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2344, 2347, 2353, 2360,  
 2365, 2371, 2378, 2385, 2391, 2396,  
 2402, 2405, 2411, 2416, 2419, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2457, 2460, 2467, 2473, 2478,  
 2481, 2486, 2489, 2495, 2500, 2503,  
 2509, 2515, 2518, 2523, 2526, 2531,  
 2534, 2539, 2542, 2548, 2551, 2556,  
 2559, 2565, 2570, 2573, 2579, 2582,  
 2587, 2590, 2595, 2598, 2603, 2606,  
 2613, 2618, 2621, 2627, 2629, 2635,  
 2638, 2647, 2653, 2656, 2661, 2664,  
 2670, 2676, 2679, 2684, 2687
- op\_amax (op\_max), 1929  
 op\_amin (op\_min), 1978  
 op\_any, 971, 974, 980, 983, 989, 992, 997,  
 1007, 1010, 1017, 1020, 1025, 1028,  
 1033, 1036, 1042, 1045, 1050, 1053,  
 1058, 1061, 1067, 1070, 1075, 1078,  
 1084, 1087, 1093, 1096, 1102, 1105,  
 1111, 1113, 1119, 1122, 1128, 1131,  
 1138, 1145, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1200, 1202, 1208, 1211, 1217, 1223,  
 1226, 1232, 1238, 1244, 1250, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1297, 1300, 1306,  
 1309, 1315, 1320, 1323, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1374, 1377, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,  
 1423, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1466, 1472, 1477,  
 1480, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1536, 1539, 1545, 1548, 1554, 1559,  
 1562, 1567, 1570, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1615,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1647, 1654, 1660, 1667, 1673, 1679,  
 1686, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1730, 1733, 1738, 1741,  
 1747, 1750, 1756, 1762, 1769, 1774,  
 1777, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1824,  
 1827, 1833, 1836, 1841, 1844, 1849,  
 1852, 1857, 1860, 1866, 1868, 1874,  
 1877, 1883, 1889, 1895, 1901, 1904,  
 1910, 1916, 1921, 1924, 1930, 1933,  
 1938, 1941, 1948, 1953, 1956, 1961,  
 1964, 1970, 1973, 1979, 1982, 1987,  
 1990, 1996, 1999, 2005, 2010, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2050, 2053, 2059, 2062, 2068,  
 2074, 2080, 2083, 2088, 2091, 2096,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2136, 2139, 2146, 2152,  
 2157, 2160, 2165, 2168, 2174, 2177,  
 2182, 2185, 2191, 2198, 2203, 2206,  
 2212, 2215, 2221, 2226, 2229, 2234,  
 2237, 2243, 2250, 2256, 2263, 2269,  
 2275, 2281, 2284, 2290, 2296, 2302,  
 2308, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2344, 2347, 2353, 2360,  
 2365, 2371, 2378, 2385, 2391, 2396,  
 2402, 2405, 2411, 2416, 2419, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2457, 2460, 2467, 2473, 2478,  
 2481, 2486, 2489, 2495, 2500, 2503,  
 2509, 2515, 2518, 2523, 2526, 2531,  
 2534, 2539, 2542, 2548, 2551, 2556,  
 2559, 2565, 2571, 2573, 2579, 2582,  
 2587, 2590, 2595, 2598, 2603, 2606,  
 2613, 2618, 2621, 2627, 2629, 2635,

- 2638, 2647, 2653, 2656, 2661, 2664,  
2670, 2676, 2679, 2684, 2687
- op\_append, 971, 974, 980, 983, 989, 992, 999,  
1002, 1006, 1017, 1020, 1025, 1028,  
1033, 1036, 1042, 1045, 1050, 1053,  
1058, 1061, 1067, 1070, 1075, 1078,  
1084, 1087, 1093, 1096, 1102, 1105,  
1111, 1113, 1119, 1122, 1128, 1131,  
1138, 1145, 1151, 1157, 1160, 1165,  
1168, 1174, 1181, 1186, 1189, 1194,  
1200, 1202, 1208, 1211, 1217, 1223,  
1226, 1232, 1238, 1244, 1250, 1256,  
1259, 1264, 1267, 1272, 1275, 1280,  
1283, 1289, 1292, 1298, 1300, 1306,  
1309, 1315, 1320, 1323, 1329, 1332,  
1338, 1345, 1350, 1356, 1359, 1366,  
1369, 1374, 1377, 1383, 1386, 1392,  
1395, 1400, 1403, 1408, 1411, 1417,  
1423, 1428, 1435, 1438, 1444, 1449,  
1452, 1458, 1461, 1466, 1472, 1477,  
1480, 1486, 1489, 1494, 1497, 1503,  
1508, 1511, 1517, 1523, 1528, 1531,  
1536, 1539, 1545, 1548, 1554, 1559,  
1562, 1567, 1570, 1577, 1583, 1586,  
1591, 1594, 1600, 1603, 1609, 1615,  
1621, 1624, 1629, 1632, 1637, 1640,  
1647, 1654, 1660, 1667, 1673, 1679,  
1686, 1693, 1699, 1705, 1711, 1717,  
1722, 1725, 1730, 1733, 1738, 1741,  
1747, 1750, 1756, 1762, 1769, 1774,  
1777, 1783, 1786, 1792, 1795, 1800,  
1803, 1808, 1811, 1816, 1819, 1824,  
1827, 1833, 1836, 1841, 1844, 1849,  
1852, 1857, 1860, 1866, 1868, 1874,  
1877, 1883, 1889, 1895, 1901, 1904,  
1910, 1916, 1921, 1924, 1930, 1933,  
1939, 1941, 1948, 1953, 1956, 1961,  
1964, 1970, 1973, 1979, 1982, 1987,  
1990, 1996, 1999, 2005, 2010, 2013,  
2019, 2022, 2028, 2034, 2037, 2042,  
2045, 2050, 2053, 2059, 2062, 2068,  
2074, 2080, 2083, 2088, 2091, 2096,  
2099, 2106, 2111, 2114, 2120, 2123,  
2128, 2131, 2136, 2139, 2146, 2152,  
2157, 2160, 2165, 2168, 2174, 2177,  
2182, 2185, 2191, 2198, 2203, 2206,  
2212, 2215, 2221, 2226, 2229, 2234,  
2237, 2243, 2250, 2256, 2263, 2269,  
2275, 2281, 2284, 2290, 2296, 2302,  
2308, 2314, 2317, 2323, 2328, 2331,  
2336, 2339, 2344, 2347, 2353, 2360,  
2365, 2371, 2378, 2385, 2391, 2396,  
2402, 2405, 2411, 2417, 2419, 2425,  
2428, 2433, 2436, 2441, 2444, 2449,  
2452, 2457, 2460, 2467, 2473, 2478,  
2481, 2486, 2489, 2495, 2500, 2503,  
2509, 2515, 2518, 2523, 2526, 2531,  
2534, 2539, 2542, 2548, 2551, 2556,  
2559, 2565, 2571, 2573, 2579, 2582,  
2587, 2590, 2595, 2598, 2603, 2606,  
2613, 2618, 2621, 2627, 2629, 2635,  
2638, 2647, 2653, 2656, 2661, 2664,  
2670, 2676, 2679, 2684, 2687
- op\_arange, 972, 974, 980, 983, 989, 992, 999,  
1002, 1007, 1010, 1015, 1025, 1028,  
1033, 1036, 1042, 1045, 1050, 1053,  
1058, 1061, 1067, 1070, 1076, 1078,  
1084, 1087, 1093, 1096, 1102, 1105,  
1111, 1113, 1119, 1122, 1129, 1131,  
1138, 1145, 1151, 1157, 1160, 1165,  
1168, 1174, 1181, 1186, 1189, 1194,  
1200, 1202, 1208, 1211, 1217, 1223,  
1226, 1232, 1238, 1244, 1250, 1256,  
1259, 1264, 1267, 1272, 1275, 1280,  
1283, 1289, 1292, 1298, 1300, 1306,  
1309, 1315, 1320, 1323, 1329, 1332,  
1338, 1345, 1350, 1356, 1359, 1366,  
1369, 1374, 1377, 1383, 1386, 1392,  
1395, 1400, 1403, 1408, 1411, 1417,  
1423, 1428, 1435, 1438, 1444, 1449,  
1452, 1458, 1461, 1466, 1472, 1477,  
1480, 1486, 1489, 1494, 1497, 1503,  
1508, 1511, 1517, 1523, 1528, 1531,  
1536, 1539, 1545, 1548, 1554, 1559,  
1562, 1567, 1570, 1577, 1583, 1586,  
1591, 1594, 1600, 1603, 1609, 1615,  
1621, 1624, 1629, 1632, 1637, 1640,  
1647, 1654, 1660, 1667, 1673, 1679,  
1686, 1693, 1699, 1705, 1711, 1717,  
1722, 1725, 1730, 1733, 1739, 1741,  
1747, 1750, 1756, 1762, 1769, 1774,  
1777, 1783, 1786, 1792, 1795, 1800,  
1803, 1808, 1811, 1816, 1819, 1824,  
1827, 1833, 1836, 1841, 1844, 1849,  
1852, 1857, 1860, 1866, 1868, 1874,  
1877, 1883, 1889, 1895, 1901, 1904,

- 1910, 1916, 1922, 1924, 1930, 1933,  
 1939, 1941, 1948, 1953, 1956, 1961,  
 1964, 1970, 1973, 1979, 1982, 1987,  
 1990, 1996, 1999, 2005, 2010, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2050, 2053, 2059, 2062, 2068,  
 2074, 2080, 2083, 2088, 2091, 2096,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2136, 2139, 2146, 2152,  
 2157, 2160, 2165, 2168, 2174, 2177,  
 2182, 2185, 2191, 2198, 2203, 2206,  
 2212, 2215, 2221, 2226, 2229, 2234,  
 2237, 2243, 2250, 2256, 2263, 2269,  
 2275, 2281, 2284, 2290, 2296, 2302,  
 2308, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2344, 2347, 2353, 2360,  
 2365, 2371, 2378, 2385, 2391, 2396,  
 2402, 2405, 2411, 2417, 2419, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2458, 2460, 2467, 2473, 2478,  
 2481, 2486, 2489, 2495, 2500, 2503,  
 2509, 2515, 2518, 2523, 2526, 2531,  
 2534, 2539, 2542, 2548, 2551, 2556,  
 2559, 2565, 2571, 2573, 2579, 2582,  
 2587, 2590, 2595, 2598, 2604, 2606,  
 2613, 2618, 2621, 2627, 2630, 2635,  
 2638, 2647, 2653, 2656, 2661, 2664,  
 2670, 2676, 2679, 2684, 2687
- op\_arccos, 972, 974, 981, 983, 989, 992, 999,  
 1002, 1008, 1010, 1017, 1020, 1024,  
 1033, 1036, 1042, 1045, 1050, 1053,  
 1058, 1061, 1067, 1070, 1076, 1078,  
 1084, 1087, 1093, 1096, 1102, 1105,  
 1111, 1114, 1119, 1122, 1129, 1131,  
 1138, 1145, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1200, 1203, 1208, 1211, 1217, 1223,  
 1226, 1232, 1238, 1244, 1250, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1298, 1300, 1306,  
 1309, 1315, 1321, 1323, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1374, 1377, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,  
 1423, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1467, 1472, 1477,  
 1480, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1536, 1539, 1545, 1548, 1554, 1559,  
 1562, 1567, 1570, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1616,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1647, 1654, 1660, 1667, 1673, 1679,  
 1686, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1730, 1733, 1739, 1741,  
 1747, 1750, 1756, 1762, 1769, 1774,  
 1777, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1824,  
 1827, 1833, 1836, 1841, 1844, 1849,  
 1852, 1857, 1860, 1866, 1869, 1874,  
 1877, 1883, 1889, 1895, 1901, 1904,  
 1910, 1916, 1922, 1924, 1930, 1933,  
 1939, 1941, 1948, 1953, 1956, 1961,  
 1964, 1970, 1973, 1979, 1982, 1987,  
 1990, 1996, 1999, 2005, 2010, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2050, 2053, 2059, 2062, 2068,  
 2074, 2080, 2083, 2088, 2091, 2096,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2137, 2139, 2146, 2152,  
 2157, 2160, 2166, 2168, 2174, 2177,  
 2182, 2185, 2191, 2198, 2203, 2206,  
 2212, 2215, 2221, 2226, 2229, 2234,  
 2237, 2243, 2250, 2256, 2263, 2269,  
 2275, 2281, 2284, 2290, 2296, 2302,  
 2308, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2344, 2347, 2353, 2360,  
 2365, 2371, 2378, 2385, 2391, 2396,  
 2402, 2405, 2411, 2417, 2419, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2458, 2460, 2467, 2473, 2478,  
 2481, 2486, 2489, 2495, 2500, 2503,  
 2509, 2515, 2518, 2523, 2526, 2531,  
 2534, 2539, 2542, 2548, 2551, 2556,  
 2559, 2565, 2571, 2574, 2579, 2582,  
 2587, 2590, 2595, 2598, 2604, 2606,  
 2613, 2618, 2621, 2627, 2630, 2635,  
 2638, 2647, 2653, 2656, 2661, 2664,  
 2670, 2676, 2679, 2684, 2687
- op\_arccosh, 972, 974, 981, 983, 989, 992,  
 999, 1002, 1008, 1010, 1017, 1020,  
 1025, 1028, 1033, 1042, 1045, 1050,  
 1053, 1058, 1061, 1067, 1070, 1076,  
 1078, 1084, 1087, 1093, 1096, 1102,  
 1105, 1111, 1114, 1119, 1122, 1129,  
 1131, 1138, 1145, 1151, 1157, 1160,



1165, 1168, 1174, 1181, 1186, 1189,  
 1194, 1200, 1203, 1208, 1211, 1217,  
 1223, 1226, 1232, 1238, 1244, 1250,  
 1256, 1259, 1264, 1267, 1272, 1275,  
 1280, 1283, 1289, 1292, 1298, 1301,  
 1306, 1309, 1315, 1321, 1323, 1329,  
 1332, 1338, 1345, 1350, 1356, 1359,  
 1366, 1369, 1374, 1377, 1383, 1386,  
 1392, 1395, 1400, 1403, 1408, 1411,  
 1417, 1423, 1428, 1435, 1438, 1444,  
 1449, 1452, 1458, 1461, 1467, 1472,  
 1477, 1480, 1486, 1489, 1494, 1497,  
 1503, 1508, 1511, 1517, 1523, 1528,  
 1531, 1536, 1539, 1545, 1548, 1554,  
 1559, 1562, 1567, 1570, 1577, 1583,  
 1586, 1591, 1594, 1600, 1603, 1609,  
 1616, 1621, 1624, 1629, 1632, 1637,  
 1640, 1647, 1654, 1660, 1667, 1673,  
 1679, 1686, 1693, 1699, 1705, 1711,  
 1717, 1722, 1725, 1730, 1733, 1739,  
 1741, 1747, 1750, 1756, 1762, 1769,  
 1775, 1777, 1783, 1786, 1792, 1795,  
 1800, 1803, 1808, 1811, 1816, 1819,  
 1824, 1827, 1833, 1836, 1841, 1844,  
 1849, 1852, 1857, 1860, 1866, 1869,  
 1874, 1877, 1883, 1889, 1895, 1901,  
 1904, 1910, 1916, 1922, 1924, 1930,  
 1933, 1939, 1942, 1948, 1953, 1956,  
 1962, 1964, 1970, 1973, 1979, 1982,  
 1987, 1990, 1996, 1999, 2005, 2010,  
 2013, 2019, 2022, 2028, 2034, 2037,  
 2042, 2045, 2050, 2053, 2059, 2062,  
 2068, 2074, 2080, 2083, 2088, 2091,  
 2096, 2099, 2106, 2111, 2114, 2120,  
 2123, 2128, 2131, 2137, 2139, 2146,  
 2152, 2157, 2160, 2166, 2168, 2174,  
 2177, 2182, 2185, 2191, 2198, 2203,  
 2206, 2212, 2215, 2221, 2226, 2229,  
 2234, 2237, 2243, 2250, 2256, 2263,  
 2269, 2275, 2281, 2284, 2290, 2296,  
 2302, 2308, 2314, 2317, 2323, 2328,  
 2331, 2336, 2339, 2344, 2347, 2353,  
 2360, 2365, 2371, 2378, 2385, 2391,  
 2396, 2402, 2405, 2411, 2417, 2420,  
 2425, 2428, 2433, 2436, 2441, 2444,  
 2449, 2452, 2458, 2460, 2467, 2473,  
 2478, 2481, 2486, 2489, 2495, 2500,  
 2503, 2509, 2515, 2518, 2523, 2526,  
 2531, 2534, 2539, 2542, 2548, 2551,  
 2556, 2559, 2565, 2571, 2574, 2579,  
 2582, 2587, 2590, 2595, 2598, 2604,  
 2606, 2613, 2618, 2621, 2627, 2630,  
 2635, 2638, 2648, 2653, 2656, 2661,  
 2664, 2670, 2676, 2679, 2684, 2687

op\_arcsin, 972, 975, 981, 983, 989, 992, 999,  
 1002, 1008, 1010, 1017, 1020, 1025,  
 1028, 1033, 1036, 1041, 1050, 1053,  
 1058, 1061, 1067, 1070, 1076, 1079,  
 1084, 1087, 1093, 1096, 1102, 1105,  
 1111, 1114, 1119, 1122, 1129, 1132,  
 1138, 1145, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1200, 1203, 1208, 1211, 1218, 1223,  
 1226, 1232, 1238, 1244, 1250, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1298, 1301, 1306,  
 1309, 1315, 1321, 1323, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1375, 1377, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,  
 1423, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1467, 1472, 1478,  
 1480, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1536, 1539, 1545, 1548, 1554, 1559,  
 1562, 1567, 1570, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1616,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1647, 1654, 1660, 1667, 1673, 1680,  
 1686, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1730, 1733, 1739, 1742,  
 1747, 1750, 1756, 1762, 1769, 1775,  
 1777, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1824,  
 1827, 1833, 1836, 1841, 1844, 1849,  
 1852, 1857, 1860, 1866, 1869, 1874,  
 1877, 1883, 1889, 1895, 1901, 1904,  
 1910, 1916, 1922, 1925, 1930, 1933,  
 1939, 1942, 1948, 1953, 1956, 1962,  
 1964, 1970, 1973, 1979, 1982, 1987,  
 1990, 1996, 1999, 2005, 2010, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2051, 2053, 2059, 2062, 2068,  
 2074, 2080, 2083, 2088, 2091, 2096,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2137, 2139, 2146, 2152,



- 2157, 2160, 2166, 2168, 2174, 2177,  
 2182, 2185, 2191, 2198, 2203, 2206,  
 2212, 2215, 2221, 2226, 2229, 2234,  
 2237, 2243, 2250, 2256, 2263, 2269,  
 2275, 2281, 2284, 2290, 2296, 2302,  
 2308, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2344, 2347, 2353, 2360,  
 2365, 2371, 2378, 2385, 2391, 2396,  
 2402, 2405, 2411, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2458, 2461, 2467, 2473, 2478,  
 2481, 2486, 2489, 2495, 2500, 2503,  
 2510, 2515, 2518, 2523, 2526, 2531,  
 2534, 2539, 2542, 2548, 2551, 2556,  
 2559, 2565, 2571, 2574, 2579, 2582,  
 2587, 2590, 2595, 2598, 2604, 2607,  
 2613, 2618, 2621, 2627, 2630, 2635,  
 2638, 2648, 2653, 2656, 2661, 2664,  
 2670, 2676, 2679, 2684, 2687
- op\_arcsinh*, 972, 975, 981, 984, 990, 992,  
 999, 1002, 1008, 1011, 1017, 1020,  
 1025, 1028, 1033, 1036, 1042, 1045,  
 1049, 1058, 1061, 1067, 1070, 1076,  
 1079, 1085, 1087, 1093, 1096, 1102,  
 1105, 1111, 1114, 1119, 1122, 1129,  
 1132, 1138, 1145, 1151, 1157, 1160,  
 1165, 1168, 1174, 1181, 1186, 1189,  
 1194, 1200, 1203, 1208, 1211, 1218,  
 1223, 1226, 1232, 1238, 1244, 1251,  
 1256, 1259, 1264, 1267, 1272, 1275,  
 1280, 1283, 1289, 1292, 1298, 1301,  
 1306, 1309, 1315, 1321, 1324, 1329,  
 1332, 1338, 1345, 1350, 1356, 1359,  
 1366, 1369, 1375, 1377, 1383, 1386,  
 1392, 1395, 1400, 1403, 1408, 1411,  
 1417, 1423, 1428, 1435, 1438, 1444,  
 1449, 1452, 1458, 1461, 1467, 1472,  
 1478, 1480, 1486, 1489, 1494, 1497,  
 1503, 1508, 1511, 1517, 1523, 1528,  
 1531, 1536, 1539, 1545, 1548, 1554,  
 1559, 1562, 1568, 1570, 1577, 1583,  
 1586, 1591, 1594, 1600, 1603, 1609,  
 1616, 1621, 1624, 1629, 1632, 1637,  
 1640, 1647, 1654, 1660, 1667, 1673,  
 1680, 1686, 1693, 1699, 1705, 1711,  
 1717, 1722, 1725, 1730, 1733, 1739,  
 1742, 1747, 1750, 1756, 1762, 1769,  
 1775, 1777, 1783, 1786, 1792, 1795,  
 1800, 1803, 1808, 1811, 1816, 1819,  
 1824, 1827, 1833, 1836, 1841, 1844,  
 1849, 1852, 1857, 1860, 1866, 1869,  
 1874, 1877, 1883, 1889, 1895, 1901,  
 1904, 1910, 1916, 1922, 1925, 1930,  
 1933, 1939, 1942, 1948, 1953, 1956,  
 1962, 1964, 1970, 1973, 1979, 1982,  
 1987, 1990, 1996, 1999, 2005, 2010,  
 2013, 2019, 2022, 2028, 2034, 2037,  
 2042, 2045, 2051, 2053, 2059, 2062,  
 2068, 2074, 2080, 2083, 2088, 2091,  
 2096, 2099, 2106, 2111, 2114, 2120,  
 2123, 2128, 2131, 2137, 2140, 2146,  
 2152, 2157, 2160, 2166, 2169, 2174,  
 2177, 2182, 2185, 2191, 2198, 2204,  
 2206, 2212, 2215, 2221, 2226, 2229,  
 2234, 2237, 2243, 2250, 2256, 2263,  
 2269, 2275, 2281, 2284, 2290, 2296,  
 2302, 2308, 2314, 2317, 2323, 2328,  
 2331, 2336, 2339, 2344, 2347, 2354,  
 2360, 2365, 2371, 2378, 2385, 2391,  
 2396, 2402, 2405, 2411, 2417, 2420,  
 2425, 2428, 2433, 2436, 2441, 2444,  
 2449, 2452, 2458, 2461, 2467, 2473,  
 2478, 2481, 2486, 2489, 2495, 2500,  
 2503, 2510, 2515, 2518, 2523, 2526,  
 2531, 2534, 2539, 2542, 2548, 2551,  
 2556, 2559, 2565, 2571, 2574, 2579,  
 2582, 2587, 2590, 2595, 2598, 2604,  
 2607, 2613, 2618, 2621, 2627, 2630,  
 2635, 2638, 2648, 2653, 2656, 2661,  
 2664, 2670, 2676, 2679, 2684, 2687
- op\_arctan*, 972, 975, 981, 984, 990, 992, 999,  
 1002, 1008, 1011, 1017, 1020, 1025,  
 1028, 1033, 1036, 1042, 1045, 1050,  
 1053, 1058, 1067, 1070, 1076, 1079,  
 1085, 1087, 1093, 1096, 1102, 1105,  
 1111, 1114, 1119, 1122, 1129, 1132,  
 1138, 1145, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1200, 1203, 1208, 1211, 1218, 1223,  
 1226, 1232, 1238, 1244, 1251, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1298, 1301, 1306,  
 1309, 1315, 1321, 1324, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1375, 1377, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,

- 1423, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1467, 1472, 1478,  
 1480, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1537, 1539, 1545, 1548, 1554, 1559,  
 1562, 1568, 1570, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1616,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1647, 1654, 1660, 1667, 1673, 1680,  
 1686, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1730, 1733, 1739, 1742,  
 1747, 1750, 1756, 1762, 1769, 1775,  
 1778, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1824,  
 1827, 1833, 1836, 1841, 1844, 1849,  
 1852, 1857, 1860, 1866, 1869, 1874,  
 1877, 1883, 1889, 1895, 1901, 1904,  
 1910, 1916, 1922, 1925, 1930, 1933,  
 1939, 1942, 1948, 1953, 1956, 1962,  
 1965, 1970, 1973, 1979, 1982, 1987,  
 1990, 1996, 1999, 2005, 2010, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2051, 2053, 2059, 2062, 2068,  
 2074, 2080, 2083, 2088, 2091, 2096,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2137, 2140, 2146, 2152,  
 2157, 2160, 2166, 2169, 2174, 2177,  
 2182, 2185, 2191, 2198, 2204, 2206,  
 2212, 2215, 2221, 2226, 2229, 2235,  
 2237, 2243, 2250, 2256, 2263, 2269,  
 2275, 2281, 2284, 2290, 2296, 2302,  
 2308, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2344, 2347, 2354, 2360,  
 2365, 2371, 2378, 2385, 2391, 2396,  
 2402, 2405, 2411, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2458, 2461, 2467, 2473, 2478,  
 2481, 2486, 2489, 2495, 2500, 2503,  
 2510, 2515, 2518, 2523, 2526, 2531,  
 2534, 2539, 2542, 2548, 2551, 2556,  
 2559, 2565, 2571, 2574, 2579, 2582,  
 2587, 2590, 2595, 2598, 2604, 2607,  
 2613, 2618, 2621, 2627, 2630, 2635,  
 2638, 2648, 2653, 2656, 2661, 2664,  
 2670, 2676, 2679, 2684, 2687
- op\_arctan2*, 972, 975, 981, 984, 990, 992,  
 999, 1002, 1008, 1011, 1017, 1020,  
 1025, 1028, 1033, 1036, 1042, 1045,  
 1050, 1053, 1058, 1061, 1066, 1076,  
 1079, 1085, 1087, 1093, 1096, 1102,  
 1105, 1111, 1114, 1119, 1122, 1129,  
 1132, 1138, 1145, 1151, 1157, 1160,  
 1165, 1168, 1174, 1181, 1186, 1189,  
 1194, 1200, 1203, 1208, 1211, 1218,  
 1223, 1226, 1232, 1238, 1244, 1251,  
 1256, 1259, 1264, 1267, 1272, 1275,  
 1280, 1283, 1289, 1292, 1298, 1301,  
 1306, 1309, 1315, 1321, 1324, 1329,  
 1332, 1338, 1345, 1350, 1356, 1359,  
 1366, 1369, 1375, 1378, 1383, 1386,  
 1392, 1395, 1400, 1403, 1408, 1411,  
 1417, 1423, 1428, 1435, 1438, 1444,  
 1449, 1452, 1458, 1461, 1467, 1472,  
 1478, 1481, 1486, 1489, 1494, 1497,  
 1503, 1508, 1511, 1517, 1523, 1528,  
 1531, 1537, 1539, 1545, 1548, 1554,  
 1559, 1562, 1568, 1570, 1577, 1583,  
 1586, 1591, 1594, 1600, 1603, 1609,  
 1616, 1621, 1624, 1629, 1632, 1637,  
 1640, 1647, 1654, 1660, 1667, 1673,  
 1680, 1686, 1693, 1699, 1705, 1711,  
 1717, 1722, 1725, 1730, 1733, 1739,  
 1742, 1747, 1750, 1756, 1762, 1769,  
 1775, 1778, 1783, 1786, 1792, 1795,  
 1800, 1803, 1808, 1811, 1816, 1819,  
 1825, 1827, 1833, 1836, 1841, 1844,  
 1849, 1852, 1857, 1860, 1866, 1869,  
 1874, 1877, 1883, 1889, 1895, 1901,  
 1904, 1910, 1916, 1922, 1925, 1930,  
 1933, 1939, 1942, 1948, 1953, 1956,  
 1962, 1965, 1970, 1973, 1979, 1982,  
 1987, 1990, 1996, 1999, 2005, 2010,  
 2013, 2019, 2022, 2028, 2034, 2037,  
 2042, 2045, 2051, 2054, 2059, 2062,  
 2068, 2074, 2080, 2083, 2088, 2091,  
 2096, 2099, 2106, 2111, 2114, 2120,  
 2123, 2128, 2131, 2137, 2140, 2146,  
 2152, 2157, 2160, 2166, 2169, 2174,  
 2177, 2182, 2185, 2191, 2198, 2204,  
 2206, 2212, 2215, 2221, 2226, 2229,  
 2235, 2237, 2243, 2250, 2256, 2263,  
 2269, 2275, 2281, 2284, 2290, 2296,  
 2302, 2308, 2314, 2317, 2323, 2328,  
 2331, 2336, 2339, 2345, 2347, 2354,  
 2360, 2365, 2371, 2378, 2385, 2391,  
 2396, 2402, 2405, 2411, 2417, 2420,

- 2425, 2428, 2433, 2436, 2441, 2444,  
 2449, 2452, 2458, 2461, 2467, 2473,  
 2478, 2481, 2487, 2489, 2495, 2500,  
 2503, 2510, 2515, 2518, 2523, 2526,  
 2531, 2534, 2539, 2542, 2548, 2551,  
 2556, 2559, 2565, 2571, 2574, 2579,  
 2582, 2587, 2590, 2595, 2598, 2604,  
 2607, 2613, 2618, 2621, 2627, 2630,  
 2635, 2638, 2648, 2653, 2656, 2661,  
 2664, 2671, 2676, 2679, 2684, 2687
- op\_arctanh*, 972, 975, 981, 984, 990, 993,  
 999, 1002, 1008, 1011, 1017, 1020,  
 1025, 1028, 1033, 1036, 1042, 1045,  
 1050, 1053, 1058, 1061, 1067, 1070,  
 1075, 1085, 1088, 1093, 1096, 1102,  
 1105, 1111, 1114, 1119, 1122, 1129,  
 1132, 1138, 1145, 1151, 1157, 1160,  
 1165, 1168, 1174, 1181, 1186, 1189,  
 1194, 1200, 1203, 1208, 1211, 1218,  
 1223, 1226, 1232, 1238, 1244, 1251,  
 1256, 1259, 1264, 1267, 1272, 1275,  
 1280, 1283, 1289, 1292, 1298, 1301,  
 1306, 1309, 1315, 1321, 1324, 1329,  
 1332, 1338, 1345, 1350, 1356, 1359,  
 1366, 1369, 1375, 1378, 1383, 1386,  
 1392, 1395, 1400, 1403, 1408, 1411,  
 1417, 1423, 1428, 1435, 1438, 1444,  
 1449, 1452, 1458, 1461, 1467, 1472,  
 1478, 1481, 1486, 1489, 1494, 1497,  
 1503, 1508, 1511, 1517, 1523, 1528,  
 1531, 1537, 1539, 1545, 1548, 1554,  
 1559, 1562, 1568, 1571, 1577, 1583,  
 1586, 1591, 1594, 1600, 1603, 1609,  
 1616, 1621, 1624, 1629, 1632, 1637,  
 1640, 1647, 1654, 1660, 1667, 1673,  
 1680, 1687, 1693, 1699, 1705, 1711,  
 1717, 1722, 1725, 1730, 1733, 1739,  
 1742, 1747, 1750, 1756, 1762, 1769,  
 1775, 1778, 1783, 1786, 1792, 1795,  
 1800, 1803, 1808, 1811, 1816, 1819,  
 1825, 1827, 1833, 1836, 1841, 1844,  
 1849, 1852, 1858, 1860, 1866, 1869,  
 1874, 1877, 1883, 1889, 1896, 1901,  
 1904, 1910, 1916, 1922, 1925, 1930,  
 1933, 1939, 1942, 1948, 1953, 1956,  
 1962, 1965, 1970, 1973, 1979, 1982,  
 1988, 1990, 1996, 1999, 2005, 2011,  
 2013, 2019, 2022, 2028, 2034, 2037,
- 2042, 2045, 2051, 2054, 2059, 2062,  
 2068, 2075, 2080, 2083, 2088, 2091,  
 2096, 2099, 2106, 2111, 2114, 2120,  
 2123, 2128, 2131, 2137, 2140, 2146,  
 2152, 2157, 2160, 2166, 2169, 2174,  
 2177, 2182, 2185, 2192, 2198, 2204,  
 2207, 2212, 2215, 2221, 2226, 2229,  
 2235, 2237, 2243, 2250, 2256, 2264,  
 2269, 2275, 2281, 2284, 2290, 2297,  
 2302, 2309, 2314, 2317, 2323, 2328,  
 2331, 2336, 2339, 2345, 2347, 2354,  
 2360, 2365, 2372, 2378, 2385, 2391,  
 2396, 2402, 2405, 2411, 2417, 2420,  
 2425, 2428, 2433, 2436, 2441, 2444,  
 2449, 2452, 2458, 2461, 2467, 2473,  
 2478, 2481, 2487, 2489, 2495, 2500,  
 2503, 2510, 2515, 2518, 2523, 2526,  
 2531, 2534, 2540, 2542, 2548, 2551,  
 2556, 2559, 2565, 2571, 2574, 2579,  
 2582, 2587, 2590, 2595, 2598, 2604,  
 2607, 2613, 2618, 2621, 2627, 2630,  
 2635, 2638, 2648, 2653, 2656, 2661,  
 2664, 2671, 2676, 2679, 2684, 2687
- op\_argmax*, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1025,  
 1028, 1033, 1036, 1042, 1045, 1050,  
 1053, 1059, 1061, 1067, 1070, 1076,  
 1079, 1083, 1093, 1096, 1102, 1105,  
 1111, 1114, 1119, 1122, 1129, 1132,  
 1138, 1145, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1200, 1203, 1208, 1211, 1218, 1223,  
 1226, 1232, 1238, 1244, 1251, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1298, 1301, 1306,  
 1309, 1315, 1321, 1324, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1375, 1378, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,  
 1423, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1467, 1472, 1478,  
 1481, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1537, 1540, 1545, 1548, 1554, 1559,  
 1562, 1568, 1571, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1616,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1647, 1654, 1660, 1667, 1673, 1680,

- 1687, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1730, 1733, 1739, 1742,  
 1747, 1750, 1756, 1762, 1769, 1775,  
 1778, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1825,  
 1827, 1833, 1836, 1841, 1844, 1849,  
 1852, 1858, 1860, 1866, 1869, 1874,  
 1877, 1883, 1889, 1896, 1901, 1904,  
 1910, 1916, 1922, 1925, 1930, 1933,  
 1939, 1942, 1948, 1953, 1956, 1962,  
 1965, 1970, 1973, 1979, 1982, 1988,  
 1990, 1996, 1999, 2005, 2011, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2051, 2054, 2059, 2062, 2068,  
 2075, 2080, 2083, 2088, 2091, 2097,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2137, 2140, 2146, 2152,  
 2157, 2160, 2166, 2169, 2174, 2177,  
 2182, 2185, 2192, 2198, 2204, 2207,  
 2212, 2215, 2221, 2226, 2229, 2235,  
 2238, 2243, 2250, 2256, 2264, 2269,  
 2275, 2281, 2284, 2290, 2297, 2302,  
 2309, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2345, 2347, 2354, 2360,  
 2365, 2372, 2378, 2385, 2391, 2397,  
 2402, 2405, 2411, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2458, 2461, 2467, 2473, 2478,  
 2481, 2487, 2489, 2495, 2500, 2503,  
 2510, 2515, 2518, 2523, 2526, 2531,  
 2534, 2540, 2542, 2548, 2551, 2556,  
 2559, 2565, 2571, 2574, 2579, 2582,  
 2587, 2590, 2595, 2598, 2604, 2607,  
 2613, 2618, 2621, 2627, 2630, 2635,  
 2638, 2648, 2653, 2656, 2661, 2664,  
 2671, 2676, 2679, 2684, 2687
- op\_argmin*, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1025,  
 1028, 1034, 1036, 1042, 1045, 1050,  
 1053, 1059, 1061, 1067, 1070, 1076,  
 1079, 1085, 1088, 1092, 1102, 1105,  
 1111, 1114, 1119, 1122, 1129, 1132,  
 1138, 1145, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1200, 1203, 1208, 1211, 1218, 1223,  
 1226, 1232, 1238, 1244, 1251, 1256,  
 1259, 1264, 1267, 1272, 1275, 1280,  
 1283, 1289, 1292, 1298, 1301, 1306,  
 1309, 1315, 1321, 1324, 1329, 1332,  
 1338, 1345, 1350, 1356, 1359, 1366,  
 1369, 1375, 1378, 1383, 1386, 1392,  
 1395, 1400, 1403, 1408, 1411, 1417,  
 1423, 1428, 1435, 1438, 1444, 1449,  
 1452, 1458, 1461, 1467, 1472, 1478,  
 1481, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1537, 1540, 1545, 1548, 1554, 1559,  
 1562, 1568, 1571, 1577, 1583, 1586,  
 1591, 1594, 1600, 1603, 1609, 1616,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1648, 1654, 1660, 1667, 1673, 1680,  
 1687, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1731, 1733, 1739, 1742,  
 1747, 1750, 1756, 1762, 1769, 1775,  
 1778, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1825,  
 1828, 1833, 1836, 1841, 1844, 1849,  
 1852, 1858, 1860, 1866, 1869, 1874,  
 1877, 1883, 1889, 1896, 1901, 1904,  
 1910, 1916, 1922, 1925, 1930, 1933,  
 1939, 1942, 1948, 1953, 1956, 1962,  
 1965, 1970, 1973, 1979, 1982, 1988,  
 1990, 1996, 1999, 2005, 2011, 2013,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2051, 2054, 2059, 2062, 2068,  
 2075, 2080, 2083, 2088, 2091, 2097,  
 2099, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2137, 2140, 2146, 2152,  
 2157, 2160, 2166, 2169, 2174, 2177,  
 2182, 2185, 2192, 2198, 2204, 2207,  
 2212, 2215, 2221, 2226, 2229, 2235,  
 2238, 2243, 2250, 2256, 2264, 2270,  
 2275, 2281, 2284, 2290, 2297, 2302,  
 2309, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2345, 2348, 2354, 2360,  
 2365, 2372, 2378, 2385, 2391, 2397,  
 2402, 2405, 2411, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2458, 2461, 2467, 2473, 2478,  
 2481, 2487, 2490, 2495, 2500, 2503,  
 2510, 2515, 2518, 2523, 2526, 2531,  
 2534, 2540, 2542, 2548, 2551, 2556,  
 2559, 2565, 2571, 2574, 2579, 2582,  
 2587, 2590, 2595, 2598, 2604, 2607,  
 2613, 2618, 2621, 2627, 2630, 2635,  
 2638, 2648, 2653, 2656, 2661, 2664,

- 2671, 2676, 2679, 2684, 2687
- `op_argpartition`, 972, 975, 981, 984, 990, 993, 999, 1002, 1008, 1011, 1017, 1020, 1025, 1028, 1034, 1036, 1042, 1045, 1050, 1053, 1059, 1061, 1068, 1070, 1076, 1079, 1085, 1088, 1093, 1096, 1101, 1111, 1114, 1119, 1122, 1129, 1132, 1138, 1145, 1151, 1157, 1160, 1165, 1168, 1174, 1181, 1186, 1189, 1194, 1200, 1203, 1208, 1211, 1218, 1223, 1226, 1232, 1238, 1244, 1251, 1256, 1259, 1264, 1267, 1272, 1275, 1281, 1283, 1289, 1292, 1298, 1301, 1306, 1309, 1315, 1321, 1324, 1329, 1332, 1338, 1345, 1350, 1356, 1359, 1366, 1369, 1375, 1378, 1383, 1386, 1392, 1395, 1400, 1403, 1408, 1411, 1417, 1423, 1428, 1435, 1438, 1444, 1450, 1452, 1458, 1461, 1467, 1472, 1478, 1481, 1486, 1489, 1494, 1497, 1503, 1508, 1511, 1517, 1523, 1528, 1531, 1537, 1540, 1545, 1548, 1554, 1559, 1562, 1568, 1571, 1577, 1583, 1586, 1591, 1594, 1600, 1603, 1610, 1616, 1621, 1624, 1629, 1632, 1637, 1640, 1648, 1654, 1660, 1667, 1673, 1680, 1687, 1693, 1699, 1705, 1711, 1717, 1722, 1725, 1731, 1733, 1739, 1742, 1747, 1750, 1756, 1762, 1769, 1775, 1778, 1783, 1786, 1792, 1795, 1800, 1803, 1808, 1811, 1816, 1819, 1825, 1828, 1833, 1836, 1841, 1844, 1849, 1852, 1858, 1861, 1866, 1869, 1874, 1877, 1883, 1889, 1896, 1901, 1904, 1910, 1916, 1922, 1925, 1930, 1933, 1939, 1942, 1948, 1953, 1956, 1962, 1965, 1971, 1973, 1979, 1982, 1988, 1991, 1996, 1999, 2005, 2011, 2014, 2019, 2022, 2028, 2034, 2037, 2042, 2045, 2051, 2054, 2059, 2062, 2068, 2075, 2080, 2083, 2088, 2091, 2097, 2099, 2106, 2111, 2114, 2120, 2123, 2128, 2131, 2137, 2140, 2146, 2152, 2158, 2160, 2166, 2169, 2174, 2177, 2182, 2185, 2192, 2198, 2204, 2207, 2212, 2215, 2221, 2226, 2229, 2235, 2238, 2243, 2250, 2256, 2264, 2270, 2275, 2281, 2284, 2290, 2297, 2303, 2309, 2314, 2317, 2323, 2328, 2331, 2336, 2339, 2345, 2348, 2354, 2360, 2365, 2372, 2378, 2385, 2391, 2397, 2402, 2405, 2411, 2417, 2420, 2425, 2428, 2433, 2436, 2441, 2444, 2449, 2452, 2458, 2461, 2467, 2473, 2478, 2481, 2487, 2490, 2495, 2500, 2503, 2510, 2515, 2518, 2523, 2526, 2531, 2534, 2540, 2543, 2548, 2551, 2556, 2559, 2565, 2571, 2574, 2579, 2582, 2587, 2590, 2595, 2598, 2604, 2607, 2613, 2619, 2621, 2627, 2630, 2635, 2638, 2648, 2653, 2656, 2661, 2664, 2671, 2676, 2679, 2684, 2687
- `op_argsort`, 972, 975, 981, 984, 990, 993, 999, 1002, 1008, 1011, 1017, 1020, 1025, 1028, 1034, 1036, 1042, 1045, 1050, 1053, 1059, 1062, 1068, 1070, 1076, 1079, 1085, 1088, 1094, 1096, 1102, 1105, 1109, 1119, 1122, 1129, 1132, 1138, 1145, 1151, 1157, 1160, 1165, 1168, 1174, 1181, 1186, 1189, 1194, 1200, 1203, 1208, 1211, 1218, 1223, 1226, 1232, 1238, 1244, 1251, 1256, 1259, 1264, 1267, 1272, 1275, 1281, 1283, 1289, 1292, 1298, 1301, 1306, 1309, 1315, 1321, 1324, 1329, 1332, 1338, 1345, 1350, 1356, 1359, 1366, 1369, 1375, 1378, 1383, 1386, 1392, 1395, 1400, 1403, 1408, 1411, 1417, 1423, 1428, 1435, 1438, 1444, 1450, 1452, 1458, 1461, 1467, 1472, 1478, 1481, 1486, 1489, 1494, 1497, 1503, 1508, 1511, 1517, 1523, 1528, 1531, 1537, 1540, 1545, 1548, 1554, 1559, 1562, 1568, 1571, 1577, 1583, 1586, 1591, 1594, 1600, 1603, 1610, 1616, 1621, 1624, 1629, 1632, 1637, 1640, 1648, 1654, 1660, 1667, 1673, 1680, 1687, 1693, 1699, 1705, 1711, 1717, 1722, 1725, 1731, 1733, 1739, 1742, 1747, 1750, 1756, 1762, 1769, 1775, 1778, 1783, 1786, 1792, 1795, 1800, 1803, 1808, 1811, 1816, 1819, 1825, 1828, 1833, 1836, 1841, 1844, 1849, 1852, 1858, 1861, 1866, 1869, 1874, 1877, 1883, 1889, 1896, 1901, 1904, 1910, 1916, 1922, 1925, 1930, 1933, 1939, 1942, 1948, 1953, 1956, 1962, 1965, 1971, 1973, 1979, 1982, 1988, 1991, 1996, 1999, 2005, 2011, 2014, 2019, 2022, 2028, 2034, 2037, 2042, 2045, 2051, 2054, 2059, 2062, 2068, 2075, 2080, 2083, 2088, 2091, 2097, 2099, 2106, 2111, 2114, 2120, 2123, 2128, 2131, 2137, 2140, 2146, 2152, 2158, 2160, 2166, 2169, 2174, 2177, 2182, 2185, 2192, 2198, 2204, 2207, 2212, 2215, 2221, 2226, 2229, 2235, 2238, 2243, 2250, 2256, 2264, 2270, 2275, 2281, 2284, 2290, 2297, 2303, 2309, 2314, 2317, 2323, 2328, 2331, 2336, 2339, 2345, 2348, 2354, 2360, 2365, 2372, 2378, 2385, 2391, 2397, 2402, 2405, 2411, 2417, 2420, 2425, 2428, 2433, 2436, 2441, 2444, 2449, 2452, 2458, 2461, 2467, 2473, 2478, 2481, 2487, 2490, 2495, 2500, 2503, 2510, 2515, 2518, 2523, 2526, 2531, 2534, 2540, 2543, 2548, 2551, 2556, 2559, 2565, 2571, 2574, 2579, 2582, 2587, 2590, 2595, 2598, 2604, 2607, 2613, 2619, 2621, 2627, 2630, 2635, 2638, 2648, 2653, 2656, 2661, 2664, 2671, 2676, 2679, 2684, 2687

- 1904, 1910, 1916, 1922, 1925, 1931,  
 1933, 1939, 1942, 1948, 1953, 1956,  
 1962, 1965, 1971, 1973, 1979, 1982,  
 1988, 1991, 1996, 1999, 2005, 2011,  
 2014, 2019, 2022, 2028, 2034, 2037,  
 2042, 2045, 2051, 2054, 2059, 2062,  
 2068, 2075, 2080, 2083, 2088, 2091,  
 2097, 2100, 2106, 2111, 2114, 2120,  
 2123, 2128, 2131, 2137, 2140, 2146,  
 2152, 2158, 2160, 2166, 2169, 2174,  
 2177, 2182, 2185, 2192, 2198, 2204,  
 2207, 2212, 2215, 2221, 2226, 2229,  
 2235, 2238, 2243, 2250, 2256, 2264,  
 2270, 2276, 2281, 2284, 2290, 2297,  
 2303, 2309, 2314, 2317, 2323, 2328,  
 2331, 2336, 2339, 2345, 2348, 2354,  
 2360, 2365, 2372, 2378, 2385, 2391,  
 2397, 2402, 2405, 2411, 2417, 2420,  
 2425, 2428, 2433, 2436, 2441, 2444,  
 2449, 2452, 2458, 2461, 2467, 2473,  
 2478, 2481, 2487, 2490, 2495, 2500,  
 2503, 2510, 2515, 2518, 2523, 2526,  
 2531, 2534, 2540, 2543, 2548, 2551,  
 2556, 2559, 2565, 2571, 2574, 2579,  
 2582, 2587, 2590, 2596, 2598, 2604,  
 2607, 2613, 2619, 2621, 2627, 2630,  
 2635, 2638, 2648, 2653, 2656, 2661,  
 2664, 2671, 2676, 2679, 2684, 2687
- op\_array, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1025,  
 1028, 1034, 1037, 1042, 1045, 1050,  
 1053, 1059, 1062, 1068, 1070, 1076,  
 1079, 1085, 1088, 1094, 1096, 1102,  
 1105, 1111, 1114, 1118, 1129, 1132,  
 1138, 1145, 1151, 1157, 1160, 1165,  
 1168, 1174, 1181, 1186, 1189, 1194,  
 1200, 1203, 1208, 1211, 1218, 1223,  
 1226, 1232, 1238, 1244, 1251, 1256,  
 1259, 1264, 1267, 1272, 1275, 1281,  
 1283, 1289, 1292, 1298, 1301, 1306,  
 1309, 1315, 1321, 1324, 1329, 1332,  
 1339, 1345, 1350, 1356, 1359, 1366,  
 1369, 1375, 1378, 1383, 1386, 1392,  
 1395, 1400, 1403, 1409, 1411, 1417,  
 1423, 1428, 1435, 1438, 1444, 1450,  
 1452, 1458, 1461, 1467, 1472, 1478,  
 1481, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1528, 1531,  
 1537, 1540, 1545, 1548, 1554, 1559,  
 1562, 1568, 1571, 1578, 1583, 1586,  
 1591, 1594, 1600, 1603, 1610, 1616,  
 1621, 1624, 1629, 1632, 1637, 1640,  
 1648, 1654, 1660, 1667, 1673, 1680,  
 1687, 1693, 1699, 1705, 1711, 1717,  
 1722, 1725, 1731, 1734, 1739, 1742,  
 1747, 1750, 1756, 1762, 1769, 1775,  
 1778, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1816, 1819, 1825,  
 1828, 1833, 1836, 1841, 1844, 1849,  
 1852, 1858, 1861, 1866, 1869, 1874,  
 1877, 1883, 1889, 1896, 1901, 1904,  
 1910, 1916, 1922, 1925, 1931, 1933,  
 1939, 1942, 1948, 1953, 1956, 1962,  
 1965, 1971, 1973, 1979, 1982, 1988,  
 1991, 1996, 1999, 2005, 2011, 2014,  
 2019, 2022, 2028, 2034, 2037, 2042,  
 2045, 2051, 2054, 2059, 2062, 2068,  
 2075, 2080, 2083, 2088, 2091, 2097,  
 2100, 2106, 2111, 2114, 2120, 2123,  
 2128, 2131, 2137, 2140, 2146, 2152,  
 2158, 2160, 2166, 2169, 2174, 2177,  
 2182, 2185, 2192, 2198, 2204, 2207,  
 2212, 2215, 2221, 2226, 2229, 2235,  
 2238, 2243, 2250, 2256, 2264, 2270,  
 2276, 2281, 2284, 2290, 2297, 2303,  
 2309, 2314, 2317, 2323, 2328, 2331,  
 2336, 2339, 2345, 2348, 2354, 2360,  
 2365, 2372, 2378, 2385, 2391, 2397,  
 2402, 2405, 2411, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2444, 2449,  
 2452, 2458, 2461, 2467, 2473, 2478,  
 2481, 2487, 2490, 2495, 2500, 2503,  
 2510, 2515, 2518, 2523, 2526, 2531,  
 2534, 2540, 2543, 2548, 2551, 2556,  
 2559, 2565, 2571, 2574, 2579, 2582,  
 2587, 2590, 2596, 2598, 2604, 2607,  
 2613, 2619, 2621, 2627, 2630, 2635,  
 2638, 2648, 2653, 2656, 2661, 2664,  
 2671, 2676, 2679, 2684, 2687
- op\_array(), 1243
- op\_average, 972, 975, 981, 984, 990, 993,  
 999, 1002, 1008, 1011, 1017, 1020,  
 1025, 1028, 1034, 1037, 1042, 1045,  
 1050, 1053, 1059, 1062, 1068, 1071,  
 1076, 1079, 1085, 1088, 1094, 1096,  
 1102, 1105, 1111, 1114, 1119, 1122,

1127, 1138, 1145, 1151, 1157, 1160,  
1165, 1168, 1174, 1181, 1186, 1189,  
1195, 1200, 1203, 1208, 1211, 1218,  
1223, 1226, 1232, 1238, 1244, 1251,  
1256, 1259, 1264, 1267, 1272, 1275,  
1281, 1284, 1289, 1292, 1298, 1301,  
1306, 1309, 1315, 1321, 1324, 1329,  
1332, 1339, 1345, 1350, 1356, 1359,  
1366, 1369, 1375, 1378, 1383, 1386,  
1392, 1395, 1400, 1403, 1409, 1411,  
1417, 1423, 1428, 1435, 1438, 1444,  
1450, 1453, 1458, 1461, 1467, 1472,  
1478, 1481, 1486, 1489, 1494, 1497,  
1503, 1508, 1511, 1517, 1523, 1528,  
1531, 1537, 1540, 1545, 1548, 1554,  
1559, 1562, 1568, 1571, 1578, 1583,  
1586, 1591, 1594, 1600, 1603, 1610,  
1616, 1621, 1624, 1629, 1632, 1637,  
1640, 1648, 1654, 1660, 1667, 1673,  
1680, 1687, 1693, 1699, 1705, 1711,  
1717, 1722, 1725, 1731, 1734, 1739,  
1742, 1747, 1750, 1756, 1762, 1769,  
1775, 1778, 1783, 1786, 1792, 1795,  
1800, 1803, 1808, 1811, 1816, 1819,  
1825, 1828, 1833, 1836, 1841, 1844,  
1849, 1852, 1858, 1861, 1866, 1869,  
1874, 1877, 1883, 1889, 1896, 1901,  
1904, 1910, 1916, 1922, 1925, 1931,  
1933, 1939, 1942, 1948, 1953, 1956,  
1962, 1965, 1971, 1974, 1979, 1982,  
1988, 1991, 1996, 1999, 2005, 2011,  
2014, 2019, 2022, 2028, 2034, 2037,  
2042, 2045, 2051, 2054, 2059, 2062,  
2068, 2075, 2080, 2083, 2088, 2091,  
2097, 2100, 2106, 2111, 2114, 2120,  
2123, 2128, 2131, 2137, 2140, 2146,  
2152, 2158, 2161, 2166, 2169, 2174,  
2177, 2182, 2185, 2192, 2198, 2204,  
2207, 2212, 2215, 2221, 2226, 2229,  
2235, 2238, 2243, 2250, 2256, 2264,  
2270, 2276, 2281, 2284, 2290, 2297,  
2303, 2309, 2314, 2317, 2323, 2328,  
2331, 2336, 2339, 2345, 2348, 2354,  
2360, 2365, 2372, 2378, 2385, 2391,  
2397, 2402, 2405, 2411, 2417, 2420,  
2425, 2428, 2433, 2436, 2441, 2444,  
2450, 2452, 2458, 2461, 2467, 2473,  
2478, 2481, 2487, 2490, 2495, 2501,  
2503, 2510, 2515, 2518, 2523, 2526,  
2531, 2534, 2540, 2543, 2548, 2551,  
2556, 2559, 2565, 2571, 2574, 2579,  
2582, 2587, 2590, 2596, 2598, 2604,  
2607, 2613, 2619, 2622, 2627, 2630,  
2635, 2638, 2648, 2653, 2656, 2661,  
2664, 2671, 2676, 2679, 2684, 2687

op\_average\_pool, 975, 984, 993, 1002, 1011,  
1020, 1028, 1037, 1045, 1053, 1062,  
1071, 1079, 1088, 1097, 1105, 1114,  
1122, 1132, 1136, 1144, 1145, 1150,  
1151, 1160, 1168, 1174, 1180, 1181,  
1189, 1195, 1203, 1211, 1218, 1226,  
1231, 1232, 1238, 1244, 1250, 1251,  
1259, 1267, 1275, 1284, 1292, 1301,  
1309, 1314, 1315, 1324, 1332, 1339,  
1344, 1345, 1350, 1359, 1369, 1378,  
1386, 1395, 1403, 1411, 1417, 1423,  
1428, 1438, 1443, 1444, 1453, 1461,  
1467, 1472, 1481, 1489, 1497, 1503,  
1511, 1517, 1523, 1531, 1540, 1548,  
1554, 1562, 1571, 1576, 1578, 1586,  
1594, 1603, 1609, 1610, 1615, 1616,  
1624, 1632, 1640, 1648, 1654, 1661,  
1667, 1673, 1680, 1687, 1693, 1699,  
1705, 1711, 1717, 1725, 1734, 1742,  
1750, 1756, 1762, 1768, 1769, 1778,  
1786, 1795, 1803, 1811, 1819, 1828,  
1836, 1844, 1852, 1861, 1869, 1877,  
1883, 1888, 1889, 1895, 1896, 1904,  
1910, 1916, 1925, 1934, 1942, 1947,  
1948, 1956, 1965, 1974, 1982, 1991,  
1999, 2004, 2005, 2014, 2022, 2027,  
2028, 2037, 2045, 2054, 2062, 2068,  
2074, 2075, 2083, 2091, 2100, 2105,  
2106, 2114, 2123, 2131, 2140, 2145,  
2146, 2152, 2161, 2169, 2177, 2185,  
2191, 2192, 2197, 2198, 2207, 2215,  
2221, 2229, 2238, 2243, 2250, 2256,  
2264, 2270, 2276, 2284, 2289, 2290,  
2296, 2297, 2303, 2308, 2309, 2317,  
2322, 2323, 2331, 2339, 2348, 2354,  
2360, 2365, 2371, 2372, 2377, 2378,  
2384, 2385, 2391, 2397, 2405, 2410,  
2411, 2420, 2428, 2436, 2444, 2452,  
2461, 2467, 2473, 2481, 2490, 2495,  
2503, 2510, 2518, 2526, 2534, 2543,  
2551, 2559, 2565, 2574, 2582, 2590,



- 2599, 2607, 2613, 2622, 2630, 2638,  
2648, 2656, 2664, 2671, 2679, 2687
- `op_batch_normalization`, 975, 984, 993,  
1002, 1011, 1020, 1028, 1037, 1045,  
1053, 1062, 1071, 1079, 1088, 1097,  
1105, 1114, 1122, 1132, 1137, 1138,  
1143, 1150, 1151, 1160, 1168, 1174,  
1180, 1181, 1189, 1195, 1203, 1211,  
1218, 1226, 1231, 1232, 1238, 1244,  
1250, 1251, 1259, 1267, 1275, 1284,  
1292, 1301, 1309, 1314, 1315, 1324,  
1332, 1339, 1344, 1345, 1350, 1359,  
1369, 1378, 1386, 1395, 1403, 1412,  
1417, 1423, 1428, 1438, 1443, 1444,  
1453, 1461, 1467, 1473, 1481, 1489,  
1497, 1503, 1511, 1517, 1523, 1531,  
1540, 1548, 1554, 1562, 1571, 1577,  
1578, 1586, 1594, 1603, 1609, 1610,  
1615, 1616, 1624, 1632, 1640, 1648,  
1654, 1661, 1667, 1673, 1680, 1687,  
1693, 1700, 1705, 1711, 1717, 1725,  
1734, 1742, 1750, 1756, 1762, 1768,  
1769, 1778, 1786, 1795, 1803, 1811,  
1819, 1828, 1836, 1844, 1852, 1861,  
1869, 1877, 1883, 1888, 1889, 1895,  
1896, 1904, 1910, 1916, 1925, 1934,  
1942, 1947, 1948, 1956, 1965, 1974,  
1982, 1991, 1999, 2004, 2005, 2014,  
2022, 2027, 2028, 2037, 2045, 2054,  
2062, 2068, 2074, 2075, 2083, 2091,  
2100, 2105, 2106, 2114, 2123, 2131,  
2140, 2145, 2146, 2152, 2161, 2169,  
2177, 2185, 2191, 2192, 2197, 2198,  
2207, 2215, 2221, 2229, 2238, 2243,  
2250, 2256, 2264, 2270, 2276, 2284,  
2289, 2290, 2296, 2297, 2303, 2308,  
2309, 2317, 2322, 2323, 2331, 2339,  
2348, 2354, 2360, 2365, 2371, 2372,  
2377, 2378, 2384, 2385, 2391, 2397,  
2405, 2410, 2411, 2420, 2428, 2436,  
2444, 2452, 2461, 2467, 2473, 2481,  
2490, 2495, 2503, 2510, 2518, 2526,  
2534, 2543, 2551, 2559, 2565, 2574,  
2582, 2590, 2599, 2607, 2613, 2622,  
2630, 2638, 2648, 2656, 2664, 2671,  
2679, 2687
- `op_binary_crossentropy`, 975, 984, 993,  
1002, 1011, 1020, 1028, 1037, 1045,  
1053, 1062, 1071, 1079, 1088, 1097,  
1105, 1114, 1122, 1132, 1137, 1138,  
1144, 1145, 1149, 1160, 1168, 1174,  
1180, 1181, 1189, 1195, 1203, 1211,  
1218, 1226, 1231, 1232, 1238, 1244,  
1250, 1251, 1259, 1267, 1275, 1284,  
1292, 1301, 1309, 1314, 1316, 1324,  
1332, 1339, 1344, 1345, 1350, 1359,  
1369, 1378, 1386, 1395, 1403, 1412,  
1417, 1423, 1428, 1438, 1443, 1444,  
1453, 1461, 1467, 1473, 1481, 1489,  
1497, 1503, 1511, 1517, 1523, 1531,  
1540, 1548, 1554, 1562, 1571, 1577,  
1578, 1586, 1594, 1603, 1609, 1610,  
1615, 1616, 1624, 1632, 1640, 1648,  
1654, 1661, 1667, 1673, 1680, 1687,  
1693, 1700, 1705, 1711, 1717, 1725,  
1734, 1742, 1750, 1756, 1762, 1768,  
1769, 1778, 1786, 1795, 1803, 1811,  
1819, 1828, 1836, 1844, 1852, 1861,  
1869, 1877, 1883, 1888, 1889, 1895,  
1896, 1904, 1910, 1916, 1925, 1934,  
1942, 1947, 1948, 1956, 1965, 1974,  
1982, 1991, 1999, 2004, 2005, 2014,  
2022, 2027, 2028, 2037, 2045, 2054,  
2062, 2068, 2074, 2075, 2083, 2091,  
2100, 2105, 2106, 2114, 2123, 2131,  
2140, 2145, 2146, 2152, 2161, 2169,  
2177, 2185, 2191, 2192, 2197, 2198,  
2207, 2215, 2221, 2229, 2238, 2244,  
2250, 2256, 2264, 2270, 2276, 2284,  
2289, 2290, 2296, 2297, 2303, 2308,  
2309, 2317, 2322, 2323, 2331, 2339,  
2348, 2354, 2360, 2365, 2371, 2372,  
2377, 2378, 2384, 2385, 2391, 2397,  
2405, 2410, 2411, 2420, 2428, 2436,  
2444, 2453, 2461, 2467, 2473, 2481,  
2490, 2495, 2504, 2510, 2518, 2526,  
2534, 2543, 2551, 2559, 2565, 2574,  
2582, 2590, 2599, 2607, 2613, 2622,  
2630, 2638, 2648, 2656, 2664, 2671,  
2679, 2687
- `op_bincount`, 972, 975, 981, 984, 990, 993,  
999, 1002, 1008, 1011, 1017, 1020,  
1025, 1028, 1034, 1037, 1042, 1045,  
1050, 1053, 1059, 1062, 1068, 1071,  
1076, 1079, 1085, 1088, 1094, 1097,  
1102, 1105, 1111, 1114, 1119, 1122,



1129, 1132, 1138, 1145, 1151, 1155,  
1165, 1168, 1174, 1181, 1186, 1189,  
1195, 1200, 1203, 1208, 1211, 1218,  
1223, 1226, 1232, 1238, 1244, 1251,  
1256, 1259, 1264, 1267, 1272, 1275,  
1281, 1284, 1289, 1292, 1298, 1301,  
1306, 1309, 1316, 1321, 1324, 1329,  
1332, 1339, 1345, 1351, 1356, 1359,  
1366, 1369, 1375, 1378, 1383, 1386,  
1392, 1395, 1400, 1403, 1409, 1412,  
1417, 1423, 1428, 1435, 1438, 1444,  
1450, 1453, 1458, 1461, 1467, 1473,  
1478, 1481, 1486, 1489, 1494, 1497,  
1503, 1508, 1511, 1517, 1523, 1529,  
1532, 1537, 1540, 1545, 1548, 1554,  
1559, 1562, 1568, 1571, 1578, 1583,  
1586, 1591, 1594, 1600, 1603, 1610,  
1616, 1621, 1624, 1629, 1632, 1637,  
1640, 1648, 1654, 1661, 1667, 1673,  
1680, 1687, 1693, 1700, 1705, 1711,  
1717, 1722, 1725, 1731, 1734, 1739,  
1742, 1747, 1750, 1756, 1762, 1769,  
1775, 1778, 1783, 1786, 1792, 1795,  
1800, 1803, 1808, 1811, 1816, 1819,  
1825, 1828, 1833, 1836, 1841, 1844,  
1849, 1852, 1858, 1861, 1866, 1869,  
1875, 1878, 1883, 1890, 1896, 1901,  
1904, 1910, 1916, 1922, 1925, 1931,  
1934, 1939, 1942, 1948, 1954, 1957,  
1962, 1965, 1971, 1974, 1979, 1982,  
1988, 1991, 1996, 1999, 2005, 2011,  
2014, 2019, 2022, 2028, 2034, 2037,  
2042, 2045, 2051, 2054, 2059, 2062,  
2068, 2075, 2080, 2083, 2088, 2091,  
2097, 2100, 2106, 2111, 2114, 2120,  
2123, 2128, 2131, 2137, 2140, 2146,  
2152, 2158, 2161, 2166, 2169, 2174,  
2177, 2182, 2185, 2192, 2198, 2204,  
2207, 2212, 2215, 2221, 2226, 2229,  
2235, 2238, 2244, 2250, 2256, 2264,  
2270, 2276, 2281, 2284, 2290, 2297,  
2303, 2309, 2314, 2317, 2323, 2328,  
2331, 2336, 2339, 2345, 2348, 2354,  
2360, 2365, 2372, 2378, 2385, 2391,  
2397, 2402, 2405, 2411, 2417, 2420,  
2425, 2428, 2433, 2436, 2441, 2444,  
2450, 2453, 2458, 2461, 2467, 2473,  
2478, 2481, 2487, 2490, 2495, 2501,  
2504, 2510, 2515, 2518, 2523, 2526,  
2531, 2534, 2540, 2543, 2548, 2551,  
2556, 2559, 2565, 2571, 2574, 2579,  
2582, 2587, 2590, 2596, 2599, 2604,  
2607, 2613, 2619, 2622, 2627, 2630,  
2636, 2639, 2648, 2653, 2656, 2661,  
2664, 2671, 2676, 2679, 2684, 2687

op\_broadcast\_to, 972, 975, 981, 984, 990,  
993, 999, 1002, 1008, 1011, 1017,  
1020, 1025, 1028, 1034, 1037, 1042,  
1045, 1050, 1053, 1059, 1062, 1068,  
1071, 1076, 1079, 1085, 1088, 1094,  
1097, 1102, 1105, 1111, 1114, 1119,  
1122, 1129, 1132, 1138, 1145, 1151,  
1157, 1160, 1164, 1175, 1181, 1186,  
1189, 1195, 1200, 1203, 1208, 1211,  
1218, 1223, 1226, 1232, 1238, 1244,  
1251, 1256, 1259, 1264, 1267, 1272,  
1275, 1281, 1284, 1289, 1292, 1298,  
1301, 1307, 1310, 1316, 1321, 1324,  
1329, 1332, 1339, 1345, 1351, 1356,  
1359, 1366, 1369, 1375, 1378, 1383,  
1386, 1392, 1395, 1400, 1403, 1409,  
1412, 1417, 1423, 1428, 1435, 1438,  
1444, 1450, 1453, 1458, 1461, 1467,  
1473, 1478, 1481, 1486, 1489, 1494,  
1497, 1503, 1508, 1511, 1517, 1523,  
1529, 1532, 1537, 1540, 1545, 1548,  
1554, 1560, 1563, 1568, 1571, 1578,  
1583, 1586, 1591, 1594, 1600, 1603,  
1610, 1616, 1621, 1624, 1629, 1632,  
1637, 1640, 1648, 1654, 1661, 1667,  
1673, 1680, 1687, 1693, 1700, 1705,  
1711, 1717, 1722, 1725, 1731, 1734,  
1739, 1742, 1747, 1750, 1756, 1762,  
1769, 1775, 1778, 1783, 1786, 1792,  
1795, 1800, 1803, 1808, 1811, 1817,  
1820, 1825, 1828, 1833, 1836, 1841,  
1844, 1849, 1852, 1858, 1861, 1866,  
1869, 1875, 1878, 1883, 1890, 1896,  
1901, 1904, 1910, 1916, 1922, 1925,  
1931, 1934, 1939, 1942, 1948, 1954,  
1957, 1962, 1965, 1971, 1974, 1979,  
1982, 1988, 1991, 1996, 1999, 2005,  
2011, 2014, 2019, 2022, 2029, 2034,  
2037, 2042, 2045, 2051, 2054, 2059,  
2062, 2068, 2075, 2080, 2083, 2088,  
2091, 2097, 2100, 2106, 2111, 2114,

- 2120, 2123, 2128, 2131, 2137, 2140,  
 2146, 2152, 2158, 2161, 2166, 2169,  
 2174, 2177, 2182, 2185, 2192, 2198,  
 2204, 2207, 2212, 2215, 2221, 2227,  
 2230, 2235, 2238, 2244, 2251, 2257,  
 2264, 2270, 2276, 2281, 2284, 2290,  
 2297, 2303, 2309, 2314, 2317, 2323,  
 2328, 2331, 2337, 2340, 2345, 2348,  
 2354, 2360, 2366, 2372, 2378, 2385,  
 2391, 2397, 2402, 2405, 2411, 2417,  
 2420, 2425, 2428, 2433, 2436, 2441,  
 2444, 2450, 2453, 2458, 2461, 2467,  
 2473, 2478, 2481, 2487, 2490, 2495,  
 2501, 2504, 2510, 2515, 2518, 2523,  
 2526, 2531, 2534, 2540, 2543, 2548,  
 2551, 2556, 2559, 2565, 2571, 2574,  
 2579, 2582, 2587, 2590, 2596, 2599,  
 2604, 2607, 2613, 2619, 2622, 2627,  
 2630, 2636, 2639, 2648, 2653, 2656,  
 2661, 2664, 2671, 2676, 2679, 2684,  
 2687
- op\_cast*, 975, 984, 993, 1002, 1011, 1020,  
 1028, 1037, 1045, 1053, 1062, 1071,  
 1079, 1088, 1097, 1105, 1114, 1122,  
 1132, 1138, 1145, 1151, 1160, 1168,  
 1173, 1181, 1189, 1195, 1203, 1211,  
 1217, 1218, 1226, 1232, 1237, 1238,  
 1243, 1244, 1251, 1259, 1267, 1275,  
 1284, 1292, 1301, 1310, 1316, 1324,  
 1332, 1338, 1339, 1345, 1351, 1360,  
 1369, 1378, 1386, 1395, 1403, 1412,  
 1417, 1423, 1428, 1438, 1444, 1453,  
 1461, 1467, 1473, 1481, 1489, 1497,  
 1503, 1511, 1517, 1523, 1532, 1540,  
 1548, 1553, 1554, 1563, 1571, 1578,  
 1586, 1595, 1603, 1610, 1616, 1624,  
 1632, 1640, 1648, 1654, 1661, 1667,  
 1673, 1680, 1687, 1693, 1700, 1705,  
 1711, 1717, 1725, 1734, 1742, 1750,  
 1756, 1761, 1762, 1769, 1778, 1786,  
 1795, 1803, 1811, 1820, 1828, 1836,  
 1844, 1852, 1861, 1869, 1878, 1883,  
 1890, 1896, 1905, 1910, 1916, 1925,  
 1934, 1942, 1948, 1957, 1965, 1974,  
 1982, 1991, 1999, 2005, 2014, 2022,  
 2029, 2037, 2045, 2054, 2062, 2069,  
 2075, 2083, 2091, 2100, 2106, 2114,  
 2123, 2132, 2140, 2146, 2152, 2161,  
 2169, 2177, 2185, 2192, 2199, 2207,  
 2215, 2221, 2230, 2238, 2244, 2250,  
 2251, 2256, 2257, 2263, 2264, 2270,  
 2276, 2284, 2290, 2297, 2302, 2303,  
 2309, 2317, 2323, 2331, 2340, 2348,  
 2353, 2354, 2359, 2360, 2366, 2372,  
 2379, 2385, 2391, 2397, 2405, 2411,  
 2420, 2428, 2436, 2444, 2453, 2461,  
 2467, 2472, 2473, 2481, 2490, 2495,  
 2504, 2509, 2510, 2518, 2526, 2535,  
 2543, 2551, 2559, 2565, 2574, 2582,  
 2590, 2599, 2607, 2612, 2613, 2622,  
 2630, 2639, 2647, 2648, 2656, 2664,  
 2670, 2671, 2679, 2687
- op\_categorical\_crossentropy*, 975, 984,  
 993, 1002, 1011, 1020, 1028, 1037,  
 1045, 1053, 1062, 1071, 1079, 1088,  
 1097, 1105, 1114, 1122, 1132, 1137,  
 1138, 1144, 1145, 1150, 1151, 1160,  
 1168, 1175, 1179, 1189, 1195, 1203,  
 1211, 1218, 1226, 1231, 1232, 1238,  
 1244, 1250, 1251, 1259, 1267, 1275,  
 1284, 1292, 1301, 1310, 1314, 1316,  
 1324, 1332, 1339, 1344, 1345, 1351,  
 1360, 1369, 1378, 1386, 1395, 1403,  
 1412, 1418, 1423, 1429, 1438, 1443,  
 1444, 1453, 1461, 1467, 1473, 1481,  
 1489, 1497, 1503, 1511, 1517, 1523,  
 1532, 1540, 1548, 1554, 1563, 1571,  
 1577, 1578, 1586, 1595, 1603, 1609,  
 1610, 1615, 1616, 1624, 1632, 1640,  
 1648, 1654, 1661, 1667, 1673, 1680,  
 1687, 1693, 1700, 1705, 1711, 1717,  
 1725, 1734, 1742, 1750, 1756, 1762,  
 1768, 1769, 1778, 1786, 1795, 1803,  
 1811, 1820, 1828, 1836, 1844, 1852,  
 1861, 1869, 1878, 1883, 1888, 1890,  
 1895, 1896, 1905, 1910, 1917, 1925,  
 1934, 1942, 1947, 1948, 1957, 1965,  
 1974, 1982, 1991, 1999, 2004, 2005,  
 2014, 2022, 2027, 2029, 2037, 2045,  
 2054, 2062, 2069, 2074, 2075, 2083,  
 2091, 2100, 2105, 2106, 2114, 2123,  
 2132, 2140, 2145, 2146, 2152, 2161,  
 2169, 2177, 2185, 2191, 2192, 2197,  
 2199, 2207, 2215, 2221, 2230, 2238,  
 2244, 2251, 2257, 2264, 2270, 2276,  
 2284, 2289, 2290, 2296, 2297, 2303,

- 2308, 2309, 2317, 2322, 2323, 2331,  
2340, 2348, 2354, 2360, 2366, 2371,  
2372, 2377, 2379, 2384, 2385, 2391,  
2397, 2405, 2410, 2412, 2420, 2428,  
2436, 2444, 2453, 2461, 2467, 2473,  
2481, 2490, 2495, 2504, 2510, 2518,  
2526, 2535, 2543, 2551, 2559, 2565,  
2574, 2582, 2590, 2599, 2607, 2613,  
2622, 2630, 2639, 2648, 2656, 2664,  
2671, 2679, 2687
- op\_ceil, 972, 975, 981, 984, 990, 993, 999,  
1002, 1008, 1011, 1017, 1020, 1025,  
1028, 1034, 1037, 1042, 1045, 1050,  
1053, 1059, 1062, 1068, 1071, 1076,  
1079, 1085, 1088, 1094, 1097, 1102,  
1105, 1111, 1114, 1119, 1122, 1129,  
1132, 1138, 1145, 1151, 1157, 1160,  
1165, 1168, 1175, 1181, 1185, 1195,  
1200, 1203, 1208, 1211, 1218, 1223,  
1226, 1233, 1238, 1244, 1251, 1256,  
1259, 1264, 1267, 1272, 1275, 1281,  
1284, 1289, 1292, 1298, 1301, 1307,  
1310, 1316, 1321, 1324, 1329, 1332,  
1339, 1345, 1351, 1357, 1360, 1366,  
1369, 1375, 1378, 1383, 1386, 1392,  
1395, 1400, 1403, 1409, 1412, 1418,  
1423, 1429, 1435, 1438, 1444, 1450,  
1453, 1458, 1461, 1467, 1473, 1478,  
1481, 1486, 1489, 1494, 1497, 1503,  
1508, 1511, 1517, 1523, 1529, 1532,  
1537, 1540, 1545, 1548, 1554, 1560,  
1563, 1568, 1571, 1578, 1583, 1586,  
1592, 1595, 1600, 1603, 1610, 1616,  
1621, 1624, 1629, 1632, 1637, 1640,  
1648, 1654, 1661, 1667, 1673, 1680,  
1687, 1693, 1700, 1705, 1711, 1717,  
1722, 1725, 1731, 1734, 1739, 1742,  
1747, 1750, 1756, 1762, 1769, 1775,  
1778, 1783, 1786, 1792, 1795, 1800,  
1803, 1808, 1811, 1817, 1820, 1825,  
1828, 1833, 1836, 1841, 1844, 1849,  
1853, 1858, 1861, 1866, 1869, 1875,  
1878, 1884, 1890, 1896, 1902, 1905,  
1910, 1917, 1922, 1925, 1931, 1934,  
1939, 1942, 1948, 1954, 1957, 1962,  
1965, 1971, 1974, 1979, 1982, 1988,  
1991, 1996, 1999, 2006, 2011, 2014,  
2019, 2022, 2029, 2034, 2037, 2042,  
2045, 2051, 2054, 2059, 2062, 2069,  
2075, 2080, 2083, 2088, 2092, 2097,  
2100, 2106, 2111, 2114, 2120, 2123,  
2129, 2132, 2137, 2140, 2146, 2152,  
2158, 2161, 2166, 2169, 2174, 2177,  
2182, 2185, 2192, 2199, 2204, 2207,  
2212, 2215, 2221, 2227, 2230, 2235,  
2238, 2244, 2251, 2257, 2264, 2270,  
2276, 2281, 2284, 2290, 2297, 2303,  
2309, 2314, 2317, 2323, 2328, 2331,  
2337, 2340, 2345, 2348, 2354, 2360,  
2366, 2372, 2379, 2385, 2391, 2397,  
2402, 2405, 2412, 2417, 2420, 2425,  
2428, 2433, 2436, 2441, 2444, 2450,  
2453, 2458, 2461, 2467, 2473, 2478,  
2481, 2487, 2490, 2495, 2501, 2504,  
2510, 2515, 2518, 2523, 2526, 2532,  
2535, 2540, 2543, 2548, 2551, 2556,  
2559, 2566, 2571, 2574, 2579, 2582,  
2587, 2590, 2596, 2599, 2604, 2607,  
2613, 2619, 2622, 2627, 2630, 2636,  
2639, 2648, 2653, 2656, 2661, 2664,  
2671, 2676, 2679, 2684, 2687
- op\_cholesky, 975, 984, 993, 1002, 1011,  
1020, 1028, 1037, 1045, 1053, 1062,  
1071, 1079, 1088, 1097, 1105, 1114,  
1122, 1132, 1138, 1145, 1151, 1160,  
1168, 1175, 1181, 1189, 1193, 1203,  
1211, 1218, 1226, 1233, 1238, 1244,  
1251, 1259, 1267, 1276, 1284, 1292,  
1301, 1310, 1316, 1324, 1332, 1339,  
1345, 1350, 1351, 1360, 1369, 1378,  
1386, 1395, 1403, 1412, 1418, 1422,  
1423, 1428, 1429, 1438, 1444, 1453,  
1461, 1467, 1473, 1481, 1489, 1497,  
1503, 1511, 1517, 1523, 1532, 1540,  
1548, 1554, 1563, 1571, 1578, 1586,  
1595, 1603, 1610, 1616, 1624, 1632,  
1641, 1648, 1654, 1661, 1667, 1673,  
1680, 1687, 1693, 1700, 1704, 1705,  
1711, 1717, 1726, 1734, 1742, 1750,  
1756, 1762, 1769, 1778, 1786, 1795,  
1803, 1811, 1820, 1828, 1836, 1844,  
1853, 1861, 1869, 1878, 1884, 1890,  
1896, 1901, 1905, 1909, 1910, 1917,  
1925, 1934, 1942, 1948, 1957, 1965,  
1974, 1983, 1991, 1999, 2006, 2014,  
2022, 2029, 2037, 2045, 2054, 2062,

- 2068, 2069, 2075, 2083, 2092, 2100,  
 2106, 2114, 2123, 2132, 2140, 2146,  
 2152, 2161, 2169, 2177, 2185, 2192,  
 2199, 2207, 2215, 2221, 2230, 2238,  
 2244, 2251, 2257, 2264, 2270, 2276,  
 2284, 2290, 2297, 2303, 2309, 2317,  
 2323, 2331, 2340, 2348, 2354, 2360,  
 2365, 2366, 2372, 2379, 2385, 2391,  
 2396, 2397, 2405, 2412, 2420, 2428,  
 2436, 2444, 2453, 2461, 2467, 2473,  
 2482, 2490, 2495, 2504, 2510, 2518,  
 2526, 2535, 2543, 2551, 2559, 2566,  
 2574, 2582, 2590, 2599, 2607, 2613,  
 2622, 2630, 2639, 2648, 2656, 2664,  
 2671, 2679, 2687
- op\_clip*, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1025,  
 1028, 1034, 1037, 1042, 1045, 1050,  
 1053, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1105, 1111, 1114, 1119, 1123, 1129,  
 1132, 1138, 1145, 1151, 1157, 1160,  
 1165, 1168, 1175, 1181, 1186, 1189,  
 1195, 1199, 1208, 1211, 1218, 1223,  
 1226, 1233, 1238, 1244, 1251, 1256,  
 1259, 1264, 1267, 1272, 1276, 1281,  
 1284, 1289, 1292, 1298, 1301, 1307,  
 1310, 1316, 1321, 1324, 1329, 1332,  
 1339, 1345, 1351, 1357, 1360, 1366,  
 1369, 1375, 1378, 1383, 1386, 1392,  
 1395, 1400, 1403, 1409, 1412, 1418,  
 1423, 1429, 1435, 1438, 1445, 1450,  
 1453, 1458, 1461, 1467, 1473, 1478,  
 1481, 1486, 1489, 1494, 1497, 1503,  
 1508, 1511, 1517, 1523, 1529, 1532,  
 1537, 1540, 1545, 1548, 1554, 1560,  
 1563, 1568, 1571, 1578, 1583, 1586,  
 1592, 1595, 1600, 1603, 1610, 1616,  
 1621, 1624, 1629, 1632, 1637, 1641,  
 1648, 1654, 1661, 1667, 1673, 1680,  
 1687, 1693, 1700, 1705, 1711, 1717,  
 1722, 1726, 1731, 1734, 1739, 1742,  
 1747, 1750, 1756, 1762, 1769, 1775,  
 1778, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1817, 1820, 1825,  
 1828, 1833, 1836, 1841, 1844, 1849,  
 1853, 1858, 1861, 1866, 1869, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1910, 1917, 1922, 1925, 1931, 1934,  
 1939, 1942, 1948, 1954, 1957, 1962,  
 1965, 1971, 1974, 1979, 1983, 1988,  
 1991, 1996, 1999, 2006, 2011, 2014,  
 2019, 2022, 2029, 2034, 2037, 2042,  
 2045, 2051, 2054, 2059, 2062, 2069,  
 2075, 2080, 2083, 2088, 2092, 2097,  
 2100, 2106, 2111, 2114, 2120, 2123,  
 2129, 2132, 2137, 2140, 2146, 2152,  
 2158, 2161, 2166, 2169, 2174, 2177,  
 2182, 2185, 2192, 2199, 2204, 2207,  
 2212, 2215, 2221, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2281, 2284, 2290, 2297, 2303,  
 2309, 2314, 2317, 2323, 2328, 2331,  
 2337, 2340, 2345, 2348, 2354, 2360,  
 2366, 2372, 2379, 2385, 2391, 2397,  
 2402, 2405, 2412, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2444, 2450,  
 2453, 2458, 2461, 2467, 2473, 2478,  
 2482, 2487, 2490, 2495, 2501, 2504,  
 2510, 2515, 2518, 2523, 2526, 2532,  
 2535, 2540, 2543, 2548, 2551, 2556,  
 2559, 2566, 2571, 2574, 2579, 2582,  
 2587, 2590, 2596, 2599, 2604, 2607,  
 2613, 2619, 2622, 2627, 2630, 2636,  
 2639, 2648, 2653, 2656, 2661, 2664,  
 2671, 2676, 2679, 2684, 2687
- op\_concatenate*, 972, 975, 981, 984, 990,  
 993, 999, 1002, 1008, 1011, 1017,  
 1020, 1025, 1028, 1034, 1037, 1042,  
 1045, 1050, 1053, 1059, 1062, 1068,  
 1071, 1076, 1079, 1085, 1088, 1094,  
 1097, 1102, 1105, 1111, 1114, 1119,  
 1123, 1129, 1132, 1138, 1145, 1151,  
 1157, 1160, 1165, 1169, 1175, 1181,  
 1186, 1189, 1195, 1200, 1203, 1207,  
 1218, 1223, 1226, 1233, 1238, 1244,  
 1251, 1256, 1259, 1264, 1267, 1272,  
 1276, 1281, 1284, 1289, 1292, 1298,  
 1301, 1307, 1310, 1316, 1321, 1324,  
 1329, 1332, 1339, 1345, 1351, 1357,  
 1360, 1366, 1369, 1375, 1378, 1383,  
 1386, 1392, 1395, 1400, 1403, 1409,  
 1412, 1418, 1423, 1429, 1435, 1438,  
 1445, 1450, 1453, 1458, 1461, 1467,  
 1473, 1478, 1481, 1486, 1489, 1494,  
 1497, 1503, 1508, 1511, 1517, 1523,

- 1529, 1532, 1537, 1540, 1545, 1548,  
 1554, 1560, 1563, 1568, 1571, 1578,  
 1583, 1586, 1592, 1595, 1600, 1603,  
 1610, 1616, 1621, 1624, 1629, 1632,  
 1637, 1641, 1648, 1654, 1661, 1667,  
 1673, 1680, 1687, 1693, 1700, 1705,  
 1711, 1717, 1722, 1726, 1731, 1734,  
 1739, 1742, 1747, 1750, 1756, 1762,  
 1769, 1775, 1778, 1783, 1786, 1792,  
 1795, 1800, 1803, 1808, 1811, 1817,  
 1820, 1825, 1828, 1833, 1836, 1841,  
 1844, 1850, 1853, 1858, 1861, 1866,  
 1869, 1875, 1878, 1884, 1890, 1896,  
 1902, 1905, 1910, 1917, 1922, 1925,  
 1931, 1934, 1939, 1942, 1948, 1954,  
 1957, 1962, 1965, 1971, 1974, 1979,  
 1983, 1988, 1991, 1996, 1999, 2006,  
 2011, 2014, 2019, 2022, 2029, 2034,  
 2037, 2042, 2045, 2051, 2054, 2059,  
 2062, 2069, 2075, 2080, 2083, 2089,  
 2092, 2097, 2100, 2106, 2111, 2115,  
 2120, 2123, 2129, 2132, 2137, 2140,  
 2146, 2152, 2158, 2161, 2166, 2169,  
 2174, 2177, 2182, 2185, 2192, 2199,  
 2204, 2207, 2212, 2215, 2221, 2227,  
 2230, 2235, 2238, 2244, 2251, 2257,  
 2264, 2270, 2276, 2281, 2284, 2290,  
 2297, 2303, 2309, 2314, 2317, 2323,  
 2328, 2331, 2337, 2340, 2345, 2348,  
 2354, 2360, 2366, 2372, 2379, 2385,  
 2391, 2397, 2402, 2405, 2412, 2417,  
 2420, 2425, 2428, 2433, 2436, 2441,  
 2444, 2450, 2453, 2458, 2461, 2467,  
 2473, 2478, 2482, 2487, 2490, 2495,  
 2501, 2504, 2510, 2515, 2518, 2523,  
 2526, 2532, 2535, 2540, 2543, 2548,  
 2551, 2556, 2559, 2566, 2571, 2574,  
 2579, 2582, 2587, 2590, 2596, 2599,  
 2604, 2607, 2613, 2619, 2622, 2627,  
 2630, 2636, 2639, 2648, 2653, 2656,  
 2661, 2664, 2671, 2676, 2679, 2684,  
 2687
- op\_cond, 975, 984, 993, 1002, 1011, 1020,  
 1028, 1037, 1045, 1053, 1062, 1071,  
 1079, 1088, 1097, 1105, 1114, 1123,  
 1132, 1138, 1145, 1151, 1160, 1169,  
 1174, 1175, 1181, 1189, 1195, 1203,  
 1211, 1215, 1226, 1233, 1237, 1238,  
 1243, 1244, 1251, 1259, 1267, 1276,  
 1284, 1292, 1301, 1310, 1316, 1324,  
 1332, 1338, 1339, 1345, 1351, 1360,  
 1369, 1378, 1386, 1395, 1403, 1412,  
 1417, 1418, 1423, 1429, 1438, 1445,  
 1453, 1461, 1467, 1473, 1481, 1489,  
 1497, 1503, 1511, 1517, 1523, 1532,  
 1540, 1548, 1553, 1554, 1563, 1571,  
 1578, 1586, 1595, 1603, 1610, 1616,  
 1624, 1632, 1641, 1648, 1654, 1661,  
 1667, 1673, 1680, 1687, 1693, 1700,  
 1705, 1711, 1717, 1726, 1734, 1742,  
 1750, 1756, 1761, 1762, 1769, 1778,  
 1786, 1795, 1803, 1811, 1820, 1828,  
 1836, 1844, 1853, 1861, 1869, 1878,  
 1884, 1890, 1896, 1905, 1910, 1916,  
 1917, 1925, 1934, 1942, 1948, 1957,  
 1965, 1974, 1983, 1991, 1999, 2006,  
 2014, 2022, 2029, 2037, 2045, 2054,  
 2062, 2069, 2075, 2083, 2092, 2100,  
 2106, 2115, 2123, 2132, 2140, 2146,  
 2152, 2161, 2169, 2177, 2185, 2192,  
 2199, 2207, 2215, 2221, 2230, 2238,  
 2244, 2250, 2251, 2256, 2257, 2263,  
 2264, 2270, 2276, 2284, 2290, 2297,  
 2302, 2303, 2309, 2317, 2323, 2331,  
 2340, 2348, 2353, 2354, 2359, 2360,  
 2366, 2372, 2379, 2385, 2391, 2397,  
 2405, 2412, 2420, 2428, 2436, 2444,  
 2453, 2461, 2467, 2472, 2473, 2482,  
 2490, 2495, 2504, 2509, 2510, 2518,  
 2526, 2535, 2543, 2551, 2559, 2566,  
 2574, 2582, 2591, 2599, 2607, 2612,  
 2613, 2622, 2630, 2639, 2647, 2648,  
 2656, 2664, 2670, 2671, 2679, 2687
- op\_conj, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1025,  
 1028, 1034, 1037, 1042, 1045, 1050,  
 1053, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1105, 1111, 1114, 1119, 1123, 1129,  
 1132, 1138, 1145, 1151, 1157, 1160,  
 1165, 1169, 1175, 1181, 1186, 1189,  
 1195, 1200, 1203, 1208, 1211, 1218,  
 1222, 1233, 1238, 1244, 1251, 1256,  
 1259, 1264, 1267, 1273, 1276, 1281,  
 1284, 1289, 1292, 1298, 1301, 1307,  
 1310, 1316, 1321, 1324, 1329, 1332,

1339, 1345, 1351, 1357, 1360, 1366,  
 1369, 1375, 1378, 1383, 1386, 1392,  
 1395, 1400, 1403, 1409, 1412, 1418,  
 1423, 1429, 1435, 1438, 1445, 1450,  
 1453, 1458, 1461, 1467, 1473, 1478,  
 1481, 1486, 1489, 1494, 1497, 1503,  
 1508, 1512, 1517, 1523, 1529, 1532,  
 1537, 1540, 1545, 1548, 1554, 1560,  
 1563, 1568, 1571, 1578, 1583, 1586,  
 1592, 1595, 1600, 1603, 1610, 1616,  
 1621, 1624, 1629, 1632, 1638, 1641,  
 1648, 1654, 1661, 1667, 1673, 1680,  
 1687, 1693, 1700, 1705, 1711, 1717,  
 1723, 1726, 1731, 1734, 1739, 1742,  
 1747, 1750, 1756, 1762, 1769, 1775,  
 1778, 1783, 1786, 1792, 1795, 1800,  
 1803, 1808, 1811, 1817, 1820, 1825,  
 1828, 1833, 1836, 1841, 1844, 1850,  
 1853, 1858, 1861, 1866, 1869, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1910, 1917, 1922, 1925, 1931, 1934,  
 1939, 1942, 1948, 1954, 1957, 1962,  
 1965, 1971, 1974, 1980, 1983, 1988,  
 1991, 1996, 1999, 2006, 2011, 2014,  
 2019, 2022, 2029, 2034, 2037, 2042,  
 2045, 2051, 2054, 2059, 2062, 2069,  
 2075, 2080, 2083, 2089, 2092, 2097,  
 2100, 2106, 2111, 2115, 2120, 2123,  
 2129, 2132, 2137, 2140, 2146, 2152,  
 2158, 2161, 2166, 2169, 2174, 2177,  
 2182, 2185, 2192, 2199, 2204, 2207,  
 2212, 2215, 2221, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2281, 2284, 2290, 2297, 2303,  
 2309, 2314, 2317, 2323, 2328, 2331,  
 2337, 2340, 2345, 2348, 2354, 2360,  
 2366, 2372, 2379, 2385, 2391, 2397,  
 2402, 2405, 2412, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2445, 2450,  
 2453, 2458, 2461, 2467, 2473, 2479,  
 2482, 2487, 2490, 2495, 2501, 2504,  
 2510, 2515, 2518, 2523, 2526, 2532,  
 2535, 2540, 2543, 2548, 2551, 2556,  
 2559, 2566, 2571, 2574, 2579, 2582,  
 2587, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2630, 2636,  
 2639, 2648, 2653, 2656, 2661, 2664,  
 2671, 2676, 2679, 2684, 2687

*op\_conv*, 975, 984, 993, 1002, 1011, 1020,  
 1029, 1037, 1045, 1053, 1062, 1071,  
 1079, 1088, 1097, 1105, 1114, 1123,  
 1132, 1137, 1138, 1144, 1145, 1150,  
 1151, 1160, 1169, 1175, 1180, 1181,  
 1189, 1195, 1203, 1211, 1218, 1226,  
 1230, 1238, 1244, 1250, 1251, 1259,  
 1267, 1276, 1284, 1292, 1301, 1310,  
 1314, 1316, 1324, 1332, 1339, 1344,  
 1345, 1351, 1360, 1369, 1378, 1386,  
 1395, 1403, 1412, 1418, 1423, 1429,  
 1438, 1443, 1445, 1453, 1461, 1467,  
 1473, 1481, 1489, 1497, 1503, 1512,  
 1517, 1523, 1532, 1540, 1548, 1554,  
 1563, 1571, 1577, 1578, 1586, 1595,  
 1603, 1609, 1610, 1615, 1616, 1624,  
 1632, 1641, 1648, 1654, 1661, 1667,  
 1673, 1680, 1687, 1693, 1700, 1705,  
 1711, 1717, 1726, 1734, 1742, 1750,  
 1756, 1762, 1768, 1769, 1778, 1786,  
 1795, 1803, 1812, 1820, 1828, 1836,  
 1844, 1853, 1861, 1869, 1878, 1884,  
 1888, 1890, 1895, 1896, 1905, 1910,  
 1917, 1925, 1934, 1942, 1947, 1948,  
 1957, 1965, 1974, 1983, 1991, 1999,  
 2004, 2006, 2014, 2022, 2027, 2029,  
 2037, 2045, 2054, 2062, 2069, 2074,  
 2075, 2083, 2092, 2100, 2105, 2106,  
 2115, 2123, 2132, 2140, 2145, 2146,  
 2152, 2161, 2169, 2177, 2185, 2191,  
 2192, 2197, 2199, 2207, 2215, 2221,  
 2230, 2238, 2244, 2251, 2257, 2264,  
 2270, 2276, 2284, 2289, 2290, 2296,  
 2297, 2303, 2308, 2309, 2317, 2322,  
 2323, 2332, 2340, 2348, 2354, 2360,  
 2366, 2371, 2372, 2377, 2379, 2384,  
 2385, 2391, 2397, 2405, 2410, 2412,  
 2420, 2428, 2436, 2445, 2453, 2461,  
 2467, 2473, 2482, 2490, 2496, 2504,  
 2510, 2518, 2526, 2535, 2543, 2551,  
 2559, 2566, 2574, 2582, 2591, 2599,  
 2607, 2614, 2622, 2630, 2639, 2648,  
 2656, 2664, 2671, 2679, 2687

*op\_conv\_transpose*, 975, 984, 993, 1002,  
 1011, 1020, 1029, 1037, 1045, 1054,  
 1062, 1071, 1079, 1088, 1097, 1105,  
 1114, 1123, 1132, 1137, 1138, 1144,  
 1145, 1150, 1151, 1160, 1169, 1175,

- 1180, 1181, 1189, 1195, 1203, 1211, 1218, 1226, 1231, 1233, 1238, 1244, 1249, 1259, 1267, 1276, 1284, 1292, 1301, 1310, 1315, 1316, 1324, 1332, 1339, 1344, 1345, 1351, 1360, 1369, 1378, 1386, 1395, 1403, 1412, 1418, 1423, 1429, 1438, 1443, 1445, 1453, 1461, 1467, 1473, 1481, 1489, 1497, 1503, 1512, 1517, 1524, 1532, 1540, 1548, 1554, 1563, 1571, 1577, 1578, 1586, 1595, 1603, 1609, 1610, 1615, 1616, 1624, 1632, 1641, 1648, 1654, 1661, 1667, 1673, 1680, 1687, 1693, 1700, 1705, 1711, 1717, 1726, 1734, 1742, 1750, 1757, 1762, 1768, 1769, 1778, 1786, 1795, 1803, 1812, 1820, 1828, 1836, 1844, 1853, 1861, 1869, 1878, 1884, 1888, 1890, 1895, 1896, 1905, 1910, 1917, 1925, 1934, 1942, 1947, 1948, 1957, 1965, 1974, 1983, 1991, 1999, 2004, 2006, 2014, 2022, 2027, 2029, 2037, 2045, 2054, 2062, 2069, 2074, 2075, 2083, 2092, 2100, 2105, 2106, 2115, 2123, 2132, 2140, 2145, 2146, 2152, 2161, 2169, 2177, 2185, 2191, 2192, 2197, 2199, 2207, 2215, 2221, 2230, 2238, 2244, 2251, 2257, 2264, 2270, 2276, 2284, 2289, 2290, 2296, 2297, 2303, 2308, 2309, 2317, 2322, 2323, 2332, 2340, 2348, 2354, 2360, 2366, 2371, 2372, 2377, 2379, 2384, 2385, 2391, 2397, 2405, 2410, 2412, 2420, 2428, 2436, 2445, 2453, 2461, 2467, 2473, 2482, 2490, 2496, 2504, 2510, 2518, 2527, 2535, 2543, 2551, 2559, 2566, 2574, 2582, 2591, 2599, 2607, 2614, 2622, 2630, 2639, 2648, 2656, 2664, 2671, 2679, 2687
- op\_convert\_to\_numpy, 975, 984, 993, 1002, 1011, 1020, 1029, 1037, 1045, 1054, 1062, 1071, 1079, 1088, 1097, 1105, 1114, 1123, 1132, 1138, 1145, 1151, 1160, 1169, 1174, 1175, 1181, 1189, 1195, 1203, 1211, 1217, 1218, 1226, 1233, 1237, 1238, 1242, 1251, 1259, 1267, 1276, 1284, 1292, 1301, 1310, 1316, 1324, 1332, 1338, 1339, 1345, 1351, 1360, 1369, 1378, 1386, 1395, 1403, 1412, 1417, 1418, 1423, 1429, 1439, 1445, 1453, 1461, 1467, 1473, 1481, 1489, 1497, 1503, 1512, 1518, 1524, 1532, 1540, 1548, 1553, 1555, 1563, 1571, 1578, 1586, 1595, 1603, 1610, 1616, 1624, 1632, 1641, 1648, 1654, 1661, 1667, 1673, 1680, 1687, 1693, 1700, 1705, 1711, 1717, 1726, 1734, 1742, 1750, 1757, 1761, 1762, 1769, 1778, 1786, 1795, 1803, 1812, 1820, 1828, 1836, 1844, 1853, 1861, 1869, 1878, 1884, 1888, 1890, 1896, 1905, 1910, 1916, 1917, 1925, 1934, 1942, 1948, 1957, 1965, 1974, 1983, 1991, 1999, 2006, 2014, 2022, 2029, 2037, 2045, 2054, 2062, 2069, 2075, 2083, 2092, 2100, 2106, 2115, 2123, 2132, 2140, 2146, 2152, 2161, 2169, 2177, 2185, 2192, 2199, 2207, 2215, 2221, 2230, 2238, 2244, 2250, 2251, 2256, 2257, 2263, 2264, 2270, 2276, 2284, 2290, 2297, 2302, 2303, 2309, 2317, 2323, 2332, 2340, 2348, 2353, 2354, 2359, 2360, 2366, 2372, 2379, 2385, 2391, 2397, 2405, 2412, 2420, 2428, 2436, 2445, 2453, 2461, 2467, 2472, 2473, 2482, 2490, 2496, 2504, 2509, 2510, 2518, 2527, 2535, 2543, 2551, 2559, 2566, 2574, 2582, 2591, 2599, 2607, 2612, 2614, 2622, 2630, 2639, 2647, 2648, 2656, 2664, 2670, 2671, 2679, 2687
- op\_convert\_to\_tensor, 975, 984, 993, 1002, 1011, 1020, 1029, 1037, 1045, 1054, 1062, 1071, 1079, 1088, 1097, 1105, 1114, 1123, 1132, 1138, 1145, 1151, 1160, 1169, 1174, 1175, 1181, 1189, 1195, 1203, 1211, 1217, 1218, 1226, 1233, 1237, 1238, 1242, 1251, 1259, 1267, 1276, 1284, 1292, 1301, 1310, 1316, 1324, 1332, 1338, 1339, 1345, 1351, 1360, 1369, 1378, 1386, 1395, 1403, 1412, 1417, 1418, 1423, 1429, 1439, 1445, 1453, 1461, 1467, 1473, 1481, 1489, 1497, 1503, 1512, 1518, 1524, 1532, 1540, 1548, 1553, 1555, 1563, 1571, 1578, 1586, 1595, 1603,



1610, 1616, 1624, 1633, 1641, 1648,  
 1654, 1661, 1667, 1674, 1680, 1687,  
 1693, 1700, 1705, 1711, 1717, 1726,  
 1734, 1742, 1750, 1757, 1761, 1762,  
 1770, 1778, 1787, 1795, 1803, 1812,  
 1820, 1828, 1836, 1845, 1853, 1861,  
 1869, 1878, 1884, 1890, 1896, 1905,  
 1910, 1916, 1917, 1925, 1934, 1942,  
 1949, 1957, 1965, 1974, 1983, 1991,  
 1999, 2006, 2014, 2022, 2029, 2037,  
 2045, 2054, 2062, 2069, 2075, 2084,  
 2092, 2100, 2106, 2115, 2123, 2132,  
 2140, 2146, 2152, 2161, 2169, 2177,  
 2185, 2192, 2199, 2207, 2215, 2221,  
 2230, 2238, 2244, 2250, 2251, 2256,  
 2257, 2263, 2264, 2270, 2276, 2284,  
 2290, 2297, 2302, 2303, 2309, 2317,  
 2323, 2332, 2340, 2348, 2353, 2354,  
 2359, 2360, 2366, 2372, 2379, 2386,  
 2391, 2397, 2405, 2412, 2420, 2428,  
 2436, 2445, 2453, 2461, 2468, 2472,  
 2473, 2482, 2490, 2496, 2504, 2509,  
 2510, 2518, 2527, 2535, 2543, 2551,  
 2560, 2566, 2574, 2582, 2591, 2599,  
 2607, 2612, 2614, 2622, 2630, 2639,  
 2647, 2648, 2656, 2664, 2670, 2671,  
 2679, 2687

op\_copy, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1025,  
 1029, 1034, 1037, 1042, 1045, 1050,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1105, 1111, 1114, 1120, 1123, 1129,  
 1132, 1139, 1145, 1151, 1157, 1160,  
 1165, 1169, 1175, 1181, 1186, 1189,  
 1195, 1200, 1203, 1208, 1211, 1218,  
 1223, 1226, 1233, 1238, 1244, 1251,  
 1255, 1264, 1268, 1273, 1276, 1281,  
 1284, 1289, 1292, 1298, 1301, 1307,  
 1310, 1316, 1321, 1324, 1329, 1332,  
 1339, 1345, 1351, 1357, 1360, 1366,  
 1369, 1375, 1378, 1383, 1386, 1392,  
 1395, 1400, 1403, 1409, 1412, 1418,  
 1423, 1429, 1435, 1439, 1445, 1450,  
 1453, 1458, 1461, 1467, 1473, 1478,  
 1481, 1486, 1489, 1494, 1497, 1503,  
 1508, 1512, 1518, 1524, 1529, 1532,  
 1537, 1540, 1545, 1549, 1555, 1560,

1563, 1568, 1571, 1578, 1583, 1586,  
 1592, 1595, 1600, 1603, 1610, 1616,  
 1621, 1624, 1629, 1633, 1638, 1641,  
 1648, 1654, 1661, 1667, 1674, 1680,  
 1687, 1693, 1700, 1705, 1711, 1717,  
 1723, 1726, 1731, 1734, 1739, 1742,  
 1747, 1750, 1757, 1762, 1770, 1775,  
 1778, 1783, 1787, 1792, 1795, 1800,  
 1803, 1808, 1812, 1817, 1820, 1825,  
 1828, 1833, 1836, 1841, 1845, 1850,  
 1853, 1858, 1861, 1866, 1869, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1910, 1917, 1922, 1925, 1931, 1934,  
 1939, 1942, 1949, 1954, 1957, 1962,  
 1965, 1971, 1974, 1980, 1983, 1988,  
 1991, 1996, 1999, 2006, 2011, 2014,  
 2019, 2022, 2029, 2034, 2037, 2042,  
 2046, 2051, 2054, 2059, 2062, 2069,  
 2075, 2080, 2084, 2089, 2092, 2097,  
 2100, 2106, 2111, 2115, 2120, 2123,  
 2129, 2132, 2137, 2140, 2146, 2152,  
 2158, 2161, 2166, 2169, 2174, 2177,  
 2182, 2185, 2192, 2199, 2204, 2207,  
 2212, 2215, 2221, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2281, 2284, 2290, 2297, 2303,  
 2309, 2314, 2317, 2323, 2328, 2332,  
 2337, 2340, 2345, 2348, 2354, 2360,  
 2366, 2372, 2379, 2386, 2391, 2397,  
 2402, 2405, 2412, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2445, 2450,  
 2453, 2458, 2461, 2468, 2473, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2510, 2515, 2518, 2523, 2527, 2532,  
 2535, 2540, 2543, 2548, 2551, 2556,  
 2560, 2566, 2571, 2574, 2579, 2582,  
 2587, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2630, 2636,  
 2639, 2648, 2653, 2656, 2661, 2665,  
 2671, 2676, 2679, 2684, 2687

op\_correlate, 972, 975, 981, 984, 990, 993,  
 999, 1002, 1008, 1011, 1017, 1020,  
 1025, 1029, 1034, 1037, 1042, 1045,  
 1050, 1054, 1059, 1062, 1068, 1071,  
 1076, 1079, 1085, 1088, 1094, 1097,  
 1102, 1105, 1111, 1114, 1120, 1123,  
 1129, 1132, 1139, 1145, 1151, 1157,  
 1160, 1166, 1169, 1175, 1181, 1186,



1189, 1195, 1200, 1203, 1208, 1211,  
1218, 1223, 1226, 1233, 1238, 1245,  
1251, 1256, 1259, 1263, 1273, 1276,  
1281, 1284, 1289, 1293, 1298, 1301,  
1307, 1310, 1316, 1321, 1324, 1329,  
1332, 1339, 1345, 1351, 1357, 1360,  
1366, 1369, 1375, 1378, 1383, 1387,  
1392, 1395, 1400, 1403, 1409, 1412,  
1418, 1423, 1429, 1435, 1439, 1445,  
1450, 1453, 1458, 1461, 1467, 1473,  
1478, 1481, 1486, 1489, 1494, 1497,  
1503, 1508, 1512, 1518, 1524, 1529,  
1532, 1537, 1540, 1545, 1549, 1555,  
1560, 1563, 1568, 1571, 1578, 1583,  
1586, 1592, 1595, 1600, 1603, 1610,  
1616, 1621, 1624, 1629, 1633, 1638,  
1641, 1648, 1654, 1661, 1667, 1674,  
1680, 1687, 1693, 1700, 1705, 1711,  
1717, 1723, 1726, 1731, 1734, 1739,  
1742, 1747, 1750, 1757, 1762, 1770,  
1775, 1778, 1783, 1787, 1792, 1795,  
1800, 1803, 1808, 1812, 1817, 1820,  
1825, 1828, 1833, 1836, 1841, 1845,  
1850, 1853, 1858, 1861, 1866, 1869,  
1875, 1878, 1884, 1890, 1896, 1902,  
1905, 1910, 1917, 1922, 1925, 1931,  
1934, 1939, 1942, 1949, 1954, 1957,  
1962, 1965, 1971, 1974, 1980, 1983,  
1988, 1991, 1996, 1999, 2006, 2011,  
2014, 2019, 2022, 2029, 2034, 2037,  
2042, 2046, 2051, 2054, 2059, 2062,  
2069, 2075, 2080, 2084, 2089, 2092,  
2097, 2100, 2106, 2112, 2115, 2120,  
2123, 2129, 2132, 2137, 2140, 2146,  
2152, 2158, 2161, 2166, 2169, 2174,  
2177, 2182, 2185, 2192, 2199, 2204,  
2207, 2212, 2215, 2222, 2227, 2230,  
2235, 2238, 2244, 2251, 2257, 2264,  
2270, 2276, 2281, 2284, 2291, 2297,  
2303, 2309, 2314, 2317, 2323, 2328,  
2332, 2337, 2340, 2345, 2348, 2354,  
2360, 2366, 2372, 2379, 2386, 2391,  
2397, 2402, 2405, 2412, 2417, 2420,  
2425, 2428, 2433, 2436, 2441, 2445,  
2450, 2453, 2458, 2461, 2468, 2473,  
2479, 2482, 2487, 2490, 2496, 2501,  
2504, 2510, 2515, 2518, 2523, 2527,  
2532, 2535, 2540, 2543, 2548, 2551,  
2556, 2560, 2566, 2571, 2574, 2579,  
2582, 2587, 2591, 2596, 2599, 2604,  
2607, 2614, 2619, 2622, 2627, 2630,  
2636, 2639, 2648, 2653, 2656, 2661,  
2665, 2671, 2676, 2679, 2684, 2687

op\_cos, 972, 975, 981, 984, 990, 993, 999,  
1002, 1008, 1011, 1017, 1020, 1025,  
1029, 1034, 1037, 1042, 1045, 1050,  
1054, 1059, 1062, 1068, 1071, 1076,  
1079, 1085, 1088, 1094, 1097, 1102,  
1105, 1111, 1114, 1120, 1123, 1129,  
1132, 1139, 1145, 1151, 1157, 1160,  
1166, 1169, 1175, 1181, 1186, 1189,  
1195, 1200, 1203, 1208, 1211, 1218,  
1223, 1226, 1233, 1238, 1245, 1251,  
1256, 1259, 1264, 1268, 1272, 1281,  
1284, 1289, 1293, 1298, 1301, 1307,  
1310, 1316, 1321, 1324, 1329, 1332,  
1339, 1345, 1351, 1357, 1360, 1366,  
1369, 1375, 1378, 1383, 1387, 1392,  
1395, 1400, 1403, 1409, 1412, 1418,  
1423, 1429, 1435, 1439, 1445, 1450,  
1453, 1458, 1461, 1467, 1473, 1478,  
1481, 1486, 1489, 1494, 1497, 1503,  
1508, 1512, 1518, 1524, 1529, 1532,  
1537, 1540, 1545, 1549, 1555, 1560,  
1563, 1568, 1571, 1578, 1583, 1586,  
1592, 1595, 1600, 1603, 1610, 1616,  
1621, 1624, 1629, 1633, 1638, 1641,  
1648, 1654, 1661, 1667, 1674, 1680,  
1687, 1693, 1700, 1705, 1711, 1718,  
1723, 1726, 1731, 1734, 1739, 1742,  
1747, 1750, 1757, 1762, 1770, 1775,  
1778, 1783, 1787, 1792, 1795, 1800,  
1803, 1808, 1812, 1817, 1820, 1825,  
1828, 1833, 1836, 1841, 1845, 1850,  
1853, 1858, 1861, 1866, 1869, 1875,  
1878, 1884, 1890, 1896, 1902, 1905,  
1910, 1917, 1922, 1925, 1931, 1934,  
1939, 1942, 1949, 1954, 1957, 1962,  
1965, 1971, 1974, 1980, 1983, 1988,  
1991, 1996, 1999, 2006, 2011, 2014,  
2019, 2022, 2029, 2034, 2037, 2042,  
2046, 2051, 2054, 2059, 2062, 2069,  
2075, 2080, 2084, 2089, 2092, 2097,  
2100, 2107, 2112, 2115, 2120, 2123,  
2129, 2132, 2137, 2140, 2146, 2152,  
2158, 2161, 2166, 2169, 2174, 2177,

- 2182, 2185, 2192, 2199, 2204, 2207,  
 2212, 2215, 2222, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2281, 2284, 2291, 2297, 2303,  
 2309, 2314, 2317, 2323, 2328, 2332,  
 2337, 2340, 2345, 2348, 2354, 2360,  
 2366, 2372, 2379, 2386, 2391, 2397,  
 2402, 2405, 2412, 2417, 2420, 2425,  
 2428, 2433, 2436, 2441, 2445, 2450,  
 2453, 2458, 2461, 2468, 2473, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2510, 2515, 2518, 2523, 2527, 2532,  
 2535, 2540, 2543, 2548, 2551, 2556,  
 2560, 2566, 2571, 2574, 2579, 2582,  
 2588, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2630, 2636,  
 2639, 2648, 2653, 2656, 2661, 2665,  
 2671, 2676, 2679, 2684, 2687
- op\_cosh*, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1025,  
 1029, 1034, 1037, 1042, 1045, 1050,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1105, 1111, 1114, 1120, 1123, 1129,  
 1132, 1139, 1145, 1152, 1157, 1160,  
 1166, 1169, 1175, 1181, 1186, 1189,  
 1195, 1200, 1203, 1208, 1211, 1218,  
 1223, 1226, 1233, 1238, 1245, 1251,  
 1256, 1259, 1264, 1268, 1273, 1276,  
 1280, 1289, 1293, 1298, 1301, 1307,  
 1310, 1316, 1321, 1324, 1329, 1332,  
 1339, 1345, 1351, 1357, 1360, 1366,  
 1369, 1375, 1378, 1383, 1387, 1392,  
 1395, 1400, 1403, 1409, 1412, 1418,  
 1423, 1429, 1435, 1439, 1445, 1450,  
 1453, 1458, 1461, 1467, 1473, 1478,  
 1481, 1486, 1489, 1494, 1497, 1503,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1540, 1545, 1549, 1555, 1560,  
 1563, 1568, 1571, 1578, 1583, 1586,  
 1592, 1595, 1600, 1603, 1610, 1616,  
 1621, 1624, 1629, 1633, 1638, 1641,  
 1648, 1654, 1661, 1667, 1674, 1680,  
 1687, 1693, 1700, 1705, 1711, 1718,  
 1723, 1726, 1731, 1734, 1739, 1742,  
 1747, 1750, 1757, 1762, 1770, 1775,  
 1778, 1783, 1787, 1792, 1795, 1800,  
 1803, 1808, 1812, 1817, 1820, 1825,  
 1828, 1833, 1836, 1841, 1845, 1850,  
 1853, 1858, 1861, 1866, 1869, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1910, 1917, 1922, 1925, 1931, 1934,  
 1939, 1942, 1949, 1954, 1957, 1962,  
 1965, 1971, 1974, 1980, 1983, 1988,  
 1991, 1996, 2000, 2006, 2011, 2014,  
 2019, 2023, 2029, 2034, 2037, 2042,  
 2046, 2051, 2054, 2059, 2062, 2069,  
 2075, 2080, 2084, 2089, 2092, 2097,  
 2100, 2107, 2112, 2115, 2120, 2123,  
 2129, 2132, 2137, 2140, 2146, 2152,  
 2158, 2161, 2166, 2169, 2174, 2177,  
 2182, 2185, 2192, 2199, 2204, 2207,  
 2212, 2215, 2222, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2281, 2285, 2291, 2297, 2303,  
 2309, 2314, 2317, 2323, 2328, 2332,  
 2337, 2340, 2345, 2348, 2354, 2360,  
 2366, 2372, 2379, 2386, 2391, 2397,  
 2402, 2405, 2412, 2417, 2420, 2425,  
 2428, 2433, 2436, 2442, 2445, 2450,  
 2453, 2458, 2461, 2468, 2473, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2510, 2515, 2518, 2523, 2527, 2532,  
 2535, 2540, 2543, 2548, 2551, 2556,  
 2560, 2566, 2571, 2574, 2579, 2582,  
 2588, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2630, 2636,  
 2639, 2648, 2653, 2656, 2661, 2665,  
 2671, 2676, 2679, 2684, 2688
- op\_count\_nonzero*, 972, 975, 981, 984, 990,  
 993, 999, 1002, 1008, 1011, 1017,  
 1020, 1026, 1029, 1034, 1037, 1042,  
 1045, 1050, 1054, 1059, 1062, 1068,  
 1071, 1076, 1079, 1085, 1088, 1094,  
 1097, 1102, 1105, 1111, 1114, 1120,  
 1123, 1129, 1132, 1139, 1145, 1152,  
 1157, 1160, 1166, 1169, 1175, 1181,  
 1186, 1189, 1195, 1200, 1203, 1208,  
 1211, 1218, 1223, 1226, 1233, 1238,  
 1245, 1251, 1256, 1259, 1264, 1268,  
 1273, 1276, 1281, 1284, 1288, 1298,  
 1301, 1307, 1310, 1316, 1321, 1324,  
 1329, 1332, 1339, 1345, 1351, 1357,  
 1360, 1366, 1369, 1375, 1378, 1383,  
 1387, 1392, 1395, 1400, 1404, 1409,  
 1412, 1418, 1423, 1429, 1435, 1439,

- 1445, 1450, 1453, 1458, 1461, 1467,  
 1473, 1478, 1481, 1486, 1489, 1494,  
 1498, 1503, 1509, 1512, 1518, 1524,  
 1529, 1532, 1537, 1540, 1545, 1549,  
 1555, 1560, 1563, 1568, 1571, 1578,  
 1583, 1586, 1592, 1595, 1600, 1603,  
 1610, 1616, 1621, 1624, 1629, 1633,  
 1638, 1641, 1648, 1654, 1661, 1667,  
 1674, 1680, 1687, 1693, 1700, 1705,  
 1711, 1718, 1723, 1726, 1731, 1734,  
 1739, 1742, 1747, 1750, 1757, 1762,  
 1770, 1775, 1778, 1783, 1787, 1792,  
 1795, 1800, 1804, 1809, 1812, 1817,  
 1820, 1825, 1828, 1833, 1836, 1841,  
 1845, 1850, 1853, 1858, 1861, 1866,  
 1869, 1875, 1878, 1884, 1890, 1896,  
 1902, 1905, 1910, 1917, 1922, 1925,  
 1931, 1934, 1939, 1942, 1949, 1954,  
 1957, 1962, 1965, 1971, 1974, 1980,  
 1983, 1988, 1991, 1996, 2000, 2006,  
 2011, 2014, 2019, 2023, 2029, 2034,  
 2037, 2042, 2046, 2051, 2054, 2059,  
 2062, 2069, 2075, 2080, 2084, 2089,  
 2092, 2097, 2100, 2107, 2112, 2115,  
 2120, 2123, 2129, 2132, 2137, 2140,  
 2146, 2152, 2158, 2161, 2166, 2169,  
 2174, 2177, 2182, 2186, 2192, 2199,  
 2204, 2207, 2212, 2215, 2222, 2227,  
 2230, 2235, 2238, 2244, 2251, 2257,  
 2264, 2270, 2276, 2281, 2285, 2291,  
 2297, 2303, 2309, 2314, 2317, 2324,  
 2329, 2332, 2337, 2340, 2345, 2348,  
 2354, 2360, 2366, 2372, 2379, 2386,  
 2391, 2397, 2402, 2405, 2412, 2417,  
 2420, 2425, 2428, 2433, 2437, 2442,  
 2445, 2450, 2453, 2458, 2461, 2468,  
 2473, 2479, 2482, 2487, 2490, 2496,  
 2501, 2504, 2510, 2515, 2518, 2523,  
 2527, 2532, 2535, 2540, 2543, 2548,  
 2551, 2556, 2560, 2566, 2571, 2574,  
 2579, 2582, 2588, 2591, 2596, 2599,  
 2604, 2607, 2614, 2619, 2622, 2627,  
 2630, 2636, 2639, 2648, 2653, 2656,  
 2661, 2665, 2671, 2676, 2679, 2684,  
 2688
- op\_cross, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1026,  
 1029, 1034, 1037, 1042, 1045, 1051,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1105, 1111, 1114, 1120, 1123, 1129,  
 1132, 1139, 1145, 1152, 1157, 1160,  
 1166, 1169, 1175, 1181, 1186, 1190,  
 1195, 1200, 1203, 1208, 1211, 1218,  
 1223, 1226, 1233, 1238, 1245, 1251,  
 1256, 1259, 1264, 1268, 1273, 1276,  
 1281, 1284, 1289, 1293, 1297, 1307,  
 1310, 1316, 1321, 1324, 1329, 1332,  
 1339, 1345, 1351, 1357, 1360, 1366,  
 1369, 1375, 1378, 1383, 1387, 1392,  
 1395, 1400, 1404, 1409, 1412, 1418,  
 1423, 1429, 1435, 1439, 1445, 1450,  
 1453, 1458, 1461, 1467, 1473, 1478,  
 1481, 1486, 1489, 1494, 1498, 1503,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1540, 1545, 1549, 1555, 1560,  
 1563, 1568, 1571, 1578, 1583, 1586,  
 1592, 1595, 1600, 1603, 1610, 1616,  
 1621, 1624, 1629, 1633, 1638, 1641,  
 1648, 1654, 1661, 1667, 1674, 1680,  
 1687, 1693, 1700, 1705, 1711, 1718,  
 1723, 1726, 1731, 1734, 1739, 1742,  
 1747, 1750, 1757, 1762, 1770, 1775,  
 1778, 1783, 1787, 1792, 1795, 1800,  
 1804, 1809, 1812, 1817, 1820, 1825,  
 1828, 1833, 1836, 1841, 1845, 1850,  
 1853, 1858, 1861, 1866, 1869, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1910, 1917, 1922, 1925, 1931, 1934,  
 1939, 1942, 1949, 1954, 1957, 1962,  
 1965, 1971, 1974, 1980, 1983, 1988,  
 1991, 1996, 2000, 2006, 2011, 2014,  
 2019, 2023, 2029, 2034, 2037, 2042,  
 2046, 2051, 2054, 2059, 2062, 2069,  
 2075, 2080, 2084, 2089, 2092, 2097,  
 2100, 2107, 2112, 2115, 2120, 2123,  
 2129, 2132, 2137, 2140, 2146, 2152,  
 2158, 2161, 2166, 2169, 2174, 2177,  
 2182, 2186, 2192, 2199, 2204, 2207,  
 2212, 2215, 2222, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2281, 2285, 2291, 2297, 2303,  
 2309, 2314, 2317, 2324, 2329, 2332,  
 2337, 2340, 2345, 2348, 2354, 2360,  
 2366, 2372, 2379, 2386, 2392, 2397,  
 2402, 2405, 2412, 2417, 2420, 2425,

- 2428, 2433, 2437, 2442, 2445, 2450,  
 2453, 2458, 2461, 2468, 2473, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2510, 2515, 2518, 2524, 2527, 2532,  
 2535, 2540, 2543, 2548, 2551, 2556,  
 2560, 2566, 2571, 2574, 2579, 2582,  
 2588, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2630, 2636,  
 2639, 2648, 2653, 2656, 2661, 2665,  
 2671, 2676, 2679, 2684, 2688
- op\_ctc\_decode*, 972, 975, 981, 984, 990, 993,  
 999, 1002, 1008, 1011, 1017, 1020,  
 1026, 1029, 1034, 1037, 1042, 1045,  
 1051, 1054, 1059, 1062, 1068, 1071,  
 1076, 1079, 1085, 1088, 1094, 1097,  
 1102, 1105, 1111, 1114, 1120, 1123,  
 1129, 1132, 1139, 1145, 1152, 1157,  
 1160, 1166, 1169, 1175, 1181, 1186,  
 1190, 1195, 1200, 1203, 1208, 1211,  
 1218, 1223, 1226, 1233, 1239, 1245,  
 1251, 1256, 1259, 1264, 1268, 1273,  
 1276, 1281, 1284, 1289, 1293, 1298,  
 1301, 1305, 1316, 1321, 1324, 1329,  
 1332, 1339, 1345, 1351, 1357, 1360,  
 1366, 1369, 1375, 1378, 1383, 1387,  
 1392, 1395, 1400, 1404, 1409, 1412,  
 1418, 1423, 1429, 1436, 1439, 1445,  
 1450, 1453, 1458, 1461, 1467, 1473,  
 1478, 1481, 1486, 1489, 1494, 1498,  
 1504, 1509, 1512, 1518, 1524, 1529,  
 1532, 1537, 1540, 1545, 1549, 1555,  
 1560, 1563, 1568, 1571, 1578, 1583,  
 1586, 1592, 1595, 1600, 1603, 1610,  
 1616, 1621, 1624, 1629, 1633, 1638,  
 1641, 1648, 1654, 1661, 1667, 1674,  
 1680, 1687, 1694, 1700, 1705, 1711,  
 1718, 1723, 1726, 1731, 1734, 1739,  
 1742, 1747, 1750, 1757, 1762, 1770,  
 1775, 1778, 1783, 1787, 1792, 1795,  
 1800, 1804, 1809, 1812, 1817, 1820,  
 1825, 1828, 1833, 1836, 1841, 1845,  
 1850, 1853, 1858, 1861, 1866, 1869,  
 1875, 1878, 1884, 1890, 1896, 1902,  
 1905, 1910, 1917, 1922, 1925, 1931,  
 1934, 1939, 1942, 1949, 1954, 1957,  
 1962, 1965, 1971, 1974, 1980, 1983,  
 1988, 1991, 1996, 2000, 2006, 2011,  
 2014, 2019, 2023, 2029, 2034, 2038,
- 2042, 2046, 2051, 2054, 2059, 2062,  
 2069, 2075, 2080, 2084, 2089, 2092,  
 2097, 2100, 2107, 2112, 2115, 2120,  
 2123, 2129, 2132, 2137, 2140, 2146,  
 2153, 2158, 2161, 2166, 2169, 2174,  
 2177, 2182, 2186, 2192, 2199, 2204,  
 2207, 2212, 2215, 2222, 2227, 2230,  
 2235, 2238, 2244, 2251, 2257, 2264,  
 2270, 2276, 2281, 2285, 2291, 2297,  
 2303, 2309, 2314, 2317, 2324, 2329,  
 2332, 2337, 2340, 2345, 2348, 2354,  
 2360, 2366, 2372, 2379, 2386, 2392,  
 2397, 2402, 2405, 2412, 2417, 2420,  
 2425, 2428, 2433, 2437, 2442, 2445,  
 2450, 2453, 2458, 2461, 2468, 2473,  
 2479, 2482, 2487, 2490, 2496, 2501,  
 2504, 2510, 2515, 2518, 2524, 2527,  
 2532, 2535, 2540, 2543, 2548, 2551,  
 2556, 2560, 2566, 2571, 2574, 2579,  
 2582, 2588, 2591, 2596, 2599, 2604,  
 2607, 2614, 2619, 2622, 2627, 2630,  
 2636, 2639, 2648, 2653, 2656, 2661,  
 2665, 2671, 2676, 2679, 2684, 2688
- op\_ctc\_loss*, 975, 984, 993, 1002, 1011,  
 1020, 1029, 1037, 1045, 1054, 1062,  
 1071, 1079, 1088, 1097, 1105, 1114,  
 1123, 1132, 1137, 1139, 1144, 1145,  
 1150, 1152, 1160, 1169, 1175, 1180,  
 1181, 1190, 1195, 1203, 1211, 1218,  
 1226, 1231, 1233, 1239, 1245, 1250,  
 1251, 1259, 1268, 1276, 1284, 1293,  
 1301, 1310, 1314, 1324, 1332, 1339,  
 1344, 1345, 1351, 1360, 1369, 1378,  
 1387, 1395, 1404, 1412, 1418, 1423,  
 1429, 1439, 1443, 1445, 1453, 1461,  
 1467, 1473, 1481, 1489, 1498, 1504,  
 1512, 1518, 1524, 1532, 1540, 1549,  
 1555, 1563, 1571, 1577, 1578, 1586,  
 1595, 1603, 1609, 1610, 1615, 1616,  
 1624, 1633, 1641, 1648, 1655, 1661,  
 1667, 1674, 1680, 1687, 1694, 1700,  
 1705, 1711, 1718, 1726, 1734, 1742,  
 1750, 1757, 1762, 1768, 1770, 1778,  
 1787, 1795, 1804, 1812, 1820, 1828,  
 1836, 1845, 1853, 1861, 1869, 1878,  
 1884, 1889, 1890, 1895, 1896, 1905,  
 1910, 1917, 1925, 1934, 1942, 1947,  
 1949, 1957, 1965, 1974, 1983, 1991,

- 2000, 2004, 2006, 2014, 2023, 2027,  
 2029, 2038, 2046, 2054, 2062, 2069,  
 2074, 2075, 2084, 2092, 2100, 2105,  
 2107, 2115, 2123, 2132, 2140, 2145,  
 2146, 2153, 2161, 2169, 2177, 2186,  
 2191, 2192, 2197, 2199, 2207, 2215,  
 2222, 2230, 2238, 2244, 2251, 2257,  
 2264, 2270, 2276, 2285, 2289, 2291,  
 2296, 2297, 2303, 2308, 2309, 2317,  
 2322, 2324, 2332, 2340, 2348, 2354,  
 2360, 2366, 2371, 2372, 2377, 2379,  
 2384, 2386, 2392, 2397, 2405, 2410,  
 2412, 2420, 2428, 2437, 2445, 2453,  
 2461, 2468, 2473, 2482, 2490, 2496,  
 2504, 2510, 2518, 2527, 2535, 2543,  
 2551, 2560, 2566, 2574, 2582, 2591,  
 2599, 2607, 2614, 2622, 2630, 2639,  
 2648, 2656, 2665, 2671, 2679, 2688
- op\_cumprod*, 972, 975, 981, 984, 990, 993,  
 999, 1002, 1008, 1011, 1017, 1020,  
 1026, 1029, 1034, 1037, 1042, 1045,  
 1051, 1054, 1059, 1062, 1068, 1071,  
 1076, 1079, 1085, 1088, 1094, 1097,  
 1102, 1105, 1111, 1114, 1120, 1123,  
 1129, 1132, 1139, 1145, 1152, 1157,  
 1160, 1166, 1169, 1175, 1181, 1186,  
 1190, 1195, 1200, 1203, 1208, 1211,  
 1218, 1223, 1226, 1233, 1239, 1245,  
 1251, 1256, 1259, 1264, 1268, 1273,  
 1276, 1281, 1284, 1289, 1293, 1298,  
 1301, 1307, 1310, 1316, 1320, 1329,  
 1332, 1339, 1346, 1351, 1357, 1360,  
 1366, 1369, 1375, 1378, 1383, 1387,  
 1392, 1395, 1400, 1404, 1409, 1412,  
 1418, 1423, 1429, 1436, 1439, 1445,  
 1450, 1453, 1458, 1462, 1467, 1473,  
 1478, 1481, 1486, 1489, 1494, 1498,  
 1504, 1509, 1512, 1518, 1524, 1529,  
 1532, 1537, 1540, 1545, 1549, 1555,  
 1560, 1563, 1568, 1571, 1578, 1583,  
 1586, 1592, 1595, 1600, 1603, 1610,  
 1616, 1621, 1625, 1630, 1633, 1638,  
 1641, 1648, 1655, 1661, 1667, 1674,  
 1680, 1687, 1694, 1700, 1705, 1711,  
 1718, 1723, 1726, 1731, 1734, 1739,  
 1742, 1747, 1750, 1757, 1762, 1770,  
 1775, 1778, 1784, 1787, 1792, 1795,  
 1800, 1804, 1809, 1812, 1817, 1820,
- 1825, 1828, 1833, 1836, 1842, 1845,  
 1850, 1853, 1858, 1861, 1866, 1869,  
 1875, 1878, 1884, 1890, 1896, 1902,  
 1905, 1910, 1917, 1922, 1925, 1931,  
 1934, 1939, 1942, 1949, 1954, 1957,  
 1962, 1965, 1971, 1974, 1980, 1983,  
 1988, 1991, 1996, 2000, 2006, 2011,  
 2014, 2019, 2023, 2029, 2034, 2038,  
 2042, 2046, 2051, 2054, 2059, 2062,  
 2069, 2075, 2081, 2084, 2089, 2092,  
 2097, 2100, 2107, 2112, 2115, 2120,  
 2123, 2129, 2132, 2137, 2140, 2146,  
 2153, 2158, 2161, 2166, 2169, 2174,  
 2177, 2182, 2186, 2192, 2199, 2204,  
 2207, 2212, 2215, 2222, 2227, 2230,  
 2235, 2238, 2244, 2251, 2257, 2264,  
 2270, 2276, 2281, 2285, 2291, 2297,  
 2303, 2309, 2314, 2317, 2324, 2329,  
 2332, 2337, 2340, 2345, 2348, 2354,  
 2360, 2366, 2372, 2379, 2386, 2392,  
 2397, 2402, 2405, 2412, 2417, 2420,  
 2425, 2428, 2433, 2437, 2442, 2445,  
 2450, 2453, 2458, 2461, 2468, 2473,  
 2479, 2482, 2487, 2490, 2496, 2501,  
 2504, 2510, 2515, 2519, 2524, 2527,  
 2532, 2535, 2540, 2543, 2548, 2551,  
 2557, 2560, 2566, 2571, 2574, 2579,  
 2583, 2588, 2591, 2596, 2599, 2604,  
 2607, 2614, 2619, 2622, 2627, 2630,  
 2636, 2639, 2648, 2653, 2656, 2661,  
 2665, 2671, 2676, 2679, 2684, 2688
- op\_cumsum*, 972, 975, 981, 984, 990, 993, 999,  
 1002, 1008, 1011, 1017, 1020, 1026,  
 1029, 1034, 1037, 1042, 1045, 1051,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1105, 1111, 1114, 1120, 1123, 1129,  
 1132, 1139, 1145, 1152, 1157, 1160,  
 1166, 1169, 1175, 1181, 1186, 1190,  
 1195, 1200, 1203, 1208, 1212, 1218,  
 1223, 1226, 1233, 1239, 1245, 1251,  
 1256, 1259, 1264, 1268, 1273, 1276,  
 1281, 1284, 1289, 1293, 1298, 1301,  
 1307, 1310, 1316, 1321, 1324, 1328,  
 1339, 1346, 1351, 1357, 1360, 1366,  
 1369, 1375, 1378, 1383, 1387, 1392,  
 1395, 1400, 1404, 1409, 1412, 1418,  
 1423, 1429, 1436, 1439, 1445, 1450,

- 1453, 1458, 1462, 1467, 1473, 1478,  
 1481, 1486, 1489, 1494, 1498, 1504,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1540, 1546, 1549, 1555, 1560,  
 1563, 1568, 1571, 1578, 1583, 1586,  
 1592, 1595, 1600, 1603, 1610, 1616,  
 1621, 1625, 1630, 1633, 1638, 1641,  
 1648, 1655, 1661, 1667, 1674, 1680,  
 1687, 1694, 1700, 1706, 1711, 1718,  
 1723, 1726, 1731, 1734, 1739, 1742,  
 1747, 1750, 1757, 1763, 1770, 1775,  
 1778, 1784, 1787, 1792, 1795, 1800,  
 1804, 1809, 1812, 1817, 1820, 1825,  
 1828, 1833, 1836, 1842, 1845, 1850,  
 1853, 1858, 1861, 1866, 1869, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1910, 1917, 1922, 1925, 1931, 1934,  
 1939, 1942, 1949, 1954, 1957, 1962,  
 1965, 1971, 1974, 1980, 1983, 1988,  
 1991, 1996, 2000, 2006, 2011, 2014,  
 2019, 2023, 2029, 2034, 2038, 2043,  
 2046, 2051, 2054, 2059, 2062, 2069,  
 2075, 2081, 2084, 2089, 2092, 2097,  
 2100, 2107, 2112, 2115, 2120, 2123,  
 2129, 2132, 2137, 2140, 2146, 2153,  
 2158, 2161, 2166, 2169, 2174, 2177,  
 2182, 2186, 2192, 2199, 2204, 2207,  
 2212, 2215, 2222, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2281, 2285, 2291, 2297, 2303,  
 2309, 2314, 2317, 2324, 2329, 2332,  
 2337, 2340, 2345, 2348, 2354, 2360,  
 2366, 2372, 2379, 2386, 2392, 2397,  
 2402, 2405, 2412, 2417, 2420, 2425,  
 2428, 2433, 2437, 2442, 2445, 2450,  
 2453, 2458, 2461, 2468, 2474, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2510, 2515, 2519, 2524, 2527, 2532,  
 2535, 2540, 2543, 2548, 2551, 2557,  
 2560, 2566, 2571, 2574, 2579, 2583,  
 2588, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2630, 2636,  
 2639, 2648, 2653, 2656, 2662, 2665,  
 2671, 2676, 2679, 2684, 2688
- op\_custom\_gradient*, 975, 984, 993, 1002,  
 1011, 1020, 1029, 1037, 1045, 1054,  
 1062, 1071, 1079, 1088, 1097, 1105,  
 1114, 1123, 1132, 1139, 1145, 1152,
- 1160, 1169, 1174, 1175, 1181, 1190,  
 1195, 1203, 1212, 1217, 1218, 1226,  
 1233, 1237, 1239, 1243, 1245, 1251,  
 1259, 1268, 1276, 1284, 1293, 1301,  
 1310, 1316, 1324, 1332, 1336, 1346,  
 1351, 1360, 1369, 1378, 1387, 1395,  
 1404, 1412, 1417, 1418, 1423, 1429,  
 1439, 1445, 1453, 1462, 1467, 1473,  
 1481, 1489, 1498, 1504, 1512, 1518,  
 1524, 1532, 1540, 1549, 1553, 1555,  
 1563, 1571, 1578, 1586, 1595, 1603,  
 1610, 1616, 1625, 1633, 1641, 1648,  
 1655, 1661, 1667, 1674, 1680, 1687,  
 1694, 1700, 1706, 1711, 1718, 1726,  
 1734, 1742, 1750, 1757, 1761, 1763,  
 1770, 1778, 1787, 1795, 1804, 1812,  
 1820, 1828, 1836, 1845, 1853, 1861,  
 1869, 1878, 1884, 1890, 1896, 1905,  
 1910, 1916, 1917, 1925, 1934, 1942,  
 1949, 1957, 1965, 1974, 1983, 1991,  
 2000, 2006, 2014, 2023, 2029, 2038,  
 2046, 2054, 2062, 2069, 2075, 2084,  
 2092, 2100, 2107, 2115, 2123, 2132,  
 2140, 2146, 2153, 2161, 2169, 2177,  
 2186, 2192, 2199, 2207, 2215, 2222,  
 2230, 2238, 2244, 2250, 2251, 2256,  
 2257, 2263, 2264, 2270, 2276, 2285,  
 2291, 2297, 2302, 2303, 2309, 2317,  
 2324, 2332, 2340, 2348, 2353, 2354,  
 2359, 2360, 2366, 2372, 2379, 2386,  
 2392, 2397, 2405, 2412, 2420, 2428,  
 2437, 2445, 2453, 2461, 2468, 2472,  
 2474, 2482, 2490, 2496, 2504, 2509,  
 2510, 2519, 2527, 2535, 2543, 2551,  
 2560, 2566, 2574, 2583, 2591, 2599,  
 2607, 2613, 2614, 2622, 2630, 2639,  
 2647, 2648, 2656, 2665, 2670, 2671,  
 2679, 2688
- op\_depthwise\_conv*, 975, 984, 993, 1002,  
 1011, 1020, 1029, 1037, 1045, 1054,  
 1062, 1071, 1079, 1088, 1097, 1105,  
 1114, 1123, 1132, 1137, 1139, 1144,  
 1145, 1150, 1152, 1160, 1169, 1175,  
 1180, 1181, 1190, 1195, 1203, 1212,  
 1218, 1226, 1231, 1233, 1239, 1245,  
 1250, 1251, 1259, 1268, 1276, 1284,  
 1293, 1301, 1310, 1315, 1316, 1324,  
 1332, 1339, 1343, 1351, 1360, 1369,

- 1378, 1387, 1395, 1404, 1412, 1418,  
 1423, 1429, 1439, 1443, 1445, 1453,  
 1462, 1467, 1473, 1481, 1489, 1498,  
 1504, 1512, 1518, 1524, 1532, 1540,  
 1549, 1555, 1563, 1571, 1577, 1578,  
 1586, 1595, 1603, 1609, 1610, 1615,  
 1616, 1625, 1633, 1641, 1648, 1655,  
 1661, 1667, 1674, 1680, 1687, 1694,  
 1700, 1706, 1712, 1718, 1726, 1734,  
 1742, 1750, 1757, 1763, 1768, 1770,  
 1778, 1787, 1795, 1804, 1812, 1820,  
 1828, 1836, 1845, 1853, 1861, 1869,  
 1878, 1884, 1889, 1890, 1895, 1896,  
 1905, 1910, 1917, 1925, 1934, 1942,  
 1947, 1949, 1957, 1965, 1974, 1983,  
 1991, 2000, 2004, 2006, 2014, 2023,  
 2028, 2029, 2038, 2046, 2054, 2062,  
 2069, 2074, 2075, 2084, 2092, 2100,  
 2105, 2107, 2115, 2123, 2132, 2140,  
 2145, 2147, 2153, 2161, 2169, 2177,  
 2186, 2191, 2192, 2197, 2199, 2207,  
 2215, 2222, 2230, 2238, 2244, 2251,  
 2257, 2264, 2270, 2276, 2285, 2289,  
 2291, 2296, 2297, 2303, 2308, 2309,  
 2317, 2322, 2324, 2332, 2340, 2348,  
 2354, 2360, 2366, 2371, 2372, 2377,  
 2379, 2384, 2386, 2392, 2397, 2405,  
 2410, 2412, 2420, 2428, 2437, 2445,  
 2453, 2461, 2468, 2474, 2482, 2490,  
 2496, 2504, 2510, 2519, 2527, 2535,  
 2543, 2551, 2560, 2566, 2574, 2583,  
 2591, 2599, 2607, 2614, 2622, 2630,  
 2639, 2648, 2656, 2665, 2671, 2679,  
 2688
- op\_det, 975, 984, 993, 1002, 1011, 1020,  
 1029, 1037, 1045, 1054, 1062, 1071,  
 1079, 1088, 1097, 1105, 1114, 1123,  
 1132, 1139, 1145, 1152, 1160, 1169,  
 1175, 1182, 1190, 1194, 1195, 1203,  
 1212, 1218, 1226, 1233, 1239, 1245,  
 1251, 1259, 1268, 1276, 1284, 1293,  
 1301, 1310, 1316, 1324, 1332, 1339,  
 1346, 1349, 1360, 1370, 1378, 1387,  
 1396, 1404, 1412, 1418, 1422, 1423,  
 1428, 1429, 1439, 1445, 1453, 1462,  
 1467, 1473, 1481, 1490, 1498, 1504,  
 1512, 1518, 1524, 1532, 1540, 1549,  
 1555, 1563, 1571, 1578, 1587, 1595,  
 1604, 1610, 1616, 1625, 1633, 1641,  
 1648, 1655, 1661, 1667, 1674, 1680,  
 1687, 1694, 1700, 1704, 1706, 1712,  
 1718, 1726, 1734, 1742, 1751, 1757,  
 1763, 1770, 1778, 1787, 1796, 1804,  
 1812, 1820, 1828, 1837, 1845, 1853,  
 1861, 1869, 1878, 1884, 1890, 1896,  
 1901, 1905, 1909, 1910, 1917, 1925,  
 1934, 1942, 1949, 1957, 1965, 1974,  
 1983, 1991, 2000, 2006, 2014, 2023,  
 2029, 2038, 2046, 2054, 2063, 2068,  
 2069, 2075, 2084, 2092, 2100, 2107,  
 2115, 2124, 2132, 2140, 2147, 2153,  
 2161, 2169, 2178, 2186, 2192, 2199,  
 2207, 2216, 2222, 2230, 2238, 2244,  
 2251, 2257, 2264, 2270, 2276, 2285,  
 2291, 2297, 2303, 2309, 2318, 2324,  
 2332, 2340, 2348, 2354, 2360, 2365,  
 2366, 2372, 2379, 2386, 2392, 2396,  
 2397, 2406, 2412, 2420, 2429, 2437,  
 2445, 2453, 2461, 2468, 2474, 2482,  
 2490, 2495, 2496, 2504, 2510, 2519,  
 2527, 2535, 2543, 2552, 2560, 2566,  
 2574, 2583, 2591, 2599, 2607, 2614,  
 2622, 2630, 2639, 2648, 2657, 2665,  
 2671, 2680, 2688
- op\_diag, 972, 975, 981, 984, 990, 993, 999,  
 1003, 1008, 1011, 1017, 1021, 1026,  
 1029, 1034, 1037, 1042, 1046, 1051,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1105, 1111, 1114, 1120, 1123, 1129,  
 1132, 1139, 1145, 1152, 1157, 1161,  
 1166, 1169, 1175, 1182, 1186, 1190,  
 1195, 1200, 1203, 1208, 1212, 1218,  
 1223, 1227, 1233, 1239, 1245, 1251,  
 1256, 1260, 1265, 1268, 1273, 1276,  
 1281, 1284, 1289, 1293, 1298, 1301,  
 1307, 1310, 1316, 1321, 1324, 1329,  
 1333, 1339, 1346, 1351, 1355, 1366,  
 1370, 1375, 1378, 1384, 1387, 1392,  
 1396, 1400, 1404, 1409, 1412, 1418,  
 1424, 1429, 1436, 1439, 1445, 1450,  
 1453, 1458, 1462, 1467, 1473, 1478,  
 1481, 1486, 1490, 1494, 1498, 1504,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1540, 1546, 1549, 1555, 1560,  
 1563, 1568, 1571, 1578, 1583, 1587,



- 1592, 1595, 1600, 1604, 1610, 1616,  
 1621, 1625, 1630, 1633, 1638, 1641,  
 1648, 1655, 1661, 1667, 1674, 1680,  
 1687, 1694, 1700, 1706, 1712, 1718,  
 1723, 1726, 1731, 1734, 1739, 1742,  
 1747, 1751, 1757, 1763, 1770, 1775,  
 1778, 1784, 1787, 1792, 1796, 1800,  
 1804, 1809, 1812, 1817, 1820, 1825,  
 1828, 1833, 1837, 1842, 1845, 1850,  
 1853, 1858, 1861, 1866, 1869, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1911, 1917, 1922, 1925, 1931, 1934,  
 1939, 1942, 1949, 1954, 1957, 1962,  
 1965, 1971, 1974, 1980, 1983, 1988,  
 1991, 1996, 2000, 2006, 2011, 2014,  
 2019, 2023, 2029, 2034, 2038, 2043,  
 2046, 2051, 2054, 2059, 2063, 2069,  
 2075, 2081, 2084, 2089, 2092, 2097,  
 2100, 2107, 2112, 2115, 2120, 2124,  
 2129, 2132, 2137, 2140, 2147, 2153,  
 2158, 2161, 2166, 2169, 2174, 2178,  
 2182, 2186, 2192, 2199, 2204, 2207,  
 2212, 2216, 2222, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2281, 2285, 2291, 2297, 2303,  
 2309, 2314, 2318, 2324, 2329, 2332,  
 2337, 2340, 2345, 2348, 2354, 2360,  
 2366, 2372, 2379, 2386, 2392, 2397,  
 2402, 2406, 2412, 2417, 2420, 2425,  
 2429, 2433, 2437, 2442, 2445, 2450,  
 2453, 2458, 2461, 2468, 2474, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2510, 2515, 2519, 2524, 2527, 2532,  
 2535, 2540, 2543, 2548, 2552, 2557,  
 2560, 2566, 2571, 2574, 2579, 2583,  
 2588, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2630, 2636,  
 2639, 2648, 2653, 2657, 2662, 2665,  
 2671, 2676, 2680, 2684, 2688
- op\_diagonal, 972, 975, 981, 984, 990, 993,  
 999, 1003, 1008, 1011, 1017, 1021,  
 1026, 1029, 1034, 1037, 1042, 1046,  
 1051, 1054, 1059, 1062, 1068, 1071,  
 1076, 1079, 1085, 1088, 1094, 1097,  
 1102, 1106, 1111, 1114, 1120, 1123,  
 1129, 1132, 1139, 1145, 1152, 1157,  
 1161, 1166, 1169, 1175, 1182, 1186,  
 1190, 1195, 1200, 1203, 1208, 1212,  
 1218, 1223, 1227, 1233, 1239, 1245,  
 1251, 1256, 1260, 1265, 1268, 1273,  
 1276, 1281, 1284, 1290, 1293, 1298,  
 1301, 1307, 1310, 1316, 1321, 1324,  
 1329, 1333, 1339, 1346, 1351, 1357,  
 1360, 1364, 1375, 1378, 1384, 1387,  
 1392, 1396, 1400, 1404, 1409, 1412,  
 1418, 1424, 1429, 1436, 1439, 1445,  
 1450, 1453, 1458, 1462, 1467, 1473,  
 1478, 1481, 1486, 1490, 1494, 1498,  
 1504, 1509, 1512, 1518, 1524, 1529,  
 1532, 1537, 1540, 1546, 1549, 1555,  
 1560, 1563, 1568, 1571, 1578, 1583,  
 1587, 1592, 1595, 1600, 1604, 1610,  
 1616, 1621, 1625, 1630, 1633, 1638,  
 1641, 1648, 1655, 1661, 1667, 1674,  
 1680, 1687, 1694, 1700, 1706, 1712,  
 1718, 1723, 1726, 1731, 1734, 1739,  
 1742, 1747, 1751, 1757, 1763, 1770,  
 1775, 1778, 1784, 1787, 1792, 1796,  
 1800, 1804, 1809, 1812, 1817, 1820,  
 1825, 1828, 1833, 1837, 1842, 1845,  
 1850, 1853, 1858, 1861, 1866, 1869,  
 1875, 1878, 1884, 1890, 1896, 1902,  
 1905, 1911, 1917, 1922, 1925, 1931,  
 1934, 1939, 1942, 1949, 1954, 1957,  
 1962, 1965, 1971, 1974, 1980, 1983,  
 1988, 1991, 1996, 2000, 2006, 2011,  
 2014, 2019, 2023, 2029, 2034, 2038,  
 2043, 2046, 2051, 2054, 2059, 2063,  
 2069, 2075, 2081, 2084, 2089, 2092,  
 2097, 2100, 2107, 2112, 2115, 2120,  
 2124, 2129, 2132, 2137, 2140, 2147,  
 2153, 2158, 2161, 2166, 2169, 2174,  
 2178, 2182, 2186, 2192, 2199, 2204,  
 2207, 2212, 2216, 2222, 2227, 2230,  
 2235, 2238, 2244, 2251, 2257, 2264,  
 2270, 2276, 2281, 2285, 2291, 2297,  
 2303, 2309, 2314, 2318, 2324, 2329,  
 2332, 2337, 2340, 2345, 2348, 2354,  
 2361, 2366, 2372, 2379, 2386, 2392,  
 2397, 2402, 2406, 2412, 2417, 2420,  
 2425, 2429, 2433, 2437, 2442, 2445,  
 2450, 2453, 2458, 2461, 2468, 2474,  
 2479, 2482, 2487, 2490, 2496, 2501,  
 2504, 2510, 2515, 2519, 2524, 2527,  
 2532, 2535, 2540, 2543, 2548, 2552,  
 2557, 2560, 2566, 2571, 2574, 2579,



- 2583, 2588, 2591, 2596, 2599, 2604,  
2607, 2614, 2619, 2622, 2627, 2630,  
2636, 2639, 2648, 2653, 2657, 2662,  
2665, 2671, 2676, 2680, 2684, 2688
- op\_diff, 972, 975, 981, 984, 990, 993, 999,  
1003, 1008, 1011, 1017, 1021, 1026,  
1029, 1034, 1037, 1042, 1046, 1051,  
1054, 1059, 1062, 1068, 1071, 1076,  
1079, 1085, 1088, 1094, 1097, 1102,  
1106, 1111, 1114, 1120, 1123, 1129,  
1132, 1139, 1146, 1152, 1157, 1161,  
1166, 1169, 1175, 1182, 1186, 1190,  
1195, 1200, 1203, 1208, 1212, 1218,  
1223, 1227, 1233, 1239, 1245, 1251,  
1256, 1260, 1265, 1268, 1273, 1276,  
1281, 1284, 1290, 1293, 1298, 1301,  
1307, 1310, 1316, 1321, 1324, 1329,  
1333, 1339, 1346, 1351, 1357, 1360,  
1366, 1370, 1373, 1384, 1387, 1392,  
1396, 1400, 1404, 1409, 1412, 1418,  
1424, 1429, 1436, 1439, 1445, 1450,  
1453, 1458, 1462, 1467, 1473, 1478,  
1481, 1486, 1490, 1494, 1498, 1504,  
1509, 1512, 1518, 1524, 1529, 1532,  
1537, 1540, 1546, 1549, 1555, 1560,  
1563, 1568, 1571, 1578, 1583, 1587,  
1592, 1595, 1600, 1604, 1610, 1616,  
1621, 1625, 1630, 1633, 1638, 1641,  
1648, 1655, 1661, 1668, 1674, 1680,  
1687, 1694, 1700, 1706, 1712, 1718,  
1723, 1726, 1731, 1734, 1739, 1742,  
1747, 1751, 1757, 1763, 1770, 1775,  
1778, 1784, 1787, 1792, 1796, 1800,  
1804, 1809, 1812, 1817, 1820, 1825,  
1828, 1833, 1837, 1842, 1845, 1850,  
1853, 1858, 1861, 1866, 1869, 1875,  
1878, 1884, 1890, 1896, 1902, 1905,  
1911, 1917, 1922, 1925, 1931, 1934,  
1939, 1942, 1949, 1954, 1957, 1962,  
1965, 1971, 1974, 1980, 1983, 1988,  
1991, 1997, 2000, 2006, 2011, 2014,  
2020, 2023, 2029, 2034, 2038, 2043,  
2046, 2051, 2054, 2059, 2063, 2069,  
2075, 2081, 2084, 2089, 2092, 2097,  
2100, 2107, 2112, 2115, 2120, 2124,  
2129, 2132, 2137, 2140, 2147, 2153,  
2158, 2161, 2166, 2169, 2174, 2178,  
2182, 2186, 2192, 2199, 2204, 2207,  
2212, 2216, 2222, 2227, 2230, 2235,  
2238, 2244, 2251, 2257, 2264, 2270,  
2276, 2282, 2285, 2291, 2297, 2303,  
2309, 2314, 2318, 2324, 2329, 2332,  
2337, 2340, 2345, 2348, 2354, 2361,  
2366, 2372, 2379, 2386, 2392, 2397,  
2402, 2406, 2412, 2417, 2420, 2425,  
2429, 2433, 2437, 2442, 2445, 2450,  
2453, 2458, 2461, 2468, 2474, 2479,  
2482, 2487, 2490, 2496, 2501, 2504,  
2510, 2515, 2519, 2524, 2527, 2532,  
2535, 2540, 2543, 2548, 2552, 2557,  
2560, 2566, 2571, 2574, 2579, 2583,  
2588, 2591, 2596, 2599, 2604, 2607,  
2614, 2619, 2622, 2627, 2630, 2636,  
2639, 2648, 2653, 2657, 2662, 2665,  
2671, 2676, 2680, 2685, 2688
- op\_digitize, 972, 975, 981, 984, 990, 993,  
999, 1003, 1008, 1011, 1017, 1021,  
1026, 1029, 1034, 1037, 1042, 1046,  
1051, 1054, 1059, 1062, 1068, 1071,  
1076, 1079, 1085, 1088, 1094, 1097,  
1102, 1106, 1111, 1114, 1120, 1123,  
1129, 1132, 1139, 1146, 1152, 1157,  
1161, 1166, 1169, 1175, 1182, 1186,  
1190, 1195, 1200, 1203, 1208, 1212,  
1218, 1223, 1227, 1233, 1239, 1245,  
1251, 1256, 1260, 1265, 1268, 1273,  
1276, 1281, 1284, 1290, 1293, 1298,  
1301, 1307, 1310, 1316, 1321, 1324,  
1329, 1333, 1339, 1346, 1351, 1357,  
1360, 1366, 1370, 1375, 1378, 1382,  
1392, 1396, 1401, 1404, 1409, 1412,  
1418, 1424, 1429, 1436, 1439, 1445,  
1450, 1453, 1458, 1462, 1467, 1473,  
1478, 1481, 1486, 1490, 1495, 1498,  
1504, 1509, 1512, 1518, 1524, 1529,  
1532, 1537, 1540, 1546, 1549, 1555,  
1560, 1563, 1568, 1571, 1578, 1583,  
1587, 1592, 1595, 1600, 1604, 1610,  
1616, 1621, 1625, 1630, 1633, 1638,  
1641, 1648, 1655, 1661, 1668, 1674,  
1680, 1687, 1694, 1700, 1706, 1712,  
1718, 1723, 1726, 1731, 1734, 1739,  
1742, 1747, 1751, 1757, 1763, 1770,  
1775, 1778, 1784, 1787, 1792, 1796,  
1801, 1804, 1809, 1812, 1817, 1820,  
1825, 1828, 1833, 1837, 1842, 1845,

- 1850, 1853, 1858, 1861, 1866, 1869,  
 1875, 1878, 1884, 1890, 1896, 1902,  
 1905, 1911, 1917, 1922, 1925, 1931,  
 1934, 1939, 1942, 1949, 1954, 1957,  
 1962, 1965, 1971, 1974, 1980, 1983,  
 1988, 1991, 1997, 2000, 2006, 2011,  
 2014, 2020, 2023, 2029, 2034, 2038,  
 2043, 2046, 2051, 2054, 2059, 2063,  
 2069, 2075, 2081, 2084, 2089, 2092,  
 2097, 2100, 2107, 2112, 2115, 2120,  
 2124, 2129, 2132, 2137, 2140, 2147,  
 2153, 2158, 2161, 2166, 2169, 2174,  
 2178, 2183, 2186, 2192, 2199, 2204,  
 2207, 2212, 2216, 2222, 2227, 2230,  
 2235, 2238, 2244, 2251, 2257, 2264,  
 2270, 2276, 2282, 2285, 2291, 2297,  
 2303, 2309, 2314, 2318, 2324, 2329,  
 2332, 2337, 2340, 2345, 2348, 2354,  
 2361, 2366, 2372, 2379, 2386, 2392,  
 2397, 2402, 2406, 2412, 2417, 2420,  
 2425, 2429, 2434, 2437, 2442, 2445,  
 2450, 2453, 2458, 2461, 2468, 2474,  
 2479, 2482, 2487, 2490, 2496, 2501,  
 2504, 2510, 2515, 2519, 2524, 2527,  
 2532, 2535, 2540, 2543, 2548, 2552,  
 2557, 2560, 2566, 2571, 2574, 2579,  
 2583, 2588, 2591, 2596, 2599, 2604,  
 2607, 2614, 2619, 2622, 2627, 2630,  
 2636, 2639, 2648, 2653, 2657, 2662,  
 2665, 2671, 2676, 2680, 2685, 2688
- op\_divide*, 972, 975, 981, 984, 990, 993, 999,  
 1003, 1008, 1011, 1017, 1021, 1026,  
 1029, 1034, 1037, 1042, 1046, 1051,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1106, 1111, 1114, 1120, 1123, 1129,  
 1132, 1139, 1146, 1152, 1157, 1161,  
 1166, 1169, 1175, 1182, 1187, 1190,  
 1195, 1200, 1203, 1208, 1212, 1218,  
 1223, 1227, 1233, 1239, 1245, 1251,  
 1256, 1260, 1265, 1268, 1273, 1276,  
 1281, 1284, 1290, 1293, 1298, 1301,  
 1307, 1310, 1316, 1321, 1324, 1329,  
 1333, 1339, 1346, 1351, 1357, 1360,  
 1366, 1370, 1375, 1378, 1384, 1387,  
 1391, 1401, 1404, 1409, 1412, 1418,  
 1424, 1429, 1436, 1439, 1445, 1450,  
 1453, 1458, 1462, 1467, 1473, 1478,  
 1481, 1486, 1490, 1495, 1498, 1504,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1540, 1546, 1549, 1555, 1560,  
 1563, 1568, 1571, 1578, 1583, 1587,  
 1592, 1595, 1600, 1604, 1610, 1616,  
 1621, 1625, 1630, 1633, 1638, 1641,  
 1648, 1655, 1661, 1668, 1674, 1680,  
 1687, 1694, 1700, 1706, 1712, 1718,  
 1723, 1726, 1731, 1734, 1739, 1742,  
 1747, 1751, 1757, 1763, 1770, 1775,  
 1778, 1784, 1787, 1792, 1796, 1801,  
 1804, 1809, 1812, 1817, 1820, 1825,  
 1828, 1833, 1837, 1842, 1845, 1850,  
 1853, 1858, 1861, 1866, 1869, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1911, 1917, 1922, 1925, 1931, 1934,  
 1939, 1942, 1949, 1954, 1957, 1962,  
 1965, 1971, 1974, 1980, 1983, 1988,  
 1991, 1997, 2000, 2006, 2011, 2014,  
 2020, 2023, 2029, 2034, 2038, 2043,  
 2046, 2051, 2054, 2059, 2063, 2069,  
 2075, 2081, 2084, 2089, 2092, 2097,  
 2100, 2107, 2112, 2115, 2120, 2124,  
 2129, 2132, 2137, 2140, 2147, 2153,  
 2158, 2161, 2166, 2169, 2174, 2178,  
 2183, 2186, 2192, 2199, 2204, 2207,  
 2212, 2216, 2222, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2282, 2285, 2291, 2297, 2303,  
 2309, 2314, 2318, 2324, 2329, 2332,  
 2337, 2340, 2345, 2348, 2354, 2361,  
 2366, 2372, 2379, 2386, 2392, 2397,  
 2402, 2406, 2412, 2417, 2420, 2425,  
 2429, 2434, 2437, 2442, 2445, 2450,  
 2453, 2458, 2461, 2468, 2474, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2510, 2515, 2519, 2524, 2527, 2532,  
 2535, 2540, 2543, 2548, 2552, 2557,  
 2560, 2566, 2571, 2574, 2579, 2583,  
 2588, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2631, 2636,  
 2639, 2648, 2653, 2657, 2662, 2665,  
 2671, 2676, 2680, 2685, 2688
- op\_divide\_no\_nan*, 972, 975, 981, 984, 990,  
 993, 999, 1003, 1008, 1011, 1017,  
 1021, 1026, 1029, 1034, 1037, 1042,  
 1046, 1051, 1054, 1059, 1062, 1068,  
 1071, 1076, 1079, 1085, 1088, 1094,

1097, 1102, 1106, 1111, 1114, 1120,  
 1123, 1129, 1132, 1139, 1146, 1152,  
 1157, 1161, 1166, 1169, 1175, 1182,  
 1187, 1190, 1195, 1200, 1203, 1208,  
 1212, 1218, 1223, 1227, 1233, 1239,  
 1245, 1251, 1256, 1260, 1265, 1268,  
 1273, 1276, 1281, 1284, 1290, 1293,  
 1298, 1301, 1307, 1310, 1316, 1321,  
 1324, 1329, 1333, 1339, 1346, 1351,  
 1357, 1360, 1366, 1370, 1375, 1378,  
 1384, 1387, 1392, 1396, 1399, 1409,  
 1412, 1418, 1424, 1429, 1436, 1439,  
 1445, 1450, 1453, 1458, 1462, 1468,  
 1473, 1478, 1481, 1486, 1490, 1495,  
 1498, 1504, 1509, 1512, 1518, 1524,  
 1529, 1532, 1537, 1540, 1546, 1549,  
 1555, 1560, 1563, 1568, 1571, 1578,  
 1583, 1587, 1592, 1595, 1600, 1604,  
 1610, 1617, 1621, 1625, 1630, 1633,  
 1638, 1641, 1648, 1655, 1661, 1668,  
 1674, 1680, 1687, 1694, 1700, 1706,  
 1712, 1718, 1723, 1726, 1731, 1734,  
 1739, 1742, 1747, 1751, 1757, 1763,  
 1770, 1775, 1778, 1784, 1787, 1792,  
 1796, 1801, 1804, 1809, 1812, 1817,  
 1820, 1825, 1828, 1833, 1837, 1842,  
 1845, 1850, 1853, 1858, 1861, 1866,  
 1870, 1875, 1878, 1884, 1890, 1896,  
 1902, 1905, 1911, 1917, 1922, 1925,  
 1931, 1934, 1939, 1942, 1949, 1954,  
 1957, 1962, 1965, 1971, 1974, 1980,  
 1983, 1988, 1991, 1997, 2000, 2006,  
 2011, 2014, 2020, 2023, 2029, 2035,  
 2038, 2043, 2046, 2051, 2054, 2059,  
 2063, 2069, 2075, 2081, 2084, 2089,  
 2092, 2097, 2100, 2107, 2112, 2115,  
 2120, 2124, 2129, 2132, 2137, 2140,  
 2147, 2153, 2158, 2161, 2166, 2169,  
 2174, 2178, 2183, 2186, 2192, 2199,  
 2204, 2207, 2212, 2216, 2222, 2227,  
 2230, 2235, 2238, 2244, 2251, 2257,  
 2264, 2270, 2276, 2282, 2285, 2291,  
 2297, 2303, 2309, 2314, 2318, 2324,  
 2329, 2332, 2337, 2340, 2345, 2348,  
 2354, 2361, 2366, 2372, 2379, 2386,  
 2392, 2397, 2402, 2406, 2412, 2417,  
 2420, 2425, 2429, 2434, 2437, 2442,  
 2445, 2450, 2453, 2458, 2461, 2468,  
 2474, 2479, 2482, 2487, 2490, 2496,  
 2501, 2504, 2510, 2515, 2519, 2524,  
 2527, 2532, 2535, 2540, 2543, 2548,  
 2552, 2557, 2560, 2566, 2571, 2575,  
 2579, 2583, 2588, 2591, 2596, 2599,  
 2604, 2607, 2614, 2619, 2622, 2627,  
 2631, 2636, 2639, 2648, 2653, 2657,  
 2662, 2665, 2671, 2676, 2680, 2685,  
 2688

op\_dot, 972, 975, 981, 984, 990, 993, 999,  
 1003, 1008, 1011, 1017, 1021, 1026,  
 1029, 1034, 1037, 1042, 1046, 1051,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1079, 1085, 1088, 1094, 1097, 1102,  
 1106, 1111, 1115, 1120, 1123, 1129,  
 1132, 1139, 1146, 1152, 1157, 1161,  
 1166, 1169, 1175, 1182, 1187, 1190,  
 1195, 1200, 1204, 1208, 1212, 1218,  
 1223, 1227, 1233, 1239, 1245, 1251,  
 1256, 1260, 1265, 1268, 1273, 1276,  
 1281, 1284, 1290, 1293, 1298, 1301,  
 1307, 1310, 1316, 1321, 1324, 1329,  
 1333, 1339, 1346, 1351, 1357, 1360,  
 1366, 1370, 1375, 1378, 1384, 1387,  
 1392, 1396, 1401, 1404, 1407, 1418,  
 1424, 1429, 1436, 1439, 1445, 1450,  
 1453, 1458, 1462, 1468, 1473, 1478,  
 1481, 1486, 1490, 1495, 1498, 1504,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1540, 1546, 1549, 1555, 1560,  
 1563, 1568, 1571, 1578, 1583, 1587,  
 1592, 1595, 1600, 1604, 1610, 1617,  
 1621, 1625, 1630, 1633, 1638, 1641,  
 1648, 1655, 1661, 1668, 1674, 1680,  
 1687, 1694, 1700, 1706, 1712, 1718,  
 1723, 1726, 1731, 1734, 1739, 1742,  
 1747, 1751, 1757, 1763, 1770, 1775,  
 1778, 1784, 1787, 1792, 1796, 1801,  
 1804, 1809, 1812, 1817, 1820, 1825,  
 1828, 1833, 1837, 1842, 1845, 1850,  
 1853, 1858, 1861, 1866, 1870, 1875,  
 1878, 1884, 1890, 1896, 1902, 1905,  
 1911, 1917, 1922, 1925, 1931, 1934,  
 1939, 1943, 1949, 1954, 1957, 1962,  
 1965, 1971, 1974, 1980, 1983, 1988,  
 1991, 1997, 2000, 2006, 2011, 2014,  
 2020, 2023, 2029, 2035, 2038, 2043,  
 2046, 2051, 2054, 2059, 2063, 2069,

- 2075, 2081, 2084, 2089, 2092, 2097,  
 2100, 2107, 2112, 2115, 2120, 2124,  
 2129, 2132, 2137, 2140, 2147, 2153,  
 2158, 2161, 2166, 2169, 2174, 2178,  
 2183, 2186, 2192, 2199, 2204, 2207,  
 2212, 2216, 2222, 2227, 2230, 2235,  
 2238, 2244, 2251, 2257, 2264, 2270,  
 2276, 2282, 2285, 2291, 2297, 2303,  
 2309, 2314, 2318, 2324, 2329, 2332,  
 2337, 2340, 2345, 2348, 2354, 2361,  
 2366, 2372, 2379, 2386, 2392, 2397,  
 2402, 2406, 2412, 2417, 2421, 2425,  
 2429, 2434, 2437, 2442, 2445, 2450,  
 2453, 2458, 2461, 2468, 2474, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2510, 2515, 2519, 2524, 2527, 2532,  
 2535, 2540, 2543, 2548, 2552, 2557,  
 2560, 2566, 2571, 2575, 2579, 2583,  
 2588, 2591, 2596, 2599, 2604, 2607,  
 2614, 2619, 2622, 2627, 2631, 2636,  
 2639, 2649, 2653, 2657, 2662, 2665,  
 2671, 2676, 2680, 2685, 2688
- op\_dtype*, 976, 984, 993, 1003, 1011, 1021,  
 1029, 1037, 1046, 1054, 1062, 1071,  
 1079, 1088, 1097, 1106, 1115, 1123,  
 1132, 1139, 1146, 1152, 1161, 1169,  
 1174, 1175, 1182, 1190, 1195, 1204,  
 1212, 1217, 1218, 1227, 1233, 1237,  
 1239, 1243, 1245, 1251, 1260, 1268,  
 1276, 1284, 1293, 1302, 1310, 1316,  
 1324, 1333, 1338, 1339, 1346, 1351,  
 1360, 1370, 1378, 1387, 1396, 1404,  
 1412, 1416, 1424, 1429, 1439, 1445,  
 1453, 1462, 1468, 1473, 1481, 1490,  
 1498, 1504, 1512, 1518, 1524, 1532,  
 1540, 1549, 1553, 1555, 1563, 1571,  
 1578, 1587, 1595, 1604, 1610, 1617,  
 1625, 1633, 1641, 1648, 1655, 1661,  
 1668, 1674, 1681, 1687, 1694, 1700,  
 1706, 1712, 1718, 1726, 1734, 1743,  
 1751, 1757, 1761, 1763, 1770, 1778,  
 1787, 1796, 1804, 1812, 1820, 1828,  
 1837, 1845, 1853, 1861, 1870, 1878,  
 1884, 1890, 1896, 1905, 1911, 1916,  
 1917, 1926, 1934, 1943, 1949, 1957,  
 1965, 1974, 1983, 1991, 2000, 2006,  
 2014, 2023, 2029, 2038, 2046, 2054,  
 2063, 2069, 2075, 2084, 2092, 2100,  
 2107, 2115, 2124, 2132, 2140, 2147,  
 2153, 2161, 2169, 2178, 2186, 2192,  
 2199, 2207, 2216, 2222, 2230, 2238,  
 2244, 2250, 2251, 2256, 2257, 2263,  
 2264, 2270, 2276, 2285, 2291, 2297,  
 2302, 2303, 2309, 2318, 2324, 2332,  
 2340, 2348, 2353, 2354, 2359, 2361,  
 2366, 2372, 2379, 2386, 2392, 2397,  
 2406, 2412, 2421, 2429, 2437, 2445,  
 2453, 2462, 2468, 2472, 2474, 2482,  
 2490, 2496, 2504, 2509, 2511, 2519,  
 2527, 2535, 2543, 2552, 2560, 2566,  
 2575, 2583, 2591, 2599, 2608, 2613,  
 2614, 2622, 2631, 2639, 2647, 2649,  
 2657, 2665, 2670, 2671, 2680, 2688
- op\_eig*, 976, 985, 993, 1003, 1012, 1021,  
 1029, 1037, 1046, 1054, 1062, 1071,  
 1080, 1088, 1097, 1106, 1115, 1123,  
 1133, 1139, 1146, 1152, 1161, 1169,  
 1175, 1182, 1190, 1194, 1195, 1204,  
 1212, 1219, 1227, 1233, 1239, 1245,  
 1251, 1260, 1268, 1276, 1284, 1293,  
 1302, 1310, 1316, 1324, 1333, 1339,  
 1346, 1350, 1351, 1360, 1370, 1378,  
 1387, 1396, 1404, 1412, 1418, 1422,  
 1428, 1429, 1439, 1445, 1453, 1462,  
 1468, 1473, 1481, 1490, 1498, 1504,  
 1512, 1518, 1524, 1532, 1540, 1549,  
 1555, 1563, 1571, 1578, 1587, 1595,  
 1604, 1610, 1617, 1625, 1633, 1641,  
 1648, 1655, 1661, 1668, 1674, 1681,  
 1687, 1694, 1700, 1704, 1706, 1712,  
 1718, 1726, 1734, 1743, 1751, 1757,  
 1763, 1770, 1778, 1787, 1796, 1804,  
 1812, 1820, 1828, 1837, 1845, 1853,  
 1861, 1870, 1878, 1884, 1890, 1896,  
 1901, 1905, 1909, 1911, 1917, 1926,  
 1934, 1943, 1949, 1957, 1965, 1974,  
 1983, 1991, 2000, 2006, 2014, 2023,  
 2029, 2038, 2046, 2054, 2063, 2068,  
 2069, 2075, 2084, 2092, 2100, 2107,  
 2115, 2124, 2132, 2141, 2147, 2153,  
 2161, 2170, 2178, 2186, 2192, 2199,  
 2207, 2216, 2222, 2230, 2238, 2244,  
 2251, 2257, 2264, 2270, 2276, 2285,  
 2291, 2297, 2303, 2309, 2318, 2324,  
 2332, 2340, 2348, 2355, 2361, 2365,  
 2366, 2372, 2379, 2386, 2392, 2396,

- 2397, 2406, 2412, 2421, 2429, 2437,  
2445, 2453, 2462, 2468, 2474, 2482,  
2490, 2495, 2496, 2504, 2511, 2519,  
2527, 2535, 2543, 2552, 2560, 2566,  
2575, 2583, 2591, 2599, 2608, 2614,  
2622, 2631, 2639, 2649, 2657, 2665,  
2671, 2680, 2688
- op\_eigh, 976, 985, 993, 1003, 1012, 1021,  
1029, 1037, 1046, 1054, 1062, 1071,  
1080, 1088, 1097, 1106, 1115, 1123,  
1133, 1139, 1146, 1152, 1161, 1169,  
1175, 1182, 1190, 1194, 1195, 1204,  
1212, 1219, 1227, 1233, 1239, 1245,  
1252, 1260, 1268, 1276, 1284, 1293,  
1302, 1310, 1316, 1325, 1333, 1339,  
1346, 1350, 1351, 1360, 1370, 1378,  
1387, 1396, 1404, 1412, 1418, 1422,  
1424, 1427, 1439, 1445, 1453, 1462,  
1468, 1473, 1481, 1490, 1498, 1504,  
1512, 1518, 1524, 1532, 1540, 1549,  
1555, 1563, 1571, 1578, 1587, 1595,  
1604, 1610, 1617, 1625, 1633, 1641,  
1648, 1655, 1661, 1668, 1674, 1681,  
1687, 1694, 1700, 1704, 1706, 1712,  
1718, 1726, 1734, 1743, 1751, 1757,  
1763, 1770, 1779, 1787, 1796, 1804,  
1812, 1820, 1828, 1837, 1845, 1853,  
1861, 1870, 1878, 1884, 1890, 1896,  
1901, 1905, 1909, 1911, 1917, 1926,  
1934, 1943, 1949, 1957, 1966, 1974,  
1983, 1991, 2000, 2006, 2014, 2023,  
2029, 2038, 2046, 2054, 2063, 2068,  
2069, 2075, 2084, 2092, 2100, 2107,  
2115, 2124, 2132, 2141, 2147, 2153,  
2161, 2170, 2178, 2186, 2192, 2199,  
2207, 2216, 2222, 2230, 2238, 2244,  
2251, 2257, 2264, 2270, 2276, 2285,  
2291, 2297, 2303, 2309, 2318, 2324,  
2332, 2340, 2348, 2355, 2361, 2365,  
2366, 2372, 2379, 2386, 2392, 2396,  
2397, 2406, 2412, 2421, 2429, 2437,  
2445, 2453, 2462, 2468, 2474, 2482,  
2490, 2495, 2496, 2504, 2511, 2519,  
2527, 2535, 2543, 2552, 2560, 2566,  
2575, 2583, 2591, 2599, 2608, 2614,  
2622, 2631, 2639, 2649, 2657, 2665,  
2671, 2680, 2688
- op\_einsum, 972, 976, 981, 985, 990, 993, 999,  
1003, 1008, 1012, 1017, 1021, 1026,  
1029, 1034, 1037, 1042, 1046, 1051,  
1054, 1059, 1062, 1068, 1071, 1076,  
1080, 1085, 1088, 1094, 1097, 1102,  
1106, 1111, 1115, 1120, 1123, 1129,  
1133, 1139, 1146, 1152, 1157, 1161,  
1166, 1169, 1175, 1182, 1187, 1190,  
1195, 1200, 1204, 1208, 1212, 1219,  
1223, 1227, 1233, 1239, 1245, 1252,  
1256, 1260, 1265, 1268, 1273, 1276,  
1281, 1284, 1290, 1293, 1298, 1302,  
1307, 1310, 1316, 1321, 1325, 1329,  
1333, 1339, 1346, 1351, 1357, 1360,  
1366, 1370, 1375, 1378, 1384, 1387,  
1392, 1396, 1401, 1404, 1409, 1412,  
1418, 1424, 1429, 1433, 1445, 1450,  
1453, 1459, 1462, 1468, 1473, 1478,  
1482, 1486, 1490, 1495, 1498, 1504,  
1509, 1512, 1518, 1524, 1529, 1532,  
1537, 1540, 1546, 1549, 1555, 1560,  
1563, 1568, 1571, 1578, 1583, 1587,  
1592, 1595, 1600, 1604, 1610, 1617,  
1622, 1625, 1630, 1633, 1638, 1641,  
1648, 1655, 1661, 1668, 1674, 1681,  
1687, 1694, 1700, 1706, 1712, 1718,  
1723, 1726, 1731, 1734, 1739, 1743,  
1747, 1751, 1757, 1763, 1770, 1775,  
1779, 1784, 1787, 1792, 1796, 1801,  
1804, 1809, 1812, 1817, 1820, 1825,  
1828, 1833, 1837, 1842, 1845, 1850,  
1853, 1858, 1861, 1866, 1870, 1875,  
1878, 1884, 1890, 1896, 1902, 1905,  
1911, 1917, 1922, 1926, 1931, 1934,  
1939, 1943, 1949, 1954, 1957, 1962,  
1966, 1971, 1974, 1980, 1983, 1988,  
1991, 1997, 2000, 2006, 2011, 2014,  
2020, 2023, 2029, 2035, 2038, 2043,  
2046, 2051, 2055, 2059, 2063, 2069,  
2075, 2081, 2084, 2089, 2092, 2097,  
2100, 2107, 2112, 2115, 2120, 2124,  
2129, 2132, 2137, 2141, 2147, 2153,  
2158, 2161, 2166, 2170, 2174, 2178,  
2183, 2186, 2192, 2199, 2204, 2207,  
2212, 2216, 2222, 2227, 2230, 2235,  
2238, 2244, 2251, 2257, 2264, 2270,  
2276, 2282, 2285, 2291, 2297, 2303,  
2309, 2314, 2318, 2324, 2329, 2332,  
2337, 2340, 2345, 2348, 2355, 2361,

- 2366, 2372, 2379, 2386, 2392, 2397,  
 2402, 2406, 2412, 2417, 2421, 2425,  
 2429, 2434, 2437, 2442, 2445, 2450,  
 2453, 2458, 2462, 2468, 2474, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2511, 2516, 2519, 2524, 2527, 2532,  
 2535, 2540, 2543, 2548, 2552, 2557,  
 2560, 2566, 2571, 2575, 2580, 2583,  
 2588, 2591, 2596, 2599, 2604, 2608,  
 2614, 2619, 2622, 2627, 2631, 2636,  
 2639, 2649, 2653, 2657, 2662, 2665,  
 2672, 2676, 2680, 2685, 2688
- op\_elu*, 976, 985, 994, 1003, 1012, 1021,  
 1029, 1037, 1046, 1054, 1062, 1071,  
 1080, 1088, 1097, 1106, 1115, 1123,  
 1133, 1137, 1139, 1144, 1146, 1150,  
 1152, 1161, 1169, 1175, 1180, 1182,  
 1190, 1195, 1204, 1212, 1219, 1227,  
 1231, 1233, 1239, 1245, 1250, 1252,  
 1260, 1268, 1276, 1284, 1293, 1302,  
 1310, 1315, 1316, 1325, 1333, 1339,  
 1344, 1346, 1351, 1360, 1370, 1379,  
 1387, 1396, 1404, 1412, 1418, 1424,  
 1429, 1439, 1443, 1453, 1462, 1468,  
 1473, 1482, 1490, 1498, 1504, 1512,  
 1518, 1524, 1532, 1540, 1549, 1555,  
 1563, 1572, 1577, 1578, 1587, 1595,  
 1604, 1609, 1610, 1615, 1617, 1625,  
 1633, 1641, 1648, 1655, 1661, 1668,  
 1674, 1681, 1688, 1694, 1700, 1706,  
 1712, 1718, 1726, 1734, 1743, 1751,  
 1757, 1763, 1768, 1770, 1779, 1787,  
 1796, 1804, 1812, 1820, 1828, 1837,  
 1845, 1853, 1861, 1870, 1878, 1884,  
 1889, 1890, 1895, 1897, 1905, 1911,  
 1917, 1926, 1934, 1943, 1947, 1949,  
 1957, 1966, 1974, 1983, 1991, 2000,  
 2004, 2006, 2014, 2023, 2028, 2029,  
 2038, 2046, 2055, 2063, 2069, 2074,  
 2076, 2084, 2092, 2100, 2105, 2107,  
 2115, 2124, 2132, 2141, 2145, 2147,  
 2153, 2161, 2170, 2178, 2186, 2191,  
 2193, 2198, 2199, 2208, 2216, 2222,  
 2230, 2238, 2244, 2251, 2257, 2265,  
 2270, 2276, 2285, 2289, 2291, 2296,  
 2298, 2303, 2308, 2310, 2318, 2322,  
 2324, 2332, 2340, 2348, 2355, 2361,  
 2366, 2371, 2373, 2378, 2379, 2384,  
 2386, 2392, 2397, 2406, 2410, 2412,  
 2421, 2429, 2437, 2445, 2453, 2462,  
 2468, 2474, 2482, 2490, 2496, 2504,  
 2511, 2519, 2527, 2535, 2543, 2552,  
 2560, 2566, 2575, 2583, 2591, 2599,  
 2608, 2614, 2622, 2631, 2639, 2649,  
 2657, 2665, 2672, 2680, 2688
- op\_empty*, 972, 976, 981, 985, 990, 994, 999,  
 1003, 1008, 1012, 1017, 1021, 1026,  
 1029, 1034, 1037, 1042, 1046, 1051,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1080, 1085, 1089, 1094, 1097, 1102,  
 1106, 1111, 1115, 1120, 1123, 1129,  
 1133, 1139, 1146, 1152, 1157, 1161,  
 1166, 1169, 1175, 1182, 1187, 1190,  
 1195, 1200, 1204, 1209, 1212, 1219,  
 1223, 1227, 1233, 1239, 1245, 1252,  
 1256, 1260, 1265, 1268, 1273, 1276,  
 1281, 1284, 1290, 1293, 1298, 1302,  
 1307, 1310, 1316, 1321, 1325, 1329,  
 1333, 1339, 1346, 1351, 1357, 1360,  
 1366, 1370, 1375, 1379, 1384, 1387,  
 1392, 1396, 1401, 1404, 1409, 1412,  
 1418, 1424, 1429, 1436, 1439, 1445,  
 1449, 1459, 1462, 1468, 1473, 1478,  
 1482, 1486, 1490, 1495, 1498, 1504,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1541, 1546, 1549, 1555, 1560,  
 1563, 1568, 1572, 1578, 1583, 1587,  
 1592, 1595, 1600, 1604, 1610, 1617,  
 1622, 1625, 1630, 1633, 1638, 1641,  
 1648, 1655, 1661, 1668, 1674, 1681,  
 1688, 1694, 1700, 1706, 1712, 1718,  
 1723, 1726, 1731, 1734, 1739, 1743,  
 1747, 1751, 1757, 1763, 1770, 1775,  
 1779, 1784, 1787, 1792, 1796, 1801,  
 1804, 1809, 1812, 1817, 1820, 1825,  
 1828, 1833, 1837, 1842, 1845, 1850,  
 1853, 1858, 1861, 1866, 1870, 1875,  
 1878, 1884, 1890, 1897, 1902, 1905,  
 1911, 1917, 1922, 1926, 1931, 1934,  
 1939, 1943, 1949, 1954, 1957, 1962,  
 1966, 1971, 1974, 1980, 1983, 1988,  
 1991, 1997, 2000, 2006, 2011, 2014,  
 2020, 2023, 2029, 2035, 2038, 2043,  
 2046, 2051, 2055, 2059, 2063, 2069,  
 2076, 2081, 2084, 2089, 2092, 2097,  
 2100, 2107, 2112, 2115, 2120, 2124,

- 2129, 2132, 2137, 2141, 2147, 2153,  
 2158, 2161, 2166, 2170, 2174, 2178,  
 2183, 2186, 2193, 2199, 2204, 2208,  
 2212, 2216, 2222, 2227, 2230, 2235,  
 2239, 2244, 2251, 2257, 2265, 2270,  
 2276, 2282, 2285, 2291, 2298, 2303,  
 2310, 2314, 2318, 2324, 2329, 2332,  
 2337, 2340, 2345, 2348, 2355, 2361,  
 2366, 2373, 2379, 2386, 2392, 2398,  
 2402, 2406, 2412, 2417, 2421, 2425,  
 2429, 2434, 2437, 2442, 2445, 2450,  
 2453, 2458, 2462, 2468, 2474, 2479,  
 2482, 2487, 2490, 2496, 2501, 2504,  
 2511, 2516, 2519, 2524, 2527, 2532,  
 2535, 2540, 2543, 2548, 2552, 2557,  
 2560, 2566, 2571, 2575, 2580, 2583,  
 2588, 2591, 2596, 2599, 2604, 2608,  
 2614, 2619, 2622, 2627, 2631, 2636,  
 2639, 2649, 2653, 2657, 2662, 2665,  
 2672, 2676, 2680, 2685, 2688
- op\_equal*, 972, 976, 981, 985, 990, 994, 999,  
 1003, 1008, 1012, 1017, 1021, 1026,  
 1029, 1034, 1037, 1042, 1046, 1051,  
 1054, 1059, 1062, 1068, 1071, 1076,  
 1080, 1085, 1089, 1094, 1097, 1102,  
 1106, 1111, 1115, 1120, 1123, 1129,  
 1133, 1139, 1146, 1152, 1157, 1161,  
 1166, 1169, 1175, 1182, 1187, 1190,  
 1195, 1200, 1204, 1209, 1212, 1219,  
 1223, 1227, 1233, 1239, 1245, 1252,  
 1256, 1260, 1265, 1268, 1273, 1276,  
 1281, 1284, 1290, 1293, 1298, 1302,  
 1307, 1310, 1316, 1321, 1325, 1329,  
 1333, 1339, 1346, 1351, 1357, 1360,  
 1366, 1370, 1375, 1379, 1384, 1387,  
 1392, 1396, 1401, 1404, 1409, 1412,  
 1418, 1424, 1429, 1436, 1439, 1445,  
 1450, 1453, 1457, 1468, 1473, 1478,  
 1482, 1486, 1490, 1495, 1498, 1504,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1541, 1546, 1549, 1555, 1560,  
 1563, 1568, 1572, 1578, 1583, 1587,  
 1592, 1595, 1600, 1604, 1610, 1617,  
 1622, 1625, 1630, 1633, 1638, 1641,  
 1649, 1655, 1661, 1668, 1674, 1681,  
 1688, 1694, 1700, 1706, 1712, 1718,  
 1723, 1726, 1731, 1734, 1739, 1743,  
 1747, 1751, 1757, 1763, 1770, 1775,
- 1779, 1784, 1787, 1792, 1796, 1801,  
 1804, 1809, 1812, 1817, 1820, 1825,  
 1829, 1833, 1837, 1842, 1845, 1850,  
 1853, 1858, 1861, 1866, 1870, 1875,  
 1878, 1884, 1890, 1897, 1902, 1905,  
 1911, 1917, 1922, 1926, 1931, 1934,  
 1939, 1943, 1949, 1954, 1957, 1962,  
 1966, 1971, 1974, 1980, 1983, 1988,  
 1991, 1997, 2000, 2006, 2011, 2014,  
 2020, 2023, 2029, 2035, 2038, 2043,  
 2046, 2051, 2055, 2059, 2063, 2069,  
 2076, 2081, 2084, 2089, 2092, 2097,  
 2100, 2107, 2112, 2115, 2120, 2124,  
 2129, 2132, 2137, 2141, 2147, 2153,  
 2158, 2161, 2166, 2170, 2174, 2178,  
 2183, 2186, 2193, 2199, 2204, 2208,  
 2212, 2216, 2222, 2227, 2230, 2235,  
 2239, 2244, 2251, 2257, 2265, 2271,  
 2276, 2282, 2285, 2291, 2298, 2303,  
 2310, 2314, 2318, 2324, 2329, 2332,  
 2337, 2340, 2345, 2349, 2355, 2361,  
 2366, 2373, 2379, 2386, 2392, 2398,  
 2402, 2406, 2412, 2417, 2421, 2425,  
 2429, 2434, 2437, 2442, 2445, 2450,  
 2453, 2458, 2462, 2468, 2474, 2479,  
 2482, 2487, 2491, 2496, 2501, 2504,  
 2511, 2516, 2519, 2524, 2527, 2532,  
 2535, 2540, 2543, 2548, 2552, 2557,  
 2560, 2566, 2571, 2575, 2580, 2583,  
 2588, 2591, 2596, 2599, 2604, 2608,  
 2614, 2619, 2622, 2627, 2631, 2636,  
 2639, 2649, 2653, 2657, 2662, 2665,  
 2672, 2676, 2680, 2685, 2688
- op\_erf*, 976, 985, 994, 1003, 1012, 1021,  
 1029, 1037, 1046, 1054, 1062, 1071,  
 1080, 1089, 1097, 1106, 1115, 1123,  
 1133, 1139, 1146, 1152, 1161, 1169,  
 1175, 1182, 1190, 1195, 1204, 1212,  
 1219, 1227, 1233, 1239, 1245, 1252,  
 1260, 1268, 1276, 1284, 1293, 1302,  
 1310, 1316, 1325, 1333, 1339, 1346,  
 1351, 1360, 1370, 1379, 1387, 1396,  
 1404, 1412, 1418, 1424, 1429, 1439,  
 1445, 1453, 1462, 1465, 1472, 1473,  
 1482, 1490, 1498, 1502, 1504, 1512,  
 1516, 1518, 1522, 1524, 1532, 1541,  
 1549, 1555, 1563, 1572, 1578, 1587,  
 1595, 1604, 1611, 1617, 1625, 1633,



- 1641, 1649, 1655, 1661, 1668, 1674,  
 1681, 1688, 1694, 1700, 1706, 1710,  
 1712, 1716, 1718, 1726, 1734, 1743,  
 1751, 1755, 1757, 1763, 1770, 1779,  
 1787, 1796, 1804, 1812, 1820, 1829,  
 1837, 1845, 1853, 1862, 1870, 1878,  
 1883, 1884, 1890, 1897, 1905, 1911,  
 1917, 1926, 1934, 1943, 1949, 1957,  
 1966, 1974, 1983, 1992, 2000, 2006,  
 2015, 2023, 2029, 2038, 2046, 2055,  
 2063, 2069, 2076, 2084, 2092, 2100,  
 2107, 2115, 2124, 2132, 2141, 2147,  
 2151, 2153, 2161, 2170, 2178, 2186,  
 2193, 2199, 2208, 2216, 2220, 2222,  
 2230, 2239, 2243, 2244, 2251, 2257,  
 2265, 2269, 2271, 2275, 2276, 2285,  
 2291, 2298, 2304, 2310, 2318, 2324,  
 2332, 2340, 2349, 2355, 2361, 2366,  
 2373, 2379, 2386, 2390, 2392, 2398,  
 2406, 2412, 2421, 2429, 2437, 2445,  
 2453, 2462, 2466, 2468, 2474, 2482,  
 2491, 2496, 2504, 2511, 2519, 2527,  
 2535, 2544, 2552, 2560, 2565, 2566,  
 2575, 2583, 2591, 2599, 2608, 2614,  
 2622, 2631, 2639, 2649, 2657, 2665,  
 2672, 2680, 2688
- op\_erfinv*, 976, 985, 994, 1003, 1012, 1021,  
 1029, 1037, 1046, 1054, 1063, 1071,  
 1080, 1089, 1097, 1106, 1115, 1123,  
 1133, 1139, 1146, 1152, 1161, 1169,  
 1175, 1182, 1190, 1195, 1204, 1212,  
 1219, 1227, 1233, 1239, 1245, 1252,  
 1260, 1268, 1276, 1284, 1293, 1302,  
 1310, 1316, 1325, 1333, 1339, 1346,  
 1351, 1360, 1370, 1379, 1387, 1396,  
 1404, 1412, 1418, 1424, 1429, 1439,  
 1445, 1453, 1462, 1466, 1468, 1471,  
 1482, 1490, 1498, 1502, 1504, 1512,  
 1516, 1518, 1522, 1524, 1532, 1541,  
 1549, 1555, 1563, 1572, 1578, 1587,  
 1595, 1604, 1611, 1617, 1625, 1633,  
 1641, 1649, 1655, 1661, 1668, 1674,  
 1681, 1688, 1694, 1700, 1706, 1710,  
 1712, 1716, 1718, 1726, 1734, 1743,  
 1751, 1755, 1757, 1763, 1770, 1779,  
 1787, 1796, 1804, 1812, 1820, 1829,  
 1837, 1845, 1853, 1862, 1870, 1878,  
 1883, 1884, 1890, 1897, 1905, 1911,  
 1917, 1926, 1934, 1943, 1949, 1957,  
 1966, 1974, 1983, 1992, 2000, 2006,  
 2015, 2023, 2029, 2038, 2046, 2055,  
 2063, 2069, 2076, 2084, 2092, 2101,  
 2107, 2115, 2124, 2132, 2141, 2147,  
 2151, 2153, 2161, 2170, 2178, 2186,  
 2193, 2199, 2208, 2216, 2220, 2222,  
 2230, 2239, 2243, 2244, 2251, 2257,  
 2265, 2269, 2271, 2275, 2277, 2285,  
 2291, 2298, 2304, 2310, 2318, 2324,  
 2332, 2340, 2349, 2355, 2361, 2366,  
 2373, 2379, 2386, 2390, 2392, 2398,  
 2406, 2412, 2421, 2429, 2437, 2445,  
 2453, 2462, 2466, 2468, 2474, 2482,  
 2491, 2496, 2504, 2511, 2519, 2527,  
 2535, 2544, 2552, 2560, 2565, 2566,  
 2575, 2583, 2591, 2599, 2608, 2614,  
 2622, 2631, 2639, 2649, 2657, 2665,  
 2672, 2680, 2688
- op\_exp*, 972, 976, 981, 985, 990, 994, 999,  
 1003, 1008, 1012, 1017, 1021, 1026,  
 1029, 1034, 1038, 1042, 1046, 1051,  
 1054, 1059, 1063, 1068, 1071, 1076,  
 1080, 1085, 1089, 1094, 1097, 1102,  
 1106, 1111, 1115, 1120, 1123, 1129,  
 1133, 1139, 1146, 1152, 1157, 1161,  
 1166, 1169, 1175, 1182, 1187, 1190,  
 1195, 1200, 1204, 1209, 1212, 1219,  
 1223, 1227, 1233, 1239, 1245, 1252,  
 1256, 1260, 1265, 1268, 1273, 1276,  
 1281, 1284, 1290, 1293, 1298, 1302,  
 1307, 1310, 1316, 1321, 1325, 1329,  
 1333, 1339, 1346, 1351, 1357, 1360,  
 1366, 1370, 1375, 1379, 1384, 1387,  
 1392, 1396, 1401, 1404, 1409, 1412,  
 1418, 1424, 1429, 1436, 1439, 1445,  
 1450, 1453, 1459, 1462, 1468, 1473,  
 1477, 1486, 1490, 1495, 1498, 1504,  
 1509, 1512, 1518, 1524, 1529, 1532,  
 1537, 1541, 1546, 1549, 1555, 1560,  
 1563, 1568, 1572, 1579, 1583, 1587,  
 1592, 1595, 1600, 1604, 1611, 1617,  
 1622, 1625, 1630, 1633, 1638, 1641,  
 1649, 1655, 1661, 1668, 1674, 1681,  
 1688, 1694, 1700, 1706, 1712, 1718,  
 1723, 1726, 1731, 1735, 1739, 1743,  
 1747, 1751, 1757, 1763, 1770, 1775,  
 1779, 1784, 1787, 1792, 1796, 1801,



- 1804, 1809, 1812, 1817, 1820, 1825,  
 1829, 1833, 1837, 1842, 1845, 1850,  
 1853, 1858, 1862, 1866, 1870, 1875,  
 1878, 1884, 1890, 1897, 1902, 1905,  
 1911, 1917, 1922, 1926, 1931, 1934,  
 1939, 1943, 1949, 1954, 1957, 1962,  
 1966, 1971, 1974, 1980, 1983, 1988,  
 1992, 1997, 2000, 2006, 2011, 2015,  
 2020, 2023, 2029, 2035, 2038, 2043,  
 2046, 2051, 2055, 2059, 2063, 2069,  
 2076, 2081, 2084, 2089, 2092, 2097,  
 2101, 2107, 2112, 2115, 2120, 2124,  
 2129, 2132, 2137, 2141, 2147, 2153,  
 2158, 2161, 2166, 2170, 2174, 2178,  
 2183, 2186, 2193, 2199, 2204, 2208,  
 2212, 2216, 2222, 2227, 2230, 2235,  
 2239, 2244, 2251, 2257, 2265, 2271,  
 2277, 2282, 2285, 2291, 2298, 2304,  
 2310, 2314, 2318, 2324, 2329, 2332,  
 2337, 2340, 2345, 2349, 2355, 2361,  
 2366, 2373, 2379, 2386, 2392, 2398,  
 2402, 2406, 2412, 2417, 2421, 2425,  
 2429, 2434, 2437, 2442, 2445, 2450,  
 2453, 2458, 2462, 2468, 2474, 2479,  
 2482, 2487, 2491, 2496, 2501, 2504,  
 2511, 2516, 2519, 2524, 2527, 2532,  
 2535, 2540, 2544, 2548, 2552, 2557,  
 2560, 2566, 2571, 2575, 2580, 2583,  
 2588, 2591, 2596, 2599, 2604, 2608,  
 2614, 2619, 2622, 2627, 2631, 2636,  
 2639, 2649, 2653, 2657, 2662, 2665,  
 2672, 2676, 2680, 2685, 2688
- op\_expand\_dims, 972, 976, 981, 985, 990,  
 994, 999, 1003, 1008, 1012, 1017,  
 1021, 1026, 1029, 1034, 1038, 1042,  
 1046, 1051, 1054, 1059, 1063, 1068,  
 1072, 1076, 1080, 1085, 1089, 1094,  
 1097, 1102, 1106, 1111, 1115, 1120,  
 1123, 1129, 1133, 1139, 1146, 1152,  
 1157, 1161, 1166, 1169, 1175, 1182,  
 1187, 1190, 1195, 1200, 1204, 1209,  
 1212, 1219, 1223, 1227, 1233, 1239,  
 1245, 1252, 1256, 1260, 1265, 1268,  
 1273, 1276, 1281, 1284, 1290, 1293,  
 1298, 1302, 1307, 1310, 1316, 1321,  
 1325, 1329, 1333, 1340, 1346, 1351,  
 1357, 1360, 1366, 1370, 1375, 1379,  
 1384, 1387, 1392, 1396, 1401, 1404,  
 1409, 1412, 1418, 1424, 1429, 1436,  
 1439, 1445, 1450, 1453, 1459, 1462,  
 1468, 1473, 1478, 1482, 1485, 1495,  
 1498, 1504, 1509, 1512, 1518, 1524,  
 1529, 1532, 1537, 1541, 1546, 1549,  
 1555, 1560, 1563, 1568, 1572, 1579,  
 1584, 1587, 1592, 1595, 1601, 1604,  
 1611, 1617, 1622, 1625, 1630, 1633,  
 1638, 1641, 1649, 1655, 1661, 1668,  
 1674, 1681, 1688, 1694, 1700, 1706,  
 1712, 1718, 1723, 1726, 1731, 1735,  
 1739, 1743, 1748, 1751, 1757, 1763,  
 1770, 1775, 1779, 1784, 1787, 1793,  
 1796, 1801, 1804, 1809, 1812, 1817,  
 1820, 1825, 1829, 1834, 1837, 1842,  
 1845, 1850, 1853, 1858, 1862, 1866,  
 1870, 1875, 1878, 1884, 1890, 1897,  
 1902, 1905, 1911, 1917, 1922, 1926,  
 1931, 1934, 1939, 1943, 1949, 1954,  
 1957, 1962, 1966, 1971, 1975, 1980,  
 1983, 1988, 1992, 1997, 2000, 2006,  
 2011, 2015, 2020, 2023, 2029, 2035,  
 2038, 2043, 2046, 2051, 2055, 2060,  
 2063, 2069, 2076, 2081, 2084, 2089,  
 2092, 2097, 2101, 2107, 2112, 2115,  
 2121, 2124, 2129, 2132, 2137, 2141,  
 2147, 2153, 2158, 2162, 2166, 2170,  
 2175, 2178, 2183, 2186, 2193, 2199,  
 2204, 2208, 2213, 2216, 2222, 2227,  
 2230, 2235, 2239, 2244, 2251, 2257,  
 2265, 2271, 2277, 2282, 2285, 2291,  
 2298, 2304, 2310, 2315, 2318, 2324,  
 2329, 2332, 2337, 2340, 2345, 2349,  
 2355, 2361, 2366, 2373, 2379, 2386,  
 2392, 2398, 2403, 2406, 2412, 2417,  
 2421, 2426, 2429, 2434, 2437, 2442,  
 2445, 2450, 2453, 2458, 2462, 2468,  
 2474, 2479, 2482, 2487, 2491, 2496,  
 2501, 2504, 2511, 2516, 2519, 2524,  
 2527, 2532, 2535, 2540, 2544, 2549,  
 2552, 2557, 2560, 2566, 2571, 2575,  
 2580, 2583, 2588, 2591, 2596, 2599,  
 2604, 2608, 2614, 2619, 2623, 2627,  
 2631, 2636, 2639, 2649, 2654, 2657,  
 2662, 2665, 2672, 2677, 2680, 2685,  
 2688
- op\_exp1, 972, 976, 981, 985, 990, 994, 1000,  
 1003, 1008, 1012, 1018, 1021, 1026,

1029, 1034, 1038, 1043, 1046, 1051,  
1054, 1059, 1063, 1068, 1072, 1076,  
1080, 1085, 1089, 1094, 1098, 1102,  
1106, 1111, 1115, 1120, 1123, 1129,  
1133, 1139, 1146, 1152, 1158, 1161,  
1166, 1169, 1175, 1182, 1187, 1190,  
1196, 1200, 1204, 1209, 1212, 1219,  
1224, 1227, 1233, 1239, 1245, 1252,  
1257, 1260, 1265, 1268, 1273, 1276,  
1281, 1285, 1290, 1293, 1298, 1302,  
1307, 1310, 1316, 1321, 1325, 1330,  
1333, 1340, 1346, 1351, 1357, 1360,  
1367, 1370, 1375, 1379, 1384, 1387,  
1393, 1396, 1401, 1404, 1409, 1412,  
1418, 1424, 1429, 1436, 1439, 1445,  
1450, 1454, 1459, 1462, 1468, 1473,  
1478, 1482, 1487, 1490, 1493, 1504,  
1509, 1512, 1518, 1524, 1529, 1532,  
1537, 1541, 1546, 1549, 1555, 1560,  
1563, 1568, 1572, 1579, 1584, 1587,  
1592, 1595, 1601, 1604, 1611, 1617,  
1622, 1625, 1630, 1633, 1638, 1641,  
1649, 1655, 1662, 1668, 1674, 1681,  
1688, 1694, 1700, 1706, 1712, 1718,  
1723, 1726, 1731, 1735, 1739, 1743,  
1748, 1751, 1757, 1763, 1770, 1775,  
1779, 1784, 1787, 1793, 1796, 1801,  
1804, 1809, 1812, 1817, 1820, 1825,  
1829, 1834, 1837, 1842, 1845, 1850,  
1853, 1858, 1862, 1866, 1870, 1875,  
1878, 1884, 1890, 1897, 1902, 1905,  
1911, 1917, 1922, 1926, 1931, 1935,  
1939, 1943, 1949, 1954, 1957, 1962,  
1966, 1971, 1975, 1980, 1983, 1988,  
1992, 1997, 2000, 2006, 2011, 2015,  
2020, 2023, 2029, 2035, 2038, 2043,  
2046, 2051, 2055, 2060, 2063, 2069,  
2076, 2081, 2084, 2089, 2092, 2097,  
2101, 2107, 2112, 2115, 2121, 2124,  
2129, 2132, 2137, 2141, 2147, 2153,  
2158, 2162, 2166, 2170, 2175, 2178,  
2183, 2186, 2193, 2199, 2204, 2208,  
2213, 2216, 2222, 2227, 2230, 2235,  
2239, 2244, 2251, 2257, 2265, 2271,  
2277, 2282, 2285, 2291, 2298, 2304,  
2310, 2315, 2318, 2324, 2329, 2332,  
2337, 2340, 2345, 2349, 2355, 2361,  
2366, 2373, 2379, 2386, 2392, 2398,  
2403, 2406, 2412, 2417, 2421, 2426,  
2429, 2434, 2437, 2442, 2445, 2450,  
2453, 2458, 2462, 2468, 2474, 2479,  
2482, 2487, 2491, 2496, 2501, 2504,  
2511, 2516, 2519, 2524, 2527, 2532,  
2535, 2540, 2544, 2549, 2552, 2557,  
2560, 2566, 2571, 2575, 2580, 2583,  
2588, 2591, 2596, 2600, 2604, 2608,  
2614, 2619, 2623, 2627, 2631, 2636,  
2639, 2649, 2654, 2657, 2662, 2665,  
2672, 2677, 2680, 2685, 2688

op\_extract\_sequences, 976, 985, 994, 1003,  
1012, 1021, 1029, 1038, 1046, 1054,  
1063, 1072, 1080, 1089, 1098, 1106,  
1115, 1123, 1133, 1139, 1146, 1152,  
1161, 1169, 1175, 1182, 1190, 1196,  
1204, 1212, 1219, 1227, 1233, 1239,  
1245, 1252, 1260, 1268, 1276, 1285,  
1293, 1302, 1310, 1316, 1325, 1333,  
1340, 1346, 1351, 1360, 1370, 1379,  
1387, 1396, 1404, 1412, 1418, 1424,  
1429, 1439, 1445, 1454, 1462, 1466,  
1468, 1472, 1473, 1482, 1490, 1498,  
1501, 1512, 1516, 1518, 1522, 1524,  
1532, 1541, 1549, 1555, 1563, 1572,  
1579, 1587, 1595, 1604, 1611, 1617,  
1625, 1633, 1641, 1649, 1655, 1662,  
1668, 1674, 1681, 1688, 1694, 1701,  
1706, 1710, 1712, 1716, 1718, 1726,  
1735, 1743, 1751, 1755, 1757, 1763,  
1770, 1779, 1787, 1796, 1804, 1812,  
1820, 1829, 1837, 1845, 1853, 1862,  
1870, 1878, 1883, 1884, 1890, 1897,  
1905, 1911, 1917, 1926, 1935, 1943,  
1949, 1957, 1966, 1975, 1983, 1992,  
2000, 2006, 2015, 2023, 2029, 2038,  
2046, 2055, 2063, 2069, 2076, 2084,  
2092, 2101, 2107, 2115, 2124, 2132,  
2141, 2147, 2151, 2153, 2162, 2170,  
2178, 2186, 2193, 2199, 2208, 2216,  
2220, 2222, 2230, 2239, 2243, 2244,  
2251, 2257, 2265, 2269, 2271, 2275,  
2277, 2285, 2291, 2298, 2304, 2310,  
2318, 2324, 2332, 2340, 2349, 2355,  
2361, 2366, 2373, 2379, 2386, 2390,  
2392, 2398, 2406, 2412, 2421, 2429,  
2437, 2445, 2453, 2462, 2466, 2468,  
2474, 2482, 2491, 2496, 2504, 2511,

- 2519, 2527, 2535, 2544, 2552, 2560,  
2565, 2566, 2575, 2583, 2591, 2600,  
2608, 2614, 2623, 2631, 2639, 2649,  
2657, 2665, 2672, 2680, 2688
- op\_eye, 972, 976, 981, 985, 990, 994, 1000,  
1003, 1008, 1012, 1018, 1021, 1026,  
1029, 1034, 1038, 1043, 1046, 1051,  
1054, 1059, 1063, 1068, 1072, 1076,  
1080, 1085, 1089, 1094, 1098, 1103,  
1106, 1111, 1115, 1120, 1123, 1129,  
1133, 1139, 1146, 1152, 1158, 1161,  
1166, 1169, 1175, 1182, 1187, 1190,  
1196, 1200, 1204, 1209, 1212, 1219,  
1224, 1227, 1233, 1239, 1245, 1252,  
1257, 1260, 1265, 1268, 1273, 1276,  
1281, 1285, 1290, 1293, 1298, 1302,  
1307, 1310, 1316, 1321, 1325, 1330,  
1333, 1340, 1346, 1351, 1357, 1360,  
1367, 1370, 1375, 1379, 1384, 1387,  
1393, 1396, 1401, 1404, 1409, 1413,  
1418, 1424, 1429, 1436, 1439, 1445,  
1450, 1454, 1459, 1462, 1468, 1474,  
1478, 1482, 1487, 1490, 1495, 1498,  
1504, 1507, 1518, 1524, 1529, 1532,  
1537, 1541, 1546, 1549, 1555, 1560,  
1563, 1568, 1572, 1579, 1584, 1587,  
1592, 1595, 1601, 1604, 1611, 1617,  
1622, 1625, 1630, 1633, 1638, 1641,  
1649, 1655, 1662, 1668, 1674, 1681,  
1688, 1694, 1701, 1706, 1712, 1718,  
1723, 1726, 1731, 1735, 1739, 1743,  
1748, 1751, 1757, 1763, 1770, 1775,  
1779, 1784, 1787, 1793, 1796, 1801,  
1804, 1809, 1812, 1817, 1820, 1825,  
1829, 1834, 1837, 1842, 1845, 1850,  
1853, 1858, 1862, 1866, 1870, 1875,  
1878, 1884, 1890, 1897, 1902, 1905,  
1911, 1917, 1922, 1926, 1931, 1935,  
1939, 1943, 1949, 1954, 1957, 1962,  
1966, 1971, 1975, 1980, 1983, 1988,  
1992, 1997, 2000, 2006, 2011, 2015,  
2020, 2023, 2029, 2035, 2038, 2043,  
2046, 2051, 2055, 2060, 2063, 2069,  
2076, 2081, 2084, 2089, 2092, 2097,  
2101, 2107, 2112, 2115, 2121, 2124,  
2129, 2132, 2137, 2141, 2147, 2153,  
2158, 2162, 2166, 2170, 2175, 2178,  
2183, 2186, 2193, 2199, 2204, 2208,  
2213, 2216, 2222, 2227, 2230, 2235,  
2239, 2245, 2251, 2257, 2265, 2271,  
2277, 2282, 2285, 2291, 2298, 2304,  
2310, 2315, 2318, 2324, 2329, 2332,  
2337, 2340, 2345, 2349, 2355, 2361,  
2366, 2373, 2379, 2386, 2392, 2398,  
2403, 2406, 2412, 2417, 2421, 2426,  
2429, 2434, 2437, 2442, 2445, 2450,  
2454, 2458, 2462, 2468, 2474, 2479,  
2482, 2487, 2491, 2496, 2501, 2505,  
2511, 2516, 2519, 2524, 2527, 2532,  
2535, 2540, 2544, 2549, 2552, 2557,  
2560, 2566, 2571, 2575, 2580, 2583,  
2588, 2591, 2596, 2600, 2604, 2608,  
2614, 2619, 2623, 2627, 2631, 2636,  
2639, 2649, 2654, 2657, 2662, 2665,  
2672, 2677, 2680, 2685, 2688
- op\_fft, 976, 985, 994, 1003, 1012, 1021,  
1029, 1038, 1046, 1054, 1063, 1072,  
1080, 1089, 1098, 1106, 1115, 1123,  
1133, 1139, 1146, 1152, 1161, 1169,  
1175, 1182, 1190, 1196, 1204, 1212,  
1219, 1227, 1233, 1239, 1245, 1252,  
1260, 1268, 1276, 1285, 1293, 1302,  
1310, 1317, 1325, 1333, 1340, 1346,  
1351, 1360, 1370, 1379, 1387, 1396,  
1404, 1413, 1418, 1424, 1429, 1439,  
1445, 1454, 1462, 1466, 1468, 1472,  
1474, 1482, 1490, 1498, 1502, 1504,  
1512, 1516, 1523, 1524, 1533, 1541,  
1549, 1555, 1563, 1572, 1579, 1587,  
1595, 1604, 1611, 1617, 1625, 1633,  
1641, 1649, 1655, 1662, 1668, 1674,  
1681, 1688, 1694, 1701, 1706, 1710,  
1712, 1716, 1718, 1726, 1735, 1743,  
1751, 1756, 1757, 1763, 1770, 1779,  
1787, 1796, 1804, 1812, 1820, 1829,  
1837, 1845, 1853, 1862, 1870, 1879,  
1883, 1884, 1891, 1897, 1905, 1911,  
1917, 1926, 1935, 1943, 1949, 1958,  
1966, 1975, 1983, 1992, 2000, 2006,  
2015, 2023, 2029, 2038, 2046, 2055,  
2063, 2069, 2076, 2084, 2092, 2101,  
2107, 2115, 2124, 2132, 2141, 2147,  
2151, 2153, 2162, 2170, 2178, 2186,  
2193, 2199, 2208, 2216, 2220, 2222,  
2230, 2239, 2243, 2245, 2251, 2257,  
2265, 2269, 2271, 2275, 2277, 2285,

- 2291, 2298, 2304, 2310, 2318, 2324,  
 2332, 2340, 2349, 2355, 2361, 2366,  
 2373, 2379, 2386, 2390, 2392, 2398,  
 2406, 2412, 2421, 2429, 2437, 2445,  
 2454, 2462, 2466, 2468, 2474, 2482,  
 2491, 2496, 2505, 2511, 2519, 2527,  
 2535, 2544, 2552, 2560, 2565, 2566,  
 2575, 2583, 2591, 2600, 2608, 2614,  
 2623, 2631, 2640, 2649, 2657, 2665,  
 2672, 2680, 2688
- op\_fft2*, 976, 985, 994, 1003, 1012, 1021,  
 1029, 1038, 1046, 1054, 1063, 1072,  
 1080, 1089, 1098, 1106, 1115, 1123,  
 1133, 1139, 1146, 1152, 1161, 1169,  
 1175, 1182, 1190, 1196, 1204, 1212,  
 1219, 1227, 1233, 1239, 1245, 1252,  
 1260, 1268, 1276, 1285, 1293, 1302,  
 1310, 1317, 1325, 1333, 1340, 1346,  
 1352, 1360, 1370, 1379, 1387, 1396,  
 1404, 1413, 1418, 1424, 1429, 1439,  
 1445, 1454, 1462, 1466, 1468, 1472,  
 1474, 1482, 1490, 1498, 1502, 1504,  
 1512, 1516, 1518, 1522, 1533, 1541,  
 1549, 1555, 1564, 1572, 1579, 1587,  
 1595, 1604, 1611, 1617, 1625, 1633,  
 1641, 1649, 1655, 1662, 1668, 1674,  
 1681, 1688, 1694, 1701, 1706, 1710,  
 1712, 1716, 1718, 1726, 1735, 1743,  
 1751, 1756, 1757, 1763, 1770, 1779,  
 1787, 1796, 1804, 1812, 1821, 1829,  
 1837, 1845, 1853, 1862, 1870, 1879,  
 1883, 1884, 1891, 1897, 1905, 1911,  
 1917, 1926, 1935, 1943, 1949, 1958,  
 1966, 1975, 1983, 1992, 2000, 2006,  
 2015, 2023, 2030, 2038, 2046, 2055,  
 2063, 2069, 2076, 2084, 2092, 2101,  
 2107, 2115, 2124, 2132, 2141, 2147,  
 2151, 2153, 2162, 2170, 2178, 2186,  
 2193, 2199, 2208, 2216, 2220, 2222,  
 2231, 2239, 2243, 2245, 2252, 2258,  
 2265, 2269, 2271, 2275, 2277, 2285,  
 2291, 2298, 2304, 2310, 2318, 2324,  
 2332, 2341, 2349, 2355, 2361, 2367,  
 2373, 2379, 2386, 2390, 2392, 2398,  
 2406, 2412, 2421, 2429, 2437, 2445,  
 2454, 2462, 2466, 2468, 2474, 2482,  
 2491, 2496, 2505, 2511, 2519, 2527,  
 2535, 2544, 2552, 2560, 2565, 2566,  
 2575, 2583, 2591, 2600, 2608, 2614,  
 2623, 2631, 2640, 2649, 2657, 2665,  
 2672, 2680, 2688
- op\_flip*, 972, 976, 981, 985, 990, 994, 1000,  
 1003, 1008, 1012, 1018, 1021, 1026,  
 1029, 1034, 1038, 1043, 1046, 1051,  
 1054, 1059, 1063, 1068, 1072, 1076,  
 1080, 1085, 1089, 1094, 1098, 1103,  
 1106, 1111, 1115, 1120, 1123, 1129,  
 1133, 1139, 1146, 1152, 1158, 1161,  
 1166, 1169, 1176, 1182, 1187, 1190,  
 1196, 1200, 1204, 1209, 1212, 1219,  
 1224, 1227, 1233, 1239, 1245, 1252,  
 1257, 1260, 1265, 1268, 1273, 1276,  
 1281, 1285, 1290, 1293, 1298, 1302,  
 1307, 1311, 1317, 1321, 1325, 1330,  
 1333, 1340, 1346, 1352, 1357, 1360,  
 1367, 1370, 1375, 1379, 1384, 1387,  
 1393, 1396, 1401, 1404, 1409, 1413,  
 1418, 1424, 1429, 1436, 1439, 1445,  
 1450, 1454, 1459, 1462, 1468, 1474,  
 1478, 1482, 1487, 1490, 1495, 1498,  
 1504, 1509, 1512, 1518, 1524, 1528,  
 1537, 1541, 1546, 1549, 1555, 1560,  
 1564, 1568, 1572, 1579, 1584, 1587,  
 1592, 1596, 1601, 1604, 1611, 1617,  
 1622, 1625, 1630, 1633, 1638, 1641,  
 1649, 1655, 1662, 1668, 1674, 1681,  
 1688, 1694, 1701, 1706, 1712, 1718,  
 1723, 1726, 1731, 1735, 1739, 1743,  
 1748, 1751, 1757, 1763, 1770, 1775,  
 1779, 1784, 1787, 1793, 1796, 1801,  
 1804, 1809, 1812, 1817, 1821, 1825,  
 1829, 1834, 1837, 1842, 1845, 1850,  
 1853, 1858, 1862, 1866, 1870, 1875,  
 1879, 1884, 1891, 1897, 1902, 1906,  
 1911, 1917, 1922, 1926, 1931, 1935,  
 1939, 1943, 1949, 1954, 1958, 1962,  
 1966, 1971, 1975, 1980, 1983, 1988,  
 1992, 1997, 2000, 2006, 2011, 2015,  
 2020, 2023, 2030, 2035, 2038, 2043,  
 2046, 2051, 2055, 2060, 2063, 2070,  
 2076, 2081, 2084, 2089, 2092, 2097,  
 2101, 2107, 2112, 2115, 2121, 2124,  
 2129, 2133, 2137, 2141, 2147, 2153,  
 2158, 2162, 2166, 2170, 2175, 2178,  
 2183, 2186, 2193, 2200, 2204, 2208,  
 2213, 2216, 2222, 2227, 2231, 2235,

- 2239, 2245, 2252, 2258, 2265, 2271,  
 2277, 2282, 2285, 2291, 2298, 2304,  
 2310, 2315, 2318, 2324, 2329, 2332,  
 2337, 2341, 2345, 2349, 2355, 2361,  
 2367, 2373, 2380, 2386, 2392, 2398,  
 2403, 2406, 2412, 2417, 2421, 2426,  
 2429, 2434, 2437, 2442, 2445, 2450,  
 2454, 2458, 2462, 2468, 2474, 2479,  
 2482, 2487, 2491, 2496, 2501, 2505,  
 2511, 2516, 2519, 2524, 2527, 2532,  
 2536, 2540, 2544, 2549, 2552, 2557,  
 2560, 2566, 2571, 2575, 2580, 2583,  
 2588, 2591, 2596, 2600, 2604, 2608,  
 2614, 2619, 2623, 2627, 2631, 2636,  
 2640, 2649, 2654, 2657, 2662, 2665,  
 2672, 2677, 2680, 2685, 2688
- op\_floor*, 972, 976, 981, 985, 990, 994, 1000,  
 1003, 1008, 1012, 1018, 1021, 1026,  
 1029, 1034, 1038, 1043, 1046, 1051,  
 1054, 1059, 1063, 1068, 1072, 1076,  
 1080, 1085, 1089, 1094, 1098, 1103,  
 1106, 1111, 1115, 1120, 1123, 1129,  
 1133, 1139, 1146, 1152, 1158, 1161,  
 1166, 1169, 1176, 1182, 1187, 1190,  
 1196, 1200, 1204, 1209, 1212, 1219,  
 1224, 1227, 1233, 1239, 1245, 1252,  
 1257, 1260, 1265, 1268, 1273, 1276,  
 1281, 1285, 1290, 1293, 1298, 1302,  
 1307, 1311, 1317, 1321, 1325, 1330,  
 1333, 1340, 1346, 1352, 1357, 1361,  
 1367, 1370, 1375, 1379, 1384, 1387,  
 1393, 1396, 1401, 1404, 1409, 1413,  
 1418, 1424, 1429, 1436, 1439, 1445,  
 1450, 1454, 1459, 1462, 1468, 1474,  
 1478, 1482, 1487, 1490, 1495, 1498,  
 1504, 1509, 1512, 1518, 1524, 1529,  
 1533, 1536, 1546, 1549, 1555, 1560,  
 1564, 1568, 1572, 1579, 1584, 1587,  
 1592, 1596, 1601, 1604, 1611, 1617,  
 1622, 1625, 1630, 1633, 1638, 1641,  
 1649, 1655, 1662, 1668, 1674, 1681,  
 1688, 1694, 1701, 1706, 1712, 1718,  
 1723, 1726, 1731, 1735, 1739, 1743,  
 1748, 1751, 1757, 1763, 1770, 1775,  
 1779, 1784, 1787, 1793, 1796, 1801,  
 1804, 1809, 1812, 1817, 1821, 1825,  
 1829, 1834, 1837, 1842, 1845, 1850,  
 1853, 1858, 1862, 1866, 1870, 1875,  
 1879, 1884, 1891, 1897, 1902, 1906,  
 1911, 1918, 1922, 1926, 1931, 1935,  
 1939, 1943, 1949, 1954, 1958, 1962,  
 1966, 1971, 1975, 1980, 1983, 1988,  
 1992, 1997, 2000, 2006, 2011, 2015,  
 2020, 2023, 2030, 2035, 2038, 2043,  
 2046, 2051, 2055, 2060, 2063, 2070,  
 2076, 2081, 2084, 2089, 2092, 2097,  
 2101, 2107, 2112, 2115, 2121, 2124,  
 2129, 2133, 2137, 2141, 2147, 2153,  
 2158, 2162, 2166, 2170, 2175, 2178,  
 2183, 2186, 2193, 2200, 2204, 2208,  
 2213, 2216, 2222, 2227, 2231, 2235,  
 2239, 2245, 2252, 2258, 2265, 2271,  
 2277, 2282, 2285, 2291, 2298, 2304,  
 2310, 2315, 2318, 2324, 2329, 2332,  
 2337, 2341, 2345, 2349, 2355, 2361,  
 2367, 2373, 2380, 2386, 2392, 2398,  
 2403, 2406, 2413, 2417, 2421, 2426,  
 2429, 2434, 2437, 2442, 2445, 2450,  
 2454, 2458, 2462, 2468, 2474, 2479,  
 2482, 2487, 2491, 2496, 2501, 2505,  
 2511, 2516, 2519, 2524, 2527, 2532,  
 2536, 2540, 2544, 2549, 2552, 2557,  
 2560, 2566, 2571, 2575, 2580, 2583,  
 2588, 2591, 2596, 2600, 2604, 2608,  
 2614, 2619, 2623, 2627, 2631, 2636,  
 2640, 2649, 2654, 2657, 2662, 2665,  
 2672, 2677, 2680, 2685, 2688
- op\_floor\_divide*, 972, 976, 981, 985, 990,  
 994, 1000, 1003, 1008, 1012, 1018,  
 1021, 1026, 1029, 1034, 1038, 1043,  
 1046, 1051, 1054, 1059, 1063, 1068,  
 1072, 1076, 1080, 1085, 1089, 1094,  
 1098, 1103, 1106, 1111, 1115, 1120,  
 1123, 1129, 1133, 1139, 1146, 1152,  
 1158, 1161, 1166, 1169, 1176, 1182,  
 1187, 1190, 1196, 1200, 1204, 1209,  
 1212, 1219, 1224, 1227, 1233, 1239,  
 1245, 1252, 1257, 1260, 1265, 1268,  
 1273, 1276, 1281, 1285, 1290, 1293,  
 1298, 1302, 1307, 1311, 1317, 1321,  
 1325, 1330, 1333, 1340, 1346, 1352,  
 1357, 1361, 1367, 1370, 1375, 1379,  
 1384, 1387, 1393, 1396, 1401, 1404,  
 1409, 1413, 1419, 1424, 1430, 1436,  
 1439, 1445, 1450, 1454, 1459, 1462,  
 1468, 1474, 1478, 1482, 1487, 1490,

- 1495, 1498, 1504, 1509, 1512, 1518,  
 1524, 1529, 1533, 1537, 1541, 1544,  
 1555, 1560, 1564, 1568, 1572, 1579,  
 1584, 1587, 1592, 1596, 1601, 1604,  
 1611, 1617, 1622, 1625, 1630, 1633,  
 1638, 1641, 1649, 1655, 1662, 1668,  
 1674, 1681, 1688, 1694, 1701, 1706,  
 1712, 1718, 1723, 1726, 1731, 1735,  
 1739, 1743, 1748, 1751, 1757, 1763,  
 1770, 1775, 1779, 1784, 1787, 1793,  
 1796, 1801, 1804, 1809, 1812, 1817,  
 1821, 1825, 1829, 1834, 1837, 1842,  
 1845, 1850, 1854, 1858, 1862, 1866,  
 1870, 1875, 1879, 1885, 1891, 1897,  
 1902, 1906, 1911, 1918, 1922, 1926,  
 1931, 1935, 1939, 1943, 1949, 1954,  
 1958, 1962, 1966, 1971, 1975, 1980,  
 1983, 1988, 1992, 1997, 2000, 2007,  
 2011, 2015, 2020, 2023, 2030, 2035,  
 2038, 2043, 2046, 2051, 2055, 2060,  
 2063, 2070, 2076, 2081, 2084, 2089,  
 2093, 2097, 2101, 2107, 2112, 2115,  
 2121, 2124, 2129, 2133, 2137, 2141,  
 2147, 2153, 2158, 2162, 2166, 2170,  
 2175, 2178, 2183, 2186, 2193, 2200,  
 2204, 2208, 2213, 2216, 2222, 2227,  
 2231, 2235, 2239, 2245, 2252, 2258,  
 2265, 2271, 2277, 2282, 2285, 2291,  
 2298, 2304, 2310, 2315, 2318, 2324,  
 2329, 2332, 2337, 2341, 2345, 2349,  
 2355, 2361, 2367, 2373, 2380, 2386,  
 2392, 2398, 2403, 2406, 2413, 2417,  
 2421, 2426, 2429, 2434, 2437, 2442,  
 2445, 2450, 2454, 2458, 2462, 2468,  
 2474, 2479, 2482, 2487, 2491, 2496,  
 2501, 2505, 2511, 2516, 2519, 2524,  
 2527, 2532, 2536, 2540, 2544, 2549,  
 2552, 2557, 2560, 2567, 2571, 2575,  
 2580, 2583, 2588, 2591, 2596, 2600,  
 2604, 2608, 2614, 2619, 2623, 2628,  
 2631, 2636, 2640, 2649, 2654, 2657,  
 2662, 2665, 2672, 2677, 2680, 2685,  
 2688
- op\_fori\_loop, 976, 985, 994, 1003, 1012,  
 1021, 1029, 1038, 1046, 1054, 1063,  
 1072, 1080, 1089, 1098, 1106, 1115,  
 1123, 1133, 1139, 1146, 1152, 1161,  
 1169, 1174, 1176, 1182, 1190, 1196,  
 1204, 1212, 1217, 1219, 1227, 1234,  
 1237, 1239, 1243, 1245, 1252, 1260,  
 1268, 1276, 1285, 1293, 1302, 1311,  
 1317, 1325, 1333, 1338, 1340, 1346,  
 1352, 1361, 1370, 1379, 1387, 1396,  
 1404, 1413, 1417, 1419, 1424, 1430,  
 1439, 1445, 1454, 1462, 1468, 1474,  
 1482, 1490, 1498, 1504, 1512, 1518,  
 1524, 1533, 1541, 1549, 1553, 1564,  
 1572, 1579, 1587, 1596, 1604, 1611,  
 1617, 1625, 1633, 1642, 1649, 1655,  
 1662, 1668, 1674, 1681, 1688, 1694,  
 1701, 1706, 1712, 1718, 1727, 1735,  
 1743, 1751, 1757, 1761, 1763, 1770,  
 1779, 1787, 1796, 1804, 1812, 1821,  
 1829, 1837, 1845, 1854, 1862, 1870,  
 1879, 1885, 1891, 1897, 1906, 1911,  
 1916, 1918, 1926, 1935, 1943, 1949,  
 1958, 1966, 1975, 1984, 1992, 2000,  
 2007, 2015, 2023, 2030, 2038, 2046,  
 2055, 2063, 2070, 2076, 2084, 2093,  
 2101, 2107, 2115, 2124, 2133, 2141,  
 2147, 2153, 2162, 2170, 2178, 2186,  
 2193, 2200, 2208, 2216, 2222, 2231,  
 2239, 2245, 2250, 2252, 2256, 2258,  
 2263, 2265, 2271, 2277, 2285, 2291,  
 2298, 2302, 2304, 2310, 2318, 2324,  
 2332, 2341, 2349, 2353, 2355, 2359,  
 2361, 2367, 2373, 2380, 2386, 2392,  
 2398, 2406, 2413, 2421, 2429, 2437,  
 2445, 2454, 2462, 2468, 2472, 2474,  
 2483, 2491, 2496, 2505, 2509, 2511,  
 2519, 2527, 2536, 2544, 2552, 2560,  
 2567, 2575, 2583, 2591, 2600, 2608,  
 2613, 2614, 2623, 2631, 2640, 2647,  
 2649, 2657, 2665, 2670, 2672, 2680,  
 2688
- op\_full, 972, 976, 981, 985, 990, 994, 1000,  
 1003, 1008, 1012, 1018, 1021, 1026,  
 1029, 1034, 1038, 1043, 1046, 1051,  
 1054, 1059, 1063, 1068, 1072, 1076,  
 1080, 1085, 1089, 1094, 1098, 1103,  
 1106, 1111, 1115, 1120, 1124, 1129,  
 1133, 1139, 1146, 1152, 1158, 1161,  
 1166, 1169, 1176, 1182, 1187, 1190,  
 1196, 1200, 1204, 1209, 1212, 1219,  
 1224, 1227, 1234, 1239, 1245, 1252,  
 1257, 1260, 1265, 1268, 1273, 1277,

- 1281, 1285, 1290, 1293, 1298, 1302,  
1307, 1311, 1317, 1321, 1325, 1330,  
1333, 1340, 1346, 1352, 1357, 1361,  
1367, 1370, 1375, 1379, 1384, 1387,  
1393, 1396, 1401, 1404, 1409, 1413,  
1419, 1424, 1430, 1436, 1439, 1445,  
1450, 1454, 1459, 1462, 1468, 1474,  
1478, 1482, 1487, 1490, 1495, 1498,  
1504, 1509, 1512, 1518, 1524, 1529,  
1533, 1537, 1541, 1546, 1549, 1555,  
1559, 1568, 1572, 1579, 1584, 1587,  
1592, 1596, 1601, 1604, 1611, 1617,  
1622, 1625, 1630, 1633, 1638, 1642,  
1649, 1655, 1662, 1668, 1674, 1681,  
1688, 1694, 1701, 1706, 1712, 1718,  
1723, 1727, 1731, 1735, 1739, 1743,  
1748, 1751, 1757, 1763, 1770, 1775,  
1779, 1784, 1787, 1793, 1796, 1801,  
1804, 1809, 1812, 1817, 1821, 1825,  
1829, 1834, 1837, 1842, 1845, 1850,  
1854, 1858, 1862, 1867, 1870, 1875,  
1879, 1885, 1891, 1897, 1902, 1906,  
1911, 1918, 1922, 1926, 1931, 1935,  
1939, 1943, 1949, 1954, 1958, 1962,  
1966, 1971, 1975, 1980, 1984, 1988,  
1992, 1997, 2000, 2007, 2011, 2015,  
2020, 2023, 2030, 2035, 2038, 2043,  
2046, 2051, 2055, 2060, 2063, 2070,  
2076, 2081, 2084, 2089, 2093, 2097,  
2101, 2107, 2112, 2115, 2121, 2124,  
2129, 2133, 2137, 2141, 2147, 2153,  
2158, 2162, 2166, 2170, 2175, 2178,  
2183, 2186, 2193, 2200, 2204, 2208,  
2213, 2216, 2222, 2227, 2231, 2235,  
2239, 2245, 2252, 2258, 2265, 2271,  
2277, 2282, 2285, 2291, 2298, 2304,  
2310, 2315, 2318, 2324, 2329, 2332,  
2337, 2341, 2345, 2349, 2355, 2361,  
2367, 2373, 2380, 2386, 2392, 2398,  
2403, 2406, 2413, 2417, 2421, 2426,  
2429, 2434, 2437, 2442, 2445, 2450,  
2454, 2458, 2462, 2468, 2474, 2479,  
2483, 2487, 2491, 2496, 2501, 2505,  
2511, 2516, 2519, 2524, 2527, 2532,  
2536, 2540, 2544, 2549, 2552, 2557,  
2560, 2567, 2572, 2575, 2580, 2583,  
2588, 2591, 2596, 2600, 2604, 2608,  
2614, 2619, 2623, 2628, 2631, 2636,  
2640, 2649, 2654, 2657, 2662, 2665,  
2672, 2677, 2680, 2685, 2688
- op\_full\_like, 972, 976, 981, 985, 990, 994,  
1000, 1003, 1008, 1012, 1018, 1021,  
1026, 1029, 1034, 1038, 1043, 1046,  
1051, 1054, 1059, 1063, 1068, 1072,  
1076, 1080, 1085, 1089, 1094, 1098,  
1103, 1106, 1112, 1115, 1120, 1124,  
1129, 1133, 1139, 1146, 1152, 1158,  
1161, 1166, 1170, 1176, 1182, 1187,  
1190, 1196, 1201, 1204, 1209, 1212,  
1219, 1224, 1227, 1234, 1239, 1245,  
1252, 1257, 1260, 1265, 1268, 1273,  
1277, 1281, 1285, 1290, 1293, 1298,  
1302, 1307, 1311, 1317, 1321, 1325,  
1330, 1333, 1340, 1346, 1352, 1357,  
1361, 1367, 1370, 1375, 1379, 1384,  
1387, 1393, 1396, 1401, 1404, 1409,  
1413, 1419, 1424, 1430, 1436, 1439,  
1446, 1450, 1454, 1459, 1462, 1468,  
1474, 1478, 1482, 1487, 1490, 1495,  
1498, 1504, 1509, 1512, 1518, 1524,  
1529, 1533, 1537, 1541, 1546, 1549,  
1555, 1560, 1564, 1567, 1579, 1584,  
1587, 1592, 1596, 1601, 1604, 1611,  
1617, 1622, 1625, 1630, 1633, 1638,  
1642, 1649, 1655, 1662, 1668, 1674,  
1681, 1688, 1694, 1701, 1706, 1712,  
1718, 1723, 1727, 1731, 1735, 1739,  
1743, 1748, 1751, 1757, 1763, 1770,  
1775, 1779, 1784, 1787, 1793, 1796,  
1801, 1804, 1809, 1812, 1817, 1821,  
1825, 1829, 1834, 1837, 1842, 1845,  
1850, 1854, 1858, 1862, 1867, 1870,  
1875, 1879, 1885, 1891, 1897, 1902,  
1906, 1911, 1918, 1922, 1926, 1931,  
1935, 1940, 1943, 1949, 1954, 1958,  
1962, 1966, 1971, 1975, 1980, 1984,  
1988, 1992, 1997, 2000, 2007, 2011,  
2015, 2020, 2023, 2030, 2035, 2038,  
2043, 2046, 2051, 2055, 2060, 2063,  
2070, 2076, 2081, 2084, 2089, 2093,  
2097, 2101, 2107, 2112, 2116, 2121,  
2124, 2129, 2133, 2137, 2141, 2147,  
2153, 2158, 2162, 2166, 2170, 2175,  
2178, 2183, 2186, 2193, 2200, 2204,  
2208, 2213, 2216, 2222, 2227, 2231,  
2235, 2239, 2245, 2252, 2258, 2265,



- 2271, 2277, 2282, 2285, 2291, 2298,  
 2304, 2310, 2315, 2318, 2324, 2329,  
 2332, 2337, 2341, 2345, 2349, 2355,  
 2361, 2367, 2373, 2380, 2386, 2392,  
 2398, 2403, 2406, 2413, 2418, 2421,  
 2426, 2429, 2434, 2437, 2442, 2445,  
 2450, 2454, 2458, 2462, 2468, 2474,  
 2479, 2483, 2487, 2491, 2496, 2501,  
 2505, 2511, 2516, 2519, 2524, 2527,  
 2532, 2536, 2540, 2544, 2549, 2552,  
 2557, 2560, 2567, 2572, 2575, 2580,  
 2583, 2588, 2591, 2596, 2600, 2604,  
 2608, 2614, 2619, 2623, 2628, 2631,  
 2636, 2640, 2649, 2654, 2657, 2662,  
 2665, 2672, 2677, 2680, 2685, 2688
- op\_gelu*, 976, 985, 994, 1003, 1012, 1021,  
 1029, 1038, 1046, 1054, 1063, 1072,  
 1080, 1089, 1098, 1106, 1115, 1124,  
 1133, 1137, 1139, 1144, 1146, 1150,  
 1152, 1161, 1170, 1176, 1180, 1182,  
 1190, 1196, 1204, 1212, 1219, 1227,  
 1231, 1234, 1239, 1245, 1250, 1252,  
 1260, 1268, 1277, 1285, 1293, 1302,  
 1311, 1315, 1317, 1325, 1333, 1340,  
 1344, 1346, 1352, 1361, 1370, 1379,  
 1387, 1396, 1404, 1413, 1419, 1424,  
 1430, 1439, 1443, 1446, 1454, 1462,  
 1468, 1474, 1482, 1490, 1498, 1504,  
 1512, 1518, 1524, 1533, 1541, 1549,  
 1555, 1564, 1572, 1575, 1587, 1596,  
 1604, 1609, 1611, 1615, 1617, 1625,  
 1633, 1642, 1649, 1655, 1662, 1668,  
 1674, 1681, 1688, 1694, 1701, 1706,  
 1712, 1718, 1727, 1735, 1743, 1751,  
 1757, 1763, 1768, 1770, 1779, 1787,  
 1796, 1804, 1812, 1821, 1829, 1837,  
 1845, 1854, 1862, 1870, 1879, 1885,  
 1889, 1891, 1895, 1897, 1906, 1911,  
 1918, 1926, 1935, 1943, 1947, 1949,  
 1958, 1966, 1975, 1984, 1992, 2000,  
 2004, 2007, 2015, 2023, 2028, 2030,  
 2038, 2046, 2055, 2063, 2070, 2074,  
 2076, 2084, 2093, 2101, 2105, 2107,  
 2116, 2124, 2133, 2141, 2145, 2147,  
 2153, 2162, 2170, 2178, 2186, 2191,  
 2193, 2198, 2200, 2208, 2216, 2222,  
 2231, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2285, 2289, 2291, 2296,  
 2298, 2304, 2308, 2310, 2318, 2322,  
 2324, 2332, 2341, 2349, 2355, 2361,  
 2367, 2371, 2373, 2378, 2380, 2384,  
 2386, 2392, 2398, 2406, 2411, 2413,  
 2421, 2429, 2437, 2445, 2454, 2462,  
 2468, 2474, 2483, 2491, 2496, 2505,  
 2511, 2519, 2527, 2536, 2544, 2552,  
 2560, 2567, 2575, 2583, 2592, 2600,  
 2608, 2614, 2623, 2631, 2640, 2649,  
 2657, 2665, 2672, 2680, 2688
- op\_get\_item*, 973, 976, 981, 985, 990, 994,  
 1000, 1003, 1008, 1012, 1018, 1021,  
 1026, 1029, 1034, 1038, 1043, 1046,  
 1051, 1054, 1059, 1063, 1068, 1072,  
 1076, 1080, 1085, 1089, 1094, 1098,  
 1103, 1106, 1112, 1115, 1120, 1124,  
 1129, 1133, 1139, 1146, 1152, 1158,  
 1161, 1166, 1170, 1176, 1182, 1187,  
 1190, 1196, 1201, 1204, 1209, 1212,  
 1219, 1224, 1227, 1234, 1239, 1245,  
 1252, 1257, 1260, 1265, 1268, 1273,  
 1277, 1281, 1285, 1290, 1293, 1299,  
 1302, 1307, 1311, 1317, 1321, 1325,  
 1330, 1333, 1340, 1346, 1352, 1357,  
 1361, 1367, 1370, 1375, 1379, 1384,  
 1387, 1393, 1396, 1401, 1404, 1409,  
 1413, 1419, 1424, 1430, 1436, 1439,  
 1446, 1450, 1454, 1459, 1462, 1468,  
 1474, 1478, 1482, 1487, 1490, 1495,  
 1498, 1504, 1509, 1512, 1518, 1524,  
 1529, 1533, 1537, 1541, 1546, 1549,  
 1555, 1560, 1564, 1568, 1572, 1579,  
 1582, 1592, 1596, 1601, 1604, 1611,  
 1617, 1622, 1625, 1630, 1633, 1638,  
 1642, 1649, 1655, 1662, 1668, 1674,  
 1681, 1688, 1694, 1701, 1706, 1712,  
 1718, 1723, 1727, 1731, 1735, 1740,  
 1743, 1748, 1751, 1757, 1763, 1770,  
 1775, 1779, 1784, 1787, 1793, 1796,  
 1801, 1804, 1809, 1812, 1817, 1821,  
 1825, 1829, 1834, 1837, 1842, 1845,  
 1850, 1854, 1858, 1862, 1867, 1870,  
 1875, 1879, 1885, 1891, 1897, 1902,  
 1906, 1911, 1918, 1923, 1926, 1931,  
 1935, 1940, 1943, 1949, 1954, 1958,  
 1962, 1966, 1971, 1975, 1980, 1984,  
 1988, 1992, 1997, 2000, 2007, 2011,  
 2015, 2020, 2023, 2030, 2035, 2038,



- 2043, 2046, 2051, 2055, 2060, 2063,  
 2070, 2076, 2081, 2084, 2089, 2093,  
 2097, 2101, 2107, 2112, 2116, 2121,  
 2124, 2129, 2133, 2137, 2141, 2147,  
 2153, 2158, 2162, 2166, 2170, 2175,  
 2178, 2183, 2186, 2193, 2200, 2204,  
 2208, 2213, 2216, 2222, 2227, 2231,  
 2235, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2282, 2285, 2291, 2298,  
 2304, 2310, 2315, 2318, 2324, 2329,  
 2332, 2337, 2341, 2345, 2349, 2355,  
 2361, 2367, 2373, 2380, 2386, 2392,  
 2398, 2403, 2406, 2413, 2418, 2421,  
 2426, 2429, 2434, 2437, 2442, 2446,  
 2450, 2454, 2459, 2462, 2468, 2474,  
 2479, 2483, 2487, 2491, 2496, 2501,  
 2505, 2511, 2516, 2519, 2524, 2527,  
 2532, 2536, 2540, 2544, 2549, 2552,  
 2557, 2560, 2567, 2572, 2575, 2580,  
 2583, 2588, 2592, 2596, 2600, 2605,  
 2608, 2615, 2619, 2623, 2628, 2631,  
 2636, 2640, 2649, 2654, 2657, 2662,  
 2665, 2672, 2677, 2680, 2685, 2688
- op\_greater*, 973, 976, 982, 985, 990, 994,  
 1000, 1003, 1009, 1012, 1018, 1021,  
 1026, 1030, 1034, 1038, 1043, 1046,  
 1051, 1054, 1059, 1063, 1068, 1072,  
 1077, 1080, 1085, 1089, 1094, 1098,  
 1103, 1106, 1112, 1115, 1120, 1124,  
 1130, 1133, 1139, 1146, 1152, 1158,  
 1161, 1166, 1170, 1176, 1182, 1187,  
 1190, 1196, 1201, 1204, 1209, 1212,  
 1219, 1224, 1227, 1234, 1239, 1245,  
 1252, 1257, 1260, 1265, 1268, 1273,  
 1277, 1281, 1285, 1290, 1293, 1299,  
 1302, 1307, 1311, 1317, 1321, 1325,  
 1330, 1333, 1340, 1346, 1352, 1357,  
 1361, 1367, 1370, 1375, 1379, 1384,  
 1387, 1393, 1396, 1401, 1404, 1409,  
 1413, 1419, 1424, 1430, 1436, 1439,  
 1446, 1450, 1454, 1459, 1462, 1468,  
 1474, 1478, 1482, 1487, 1490, 1495,  
 1498, 1504, 1509, 1513, 1518, 1524,  
 1529, 1533, 1537, 1541, 1546, 1549,  
 1555, 1560, 1564, 1568, 1572, 1579,  
 1584, 1587, 1590, 1601, 1604, 1611,  
 1617, 1622, 1625, 1630, 1633, 1638,  
 1642, 1649, 1655, 1662, 1668, 1674,
- 1681, 1688, 1694, 1701, 1706, 1712,  
 1718, 1723, 1727, 1731, 1735, 1740,  
 1743, 1748, 1751, 1757, 1763, 1770,  
 1775, 1779, 1784, 1787, 1793, 1796,  
 1801, 1804, 1809, 1813, 1817, 1821,  
 1825, 1829, 1834, 1837, 1842, 1845,  
 1850, 1854, 1858, 1862, 1867, 1870,  
 1875, 1879, 1885, 1891, 1897, 1902,  
 1906, 1911, 1918, 1923, 1926, 1931,  
 1935, 1940, 1943, 1949, 1954, 1958,  
 1962, 1966, 1971, 1975, 1980, 1984,  
 1988, 1992, 1997, 2000, 2007, 2011,  
 2015, 2020, 2023, 2030, 2035, 2038,  
 2043, 2046, 2051, 2055, 2060, 2063,  
 2070, 2076, 2081, 2084, 2089, 2093,  
 2097, 2101, 2107, 2112, 2116, 2121,  
 2124, 2129, 2133, 2138, 2141, 2147,  
 2153, 2158, 2162, 2167, 2170, 2175,  
 2178, 2183, 2186, 2193, 2200, 2204,  
 2208, 2213, 2216, 2222, 2227, 2231,  
 2235, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2282, 2285, 2291, 2298,  
 2304, 2310, 2315, 2318, 2324, 2329,  
 2333, 2337, 2341, 2345, 2349, 2355,  
 2361, 2367, 2373, 2380, 2386, 2392,  
 2398, 2403, 2406, 2413, 2418, 2421,  
 2426, 2429, 2434, 2437, 2442, 2446,  
 2450, 2454, 2459, 2462, 2468, 2474,  
 2479, 2483, 2487, 2491, 2497, 2501,  
 2505, 2511, 2516, 2519, 2524, 2527,  
 2532, 2536, 2540, 2544, 2549, 2552,  
 2557, 2560, 2567, 2572, 2575, 2580,  
 2583, 2588, 2592, 2596, 2600, 2605,  
 2608, 2615, 2619, 2623, 2628, 2631,  
 2636, 2640, 2649, 2654, 2657, 2662,  
 2665, 2672, 2677, 2680, 2685, 2688
- op\_greater\_equal*, 973, 976, 982, 985, 990,  
 994, 1000, 1003, 1009, 1012, 1018,  
 1021, 1026, 1030, 1034, 1038, 1043,  
 1046, 1051, 1055, 1059, 1063, 1068,  
 1072, 1077, 1080, 1085, 1089, 1094,  
 1098, 1103, 1106, 1112, 1115, 1120,  
 1124, 1130, 1133, 1139, 1146, 1152,  
 1158, 1161, 1166, 1170, 1176, 1182,  
 1187, 1190, 1196, 1201, 1204, 1209,  
 1212, 1219, 1224, 1227, 1234, 1239,  
 1245, 1252, 1257, 1260, 1265, 1268,  
 1273, 1277, 1281, 1285, 1290, 1293,

- 1299, 1302, 1307, 1311, 1317, 1322,  
 1325, 1330, 1333, 1340, 1346, 1352,  
 1357, 1361, 1367, 1370, 1375, 1379,  
 1384, 1387, 1393, 1396, 1401, 1404,  
 1409, 1413, 1419, 1424, 1430, 1436,  
 1439, 1446, 1450, 1454, 1459, 1462,  
 1468, 1474, 1478, 1482, 1487, 1490,  
 1495, 1498, 1504, 1509, 1513, 1518,  
 1524, 1529, 1533, 1537, 1541, 1546,  
 1549, 1555, 1560, 1564, 1568, 1572,  
 1579, 1584, 1587, 1592, 1596, 1599,  
 1611, 1617, 1622, 1625, 1630, 1633,  
 1638, 1642, 1649, 1655, 1662, 1668,  
 1674, 1681, 1688, 1694, 1701, 1706,  
 1712, 1718, 1723, 1727, 1731, 1735,  
 1740, 1743, 1748, 1751, 1758, 1763,  
 1770, 1776, 1779, 1784, 1787, 1793,  
 1796, 1801, 1804, 1809, 1813, 1817,  
 1821, 1825, 1829, 1834, 1837, 1842,  
 1845, 1850, 1854, 1858, 1862, 1867,  
 1870, 1875, 1879, 1885, 1891, 1897,  
 1902, 1906, 1911, 1918, 1923, 1926,  
 1931, 1935, 1940, 1943, 1949, 1954,  
 1958, 1963, 1966, 1971, 1975, 1980,  
 1984, 1988, 1992, 1997, 2000, 2007,  
 2011, 2015, 2020, 2023, 2030, 2035,  
 2038, 2043, 2046, 2051, 2055, 2060,  
 2063, 2070, 2076, 2081, 2084, 2089,  
 2093, 2097, 2101, 2107, 2112, 2116,  
 2121, 2124, 2129, 2133, 2138, 2141,  
 2147, 2153, 2158, 2162, 2167, 2170,  
 2175, 2178, 2183, 2186, 2193, 2200,  
 2204, 2208, 2213, 2216, 2222, 2227,  
 2231, 2235, 2239, 2245, 2252, 2258,  
 2265, 2271, 2277, 2282, 2285, 2291,  
 2298, 2304, 2310, 2315, 2318, 2324,  
 2329, 2333, 2337, 2341, 2345, 2349,  
 2355, 2361, 2367, 2373, 2380, 2386,  
 2392, 2398, 2403, 2406, 2413, 2418,  
 2421, 2426, 2429, 2434, 2437, 2442,  
 2446, 2450, 2454, 2459, 2462, 2468,  
 2474, 2479, 2483, 2487, 2491, 2497,  
 2501, 2505, 2511, 2516, 2519, 2524,  
 2528, 2532, 2536, 2540, 2544, 2549,  
 2552, 2557, 2560, 2567, 2572, 2575,  
 2580, 2583, 2588, 2592, 2596, 2600,  
 2605, 2608, 2615, 2619, 2623, 2628,  
 2631, 2636, 2640, 2649, 2654, 2657,  
 2662, 2665, 2672, 2677, 2680, 2685,  
 2688  
 op\_hard\_sigmoid, 976, 985, 994, 1003, 1012,  
 1021, 1030, 1038, 1046, 1055, 1063,  
 1072, 1080, 1089, 1098, 1106, 1115,  
 1124, 1133, 1137, 1139, 1144, 1146,  
 1150, 1152, 1161, 1170, 1176, 1180,  
 1182, 1190, 1196, 1204, 1212, 1219,  
 1227, 1231, 1234, 1239, 1245, 1250,  
 1252, 1260, 1268, 1277, 1285, 1293,  
 1302, 1311, 1315, 1317, 1325, 1333,  
 1340, 1344, 1346, 1352, 1361, 1370,  
 1379, 1387, 1396, 1404, 1413, 1419,  
 1424, 1430, 1439, 1443, 1446, 1454,  
 1462, 1468, 1474, 1482, 1490, 1498,  
 1504, 1513, 1518, 1525, 1533, 1541,  
 1549, 1555, 1564, 1572, 1577, 1579,  
 1587, 1596, 1604, 1607, 1615, 1617,  
 1625, 1633, 1642, 1649, 1655, 1662,  
 1668, 1674, 1681, 1688, 1694, 1701,  
 1706, 1712, 1718, 1727, 1735, 1743,  
 1751, 1758, 1763, 1768, 1770, 1779,  
 1787, 1796, 1804, 1813, 1821, 1829,  
 1837, 1845, 1854, 1862, 1870, 1879,  
 1885, 1889, 1891, 1895, 1897, 1906,  
 1911, 1918, 1926, 1935, 1943, 1947,  
 1949, 1958, 1966, 1975, 1984, 1992,  
 2000, 2005, 2007, 2015, 2023, 2028,  
 2030, 2038, 2046, 2055, 2063, 2070,  
 2074, 2076, 2084, 2093, 2101, 2105,  
 2107, 2116, 2124, 2133, 2141, 2145,  
 2147, 2153, 2162, 2170, 2178, 2186,  
 2191, 2193, 2198, 2200, 2208, 2216,  
 2222, 2231, 2239, 2245, 2252, 2258,  
 2265, 2271, 2277, 2285, 2289, 2291,  
 2296, 2298, 2304, 2308, 2310, 2318,  
 2322, 2324, 2333, 2341, 2349, 2355,  
 2361, 2367, 2371, 2373, 2378, 2380,  
 2384, 2386, 2392, 2398, 2406, 2411,  
 2413, 2421, 2429, 2437, 2446, 2454,  
 2462, 2468, 2474, 2483, 2491, 2497,  
 2505, 2511, 2519, 2528, 2536, 2544,  
 2552, 2560, 2567, 2575, 2583, 2592,  
 2600, 2608, 2615, 2623, 2631, 2640,  
 2649, 2657, 2665, 2672, 2680, 2688  
 op\_hard\_silu, 976, 985, 994, 1003, 1012,  
 1021, 1030, 1038, 1046, 1055, 1063,  
 1072, 1080, 1089, 1098, 1106, 1115,

- 1124, 1133, 1137, 1139, 1144, 1146,  
1150, 1152, 1161, 1170, 1176, 1180,  
1182, 1190, 1196, 1204, 1212, 1219,  
1227, 1232, 1234, 1239, 1245, 1250,  
1252, 1260, 1268, 1277, 1285, 1293,  
1302, 1311, 1315, 1317, 1325, 1333,  
1340, 1344, 1346, 1352, 1361, 1370,  
1379, 1387, 1396, 1404, 1413, 1419,  
1424, 1430, 1440, 1443, 1446, 1454,  
1462, 1468, 1474, 1482, 1490, 1498,  
1504, 1513, 1518, 1525, 1533, 1541,  
1549, 1556, 1564, 1572, 1577, 1579,  
1587, 1596, 1604, 1609, 1611, 1614,  
1625, 1634, 1642, 1649, 1655, 1662,  
1668, 1675, 1681, 1688, 1694, 1701,  
1706, 1712, 1718, 1727, 1735, 1743,  
1751, 1758, 1763, 1768, 1771, 1779,  
1788, 1796, 1804, 1813, 1821, 1829,  
1837, 1846, 1854, 1862, 1870, 1879,  
1885, 1889, 1891, 1895, 1897, 1906,  
1911, 1918, 1926, 1935, 1943, 1947,  
1950, 1958, 1966, 1975, 1984, 1992,  
2000, 2005, 2007, 2015, 2023, 2028,  
2030, 2038, 2046, 2055, 2063, 2070,  
2074, 2076, 2085, 2093, 2101, 2105,  
2107, 2116, 2124, 2133, 2141, 2145,  
2147, 2153, 2162, 2170, 2178, 2186,  
2191, 2193, 2198, 2200, 2208, 2216,  
2222, 2231, 2239, 2245, 2252, 2258,  
2265, 2271, 2277, 2285, 2289, 2291,  
2296, 2298, 2304, 2308, 2310, 2318,  
2322, 2324, 2333, 2341, 2349, 2355,  
2361, 2367, 2371, 2373, 2378, 2380,  
2384, 2387, 2392, 2398, 2406, 2411,  
2413, 2421, 2429, 2437, 2446, 2454,  
2462, 2469, 2474, 2483, 2491, 2497,  
2505, 2511, 2519, 2528, 2536, 2544,  
2552, 2561, 2567, 2575, 2583, 2592,  
2600, 2608, 2615, 2623, 2631, 2640,  
2649, 2657, 2665, 2672, 2680, 2688
- op\_hard\_swish (op\_hard\_silu), 1614
- op\_hstack, 973, 976, 982, 985, 990, 994,  
1000, 1003, 1009, 1012, 1018, 1021,  
1026, 1030, 1034, 1038, 1043, 1046,  
1051, 1055, 1059, 1063, 1068, 1072,  
1077, 1080, 1085, 1089, 1094, 1098,  
1103, 1106, 1112, 1115, 1120, 1124,  
1130, 1133, 1140, 1146, 1152, 1158,  
1161, 1166, 1170, 1176, 1182, 1187,  
1190, 1196, 1201, 1204, 1209, 1212,  
1219, 1224, 1227, 1234, 1239, 1245,  
1252, 1257, 1260, 1265, 1268, 1273,  
1277, 1281, 1285, 1290, 1293, 1299,  
1302, 1307, 1311, 1317, 1322, 1325,  
1330, 1333, 1340, 1346, 1352, 1357,  
1361, 1367, 1370, 1375, 1379, 1384,  
1387, 1393, 1396, 1401, 1404, 1409,  
1413, 1419, 1424, 1430, 1436, 1440,  
1446, 1450, 1454, 1459, 1462, 1468,  
1474, 1478, 1482, 1487, 1490, 1495,  
1498, 1504, 1509, 1513, 1519, 1525,  
1529, 1533, 1537, 1541, 1546, 1549,  
1556, 1560, 1564, 1568, 1572, 1579,  
1584, 1587, 1592, 1596, 1601, 1604,  
1611, 1617, 1620, 1630, 1634, 1638,  
1642, 1649, 1655, 1662, 1668, 1675,  
1681, 1688, 1694, 1701, 1706, 1712,  
1718, 1723, 1727, 1731, 1735, 1740,  
1743, 1748, 1751, 1758, 1763, 1771,  
1776, 1779, 1784, 1788, 1793, 1796,  
1801, 1804, 1809, 1813, 1817, 1821,  
1825, 1829, 1834, 1837, 1842, 1846,  
1850, 1854, 1858, 1862, 1867, 1870,  
1875, 1879, 1885, 1891, 1897, 1902,  
1906, 1911, 1918, 1923, 1926, 1931,  
1935, 1940, 1943, 1950, 1954, 1958,  
1963, 1966, 1971, 1975, 1980, 1984,  
1988, 1992, 1997, 2000, 2007, 2011,  
2015, 2020, 2023, 2030, 2035, 2038,  
2043, 2047, 2052, 2055, 2060, 2063,  
2070, 2076, 2081, 2085, 2089, 2093,  
2097, 2101, 2107, 2112, 2116, 2121,  
2124, 2129, 2133, 2138, 2141, 2147,  
2153, 2158, 2162, 2167, 2170, 2175,  
2178, 2183, 2186, 2193, 2200, 2204,  
2208, 2213, 2216, 2222, 2227, 2231,  
2235, 2239, 2245, 2252, 2258, 2265,  
2271, 2277, 2282, 2285, 2291, 2298,  
2304, 2310, 2315, 2318, 2324, 2329,  
2333, 2337, 2341, 2345, 2349, 2355,  
2361, 2367, 2373, 2380, 2387, 2392,  
2398, 2403, 2406, 2413, 2418, 2421,  
2426, 2429, 2434, 2437, 2442, 2446,  
2450, 2454, 2459, 2462, 2469, 2474,  
2479, 2483, 2487, 2491, 2497, 2501,  
2505, 2511, 2516, 2519, 2524, 2528,

- 2532, 2536, 2540, 2544, 2549, 2552,  
 2557, 2561, 2567, 2572, 2575, 2580,  
 2583, 2588, 2592, 2596, 2600, 2605,  
 2608, 2615, 2619, 2623, 2628, 2631,  
 2636, 2640, 2649, 2654, 2657, 2662,  
 2666, 2672, 2677, 2680, 2685, 2688
- op\_identity*, 973, 976, 982, 985, 991, 994,  
 1000, 1003, 1009, 1012, 1018, 1021,  
 1026, 1030, 1034, 1038, 1043, 1046,  
 1051, 1055, 1059, 1063, 1068, 1072,  
 1077, 1080, 1085, 1089, 1094, 1098,  
 1103, 1106, 1112, 1115, 1120, 1124,  
 1130, 1133, 1140, 1146, 1152, 1158,  
 1161, 1166, 1170, 1176, 1182, 1187,  
 1190, 1196, 1201, 1204, 1209, 1212,  
 1219, 1224, 1227, 1234, 1239, 1246,  
 1252, 1257, 1260, 1265, 1269, 1273,  
 1277, 1281, 1285, 1290, 1293, 1299,  
 1302, 1307, 1311, 1317, 1322, 1325,  
 1330, 1333, 1340, 1346, 1352, 1357,  
 1361, 1367, 1370, 1376, 1379, 1384,  
 1387, 1393, 1396, 1401, 1404, 1409,  
 1413, 1419, 1424, 1430, 1436, 1440,  
 1446, 1450, 1454, 1459, 1462, 1468,  
 1474, 1479, 1482, 1487, 1490, 1495,  
 1498, 1504, 1509, 1513, 1519, 1525,  
 1529, 1533, 1537, 1541, 1546, 1550,  
 1556, 1560, 1564, 1568, 1572, 1579,  
 1584, 1587, 1592, 1596, 1601, 1604,  
 1611, 1617, 1622, 1625, 1628, 1638,  
 1642, 1649, 1655, 1662, 1668, 1675,  
 1681, 1688, 1694, 1701, 1706, 1712,  
 1718, 1723, 1727, 1731, 1735, 1740,  
 1743, 1748, 1751, 1758, 1763, 1771,  
 1776, 1779, 1784, 1788, 1793, 1796,  
 1801, 1804, 1809, 1813, 1817, 1821,  
 1825, 1829, 1834, 1837, 1842, 1846,  
 1850, 1854, 1858, 1862, 1867, 1870,  
 1875, 1879, 1885, 1891, 1897, 1902,  
 1906, 1911, 1918, 1923, 1926, 1931,  
 1935, 1940, 1943, 1950, 1954, 1958,  
 1963, 1966, 1971, 1975, 1980, 1984,  
 1988, 1992, 1997, 2000, 2007, 2011,  
 2015, 2020, 2023, 2030, 2035, 2038,  
 2043, 2047, 2052, 2055, 2060, 2063,  
 2070, 2076, 2081, 2085, 2089, 2093,  
 2097, 2101, 2107, 2112, 2116, 2121,  
 2124, 2129, 2133, 2138, 2141, 2147,  
 2153, 2158, 2162, 2167, 2170, 2175,  
 2178, 2183, 2186, 2193, 2200, 2205,  
 2208, 2213, 2216, 2223, 2227, 2231,  
 2235, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2282, 2285, 2292, 2298,  
 2304, 2310, 2315, 2318, 2324, 2329,  
 2333, 2337, 2341, 2345, 2349, 2355,  
 2361, 2367, 2373, 2380, 2387, 2392,  
 2398, 2403, 2406, 2413, 2418, 2421,  
 2426, 2429, 2434, 2437, 2442, 2446,  
 2450, 2454, 2459, 2462, 2469, 2474,  
 2479, 2483, 2487, 2491, 2497, 2501,  
 2505, 2511, 2516, 2519, 2524, 2528,  
 2532, 2536, 2540, 2544, 2549, 2552,  
 2557, 2561, 2567, 2572, 2575, 2580,  
 2583, 2588, 2592, 2596, 2600, 2605,  
 2608, 2615, 2619, 2623, 2628, 2631,  
 2636, 2640, 2649, 2654, 2657, 2662,  
 2666, 2672, 2677, 2680, 2685, 2688
- op\_imag*, 973, 976, 982, 985, 991, 994, 1000,  
 1003, 1009, 1012, 1018, 1021, 1026,  
 1030, 1034, 1038, 1043, 1046, 1051,  
 1055, 1059, 1063, 1068, 1072, 1077,  
 1080, 1086, 1089, 1094, 1098, 1103,  
 1106, 1112, 1115, 1120, 1124, 1130,  
 1133, 1140, 1146, 1152, 1158, 1161,  
 1166, 1170, 1176, 1182, 1187, 1190,  
 1196, 1201, 1204, 1209, 1212, 1219,  
 1224, 1227, 1234, 1239, 1246, 1252,  
 1257, 1260, 1265, 1269, 1273, 1277,  
 1281, 1285, 1290, 1294, 1299, 1302,  
 1307, 1311, 1317, 1322, 1325, 1330,  
 1333, 1340, 1346, 1352, 1357, 1361,  
 1367, 1370, 1376, 1379, 1384, 1388,  
 1393, 1396, 1401, 1404, 1409, 1413,  
 1419, 1424, 1430, 1436, 1440, 1446,  
 1450, 1454, 1459, 1462, 1468, 1474,  
 1479, 1482, 1487, 1490, 1495, 1498,  
 1504, 1509, 1513, 1519, 1525, 1529,  
 1533, 1537, 1541, 1546, 1550, 1556,  
 1560, 1564, 1569, 1572, 1579, 1584,  
 1587, 1592, 1596, 1601, 1604, 1611,  
 1617, 1622, 1625, 1630, 1634, 1637,  
 1649, 1655, 1662, 1668, 1675, 1681,  
 1688, 1694, 1701, 1706, 1712, 1719,  
 1723, 1727, 1731, 1735, 1740, 1743,  
 1748, 1751, 1758, 1763, 1771, 1776,  
 1779, 1784, 1788, 1793, 1796, 1801,

- 1804, 1809, 1813, 1817, 1821, 1825,  
 1829, 1834, 1837, 1842, 1846, 1850,  
 1854, 1858, 1862, 1867, 1870, 1875,  
 1879, 1885, 1891, 1897, 1902, 1906,  
 1911, 1918, 1923, 1926, 1931, 1935,  
 1940, 1943, 1950, 1954, 1958, 1963,  
 1966, 1971, 1975, 1980, 1984, 1988,  
 1992, 1997, 2000, 2007, 2011, 2015,  
 2020, 2023, 2030, 2035, 2038, 2043,  
 2047, 2052, 2055, 2060, 2063, 2070,  
 2076, 2081, 2085, 2089, 2093, 2097,  
 2101, 2108, 2112, 2116, 2121, 2124,  
 2129, 2133, 2138, 2141, 2147, 2153,  
 2158, 2162, 2167, 2170, 2175, 2178,  
 2183, 2186, 2193, 2200, 2205, 2208,  
 2213, 2216, 2223, 2227, 2231, 2236,  
 2239, 2245, 2252, 2258, 2265, 2271,  
 2277, 2282, 2285, 2292, 2298, 2304,  
 2310, 2315, 2318, 2324, 2329, 2333,  
 2337, 2341, 2345, 2349, 2355, 2361,  
 2367, 2373, 2380, 2387, 2392, 2398,  
 2403, 2406, 2413, 2418, 2421, 2426,  
 2429, 2434, 2437, 2442, 2446, 2450,  
 2454, 2459, 2462, 2469, 2474, 2479,  
 2483, 2487, 2491, 2497, 2501, 2505,  
 2511, 2516, 2519, 2524, 2528, 2532,  
 2536, 2540, 2544, 2549, 2552, 2557,  
 2561, 2567, 2572, 2575, 2580, 2583,  
 2588, 2592, 2596, 2600, 2605, 2608,  
 2615, 2619, 2623, 2628, 2631, 2636,  
 2640, 2649, 2654, 2657, 2662, 2666,  
 2672, 2677, 2680, 2685, 2688
- op\_image\_affine\_transform*, 203, 208, 210,  
 212, 214, 976, 985, 994, 1003, 1012,  
 1021, 1030, 1038, 1046, 1055, 1063,  
 1072, 1080, 1089, 1098, 1106, 1115,  
 1124, 1133, 1140, 1146, 1153, 1161,  
 1170, 1176, 1182, 1190, 1196, 1204,  
 1212, 1219, 1227, 1234, 1239, 1246,  
 1252, 1260, 1269, 1277, 1285, 1294,  
 1302, 1311, 1317, 1325, 1333, 1340,  
 1346, 1352, 1361, 1370, 1379, 1388,  
 1396, 1404, 1413, 1419, 1424, 1430,  
 1440, 1446, 1454, 1462, 1468, 1474,  
 1482, 1490, 1498, 1504, 1513, 1519,  
 1525, 1533, 1541, 1550, 1556, 1564,  
 1572, 1579, 1587, 1596, 1604, 1611,  
 1617, 1625, 1634, 1642, 1645, 1653,  
 1655, 1660, 1662, 1666, 1668, 1672,  
 1673, 1675, 1679, 1681, 1686, 1688,  
 1692, 1694, 1699, 1701, 1706, 1712,  
 1719, 1727, 1735, 1743, 1751, 1758,  
 1763, 1771, 1779, 1788, 1796, 1804,  
 1813, 1821, 1829, 1837, 1846, 1854,  
 1862, 1870, 1879, 1885, 1891, 1897,  
 1906, 1911, 1918, 1926, 1935, 1943,  
 1950, 1958, 1966, 1975, 1984, 1992,  
 2001, 2007, 2015, 2024, 2030, 2038,  
 2047, 2055, 2063, 2070, 2076, 2085,  
 2093, 2101, 2108, 2116, 2124, 2133,  
 2141, 2147, 2153, 2162, 2170, 2178,  
 2186, 2193, 2200, 2208, 2216, 2223,  
 2231, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2286, 2292, 2298, 2304,  
 2310, 2318, 2324, 2333, 2341, 2349,  
 2355, 2361, 2367, 2373, 2380, 2387,  
 2392, 2398, 2406, 2413, 2421, 2429,  
 2437, 2446, 2454, 2462, 2469, 2474,  
 2483, 2491, 2497, 2505, 2511, 2519,  
 2528, 2536, 2544, 2552, 2561, 2567,  
 2575, 2583, 2592, 2600, 2608, 2615,  
 2623, 2631, 2640, 2649, 2657, 2666,  
 2672, 2680, 2689
- op\_image\_crop*, 203, 208, 210, 212, 214, 976,  
 985, 994, 1003, 1012, 1021, 1030,  
 1038, 1046, 1055, 1063, 1072, 1080,  
 1089, 1098, 1106, 1115, 1124, 1133,  
 1140, 1146, 1153, 1161, 1170, 1176,  
 1182, 1190, 1196, 1204, 1212, 1219,  
 1227, 1234, 1239, 1246, 1252, 1260,  
 1269, 1277, 1285, 1294, 1302, 1311,  
 1317, 1325, 1333, 1340, 1346, 1352,  
 1361, 1370, 1379, 1388, 1396, 1404,  
 1413, 1419, 1424, 1430, 1440, 1446,  
 1454, 1462, 1468, 1474, 1482, 1490,  
 1498, 1504, 1513, 1519, 1525, 1533,  
 1541, 1550, 1556, 1564, 1572, 1579,  
 1587, 1596, 1604, 1611, 1617, 1625,  
 1634, 1642, 1647, 1649, 1652, 1660,  
 1662, 1666, 1668, 1672, 1673, 1675,  
 1679, 1681, 1686, 1688, 1692, 1694,  
 1699, 1701, 1706, 1712, 1719, 1727,  
 1735, 1743, 1751, 1758, 1763, 1771,  
 1779, 1788, 1796, 1805, 1813, 1821,  
 1829, 1837, 1846, 1854, 1862, 1870,  
 1879, 1885, 1891, 1897, 1906, 1911,

- 1918, 1926, 1935, 1943, 1950, 1958,  
 1966, 1975, 1984, 1992, 2001, 2007,  
 2015, 2024, 2030, 2038, 2047, 2055,  
 2063, 2070, 2076, 2085, 2093, 2101,  
 2108, 2116, 2124, 2133, 2141, 2147,  
 2153, 2162, 2170, 2178, 2187, 2193,  
 2200, 2208, 2216, 2223, 2231, 2239,  
 2245, 2252, 2258, 2265, 2271, 2277,  
 2286, 2292, 2298, 2304, 2310, 2318,  
 2325, 2333, 2341, 2349, 2355, 2361,  
 2367, 2373, 2380, 2387, 2392, 2398,  
 2406, 2413, 2421, 2429, 2438, 2446,  
 2454, 2462, 2469, 2474, 2483, 2491,  
 2497, 2505, 2511, 2519, 2528, 2536,  
 2544, 2552, 2561, 2567, 2575, 2583,  
 2592, 2600, 2608, 2615, 2623, 2631,  
 2640, 2649, 2657, 2666, 2672, 2680,  
 2689
- op\_image\_extract\_patches*, 203, 208, 210,  
 212, 214, 976, 985, 994, 1003, 1012,  
 1021, 1030, 1038, 1046, 1055, 1063,  
 1072, 1080, 1089, 1098, 1106, 1115,  
 1124, 1133, 1140, 1146, 1153, 1161,  
 1170, 1176, 1182, 1191, 1196, 1204,  
 1212, 1219, 1227, 1234, 1239, 1246,  
 1252, 1260, 1269, 1277, 1285, 1294,  
 1302, 1311, 1317, 1325, 1333, 1340,  
 1346, 1352, 1361, 1370, 1379, 1388,  
 1396, 1405, 1413, 1419, 1424, 1430,  
 1440, 1446, 1454, 1462, 1468, 1474,  
 1482, 1490, 1499, 1504, 1513, 1519,  
 1525, 1533, 1541, 1550, 1556, 1564,  
 1572, 1579, 1587, 1596, 1604, 1611,  
 1617, 1625, 1634, 1642, 1647, 1649,  
 1653, 1655, 1658, 1666, 1668, 1672,  
 1673, 1675, 1679, 1681, 1686, 1688,  
 1692, 1694, 1699, 1701, 1706, 1712,  
 1719, 1727, 1735, 1743, 1751, 1758,  
 1763, 1771, 1779, 1788, 1796, 1805,  
 1813, 1821, 1829, 1837, 1846, 1854,  
 1862, 1870, 1879, 1885, 1891, 1897,  
 1906, 1911, 1918, 1926, 1935, 1943,  
 1950, 1958, 1966, 1975, 1984, 1992,  
 2001, 2007, 2015, 2024, 2030, 2038,  
 2047, 2055, 2063, 2070, 2076, 2085,  
 2093, 2101, 2108, 2116, 2124, 2133,  
 2141, 2147, 2153, 2162, 2170, 2178,  
 2187, 2193, 2200, 2208, 2216, 2223,  
 2231, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2286, 2292, 2298, 2304,  
 2310, 2318, 2325, 2333, 2341, 2349,  
 2355, 2361, 2367, 2373, 2380, 2387,  
 2393, 2398, 2406, 2413, 2421, 2429,  
 2438, 2446, 2454, 2462, 2469, 2474,  
 2483, 2491, 2497, 2505, 2511, 2519,  
 2528, 2536, 2544, 2552, 2561, 2567,  
 2575, 2583, 2592, 2600, 2608, 2615,  
 2623, 2631, 2640, 2649, 2657, 2666,  
 2672, 2680, 2689
- op\_image\_hsv\_to\_rgb*, 203, 208, 210, 212,  
 214, 976, 985, 994, 1003, 1012,  
 1021, 1030, 1038, 1046, 1055, 1063,  
 1072, 1080, 1089, 1098, 1106, 1115,  
 1124, 1133, 1140, 1146, 1153, 1161,  
 1170, 1176, 1182, 1191, 1196, 1204,  
 1212, 1219, 1227, 1234, 1240, 1246,  
 1252, 1260, 1269, 1277, 1285, 1294,  
 1302, 1311, 1317, 1325, 1333, 1340,  
 1346, 1352, 1361, 1370, 1379, 1388,  
 1396, 1405, 1413, 1419, 1424, 1430,  
 1440, 1446, 1454, 1462, 1468, 1474,  
 1482, 1490, 1499, 1504, 1513, 1519,  
 1525, 1533, 1541, 1550, 1556, 1564,  
 1572, 1579, 1587, 1596, 1604, 1611,  
 1617, 1625, 1634, 1642, 1647, 1649,  
 1653, 1655, 1660, 1662, 1665, 1672,  
 1673, 1675, 1679, 1681, 1686, 1688,  
 1692, 1695, 1699, 1701, 1706, 1712,  
 1719, 1727, 1735, 1743, 1751, 1758,  
 1763, 1771, 1779, 1788, 1796, 1805,  
 1813, 1821, 1829, 1837, 1846, 1854,  
 1862, 1870, 1879, 1885, 1891, 1897,  
 1906, 1911, 1918, 1926, 1935, 1943,  
 1950, 1958, 1966, 1975, 1984, 1992,  
 2001, 2007, 2015, 2024, 2030, 2039,  
 2047, 2055, 2063, 2070, 2076, 2085,  
 2093, 2101, 2108, 2116, 2124, 2133,  
 2141, 2147, 2154, 2162, 2170, 2178,  
 2187, 2193, 2200, 2208, 2216, 2223,  
 2231, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2286, 2292, 2298, 2304,  
 2310, 2318, 2325, 2333, 2341, 2349,  
 2355, 2361, 2367, 2373, 2380, 2387,  
 2393, 2398, 2406, 2413, 2421, 2429,  
 2438, 2446, 2454, 2462, 2469, 2474,  
 2483, 2491, 2497, 2505, 2511, 2519,



- 2528, 2536, 2544, 2552, 2561, 2567,  
2575, 2583, 2592, 2600, 2608, 2615,  
2623, 2631, 2640, 2649, 2657, 2666,  
2672, 2680, 2689
- `op_image_map_coordinates`, 203, 208, 210,  
212, 214, 976, 985, 994, 1003, 1012,  
1021, 1030, 1038, 1046, 1055, 1063,  
1072, 1080, 1089, 1098, 1106, 1115,  
1124, 1133, 1140, 1146, 1153, 1161,  
1170, 1176, 1182, 1191, 1196, 1204,  
1212, 1219, 1227, 1234, 1240, 1246,  
1252, 1260, 1269, 1277, 1285, 1294,  
1302, 1311, 1317, 1325, 1333, 1340,  
1346, 1352, 1361, 1370, 1379, 1388,  
1396, 1405, 1413, 1419, 1424, 1430,  
1440, 1446, 1454, 1462, 1468, 1474,  
1482, 1490, 1499, 1505, 1513, 1519,  
1525, 1533, 1541, 1550, 1556, 1564,  
1572, 1579, 1587, 1596, 1604, 1611,  
1617, 1625, 1634, 1642, 1647, 1649,  
1653, 1655, 1660, 1662, 1666, 1668,  
1671, 1679, 1681, 1686, 1688, 1692,  
1693, 1695, 1699, 1701, 1706, 1712,  
1719, 1727, 1735, 1743, 1751, 1758,  
1763, 1771, 1779, 1788, 1796, 1805,  
1813, 1821, 1829, 1837, 1846, 1854,  
1862, 1870, 1879, 1885, 1891, 1897,  
1906, 1911, 1918, 1926, 1935, 1943,  
1950, 1958, 1966, 1975, 1984, 1992,  
2001, 2007, 2015, 2024, 2030, 2039,  
2047, 2055, 2063, 2070, 2076, 2085,  
2093, 2101, 2108, 2116, 2124, 2133,  
2141, 2147, 2154, 2162, 2170, 2178,  
2187, 2193, 2200, 2208, 2216, 2223,  
2231, 2239, 2245, 2252, 2258, 2265,  
2271, 2277, 2286, 2292, 2298, 2304,  
2310, 2318, 2325, 2333, 2341, 2349,  
2355, 2361, 2367, 2373, 2380, 2387,  
2393, 2398, 2406, 2413, 2421, 2429,  
2438, 2446, 2454, 2462, 2469, 2474,  
2483, 2491, 2497, 2505, 2511, 2519,  
2528, 2536, 2544, 2552, 2561, 2567,  
2575, 2583, 2592, 2600, 2608, 2615,  
2623, 2631, 2640, 2649, 2657, 2666,  
2672, 2680, 2689
- `op_image_pad`, 203, 208, 210, 212, 214, 976,  
985, 994, 1003, 1012, 1021, 1030,  
1038, 1046, 1055, 1063, 1072, 1080,  
1089, 1098, 1106, 1115, 1124, 1133,  
1140, 1146, 1153, 1161, 1170, 1176,  
1182, 1191, 1196, 1204, 1212, 1219,  
1227, 1234, 1240, 1246, 1252, 1260,  
1269, 1277, 1285, 1294, 1302, 1311,  
1317, 1325, 1333, 1340, 1347,  
1352, 1361, 1370, 1379, 1388, 1396,  
1405, 1413, 1419, 1424, 1430, 1440,  
1446, 1454, 1462, 1468, 1474, 1482,  
1490, 1499, 1505, 1513, 1519, 1525,  
1533, 1541, 1550, 1556, 1564, 1572,  
1579, 1587, 1596, 1604, 1611, 1617,  
1625, 1634, 1642, 1647, 1649, 1653,  
1655, 1660, 1662, 1666, 1668, 1671,  
1679, 1681, 1686, 1688, 1692, 1693,  
1695, 1699, 1701, 1706, 1712, 1719,  
1727, 1735, 1743, 1751, 1758, 1763,  
1771, 1779, 1788, 1796, 1805, 1813,  
1821, 1829, 1837, 1846, 1854, 1862,  
1870, 1879, 1885, 1891, 1897, 1906,  
1911, 1918, 1926, 1935, 1943, 1950,  
1958, 1966, 1975, 1984, 1992, 2001,  
2007, 2015, 2024, 2030, 2039, 2047,  
2055, 2063, 2070, 2076, 2085, 2093,  
2101, 2108, 2116, 2124, 2133, 2141,  
2147, 2154, 2162, 2170, 2178, 2187,  
2193, 2200, 2208, 2216, 2223, 2231,  
2239, 2245, 2252, 2258, 2265, 2271,  
2277, 2286, 2292, 2298, 2304, 2310,  
2318, 2325, 2333, 2341, 2349, 2355,  
2361, 2367, 2373, 2380, 2387, 2393,  
2398, 2406, 2413, 2421, 2429, 2438,  
2446, 2454, 2462, 2469, 2474, 2483,  
2491, 2497, 2505, 2511, 2520, 2528,  
2536, 2544, 2552, 2561, 2567, 2575,  
2584, 2592, 2600, 2608, 2615, 2623,  
2631, 2640, 2649, 2657, 2666, 2672,  
2680, 2689
- `op_image_resize`, 203, 208, 210, 212, 214,  
976, 985, 994, 1003, 1012, 1021,  
1030, 1038, 1046, 1055, 1063, 1072,  
1080, 1089, 1098, 1106, 1115, 1124,  
1133, 1140, 1146, 1153, 1161, 1170,  
1176, 1182, 1191, 1196, 1204, 1213,  
1219, 1227, 1234, 1240, 1246, 1252,  
1260, 1269, 1277, 1285, 1294, 1302,  
1311, 1317, 1325, 1333, 1340, 1347,  
1352, 1361, 1370, 1379, 1388, 1396,

- 1405, 1413, 1419, 1424, 1430, 1440,  
 1446, 1454, 1463, 1468, 1474, 1482,  
 1490, 1499, 1505, 1513, 1519, 1525,  
 1533, 1541, 1550, 1556, 1564, 1572,  
 1579, 1587, 1596, 1604, 1611, 1617,  
 1626, 1634, 1642, 1647, 1649, 1653,  
 1654, 1656, 1660, 1662, 1666, 1668,  
 1672, 1673, 1675, 1679, 1681, 1684,  
 1692, 1693, 1695, 1699, 1701, 1707,  
 1712, 1719, 1727, 1735, 1743, 1751,  
 1758, 1764, 1771, 1779, 1788, 1796,  
 1805, 1813, 1821, 1829, 1837, 1846,  
 1854, 1862, 1870, 1879, 1885, 1891,  
 1897, 1906, 1911, 1918, 1926, 1935,  
 1943, 1950, 1958, 1966, 1975, 1984,  
 1992, 2001, 2007, 2015, 2024, 2030,  
 2039, 2047, 2055, 2063, 2070, 2076,  
 2085, 2093, 2101, 2108, 2116, 2124,  
 2133, 2141, 2147, 2154, 2162, 2170,  
 2178, 2187, 2193, 2200, 2208, 2216,  
 2223, 2231, 2239, 2245, 2252, 2258,  
 2265, 2271, 2277, 2286, 2292, 2298,  
 2304, 2310, 2318, 2325, 2333, 2341,  
 2349, 2355, 2361, 2367, 2373, 2380,  
 2387, 2393, 2398, 2406, 2413, 2421,  
 2429, 2438, 2446, 2454, 2462, 2469,  
 2475, 2483, 2491, 2497, 2505, 2511,  
 2520, 2528, 2536, 2544, 2552, 2561,  
 2567, 2575, 2584, 2592, 2600, 2608,  
 2615, 2623, 2631, 2640, 2649, 2657,  
 2666, 2672, 2680, 2689
- op\_image\_rgb\_to\_grayscale*, 203, 208, 210,  
 212, 214, 976, 985, 994, 1003, 1012,  
 1021, 1030, 1038, 1046, 1055, 1063,  
 1072, 1080, 1089, 1098, 1106, 1115,  
 1124, 1133, 1140, 1146, 1153, 1161,  
 1170, 1176, 1182, 1191, 1196, 1204,  
 1213, 1219, 1227, 1234, 1240, 1246,  
 1252, 1260, 1269, 1277, 1285, 1294,  
 1302, 1311, 1317, 1325, 1333, 1340,  
 1347, 1352, 1361, 1370, 1379, 1388,  
 1396, 1405, 1413, 1419, 1424, 1430,  
 1440, 1446, 1454, 1463, 1468, 1474,  
 1482, 1490, 1499, 1505, 1513, 1519,  
 1525, 1533, 1541, 1550, 1556, 1564,  
 1572, 1579, 1587, 1596, 1604, 1611,  
 1617, 1626, 1634, 1642, 1647, 1649,  
 1653, 1654, 1656, 1660, 1662, 1666,
- 1668, 1672, 1673, 1675, 1679, 1681,  
 1686, 1688, 1691, 1699, 1701, 1707,  
 1712, 1719, 1727, 1735, 1743, 1751,  
 1758, 1764, 1771, 1779, 1788, 1796,  
 1805, 1813, 1821, 1829, 1837, 1846,  
 1854, 1862, 1870, 1879, 1885, 1891,  
 1897, 1906, 1911, 1918, 1926, 1935,  
 1943, 1950, 1958, 1966, 1975, 1984,  
 1992, 2001, 2007, 2015, 2024, 2030,  
 2039, 2047, 2055, 2063, 2070, 2076,  
 2085, 2093, 2101, 2108, 2116, 2124,  
 2133, 2141, 2147, 2154, 2162, 2170,  
 2178, 2187, 2193, 2200, 2208, 2216,  
 2223, 2231, 2239, 2245, 2252, 2258,  
 2265, 2271, 2277, 2286, 2292, 2298,  
 2304, 2310, 2318, 2325, 2333, 2341,  
 2349, 2355, 2361, 2367, 2373, 2380,  
 2387, 2393, 2398, 2406, 2413, 2421,  
 2429, 2438, 2446, 2454, 2462, 2469,  
 2475, 2483, 2491, 2497, 2505, 2511,  
 2520, 2528, 2536, 2544, 2552, 2561,  
 2567, 2575, 2584, 2592, 2600, 2608,  
 2615, 2623, 2631, 2640, 2649, 2657,  
 2666, 2672, 2680, 2689
- op\_image\_rgb\_to\_hsv*, 203, 208, 210, 212,  
 214, 976, 985, 994, 1003, 1012,  
 1021, 1030, 1038, 1046, 1055, 1063,  
 1072, 1080, 1089, 1098, 1106, 1115,  
 1124, 1133, 1140, 1146, 1153, 1161,  
 1170, 1176, 1182, 1191, 1196, 1204,  
 1213, 1219, 1227, 1234, 1240, 1246,  
 1252, 1260, 1269, 1277, 1285, 1294,  
 1302, 1311, 1317, 1325, 1333, 1340,  
 1347, 1352, 1361, 1370, 1379, 1388,  
 1396, 1405, 1413, 1419, 1424, 1430,  
 1440, 1446, 1454, 1463, 1468, 1474,  
 1482, 1490, 1499, 1505, 1513, 1519,  
 1525, 1533, 1541, 1550, 1556, 1564,  
 1572, 1579, 1587, 1596, 1604, 1611,  
 1617, 1626, 1634, 1642, 1647, 1649,  
 1653, 1654, 1656, 1660, 1662, 1666,  
 1668, 1672, 1673, 1675, 1679, 1681,  
 1686, 1688, 1692, 1693, 1695, 1697,  
 1707, 1713, 1719, 1727, 1735, 1743,  
 1751, 1758, 1764, 1771, 1779, 1788,  
 1796, 1805, 1813, 1821, 1829, 1837,  
 1846, 1854, 1862, 1870, 1879, 1885,  
 1891, 1897, 1906, 1911, 1918, 1926,



- 1935, 1943, 1950, 1958, 1966, 1975,  
1984, 1992, 2001, 2007, 2015, 2024,  
2030, 2039, 2047, 2055, 2063, 2070,  
2076, 2085, 2093, 2101, 2108, 2116,  
2124, 2133, 2141, 2148, 2154, 2162,  
2170, 2178, 2187, 2193, 2200, 2208,  
2216, 2223, 2231, 2239, 2245, 2252,  
2258, 2265, 2271, 2277, 2286, 2292,  
2298, 2304, 2310, 2318, 2325, 2333,  
2341, 2349, 2355, 2361, 2367, 2373,  
2380, 2387, 2393, 2398, 2406, 2413,  
2421, 2429, 2438, 2446, 2454, 2462,  
2469, 2475, 2483, 2491, 2497, 2505,  
2511, 2520, 2528, 2536, 2544, 2552,  
2561, 2567, 2575, 2584, 2592, 2600,  
2608, 2615, 2623, 2631, 2640, 2649,  
2657, 2666, 2672, 2680, 2689
- op\_in\_top\_k, 976, 985, 994, 1003, 1012,  
1021, 1030, 1038, 1046, 1055, 1063,  
1072, 1080, 1089, 1098, 1106, 1115,  
1124, 1133, 1140, 1146, 1153, 1161,  
1170, 1176, 1183, 1191, 1196, 1204,  
1213, 1219, 1227, 1234, 1240, 1246,  
1252, 1260, 1269, 1277, 1285, 1294,  
1302, 1311, 1317, 1325, 1333, 1340,  
1347, 1352, 1361, 1370, 1379, 1388,  
1396, 1405, 1413, 1419, 1424, 1430,  
1440, 1446, 1454, 1463, 1466, 1468,  
1472, 1474, 1482, 1490, 1499, 1502,  
1505, 1513, 1516, 1519, 1523, 1525,  
1533, 1541, 1550, 1556, 1564, 1572,  
1579, 1587, 1596, 1604, 1611, 1617,  
1626, 1634, 1642, 1649, 1656, 1662,  
1668, 1675, 1681, 1688, 1695, 1701,  
1707, 1709, 1716, 1719, 1727, 1735,  
1743, 1752, 1756, 1758, 1764, 1771,  
1779, 1788, 1797, 1805, 1813, 1821,  
1829, 1838, 1846, 1854, 1862, 1870,  
1879, 1883, 1885, 1891, 1897, 1906,  
1911, 1918, 1926, 1935, 1943, 1950,  
1958, 1966, 1975, 1984, 1992, 2001,  
2007, 2015, 2024, 2030, 2039, 2047,  
2055, 2064, 2070, 2076, 2085, 2093,  
2101, 2108, 2116, 2125, 2133, 2141,  
2148, 2151, 2154, 2162, 2170, 2179,  
2187, 2193, 2200, 2208, 2217, 2220,  
2223, 2231, 2239, 2243, 2245, 2252,  
2258, 2265, 2269, 2271, 2275, 2277,  
2286, 2292, 2298, 2304, 2310, 2319,  
2325, 2333, 2341, 2349, 2355, 2361,  
2367, 2373, 2380, 2387, 2390, 2393,  
2398, 2407, 2413, 2421, 2430, 2438,  
2446, 2454, 2462, 2467, 2469, 2475,  
2483, 2491, 2497, 2505, 2511, 2520,  
2528, 2536, 2544, 2553, 2561, 2565,  
2567, 2575, 2584, 2592, 2600, 2608,  
2615, 2623, 2631, 2640, 2649, 2658,  
2666, 2672, 2681, 2689
- op\_inv, 976, 985, 994, 1004, 1012, 1022,  
1030, 1038, 1047, 1055, 1063, 1072,  
1080, 1089, 1098, 1106, 1115, 1124,  
1133, 1140, 1146, 1153, 1162, 1170,  
1176, 1183, 1191, 1194, 1196, 1204,  
1213, 1219, 1228, 1234, 1240, 1246,  
1252, 1261, 1269, 1277, 1285, 1294,  
1302, 1311, 1317, 1325, 1334, 1340,  
1347, 1350, 1352, 1361, 1371, 1379,  
1388, 1397, 1405, 1413, 1419, 1422,  
1424, 1428, 1430, 1440, 1446, 1454,  
1463, 1468, 1474, 1482, 1491, 1499,  
1505, 1513, 1519, 1525, 1533, 1541,  
1550, 1556, 1564, 1572, 1579, 1588,  
1596, 1605, 1611, 1617, 1626, 1634,  
1642, 1649, 1656, 1662, 1668, 1675,  
1681, 1688, 1695, 1701, 1704, 1713,  
1719, 1727, 1735, 1743, 1752, 1758,  
1764, 1771, 1779, 1788, 1797, 1805,  
1813, 1821, 1829, 1838, 1846, 1854,  
1862, 1870, 1879, 1885, 1891, 1897,  
1901, 1906, 1909, 1912, 1918, 1926,  
1935, 1943, 1950, 1958, 1966, 1975,  
1984, 1992, 2001, 2007, 2015, 2024,  
2030, 2039, 2047, 2055, 2064, 2068,  
2070, 2076, 2085, 2093, 2101, 2108,  
2116, 2125, 2133, 2141, 2148, 2154,  
2162, 2170, 2179, 2187, 2193, 2200,  
2208, 2217, 2223, 2231, 2239, 2245,  
2252, 2258, 2265, 2271, 2277, 2286,  
2292, 2298, 2304, 2310, 2319, 2325,  
2333, 2341, 2349, 2355, 2361, 2365,  
2367, 2373, 2380, 2387, 2393, 2396,  
2398, 2407, 2413, 2421, 2430, 2438,  
2446, 2454, 2462, 2469, 2475, 2483,  
2491, 2495, 2497, 2505, 2511, 2520,  
2528, 2536, 2544, 2553, 2561, 2567,  
2575, 2584, 2592, 2600, 2608, 2615,

- 2623, 2631, 2640, 2649, 2658, 2666,  
2672, 2681, 2689
- op\_irfft*, 976, 985, 994, 1004, 1012, 1022,  
1030, 1038, 1047, 1055, 1063, 1072,  
1080, 1089, 1098, 1107, 1115, 1124,  
1133, 1140, 1146, 1153, 1162, 1170,  
1176, 1183, 1191, 1196, 1204, 1213,  
1219, 1228, 1234, 1240, 1246, 1252,  
1261, 1269, 1277, 1285, 1294, 1302,  
1311, 1317, 1325, 1334, 1340, 1347,  
1352, 1361, 1371, 1379, 1388, 1397,  
1405, 1413, 1419, 1425, 1430, 1440,  
1446, 1454, 1463, 1466, 1468, 1472,  
1474, 1482, 1491, 1499, 1502, 1505,  
1513, 1517, 1519, 1523, 1525, 1533,  
1541, 1550, 1556, 1564, 1572, 1579,  
1588, 1596, 1605, 1611, 1617, 1626,  
1634, 1642, 1649, 1656, 1662, 1668,  
1675, 1681, 1688, 1695, 1701, 1707,  
1710, 1713, 1715, 1727, 1735, 1743,  
1752, 1756, 1758, 1764, 1771, 1779,  
1788, 1797, 1805, 1813, 1821, 1829,  
1838, 1846, 1854, 1862, 1870, 1879,  
1883, 1885, 1891, 1897, 1906, 1912,  
1918, 1926, 1935, 1943, 1950, 1958,  
1966, 1975, 1984, 1992, 2001, 2007,  
2015, 2024, 2030, 2039, 2047, 2055,  
2064, 2070, 2076, 2085, 2093, 2101,  
2108, 2116, 2125, 2133, 2141, 2148,  
2151, 2154, 2162, 2170, 2179, 2187,  
2193, 2200, 2208, 2217, 2220, 2223,  
2231, 2239, 2243, 2245, 2252, 2258,  
2265, 2269, 2271, 2275, 2277, 2286,  
2292, 2298, 2304, 2310, 2319, 2325,  
2333, 2341, 2349, 2355, 2362, 2367,  
2373, 2380, 2387, 2390, 2393, 2398,  
2407, 2413, 2421, 2430, 2438, 2446,  
2454, 2462, 2467, 2469, 2475, 2483,  
2491, 2497, 2505, 2511, 2520, 2528,  
2536, 2544, 2553, 2561, 2565, 2567,  
2575, 2584, 2592, 2600, 2608, 2615,  
2623, 2631, 2640, 2649, 2658, 2666,  
2672, 2681, 2689
- op\_is\_tensor*, 976, 985, 994, 1004, 1012,  
1022, 1030, 1038, 1047, 1055, 1063,  
1072, 1080, 1089, 1098, 1107, 1115,  
1124, 1133, 1140, 1147, 1153, 1162,  
1170, 1174, 1176, 1183, 1191, 1196,  
1204, 1213, 1217, 1219, 1228, 1234,  
1237, 1240, 1243, 1246, 1252, 1261,  
1269, 1277, 1285, 1294, 1302, 1311,  
1317, 1325, 1334, 1338, 1340, 1347,  
1352, 1361, 1371, 1379, 1388, 1397,  
1405, 1413, 1417, 1419, 1425, 1430,  
1440, 1446, 1454, 1463, 1468, 1474,  
1482, 1491, 1499, 1505, 1513, 1519,  
1525, 1533, 1541, 1550, 1553, 1556,  
1564, 1572, 1579, 1588, 1596, 1605,  
1611, 1617, 1626, 1634, 1642, 1649,  
1656, 1662, 1668, 1675, 1681, 1688,  
1695, 1701, 1707, 1713, 1719, 1727,  
1735, 1743, 1752, 1758, 1761, 1771,  
1779, 1788, 1797, 1805, 1813, 1821,  
1829, 1838, 1846, 1854, 1862, 1870,  
1879, 1885, 1891, 1897, 1906, 1912,  
1916, 1918, 1926, 1935, 1943, 1950,  
1958, 1966, 1975, 1984, 1992, 2001,  
2007, 2015, 2024, 2030, 2039, 2047,  
2055, 2064, 2070, 2076, 2085, 2093,  
2101, 2108, 2116, 2125, 2133, 2141,  
2148, 2154, 2162, 2170, 2179, 2187,  
2193, 2200, 2208, 2217, 2223, 2231,  
2239, 2245, 2250, 2252, 2256, 2258,  
2263, 2265, 2271, 2277, 2286, 2292,  
2298, 2302, 2304, 2310, 2319, 2325,  
2333, 2341, 2349, 2353, 2355, 2359,  
2362, 2367, 2373, 2380, 2387, 2393,  
2398, 2407, 2413, 2421, 2430, 2438,  
2446, 2454, 2462, 2469, 2472, 2475,  
2483, 2491, 2497, 2505, 2509, 2511,  
2520, 2528, 2536, 2544, 2553, 2561,  
2567, 2575, 2584, 2592, 2600, 2608,  
2613, 2615, 2623, 2631, 2640, 2647,  
2649, 2658, 2666, 2670, 2672, 2681,  
2689
- op\_isclose*, 973, 976, 982, 985, 991, 994,  
1000, 1004, 1009, 1012, 1018, 1022,  
1026, 1030, 1034, 1038, 1043, 1047,  
1051, 1055, 1059, 1063, 1068, 1072,  
1077, 1080, 1086, 1089, 1094, 1098,  
1103, 1107, 1112, 1115, 1120, 1124,  
1130, 1133, 1140, 1147, 1153, 1158,  
1162, 1166, 1170, 1176, 1183, 1187,  
1191, 1196, 1201, 1204, 1209, 1213,  
1219, 1224, 1228, 1234, 1240, 1246,  
1252, 1257, 1261, 1265, 1269, 1273,

- 1277, 1281, 1285, 1290, 1294, 1299,  
 1302, 1307, 1311, 1317, 1322, 1325,  
 1330, 1334, 1340, 1347, 1352, 1357,  
 1361, 1367, 1371, 1376, 1379, 1384,  
 1388, 1393, 1397, 1401, 1405, 1409,  
 1413, 1419, 1425, 1430, 1436, 1440,  
 1446, 1450, 1454, 1459, 1463, 1468,  
 1474, 1479, 1482, 1487, 1491, 1495,  
 1499, 1505, 1509, 1513, 1519, 1525,  
 1529, 1533, 1538, 1541, 1546, 1550,  
 1556, 1560, 1564, 1569, 1572, 1579,  
 1584, 1588, 1592, 1596, 1601, 1605,  
 1611, 1617, 1622, 1626, 1630, 1634,  
 1638, 1642, 1649, 1656, 1662, 1669,  
 1675, 1681, 1688, 1695, 1701, 1707,  
 1713, 1719, 1721, 1731, 1735, 1740,  
 1743, 1748, 1752, 1758, 1764, 1771,  
 1776, 1779, 1784, 1788, 1793, 1797,  
 1801, 1805, 1809, 1813, 1817, 1821,  
 1826, 1829, 1834, 1838, 1842, 1846,  
 1850, 1854, 1858, 1862, 1867, 1870,  
 1875, 1879, 1885, 1891, 1897, 1902,  
 1906, 1912, 1918, 1923, 1926, 1931,  
 1935, 1940, 1943, 1950, 1954, 1958,  
 1963, 1966, 1971, 1975, 1980, 1984,  
 1988, 1992, 1997, 2001, 2007, 2011,  
 2015, 2020, 2024, 2030, 2035, 2039,  
 2043, 2047, 2052, 2055, 2060, 2064,  
 2070, 2076, 2081, 2085, 2089, 2093,  
 2097, 2101, 2108, 2112, 2116, 2121,  
 2125, 2129, 2133, 2138, 2141, 2148,  
 2154, 2158, 2162, 2167, 2170, 2175,  
 2179, 2183, 2187, 2193, 2200, 2205,  
 2208, 2213, 2217, 2223, 2227, 2231,  
 2236, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2282, 2286, 2292, 2298,  
 2304, 2310, 2315, 2319, 2325, 2329,  
 2333, 2337, 2341, 2346, 2349, 2355,  
 2362, 2367, 2373, 2380, 2387, 2393,  
 2398, 2403, 2407, 2413, 2418, 2421,  
 2426, 2430, 2434, 2438, 2442, 2446,  
 2450, 2454, 2459, 2462, 2469, 2475,  
 2479, 2483, 2488, 2491, 2497, 2501,  
 2505, 2511, 2516, 2520, 2524, 2528,  
 2532, 2536, 2540, 2544, 2549, 2553,  
 2557, 2561, 2567, 2572, 2575, 2580,  
 2584, 2588, 2592, 2596, 2600, 2605,  
 2608, 2615, 2619, 2623, 2628, 2631,  
 2636, 2640, 2649, 2654, 2658, 2662,  
 2666, 2672, 2677, 2681, 2685, 2689
- op\_isfinite, 973, 976, 982, 985, 991, 994,  
 1000, 1004, 1009, 1012, 1018, 1022,  
 1026, 1030, 1034, 1038, 1043, 1047,  
 1051, 1055, 1059, 1063, 1068, 1072,  
 1077, 1080, 1086, 1089, 1094, 1098,  
 1103, 1107, 1112, 1115, 1120, 1124,  
 1130, 1133, 1140, 1147, 1153, 1158,  
 1162, 1166, 1170, 1176, 1183, 1187,  
 1191, 1196, 1201, 1204, 1209, 1213,  
 1219, 1224, 1228, 1234, 1240, 1246,  
 1252, 1257, 1261, 1265, 1269, 1273,  
 1277, 1281, 1285, 1290, 1294, 1299,  
 1302, 1307, 1311, 1317, 1322, 1325,  
 1330, 1334, 1340, 1347, 1352, 1357,  
 1361, 1367, 1371, 1376, 1379, 1384,  
 1388, 1393, 1397, 1401, 1405, 1409,  
 1413, 1419, 1425, 1430, 1436, 1440,  
 1446, 1450, 1454, 1459, 1463, 1468,  
 1474, 1479, 1482, 1487, 1491, 1495,  
 1499, 1505, 1509, 1513, 1519, 1525,  
 1529, 1533, 1538, 1541, 1546, 1550,  
 1556, 1560, 1564, 1569, 1572, 1579,  
 1584, 1588, 1592, 1596, 1601, 1605,  
 1611, 1617, 1622, 1626, 1630, 1634,  
 1638, 1642, 1649, 1656, 1662, 1669,  
 1675, 1681, 1688, 1695, 1701, 1707,  
 1713, 1719, 1723, 1727, 1730, 1740,  
 1743, 1748, 1752, 1758, 1764, 1771,  
 1776, 1779, 1784, 1788, 1793, 1797,  
 1801, 1805, 1809, 1813, 1817, 1821,  
 1826, 1829, 1834, 1838, 1842, 1846,  
 1850, 1854, 1859, 1862, 1867, 1870,  
 1875, 1879, 1885, 1891, 1897, 1902,  
 1906, 1912, 1918, 1923, 1926, 1931,  
 1935, 1940, 1943, 1950, 1954, 1958,  
 1963, 1966, 1971, 1975, 1980, 1984,  
 1989, 1992, 1997, 2001, 2007, 2012,  
 2015, 2020, 2024, 2030, 2035, 2039,  
 2043, 2047, 2052, 2055, 2060, 2064,  
 2070, 2076, 2081, 2085, 2089, 2093,  
 2097, 2101, 2108, 2112, 2116, 2121,  
 2125, 2129, 2133, 2138, 2141, 2148,  
 2154, 2158, 2162, 2167, 2170, 2175,  
 2179, 2183, 2187, 2193, 2200, 2205,  
 2208, 2213, 2217, 2223, 2227, 2231,  
 2236, 2239, 2245, 2252, 2258, 2265,

- 2271, 2277, 2282, 2286, 2292, 2298,  
 2304, 2310, 2315, 2319, 2325, 2329,  
 2333, 2337, 2341, 2346, 2349, 2355,  
 2362, 2367, 2373, 2380, 2387, 2393,  
 2398, 2403, 2407, 2413, 2418, 2421,  
 2426, 2430, 2434, 2438, 2442, 2446,  
 2450, 2454, 2459, 2462, 2469, 2475,  
 2479, 2483, 2488, 2491, 2497, 2501,  
 2505, 2511, 2516, 2520, 2524, 2528,  
 2532, 2536, 2541, 2544, 2549, 2553,  
 2557, 2561, 2567, 2572, 2575, 2580,  
 2584, 2588, 2592, 2596, 2600, 2605,  
 2608, 2615, 2619, 2623, 2628, 2632,  
 2636, 2640, 2649, 2654, 2658, 2662,  
 2666, 2672, 2677, 2681, 2685, 2689
- op\_isinf*, 973, 976, 982, 985, 991, 994, 1000,  
 1004, 1009, 1012, 1018, 1022, 1026,  
 1030, 1034, 1038, 1043, 1047, 1051,  
 1055, 1060, 1063, 1068, 1072, 1077,  
 1080, 1086, 1089, 1094, 1098, 1103,  
 1107, 1112, 1115, 1120, 1124, 1130,  
 1133, 1140, 1147, 1153, 1158, 1162,  
 1166, 1170, 1176, 1183, 1187, 1191,  
 1196, 1201, 1204, 1209, 1213, 1219,  
 1224, 1228, 1234, 1240, 1246, 1252,  
 1257, 1261, 1265, 1269, 1273, 1277,  
 1281, 1285, 1290, 1294, 1299, 1302,  
 1307, 1311, 1317, 1322, 1325, 1330,  
 1334, 1340, 1347, 1352, 1357, 1361,  
 1367, 1371, 1376, 1379, 1384, 1388,  
 1393, 1397, 1401, 1405, 1409, 1413,  
 1419, 1425, 1430, 1436, 1440, 1446,  
 1450, 1454, 1459, 1463, 1468, 1474,  
 1479, 1482, 1487, 1491, 1495, 1499,  
 1505, 1509, 1513, 1519, 1525, 1529,  
 1533, 1538, 1541, 1546, 1550, 1556,  
 1560, 1564, 1569, 1572, 1579, 1584,  
 1588, 1592, 1596, 1601, 1605, 1611,  
 1617, 1622, 1626, 1630, 1634, 1638,  
 1642, 1649, 1656, 1662, 1669, 1675,  
 1681, 1688, 1695, 1701, 1707, 1713,  
 1719, 1723, 1727, 1731, 1735, 1738,  
 1748, 1752, 1758, 1764, 1771, 1776,  
 1779, 1784, 1788, 1793, 1797, 1801,  
 1805, 1809, 1813, 1817, 1821, 1826,  
 1829, 1834, 1838, 1842, 1846, 1850,  
 1854, 1859, 1862, 1867, 1871, 1875,  
 1879, 1885, 1891, 1897, 1902, 1906,  
 1912, 1918, 1923, 1926, 1931, 1935,  
 1940, 1943, 1950, 1954, 1958, 1963,  
 1966, 1971, 1975, 1980, 1984, 1989,  
 1992, 1997, 2001, 2007, 2012, 2015,  
 2020, 2024, 2030, 2035, 2039, 2043,  
 2047, 2052, 2055, 2060, 2064, 2070,  
 2076, 2081, 2085, 2089, 2093, 2098,  
 2101, 2108, 2112, 2116, 2121, 2125,  
 2129, 2133, 2138, 2141, 2148, 2154,  
 2158, 2162, 2167, 2170, 2175, 2179,  
 2183, 2187, 2193, 2200, 2205, 2208,  
 2213, 2217, 2223, 2227, 2231, 2236,  
 2239, 2245, 2252, 2258, 2265, 2271,  
 2277, 2282, 2286, 2292, 2298, 2304,  
 2310, 2315, 2319, 2325, 2329, 2333,  
 2337, 2341, 2346, 2349, 2355, 2362,  
 2367, 2373, 2380, 2387, 2393, 2398,  
 2403, 2407, 2413, 2418, 2421, 2426,  
 2430, 2434, 2438, 2442, 2446, 2450,  
 2454, 2459, 2462, 2469, 2475, 2479,  
 2483, 2488, 2491, 2497, 2501, 2505,  
 2511, 2516, 2520, 2524, 2528, 2532,  
 2536, 2541, 2544, 2549, 2553, 2557,  
 2561, 2567, 2572, 2576, 2580, 2584,  
 2588, 2592, 2596, 2600, 2605, 2608,  
 2615, 2619, 2623, 2628, 2632, 2636,  
 2640, 2649, 2654, 2658, 2662, 2666,  
 2672, 2677, 2681, 2685, 2689
- op\_isnan*, 973, 976, 982, 985, 991, 994, 1000,  
 1004, 1009, 1012, 1018, 1022, 1026,  
 1030, 1035, 1038, 1043, 1047, 1051,  
 1055, 1060, 1063, 1068, 1072, 1077,  
 1080, 1086, 1089, 1094, 1098, 1103,  
 1107, 1112, 1116, 1120, 1124, 1130,  
 1133, 1140, 1147, 1153, 1158, 1162,  
 1166, 1170, 1176, 1183, 1187, 1191,  
 1196, 1201, 1205, 1209, 1213, 1219,  
 1224, 1228, 1234, 1240, 1246, 1252,  
 1257, 1261, 1265, 1269, 1273, 1277,  
 1281, 1285, 1290, 1294, 1299, 1302,  
 1307, 1311, 1317, 1322, 1325, 1330,  
 1334, 1340, 1347, 1352, 1357, 1361,  
 1367, 1371, 1376, 1379, 1384, 1388,  
 1393, 1397, 1401, 1405, 1409, 1413,  
 1419, 1425, 1430, 1436, 1440, 1446,  
 1450, 1454, 1459, 1463, 1469, 1474,  
 1479, 1482, 1487, 1491, 1495, 1499,  
 1505, 1509, 1513, 1519, 1525, 1529,

- 1533, 1538, 1541, 1546, 1550, 1556,  
1560, 1564, 1569, 1572, 1579, 1584,  
1588, 1592, 1596, 1601, 1605, 1611,  
1618, 1622, 1626, 1630, 1634, 1638,  
1642, 1649, 1656, 1662, 1669, 1675,  
1681, 1688, 1695, 1701, 1707, 1713,  
1719, 1723, 1727, 1731, 1735, 1740,  
1743, 1746, 1758, 1764, 1771, 1776,  
1779, 1784, 1788, 1793, 1797, 1801,  
1805, 1809, 1813, 1817, 1821, 1826,  
1829, 1834, 1838, 1842, 1846, 1850,  
1854, 1859, 1862, 1867, 1871, 1875,  
1879, 1885, 1891, 1897, 1902, 1906,  
1912, 1918, 1923, 1926, 1931, 1935,  
1940, 1944, 1950, 1954, 1958, 1963,  
1966, 1971, 1975, 1980, 1984, 1989,  
1992, 1997, 2001, 2007, 2012, 2015,  
2020, 2024, 2030, 2035, 2039, 2043,  
2047, 2052, 2055, 2060, 2064, 2070,  
2076, 2081, 2085, 2089, 2093, 2098,  
2101, 2108, 2112, 2116, 2121, 2125,  
2129, 2133, 2138, 2141, 2148, 2154,  
2158, 2162, 2167, 2170, 2175, 2179,  
2183, 2187, 2193, 2200, 2205, 2208,  
2213, 2217, 2223, 2227, 2231, 2236,  
2239, 2245, 2252, 2258, 2265, 2271,  
2277, 2282, 2286, 2292, 2298, 2304,  
2310, 2315, 2319, 2325, 2329, 2333,  
2337, 2341, 2346, 2349, 2355, 2362,  
2367, 2373, 2380, 2387, 2393, 2398,  
2403, 2407, 2413, 2418, 2422, 2426,  
2430, 2434, 2438, 2442, 2446, 2450,  
2454, 2459, 2462, 2469, 2475, 2479,  
2483, 2488, 2491, 2497, 2501, 2505,  
2511, 2516, 2520, 2524, 2528, 2532,  
2536, 2541, 2544, 2549, 2553, 2557,  
2561, 2567, 2572, 2576, 2580, 2584,  
2588, 2592, 2596, 2600, 2605, 2608,  
2615, 2619, 2623, 2628, 2632, 2636,  
2640, 2650, 2654, 2658, 2662, 2666,  
2672, 2677, 2681, 2685, 2689
- op\_istft, 977, 985, 994, 1004, 1012, 1022,  
1030, 1038, 1047, 1055, 1063, 1072,  
1080, 1089, 1098, 1107, 1116, 1124,  
1133, 1140, 1147, 1153, 1162, 1170,  
1176, 1183, 1191, 1196, 1205, 1213,  
1219, 1228, 1234, 1240, 1246, 1252,  
1261, 1269, 1277, 1285, 1294, 1303,  
1311, 1317, 1325, 1334, 1340, 1347,  
1352, 1361, 1371, 1379, 1388, 1397,  
1405, 1413, 1419, 1425, 1430, 1440,  
1446, 1454, 1463, 1466, 1469, 1472,  
1474, 1482, 1491, 1499, 1502, 1505,  
1513, 1517, 1519, 1523, 1525, 1533,  
1541, 1550, 1556, 1564, 1572, 1579,  
1588, 1596, 1605, 1611, 1618, 1626,  
1634, 1642, 1649, 1656, 1662, 1669,  
1675, 1681, 1688, 1695, 1701, 1707,  
1710, 1713, 1716, 1719, 1727, 1735,  
1743, 1752, 1754, 1764, 1771, 1779,  
1788, 1797, 1805, 1813, 1821, 1829,  
1838, 1846, 1854, 1862, 1871, 1879,  
1883, 1885, 1891, 1897, 1906, 1912,  
1918, 1927, 1935, 1944, 1950, 1958,  
1966, 1975, 1984, 1992, 2001, 2007,  
2015, 2024, 2030, 2039, 2047, 2055,  
2064, 2070, 2076, 2085, 2093, 2101,  
2108, 2116, 2125, 2133, 2141, 2148,  
2151, 2154, 2162, 2170, 2179, 2187,  
2193, 2200, 2208, 2217, 2221, 2223,  
2231, 2239, 2243, 2245, 2252, 2258,  
2265, 2269, 2271, 2275, 2277, 2286,  
2292, 2298, 2304, 2310, 2319, 2325,  
2333, 2341, 2349, 2355, 2362, 2367,  
2373, 2380, 2387, 2390, 2393, 2398,  
2407, 2413, 2422, 2430, 2438, 2446,  
2454, 2463, 2467, 2469, 2475, 2483,  
2491, 2497, 2505, 2512, 2520, 2528,  
2536, 2544, 2553, 2561, 2565, 2567,  
2576, 2584, 2592, 2600, 2609, 2615,  
2623, 2632, 2640, 2650, 2658, 2666,  
2672, 2681, 2689
- op\_leaky\_relu, 977, 986, 994, 1004, 1013,  
1022, 1030, 1038, 1047, 1055, 1063,  
1072, 1081, 1089, 1098, 1107, 1116,  
1124, 1134, 1137, 1140, 1144, 1147,  
1150, 1153, 1162, 1170, 1176, 1180,  
1183, 1191, 1196, 1205, 1213, 1220,  
1228, 1232, 1234, 1240, 1246, 1250,  
1252, 1261, 1269, 1277, 1285, 1294,  
1303, 1311, 1315, 1317, 1325, 1334,  
1340, 1344, 1347, 1352, 1361, 1371,  
1379, 1388, 1397, 1405, 1413, 1419,  
1425, 1430, 1440, 1443, 1446, 1454,  
1463, 1469, 1474, 1482, 1491, 1499,  
1505, 1513, 1519, 1525, 1533, 1541,

- 1550, 1556, 1564, 1572, 1577, 1579,  
 1588, 1596, 1605, 1609, 1611, 1615,  
 1618, 1626, 1634, 1642, 1649, 1656,  
 1662, 1669, 1675, 1682, 1688, 1695,  
 1701, 1707, 1713, 1719, 1727, 1735,  
 1744, 1752, 1758, 1764, 1766, 1779,  
 1788, 1797, 1805, 1813, 1821, 1829,  
 1838, 1846, 1854, 1862, 1871, 1879,  
 1885, 1889, 1891, 1895, 1897, 1906,  
 1912, 1918, 1927, 1935, 1944, 1947,  
 1950, 1958, 1966, 1975, 1984, 1992,  
 2001, 2005, 2007, 2015, 2024, 2028,  
 2030, 2039, 2047, 2055, 2064, 2070,  
 2074, 2076, 2085, 2093, 2101, 2105,  
 2108, 2116, 2125, 2133, 2142, 2145,  
 2148, 2154, 2162, 2171, 2179, 2187,  
 2191, 2193, 2198, 2200, 2208, 2217,  
 2223, 2231, 2239, 2245, 2252, 2258,  
 2265, 2271, 2277, 2286, 2289, 2292,  
 2296, 2298, 2304, 2308, 2310, 2319,  
 2322, 2325, 2333, 2341, 2349, 2356,  
 2362, 2367, 2371, 2373, 2378, 2380,  
 2384, 2387, 2393, 2398, 2407, 2411,  
 2413, 2422, 2430, 2438, 2446, 2454,  
 2463, 2469, 2475, 2483, 2491, 2497,  
 2505, 2512, 2520, 2528, 2536, 2544,  
 2553, 2561, 2567, 2576, 2584, 2592,  
 2600, 2609, 2615, 2623, 2632, 2640,  
 2650, 2658, 2666, 2672, 2681, 2689
- op\_less*, 973, 977, 982, 986, 991, 994, 1000,  
 1004, 1009, 1013, 1018, 1022, 1026,  
 1030, 1035, 1038, 1043, 1047, 1051,  
 1055, 1060, 1063, 1069, 1072, 1077,  
 1081, 1086, 1089, 1094, 1098, 1103,  
 1107, 1112, 1116, 1120, 1124, 1130,  
 1134, 1140, 1147, 1153, 1158, 1162,  
 1166, 1170, 1176, 1183, 1187, 1191,  
 1196, 1201, 1205, 1209, 1213, 1220,  
 1224, 1228, 1234, 1240, 1246, 1253,  
 1257, 1261, 1265, 1269, 1273, 1277,  
 1281, 1285, 1290, 1294, 1299, 1303,  
 1307, 1311, 1317, 1322, 1326, 1330,  
 1334, 1340, 1347, 1352, 1357, 1361,  
 1367, 1371, 1376, 1379, 1384, 1388,  
 1393, 1397, 1401, 1405, 1409, 1413,  
 1419, 1425, 1430, 1436, 1440, 1446,  
 1450, 1454, 1459, 1463, 1469, 1474,  
 1479, 1482, 1487, 1491, 1495, 1499,
- 1505, 1509, 1513, 1519, 1525, 1529,  
 1533, 1538, 1541, 1546, 1550, 1556,  
 1560, 1564, 1569, 1572, 1579, 1584,  
 1588, 1592, 1596, 1601, 1605, 1611,  
 1618, 1622, 1626, 1630, 1634, 1638,  
 1642, 1649, 1656, 1662, 1669, 1675,  
 1682, 1688, 1695, 1701, 1707, 1713,  
 1719, 1723, 1727, 1732, 1735, 1740,  
 1744, 1748, 1752, 1758, 1764, 1771,  
 1774, 1784, 1788, 1793, 1797, 1801,  
 1805, 1809, 1813, 1817, 1821, 1826,  
 1829, 1834, 1838, 1842, 1846, 1850,  
 1854, 1859, 1862, 1867, 1871, 1875,  
 1879, 1885, 1891, 1897, 1902, 1906,  
 1912, 1918, 1923, 1927, 1931, 1935,  
 1940, 1944, 1950, 1954, 1958, 1963,  
 1967, 1972, 1975, 1980, 1984, 1989,  
 1992, 1997, 2001, 2007, 2012, 2015,  
 2020, 2024, 2030, 2035, 2039, 2043,  
 2047, 2052, 2055, 2060, 2064, 2070,  
 2076, 2081, 2085, 2089, 2093, 2098,  
 2101, 2108, 2112, 2116, 2121, 2125,  
 2129, 2133, 2138, 2142, 2148, 2154,  
 2159, 2162, 2167, 2171, 2175, 2179,  
 2183, 2187, 2193, 2200, 2205, 2208,  
 2213, 2217, 2223, 2227, 2231, 2236,  
 2239, 2245, 2252, 2258, 2265, 2271,  
 2277, 2282, 2286, 2292, 2298, 2304,  
 2310, 2315, 2319, 2325, 2329, 2333,  
 2337, 2341, 2346, 2349, 2356, 2362,  
 2367, 2373, 2380, 2387, 2393, 2398,  
 2403, 2407, 2413, 2418, 2422, 2426,  
 2430, 2434, 2438, 2442, 2446, 2450,  
 2454, 2459, 2463, 2469, 2475, 2479,  
 2483, 2488, 2491, 2497, 2501, 2505,  
 2512, 2516, 2520, 2524, 2528, 2532,  
 2536, 2541, 2544, 2549, 2553, 2557,  
 2561, 2567, 2572, 2576, 2580, 2584,  
 2588, 2592, 2596, 2600, 2605, 2609,  
 2615, 2620, 2623, 2628, 2632, 2636,  
 2640, 2650, 2654, 2658, 2662, 2666,  
 2672, 2677, 2681, 2685, 2689
- op\_less\_equal*, 973, 977, 982, 986, 991, 994,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1026, 1030, 1035, 1038, 1043, 1047,  
 1051, 1055, 1060, 1063, 1069, 1072,  
 1077, 1081, 1086, 1089, 1095, 1098,  
 1103, 1107, 1112, 1116, 1120, 1124,

1130, 1134, 1140, 1147, 1153, 1158,  
 1162, 1166, 1170, 1176, 1183, 1187,  
 1191, 1196, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1234, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1273,  
 1277, 1282, 1285, 1290, 1294, 1299,  
 1303, 1307, 1311, 1317, 1322, 1326,  
 1330, 1334, 1340, 1347, 1352, 1357,  
 1361, 1367, 1371, 1376, 1379, 1384,  
 1388, 1393, 1397, 1401, 1405, 1409,  
 1413, 1419, 1425, 1430, 1436, 1440,  
 1446, 1451, 1454, 1459, 1463, 1469,  
 1474, 1479, 1482, 1487, 1491, 1495,  
 1499, 1505, 1509, 1513, 1519, 1525,  
 1529, 1533, 1538, 1541, 1546, 1550,  
 1556, 1560, 1564, 1569, 1572, 1579,  
 1584, 1588, 1592, 1596, 1601, 1605,  
 1611, 1618, 1622, 1626, 1630, 1634,  
 1638, 1642, 1649, 1656, 1662, 1669,  
 1675, 1682, 1688, 1695, 1701, 1707,  
 1713, 1719, 1723, 1727, 1732, 1735,  
 1740, 1744, 1748, 1752, 1758, 1764,  
 1771, 1776, 1780, 1782, 1793, 1797,  
 1801, 1805, 1809, 1813, 1817, 1821,  
 1826, 1829, 1834, 1838, 1842, 1846,  
 1850, 1854, 1859, 1862, 1867, 1871,  
 1875, 1879, 1885, 1891, 1897, 1902,  
 1906, 1912, 1918, 1923, 1927, 1932,  
 1935, 1940, 1944, 1950, 1954, 1958,  
 1963, 1967, 1972, 1975, 1980, 1984,  
 1989, 1992, 1997, 2001, 2007, 2012,  
 2015, 2020, 2024, 2030, 2035, 2039,  
 2043, 2047, 2052, 2056, 2060, 2064,  
 2070, 2076, 2081, 2085, 2089, 2093,  
 2098, 2101, 2108, 2112, 2116, 2121,  
 2125, 2129, 2133, 2138, 2142, 2148,  
 2154, 2159, 2162, 2167, 2171, 2175,  
 2179, 2183, 2187, 2193, 2200, 2205,  
 2208, 2213, 2217, 2223, 2227, 2231,  
 2236, 2239, 2245, 2252, 2258, 2265,  
 2271, 2277, 2282, 2286, 2292, 2298,  
 2304, 2310, 2315, 2319, 2325, 2329,  
 2333, 2337, 2341, 2346, 2349, 2356,  
 2362, 2367, 2373, 2380, 2387, 2393,  
 2398, 2403, 2407, 2413, 2418, 2422,  
 2426, 2430, 2434, 2438, 2442, 2446,  
 2450, 2454, 2459, 2463, 2469, 2475,  
 2479, 2483, 2488, 2491, 2497, 2501,  
 2505, 2512, 2516, 2520, 2524, 2528,  
 2532, 2536, 2541, 2544, 2549, 2553,  
 2557, 2561, 2567, 2572, 2576, 2580,  
 2584, 2588, 2592, 2597, 2600, 2605,  
 2609, 2615, 2620, 2623, 2628, 2632,  
 2636, 2640, 2650, 2654, 2658, 2662,  
 2666, 2673, 2677, 2681, 2685, 2689  
 op\_linspace, 973, 977, 982, 986, 991, 995,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1026, 1030, 1035, 1038, 1043, 1047,  
 1051, 1055, 1060, 1063, 1069, 1072,  
 1077, 1081, 1086, 1089, 1095, 1098,  
 1103, 1107, 1112, 1116, 1120, 1124,  
 1130, 1134, 1140, 1147, 1153, 1158,  
 1162, 1166, 1170, 1176, 1183, 1187,  
 1191, 1196, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1234, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1273,  
 1277, 1282, 1285, 1290, 1294, 1299,  
 1303, 1307, 1311, 1317, 1322, 1326,  
 1330, 1334, 1340, 1347, 1352, 1357,  
 1361, 1367, 1371, 1376, 1380, 1384,  
 1388, 1393, 1397, 1401, 1405, 1409,  
 1413, 1419, 1425, 1430, 1436, 1440,  
 1446, 1451, 1454, 1459, 1463, 1469,  
 1474, 1479, 1483, 1487, 1491, 1495,  
 1499, 1505, 1509, 1513, 1519, 1525,  
 1529, 1533, 1538, 1541, 1546, 1550,  
 1556, 1560, 1564, 1569, 1572, 1579,  
 1584, 1588, 1592, 1596, 1601, 1605,  
 1611, 1618, 1622, 1626, 1630, 1634,  
 1638, 1642, 1649, 1656, 1662, 1669,  
 1675, 1682, 1688, 1695, 1701, 1707,  
 1713, 1719, 1723, 1727, 1732, 1735,  
 1740, 1744, 1748, 1752, 1758, 1764,  
 1771, 1776, 1780, 1784, 1788, 1791,  
 1801, 1805, 1809, 1813, 1817, 1821,  
 1826, 1829, 1834, 1838, 1842, 1846,  
 1850, 1854, 1859, 1862, 1867, 1871,  
 1875, 1879, 1885, 1891, 1898, 1902,  
 1906, 1912, 1918, 1923, 1927, 1932,  
 1935, 1940, 1944, 1950, 1954, 1958,  
 1963, 1967, 1972, 1975, 1980, 1984,  
 1989, 1992, 1997, 2001, 2007, 2012,  
 2015, 2020, 2024, 2030, 2035, 2039,  
 2043, 2047, 2052, 2056, 2060, 2064,  
 2070, 2077, 2081, 2085, 2089, 2093,  
 2098, 2101, 2108, 2112, 2116, 2121,



- 2125, 2129, 2133, 2138, 2142, 2148,  
 2154, 2159, 2162, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2200, 2205,  
 2209, 2213, 2217, 2223, 2227, 2231,  
 2236, 2239, 2245, 2252, 2258, 2266,  
 2271, 2277, 2282, 2286, 2292, 2299,  
 2304, 2311, 2315, 2319, 2325, 2329,  
 2333, 2337, 2341, 2346, 2349, 2356,  
 2362, 2367, 2374, 2380, 2387, 2393,  
 2398, 2403, 2407, 2413, 2418, 2422,  
 2426, 2430, 2434, 2438, 2442, 2446,  
 2450, 2454, 2459, 2463, 2469, 2475,  
 2479, 2483, 2488, 2491, 2497, 2501,  
 2505, 2512, 2516, 2520, 2524, 2528,  
 2532, 2536, 2541, 2544, 2549, 2553,  
 2557, 2561, 2567, 2572, 2576, 2580,  
 2584, 2588, 2592, 2597, 2600, 2605,  
 2609, 2615, 2620, 2623, 2628, 2632,  
 2636, 2640, 2650, 2654, 2658, 2662,  
 2666, 2673, 2677, 2681, 2685, 2689
- op\_log*, 973, 977, 982, 986, 991, 995, 1000,  
 1004, 1009, 1013, 1018, 1022, 1026,  
 1030, 1035, 1038, 1043, 1047, 1051,  
 1055, 1060, 1063, 1069, 1072, 1077,  
 1081, 1086, 1090, 1095, 1098, 1103,  
 1107, 1112, 1116, 1120, 1124, 1130,  
 1134, 1140, 1147, 1153, 1158, 1162,  
 1166, 1170, 1176, 1183, 1187, 1191,  
 1196, 1201, 1205, 1209, 1213, 1220,  
 1224, 1228, 1234, 1240, 1246, 1253,  
 1257, 1261, 1265, 1269, 1273, 1277,  
 1282, 1285, 1290, 1294, 1299, 1303,  
 1307, 1311, 1317, 1322, 1326, 1330,  
 1334, 1340, 1347, 1352, 1357, 1361,  
 1367, 1371, 1376, 1380, 1384, 1388,  
 1393, 1397, 1401, 1405, 1410, 1413,  
 1419, 1425, 1430, 1436, 1440, 1446,  
 1451, 1454, 1459, 1463, 1469, 1474,  
 1479, 1483, 1487, 1491, 1495, 1499,  
 1505, 1509, 1513, 1519, 1525, 1529,  
 1533, 1538, 1541, 1546, 1550, 1556,  
 1560, 1564, 1569, 1573, 1579, 1584,  
 1588, 1592, 1596, 1601, 1605, 1611,  
 1618, 1622, 1626, 1630, 1634, 1638,  
 1642, 1649, 1656, 1662, 1669, 1675,  
 1682, 1689, 1695, 1701, 1707, 1713,  
 1719, 1723, 1727, 1732, 1735, 1740,  
 1744, 1748, 1752, 1758, 1764, 1771,  
 1776, 1780, 1784, 1788, 1793, 1797,  
 1799, 1809, 1813, 1817, 1821, 1826,  
 1829, 1834, 1838, 1842, 1846, 1850,  
 1854, 1859, 1862, 1867, 1871, 1875,  
 1879, 1885, 1891, 1898, 1902, 1906,  
 1912, 1918, 1923, 1927, 1932, 1935,  
 1940, 1944, 1950, 1954, 1958, 1963,  
 1967, 1972, 1975, 1980, 1984, 1989,  
 1992, 1997, 2001, 2007, 2012, 2015,  
 2020, 2024, 2030, 2035, 2039, 2043,  
 2047, 2052, 2056, 2060, 2064, 2070,  
 2077, 2081, 2085, 2089, 2093, 2098,  
 2101, 2108, 2112, 2116, 2121, 2125,  
 2129, 2133, 2138, 2142, 2148, 2154,  
 2159, 2162, 2167, 2171, 2175, 2179,  
 2183, 2187, 2194, 2200, 2205, 2209,  
 2213, 2217, 2223, 2227, 2231, 2236,  
 2240, 2245, 2252, 2258, 2266, 2271,  
 2277, 2282, 2286, 2292, 2299, 2304,  
 2311, 2315, 2319, 2325, 2329, 2333,  
 2337, 2341, 2346, 2349, 2356, 2362,  
 2367, 2374, 2380, 2387, 2393, 2399,  
 2403, 2407, 2413, 2418, 2422, 2426,  
 2430, 2434, 2438, 2442, 2446, 2451,  
 2454, 2459, 2463, 2469, 2475, 2479,  
 2483, 2488, 2491, 2497, 2502, 2505,  
 2512, 2516, 2520, 2524, 2528, 2532,  
 2536, 2541, 2544, 2549, 2553, 2557,  
 2561, 2567, 2572, 2576, 2580, 2584,  
 2588, 2592, 2597, 2600, 2605, 2609,  
 2615, 2620, 2623, 2628, 2632, 2636,  
 2640, 2650, 2654, 2658, 2662, 2666,  
 2673, 2677, 2681, 2685, 2689
- op\_log10*, 973, 977, 982, 986, 991, 995, 1000,  
 1004, 1009, 1013, 1018, 1022, 1026,  
 1030, 1035, 1038, 1043, 1047, 1051,  
 1055, 1060, 1063, 1069, 1072, 1077,  
 1081, 1086, 1090, 1095, 1098, 1103,  
 1107, 1112, 1116, 1120, 1124, 1130,  
 1134, 1140, 1147, 1153, 1158, 1162,  
 1166, 1170, 1176, 1183, 1187, 1191,  
 1196, 1201, 1205, 1209, 1213, 1220,  
 1224, 1228, 1234, 1240, 1246, 1253,  
 1257, 1261, 1265, 1269, 1273, 1277,  
 1282, 1285, 1290, 1294, 1299, 1303,  
 1307, 1311, 1317, 1322, 1326, 1330,  
 1334, 1340, 1347, 1352, 1357, 1361,  
 1367, 1371, 1376, 1380, 1384, 1388,



- 1393, 1397, 1401, 1405, 1410, 1413,  
1419, 1425, 1430, 1436, 1440, 1446,  
1451, 1454, 1459, 1463, 1469, 1474,  
1479, 1483, 1487, 1491, 1495, 1499,  
1505, 1509, 1513, 1519, 1525, 1529,  
1533, 1538, 1542, 1546, 1550, 1556,  
1560, 1564, 1569, 1573, 1579, 1584,  
1588, 1592, 1596, 1601, 1605, 1611,  
1618, 1622, 1626, 1630, 1634, 1638,  
1642, 1649, 1656, 1662, 1669, 1675,  
1682, 1689, 1695, 1701, 1707, 1713,  
1719, 1723, 1727, 1732, 1735, 1740,  
1744, 1748, 1752, 1758, 1764, 1771,  
1776, 1780, 1784, 1788, 1793, 1797,  
1801, 1805, 1807, 1817, 1821, 1826,  
1830, 1834, 1838, 1842, 1846, 1850,  
1854, 1859, 1862, 1867, 1871, 1876,  
1879, 1885, 1891, 1898, 1902, 1906,  
1912, 1918, 1923, 1927, 1932, 1935,  
1940, 1944, 1950, 1955, 1958, 1963,  
1967, 1972, 1975, 1980, 1984, 1989,  
1992, 1997, 2001, 2007, 2012, 2015,  
2020, 2024, 2030, 2035, 2039, 2043,  
2047, 2052, 2056, 2060, 2064, 2070,  
2077, 2081, 2085, 2089, 2093, 2098,  
2101, 2108, 2112, 2116, 2121, 2125,  
2129, 2133, 2138, 2142, 2148, 2154,  
2159, 2162, 2167, 2171, 2175, 2179,  
2183, 2187, 2194, 2200, 2205, 2209,  
2213, 2217, 2223, 2227, 2231, 2236,  
2240, 2245, 2252, 2258, 2266, 2272,  
2277, 2282, 2286, 2292, 2299, 2304,  
2311, 2315, 2319, 2325, 2329, 2333,  
2337, 2341, 2346, 2350, 2356, 2362,  
2367, 2374, 2380, 2387, 2393, 2399,  
2403, 2407, 2413, 2418, 2422, 2426,  
2430, 2434, 2438, 2442, 2446, 2451,  
2454, 2459, 2463, 2469, 2475, 2479,  
2483, 2488, 2492, 2497, 2502, 2505,  
2512, 2516, 2520, 2524, 2528, 2532,  
2536, 2541, 2544, 2549, 2553, 2557,  
2561, 2567, 2572, 2576, 2580, 2584,  
2588, 2592, 2597, 2600, 2605, 2609,  
2615, 2620, 2623, 2628, 2632, 2637,  
2640, 2650, 2654, 2658, 2662, 2666,  
2673, 2677, 2681, 2685, 2689
- op\_log1p, 973, 977, 982, 986, 991, 995, 1000,  
1004, 1009, 1013, 1018, 1022, 1026,  
1030, 1035, 1038, 1043, 1047, 1051,  
1055, 1060, 1063, 1069, 1072, 1077,  
1081, 1086, 1090, 1095, 1098, 1103,  
1107, 1112, 1116, 1120, 1124, 1130,  
1134, 1140, 1147, 1153, 1158, 1162,  
1166, 1170, 1176, 1183, 1187, 1191,  
1196, 1201, 1205, 1209, 1213, 1220,  
1224, 1228, 1234, 1240, 1246, 1253,  
1257, 1261, 1265, 1269, 1273, 1277,  
1282, 1285, 1290, 1294, 1299, 1303,  
1307, 1311, 1317, 1322, 1326, 1330,  
1334, 1340, 1347, 1352, 1357, 1361,  
1367, 1371, 1376, 1380, 1384, 1388,  
1393, 1397, 1401, 1405, 1410, 1413,  
1419, 1425, 1430, 1436, 1440, 1446,  
1451, 1454, 1459, 1463, 1469, 1474,  
1479, 1483, 1487, 1491, 1495, 1499,  
1505, 1509, 1513, 1519, 1525, 1530,  
1533, 1538, 1542, 1546, 1550, 1556,  
1560, 1564, 1569, 1573, 1579, 1584,  
1588, 1592, 1596, 1601, 1605, 1611,  
1618, 1622, 1626, 1630, 1634, 1638,  
1642, 1650, 1656, 1662, 1669, 1675,  
1682, 1689, 1695, 1701, 1707, 1713,  
1719, 1723, 1727, 1732, 1735, 1740,  
1744, 1748, 1752, 1758, 1764, 1771,  
1776, 1780, 1784, 1788, 1793, 1797,  
1801, 1805, 1809, 1813, 1816, 1826,  
1830, 1834, 1838, 1842, 1846, 1850,  
1854, 1859, 1863, 1867, 1871, 1876,  
1879, 1885, 1891, 1898, 1902, 1906,  
1912, 1918, 1923, 1927, 1932, 1935,  
1940, 1944, 1950, 1955, 1958, 1963,  
1967, 1972, 1975, 1980, 1984, 1989,  
1993, 1997, 2001, 2007, 2012, 2016,  
2020, 2024, 2030, 2035, 2039, 2043,  
2047, 2052, 2056, 2060, 2064, 2070,  
2077, 2081, 2085, 2089, 2093, 2098,  
2101, 2108, 2112, 2116, 2121, 2125,  
2129, 2133, 2138, 2142, 2148, 2154,  
2159, 2162, 2167, 2171, 2175, 2179,  
2183, 2187, 2194, 2200, 2205, 2209,  
2213, 2217, 2223, 2228, 2231, 2236,  
2240, 2245, 2252, 2258, 2266, 2272,  
2277, 2282, 2286, 2292, 2299, 2305,  
2311, 2315, 2319, 2325, 2329, 2333,  
2338, 2341, 2346, 2350, 2356, 2362,  
2367, 2374, 2380, 2387, 2393, 2399,

- 2403, 2407, 2413, 2418, 2422, 2426,  
 2430, 2434, 2438, 2442, 2446, 2451,  
 2454, 2459, 2463, 2469, 2475, 2479,  
 2483, 2488, 2492, 2497, 2502, 2505,  
 2512, 2516, 2520, 2524, 2528, 2532,  
 2536, 2541, 2545, 2549, 2553, 2557,  
 2561, 2567, 2572, 2576, 2580, 2584,  
 2588, 2592, 2597, 2600, 2605, 2609,  
 2615, 2620, 2623, 2628, 2632, 2637,  
 2640, 2650, 2654, 2658, 2662, 2666,  
 2673, 2677, 2681, 2685, 2689
- op\_log2*, 973, 977, 982, 986, 991, 995, 1000,  
 1004, 1009, 1013, 1018, 1022, 1026,  
 1030, 1035, 1038, 1043, 1047, 1051,  
 1055, 1060, 1064, 1069, 1072, 1077,  
 1081, 1086, 1090, 1095, 1098, 1103,  
 1107, 1112, 1116, 1120, 1124, 1130,  
 1134, 1140, 1147, 1153, 1158, 1162,  
 1166, 1170, 1176, 1183, 1187, 1191,  
 1196, 1201, 1205, 1209, 1213, 1220,  
 1224, 1228, 1234, 1240, 1246, 1253,  
 1257, 1261, 1265, 1269, 1273, 1277,  
 1282, 1285, 1290, 1294, 1299, 1303,  
 1308, 1311, 1317, 1322, 1326, 1330,  
 1334, 1340, 1347, 1352, 1357, 1361,  
 1367, 1371, 1376, 1380, 1384, 1388,  
 1393, 1397, 1401, 1405, 1410, 1413,  
 1419, 1425, 1430, 1436, 1440, 1446,  
 1451, 1454, 1459, 1463, 1469, 1474,  
 1479, 1483, 1487, 1491, 1495, 1499,  
 1505, 1509, 1513, 1519, 1525, 1530,  
 1533, 1538, 1542, 1546, 1550, 1556,  
 1561, 1564, 1569, 1573, 1579, 1584,  
 1588, 1592, 1596, 1601, 1605, 1612,  
 1618, 1622, 1626, 1630, 1634, 1638,  
 1642, 1650, 1656, 1662, 1669, 1675,  
 1682, 1689, 1695, 1701, 1707, 1713,  
 1719, 1723, 1727, 1732, 1735, 1740,  
 1744, 1748, 1752, 1758, 1764, 1771,  
 1776, 1780, 1784, 1788, 1793, 1797,  
 1801, 1805, 1809, 1813, 1818, 1821,  
 1824, 1834, 1838, 1842, 1846, 1850,  
 1854, 1859, 1863, 1867, 1871, 1876,  
 1879, 1885, 1891, 1898, 1903, 1906,  
 1912, 1918, 1923, 1927, 1932, 1935,  
 1940, 1944, 1950, 1955, 1958, 1963,  
 1967, 1972, 1975, 1980, 1984, 1989,  
 1993, 1997, 2001, 2007, 2012, 2016,  
 2020, 2024, 2030, 2035, 2039, 2043,  
 2047, 2052, 2056, 2060, 2064, 2070,  
 2077, 2081, 2085, 2089, 2093, 2098,  
 2102, 2108, 2112, 2116, 2121, 2125,  
 2130, 2133, 2138, 2142, 2148, 2154,  
 2159, 2162, 2167, 2171, 2175, 2179,  
 2183, 2187, 2194, 2200, 2205, 2209,  
 2213, 2217, 2223, 2228, 2231, 2236,  
 2240, 2245, 2252, 2258, 2266, 2272,  
 2278, 2282, 2286, 2292, 2299, 2305,  
 2311, 2315, 2319, 2325, 2329, 2333,  
 2338, 2341, 2346, 2350, 2356, 2362,  
 2367, 2374, 2380, 2387, 2393, 2399,  
 2403, 2407, 2413, 2418, 2422, 2426,  
 2430, 2434, 2438, 2442, 2446, 2451,  
 2454, 2459, 2463, 2469, 2475, 2479,  
 2483, 2488, 2492, 2497, 2502, 2505,  
 2512, 2516, 2520, 2524, 2528, 2533,  
 2536, 2541, 2545, 2549, 2553, 2557,  
 2561, 2567, 2572, 2576, 2580, 2584,  
 2588, 2592, 2597, 2600, 2605, 2609,  
 2615, 2620, 2623, 2628, 2632, 2637,  
 2640, 2650, 2654, 2658, 2662, 2666,  
 2673, 2677, 2681, 2685, 2689
- op\_log\_sigmoid*, 977, 986, 995, 1004, 1013,  
 1022, 1030, 1039, 1047, 1055, 1064,  
 1072, 1081, 1090, 1098, 1107, 1116,  
 1124, 1134, 1137, 1140, 1144, 1147,  
 1150, 1153, 1162, 1170, 1176, 1180,  
 1183, 1191, 1196, 1205, 1213, 1220,  
 1228, 1232, 1234, 1240, 1246, 1250,  
 1253, 1261, 1269, 1277, 1285, 1294,  
 1303, 1311, 1315, 1317, 1326, 1334,  
 1340, 1344, 1347, 1352, 1361, 1371,  
 1380, 1388, 1397, 1405, 1413, 1419,  
 1425, 1430, 1440, 1444, 1446, 1454,  
 1463, 1469, 1474, 1483, 1491, 1499,  
 1505, 1513, 1519, 1525, 1533, 1542,  
 1550, 1556, 1564, 1573, 1577, 1579,  
 1588, 1596, 1605, 1609, 1612, 1615,  
 1618, 1626, 1634, 1642, 1650, 1656,  
 1662, 1669, 1675, 1682, 1689, 1695,  
 1701, 1707, 1713, 1719, 1727, 1735,  
 1744, 1752, 1758, 1764, 1768, 1771,  
 1780, 1788, 1797, 1805, 1813, 1821,  
 1830, 1838, 1846, 1854, 1863, 1871,  
 1879, 1885, 1888, 1895, 1898, 1906,  
 1912, 1918, 1927, 1935, 1944, 1947,

- 1950, 1958, 1967, 1975, 1984, 1993,  
 2001, 2005, 2007, 2016, 2024, 2028,  
 2030, 2039, 2047, 2056, 2064, 2070,  
 2074, 2077, 2085, 2093, 2102, 2105,  
 2108, 2116, 2125, 2133, 2142, 2145,  
 2148, 2154, 2162, 2171, 2179, 2187,  
 2191, 2194, 2198, 2200, 2209, 2217,  
 2223, 2231, 2240, 2245, 2252, 2258,  
 2266, 2272, 2278, 2286, 2289, 2292,  
 2296, 2299, 2305, 2308, 2311, 2319,  
 2322, 2325, 2333, 2341, 2350, 2356,  
 2362, 2367, 2371, 2374, 2378, 2380,  
 2384, 2387, 2393, 2399, 2407, 2411,  
 2413, 2422, 2430, 2438, 2446, 2454,  
 2463, 2469, 2475, 2483, 2492, 2497,  
 2505, 2512, 2520, 2528, 2536, 2545,  
 2553, 2561, 2567, 2576, 2584, 2592,  
 2600, 2609, 2615, 2623, 2632, 2640,  
 2650, 2658, 2666, 2673, 2681, 2689
- op\_log\_softmax*, 977, 986, 995, 1004, 1013,  
 1022, 1030, 1039, 1047, 1055, 1064,  
 1073, 1081, 1090, 1098, 1107, 1116,  
 1124, 1134, 1137, 1140, 1144, 1147,  
 1150, 1153, 1162, 1170, 1176, 1180,  
 1183, 1191, 1196, 1205, 1213, 1220,  
 1228, 1232, 1234, 1240, 1246, 1250,  
 1253, 1261, 1269, 1277, 1285, 1294,  
 1303, 1311, 1315, 1317, 1326, 1334,  
 1341, 1344, 1347, 1352, 1361, 1371,  
 1380, 1388, 1397, 1405, 1413, 1419,  
 1425, 1430, 1440, 1444, 1446, 1454,  
 1463, 1469, 1474, 1483, 1491, 1499,  
 1505, 1513, 1519, 1525, 1533, 1542,  
 1550, 1556, 1564, 1573, 1577, 1580,  
 1588, 1596, 1605, 1609, 1612, 1615,  
 1618, 1626, 1634, 1642, 1650, 1656,  
 1662, 1669, 1675, 1682, 1689, 1695,  
 1701, 1707, 1713, 1719, 1727, 1736,  
 1744, 1752, 1758, 1764, 1768, 1771,  
 1780, 1788, 1797, 1805, 1813, 1821,  
 1830, 1838, 1846, 1854, 1863, 1871,  
 1879, 1885, 1889, 1891, 1894, 1906,  
 1912, 1918, 1927, 1935, 1944, 1947,  
 1950, 1958, 1967, 1976, 1984, 1993,  
 2001, 2005, 2007, 2016, 2024, 2028,  
 2030, 2039, 2047, 2056, 2064, 2070,  
 2074, 2077, 2085, 2093, 2102, 2105,  
 2108, 2116, 2125, 2133, 2142, 2145,  
 2148, 2154, 2163, 2171, 2179, 2187,  
 2191, 2194, 2198, 2200, 2209, 2217,  
 2223, 2231, 2240, 2245, 2252, 2258,  
 2266, 2272, 2278, 2286, 2289, 2292,  
 2296, 2299, 2305, 2308, 2311, 2319,  
 2322, 2325, 2333, 2341, 2350, 2356,  
 2362, 2367, 2371, 2374, 2378, 2380,  
 2384, 2387, 2393, 2399, 2407, 2411,  
 2413, 2422, 2430, 2438, 2446, 2454,  
 2463, 2469, 2475, 2483, 2492, 2497,  
 2505, 2512, 2520, 2528, 2536, 2545,  
 2553, 2561, 2567, 2576, 2584, 2592,  
 2600, 2609, 2615, 2624, 2632, 2640,  
 2650, 2658, 2666, 2673, 2681, 2689
- op\_logaddexp*, 973, 977, 982, 986, 991, 995,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1026, 1030, 1035, 1039, 1043, 1047,  
 1051, 1055, 1060, 1064, 1069, 1073,  
 1077, 1081, 1086, 1090, 1095, 1099,  
 1103, 1107, 1112, 1116, 1120, 1124,  
 1130, 1134, 1140, 1147, 1153, 1158,  
 1162, 1166, 1170, 1176, 1183, 1187,  
 1191, 1197, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1234, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1273,  
 1277, 1282, 1286, 1290, 1294, 1299,  
 1303, 1308, 1311, 1317, 1322, 1326,  
 1330, 1334, 1341, 1347, 1352, 1358,  
 1361, 1367, 1371, 1376, 1380, 1384,  
 1388, 1393, 1397, 1401, 1405, 1410,  
 1413, 1419, 1425, 1430, 1436, 1440,  
 1446, 1451, 1455, 1459, 1463, 1469,  
 1474, 1479, 1483, 1487, 1491, 1495,  
 1499, 1505, 1509, 1513, 1519, 1525,  
 1530, 1533, 1538, 1542, 1546, 1550,  
 1556, 1561, 1564, 1569, 1573, 1580,  
 1584, 1588, 1593, 1596, 1601, 1605,  
 1612, 1618, 1622, 1626, 1630, 1634,  
 1638, 1642, 1650, 1656, 1662, 1669,  
 1675, 1682, 1689, 1695, 1701, 1707,  
 1713, 1719, 1723, 1727, 1732, 1736,  
 1740, 1744, 1748, 1752, 1758, 1764,  
 1771, 1776, 1780, 1784, 1788, 1793,  
 1797, 1801, 1805, 1809, 1813, 1818,  
 1821, 1826, 1830, 1832, 1842, 1846,  
 1850, 1854, 1859, 1863, 1867, 1871,  
 1876, 1879, 1885, 1891, 1898, 1903,  
 1906, 1912, 1918, 1923, 1927, 1932,

1936, 1940, 1944, 1950, 1955, 1958,  
 1963, 1967, 1972, 1976, 1980, 1984,  
 1989, 1993, 1997, 2001, 2007, 2012,  
 2016, 2020, 2024, 2030, 2035, 2039,  
 2043, 2047, 2052, 2056, 2060, 2064,  
 2070, 2077, 2081, 2085, 2089, 2093,  
 2098, 2102, 2108, 2112, 2116, 2121,  
 2125, 2130, 2133, 2138, 2142, 2148,  
 2154, 2159, 2163, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2200, 2205,  
 2209, 2213, 2217, 2223, 2228, 2231,  
 2236, 2240, 2245, 2252, 2258, 2266,  
 2272, 2278, 2282, 2286, 2292, 2299,  
 2305, 2311, 2315, 2319, 2325, 2329,  
 2333, 2338, 2341, 2346, 2350, 2356,  
 2362, 2367, 2374, 2380, 2387, 2393,  
 2399, 2403, 2407, 2413, 2418, 2422,  
 2426, 2430, 2434, 2438, 2442, 2446,  
 2451, 2454, 2459, 2463, 2469, 2475,  
 2479, 2483, 2488, 2492, 2497, 2502,  
 2505, 2512, 2516, 2520, 2524, 2528,  
 2533, 2536, 2541, 2545, 2549, 2553,  
 2557, 2561, 2567, 2572, 2576, 2580,  
 2584, 2588, 2592, 2597, 2601, 2605,  
 2609, 2615, 2620, 2624, 2628, 2632,  
 2637, 2640, 2650, 2654, 2658, 2662,  
 2666, 2673, 2677, 2681, 2685, 2689

op\_logical\_and, 973, 977, 982, 986, 991,  
 995, 1000, 1004, 1009, 1013, 1018,  
 1022, 1026, 1030, 1035, 1039, 1043,  
 1047, 1051, 1055, 1060, 1064, 1069,  
 1073, 1077, 1081, 1086, 1090, 1095,  
 1099, 1103, 1107, 1112, 1116, 1120,  
 1124, 1130, 1134, 1140, 1147, 1153,  
 1158, 1162, 1166, 1170, 1176, 1183,  
 1187, 1191, 1197, 1201, 1205, 1209,  
 1213, 1220, 1224, 1228, 1234, 1240,  
 1246, 1253, 1257, 1261, 1265, 1269,  
 1273, 1277, 1282, 1286, 1290, 1294,  
 1299, 1303, 1308, 1311, 1317, 1322,  
 1326, 1330, 1334, 1341, 1347, 1352,  
 1358, 1361, 1367, 1371, 1376, 1380,  
 1384, 1388, 1393, 1397, 1401, 1405,  
 1410, 1413, 1419, 1425, 1430, 1436,  
 1440, 1446, 1451, 1455, 1459, 1463,  
 1469, 1474, 1479, 1483, 1487, 1491,  
 1495, 1499, 1505, 1509, 1513, 1519,  
 1525, 1530, 1533, 1538, 1542, 1546,

1550, 1556, 1561, 1564, 1569, 1573,  
 1580, 1584, 1588, 1593, 1596, 1601,  
 1605, 1612, 1618, 1622, 1626, 1630,  
 1634, 1638, 1642, 1650, 1656, 1663,  
 1669, 1675, 1682, 1689, 1695, 1701,  
 1707, 1713, 1719, 1723, 1727, 1732,  
 1736, 1740, 1744, 1748, 1752, 1758,  
 1764, 1771, 1776, 1780, 1784, 1788,  
 1793, 1797, 1801, 1805, 1809, 1813,  
 1818, 1821, 1826, 1830, 1834, 1838,  
 1840, 1851, 1854, 1859, 1863, 1867,  
 1871, 1876, 1879, 1885, 1891, 1898,  
 1903, 1906, 1912, 1918, 1923, 1927,  
 1932, 1936, 1940, 1944, 1950, 1955,  
 1958, 1963, 1967, 1972, 1976, 1980,  
 1984, 1989, 1993, 1997, 2001, 2007,  
 2012, 2016, 2020, 2024, 2030, 2035,  
 2039, 2043, 2047, 2052, 2056, 2060,  
 2064, 2070, 2077, 2081, 2085, 2090,  
 2093, 2098, 2102, 2108, 2112, 2116,  
 2121, 2125, 2130, 2133, 2138, 2142,  
 2148, 2154, 2159, 2163, 2167, 2171,  
 2175, 2179, 2183, 2187, 2194, 2200,  
 2205, 2209, 2213, 2217, 2223, 2228,  
 2231, 2236, 2240, 2245, 2252, 2258,  
 2266, 2272, 2278, 2282, 2286, 2292,  
 2299, 2305, 2311, 2315, 2319, 2325,  
 2329, 2333, 2338, 2341, 2346, 2350,  
 2356, 2362, 2367, 2374, 2380, 2387,  
 2393, 2399, 2403, 2407, 2413, 2418,  
 2422, 2426, 2430, 2434, 2438, 2442,  
 2446, 2451, 2454, 2459, 2463, 2469,  
 2475, 2479, 2483, 2488, 2492, 2497,  
 2502, 2505, 2512, 2516, 2520, 2524,  
 2528, 2533, 2536, 2541, 2545, 2549,  
 2553, 2557, 2561, 2567, 2572, 2576,  
 2580, 2584, 2588, 2592, 2597, 2601,  
 2605, 2609, 2615, 2620, 2624, 2628,  
 2632, 2637, 2640, 2650, 2654, 2658,  
 2662, 2666, 2673, 2677, 2681, 2685,  
 2689

op\_logical\_not, 973, 977, 982, 986, 991,  
 995, 1000, 1004, 1009, 1013, 1018,  
 1022, 1026, 1030, 1035, 1039, 1043,  
 1047, 1051, 1055, 1060, 1064, 1069,  
 1073, 1077, 1081, 1086, 1090, 1095,  
 1099, 1103, 1107, 1112, 1116, 1120,  
 1124, 1130, 1134, 1140, 1147, 1153,

1158, 1162, 1166, 1170, 1176, 1183,  
 1187, 1191, 1197, 1201, 1205, 1209,  
 1213, 1220, 1224, 1228, 1234, 1240,  
 1246, 1253, 1257, 1261, 1265, 1269,  
 1273, 1277, 1282, 1286, 1290, 1294,  
 1299, 1303, 1308, 1311, 1317, 1322,  
 1326, 1330, 1334, 1341, 1347, 1352,  
 1358, 1361, 1367, 1371, 1376, 1380,  
 1384, 1388, 1393, 1397, 1401, 1405,  
 1410, 1414, 1419, 1425, 1430, 1436,  
 1440, 1446, 1451, 1455, 1459, 1463,  
 1469, 1475, 1479, 1483, 1487, 1491,  
 1495, 1499, 1505, 1509, 1513, 1519,  
 1525, 1530, 1533, 1538, 1542, 1546,  
 1550, 1556, 1561, 1564, 1569, 1573,  
 1580, 1584, 1588, 1593, 1596, 1601,  
 1605, 1612, 1618, 1622, 1626, 1630,  
 1634, 1638, 1642, 1650, 1656, 1663,  
 1669, 1675, 1682, 1689, 1695, 1702,  
 1707, 1713, 1719, 1723, 1727, 1732,  
 1736, 1740, 1744, 1748, 1752, 1758,  
 1764, 1771, 1776, 1780, 1784, 1788,  
 1793, 1797, 1801, 1805, 1809, 1813,  
 1818, 1821, 1826, 1830, 1834, 1838,  
 1842, 1846, 1849, 1859, 1863, 1867,  
 1871, 1876, 1879, 1885, 1891, 1898,  
 1903, 1906, 1912, 1918, 1923, 1927,  
 1932, 1936, 1940, 1944, 1950, 1955,  
 1958, 1963, 1967, 1972, 1976, 1981,  
 1984, 1989, 1993, 1997, 2001, 2007,  
 2012, 2016, 2020, 2024, 2030, 2035,  
 2039, 2043, 2047, 2052, 2056, 2060,  
 2064, 2070, 2077, 2081, 2085, 2090,  
 2093, 2098, 2102, 2108, 2112, 2116,  
 2121, 2125, 2130, 2133, 2138, 2142,  
 2148, 2154, 2159, 2163, 2167, 2171,  
 2175, 2179, 2183, 2187, 2194, 2200,  
 2205, 2209, 2213, 2217, 2223, 2228,  
 2231, 2236, 2240, 2246, 2252, 2258,  
 2266, 2272, 2278, 2282, 2286, 2292,  
 2299, 2305, 2311, 2315, 2319, 2325,  
 2329, 2333, 2338, 2341, 2346, 2350,  
 2356, 2362, 2367, 2374, 2380, 2387,  
 2393, 2399, 2403, 2407, 2413, 2418,  
 2422, 2426, 2430, 2434, 2438, 2442,  
 2446, 2451, 2455, 2459, 2463, 2469,  
 2475, 2480, 2483, 2488, 2492, 2497,  
 2502, 2506, 2512, 2516, 2520, 2524,  
 2528, 2533, 2536, 2541, 2545, 2549,  
 2553, 2557, 2561, 2567, 2572, 2576,  
 2580, 2584, 2588, 2592, 2597, 2601,  
 2605, 2609, 2615, 2620, 2624, 2628,  
 2632, 2637, 2640, 2650, 2654, 2658,  
 2662, 2666, 2673, 2677, 2681, 2685,  
 2689  
 op\_logical\_or, 973, 977, 982, 986, 991, 995,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1026, 1030, 1035, 1039, 1043, 1047,  
 1051, 1055, 1060, 1064, 1069, 1073,  
 1077, 1081, 1086, 1090, 1095, 1099,  
 1103, 1107, 1112, 1116, 1121, 1124,  
 1130, 1134, 1140, 1147, 1153, 1158,  
 1162, 1166, 1170, 1176, 1183, 1187,  
 1191, 1197, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1234, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1274,  
 1277, 1282, 1286, 1290, 1294, 1299,  
 1303, 1308, 1311, 1318, 1322, 1326,  
 1330, 1334, 1341, 1347, 1352, 1358,  
 1361, 1367, 1371, 1376, 1380, 1384,  
 1388, 1393, 1397, 1401, 1405, 1410,  
 1414, 1419, 1425, 1430, 1436, 1440,  
 1446, 1451, 1455, 1459, 1463, 1469,  
 1475, 1479, 1483, 1487, 1491, 1495,  
 1499, 1505, 1509, 1513, 1519, 1525,  
 1530, 1533, 1538, 1542, 1546, 1550,  
 1556, 1561, 1564, 1569, 1573, 1580,  
 1584, 1588, 1593, 1596, 1601, 1605,  
 1612, 1618, 1622, 1626, 1630, 1634,  
 1639, 1642, 1650, 1656, 1663, 1669,  
 1675, 1682, 1689, 1695, 1702, 1707,  
 1713, 1719, 1724, 1727, 1732, 1736,  
 1740, 1744, 1748, 1752, 1758, 1764,  
 1771, 1776, 1780, 1784, 1788, 1793,  
 1797, 1801, 1805, 1809, 1813, 1818,  
 1821, 1826, 1830, 1834, 1838, 1842,  
 1846, 1851, 1854, 1857, 1867, 1871,  
 1876, 1880, 1885, 1891, 1898, 1903,  
 1906, 1912, 1918, 1923, 1927, 1932,  
 1936, 1940, 1944, 1950, 1955, 1959,  
 1963, 1967, 1972, 1976, 1981, 1984,  
 1989, 1993, 1997, 2001, 2007, 2012,  
 2016, 2020, 2024, 2030, 2035, 2039,  
 2043, 2047, 2052, 2056, 2060, 2064,  
 2070, 2077, 2081, 2085, 2090, 2093,  
 2098, 2102, 2108, 2112, 2116, 2121,

- 2125, 2130, 2133, 2138, 2142, 2148,  
 2154, 2159, 2163, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2200, 2205,  
 2209, 2213, 2217, 2223, 2228, 2231,  
 2236, 2240, 2246, 2252, 2258, 2266,  
 2272, 2278, 2282, 2286, 2292, 2299,  
 2305, 2311, 2315, 2319, 2325, 2329,  
 2333, 2338, 2341, 2346, 2350, 2356,  
 2362, 2367, 2374, 2380, 2387, 2393,  
 2399, 2403, 2407, 2413, 2418, 2422,  
 2426, 2430, 2434, 2438, 2442, 2446,  
 2451, 2455, 2459, 2463, 2469, 2475,  
 2480, 2483, 2488, 2492, 2497, 2502,  
 2506, 2512, 2516, 2520, 2524, 2528,  
 2533, 2536, 2541, 2545, 2549, 2553,  
 2557, 2561, 2567, 2572, 2576, 2580,  
 2584, 2588, 2592, 2597, 2601, 2605,  
 2609, 2615, 2620, 2624, 2628, 2632,  
 2637, 2641, 2650, 2654, 2658, 2662,  
 2666, 2673, 2677, 2681, 2685, 2689
- op\_logical\_xor*, 973, 977, 982, 986, 991,  
 995, 1000, 1004, 1009, 1013, 1018,  
 1022, 1026, 1030, 1035, 1039, 1043,  
 1047, 1051, 1055, 1060, 1064, 1069,  
 1073, 1077, 1081, 1086, 1090, 1095,  
 1099, 1103, 1107, 1112, 1116, 1121,  
 1124, 1130, 1134, 1140, 1147, 1153,  
 1158, 1162, 1167, 1170, 1176, 1183,  
 1187, 1191, 1197, 1201, 1205, 1209,  
 1213, 1220, 1224, 1228, 1234, 1240,  
 1246, 1253, 1257, 1261, 1265, 1269,  
 1274, 1277, 1282, 1286, 1290, 1294,  
 1299, 1303, 1308, 1311, 1318, 1322,  
 1326, 1330, 1334, 1341, 1347, 1353,  
 1358, 1361, 1367, 1371, 1376, 1380,  
 1384, 1388, 1393, 1397, 1401, 1405,  
 1410, 1414, 1419, 1425, 1430, 1436,  
 1440, 1446, 1451, 1455, 1459, 1463,  
 1469, 1475, 1479, 1483, 1487, 1491,  
 1495, 1499, 1505, 1509, 1513, 1519,  
 1525, 1530, 1534, 1538, 1542, 1546,  
 1550, 1556, 1561, 1564, 1569, 1573,  
 1580, 1584, 1588, 1593, 1596, 1601,  
 1605, 1612, 1618, 1622, 1626, 1630,  
 1634, 1639, 1642, 1650, 1656, 1663,  
 1669, 1675, 1682, 1689, 1695, 1702,  
 1707, 1713, 1719, 1724, 1727, 1732,  
 1736, 1740, 1744, 1748, 1752, 1758,
- 1764, 1771, 1776, 1780, 1784, 1788,  
 1793, 1797, 1801, 1805, 1809, 1813,  
 1818, 1821, 1826, 1830, 1834, 1838,  
 1842, 1846, 1851, 1854, 1859, 1863,  
 1865, 1876, 1880, 1885, 1892, 1898,  
 1903, 1906, 1912, 1918, 1923, 1927,  
 1932, 1936, 1940, 1944, 1950, 1955,  
 1959, 1963, 1967, 1972, 1976, 1981,  
 1984, 1989, 1993, 1997, 2001, 2007,  
 2012, 2016, 2020, 2024, 2031, 2035,  
 2039, 2043, 2047, 2052, 2056, 2060,  
 2064, 2070, 2077, 2081, 2085, 2090,  
 2093, 2098, 2102, 2108, 2113, 2116,  
 2121, 2125, 2130, 2133, 2138, 2142,  
 2148, 2154, 2159, 2163, 2167, 2171,  
 2175, 2179, 2183, 2187, 2194, 2200,  
 2205, 2209, 2213, 2217, 2223, 2228,  
 2232, 2236, 2240, 2246, 2253, 2259,  
 2266, 2272, 2278, 2282, 2286, 2292,  
 2299, 2305, 2311, 2315, 2319, 2325,  
 2329, 2333, 2338, 2342, 2346, 2350,  
 2356, 2362, 2368, 2374, 2380, 2387,  
 2393, 2399, 2403, 2407, 2413, 2418,  
 2422, 2426, 2430, 2434, 2438, 2442,  
 2446, 2451, 2455, 2459, 2463, 2469,  
 2475, 2480, 2483, 2488, 2492, 2497,  
 2502, 2506, 2512, 2516, 2520, 2524,  
 2528, 2533, 2536, 2541, 2545, 2549,  
 2553, 2557, 2561, 2567, 2572, 2576,  
 2580, 2584, 2588, 2592, 2597, 2601,  
 2605, 2609, 2615, 2620, 2624, 2628,  
 2632, 2637, 2641, 2650, 2654, 2658,  
 2662, 2666, 2673, 2677, 2681, 2685,  
 2689
- op\_logspace*, 973, 977, 982, 986, 991, 995,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1026, 1030, 1035, 1039, 1043, 1047,  
 1051, 1055, 1060, 1064, 1069, 1073,  
 1077, 1081, 1086, 1090, 1095, 1099,  
 1103, 1107, 1112, 1116, 1121, 1124,  
 1130, 1134, 1140, 1147, 1153, 1158,  
 1162, 1167, 1170, 1177, 1183, 1187,  
 1191, 1197, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1234, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1274,  
 1277, 1282, 1286, 1290, 1294, 1299,  
 1303, 1308, 1312, 1318, 1322, 1326,  
 1330, 1334, 1341, 1347, 1353, 1358,

1361, 1367, 1371, 1376, 1380, 1384,  
 1388, 1393, 1397, 1401, 1405, 1410,  
 1414, 1419, 1425, 1430, 1436, 1440,  
 1446, 1451, 1455, 1459, 1463, 1469,  
 1475, 1479, 1483, 1487, 1491, 1495,  
 1499, 1505, 1509, 1513, 1519, 1525,  
 1530, 1534, 1538, 1542, 1546, 1550,  
 1556, 1561, 1565, 1569, 1573, 1580,  
 1584, 1588, 1593, 1596, 1601, 1605,  
 1612, 1618, 1622, 1626, 1630, 1634,  
 1639, 1642, 1650, 1656, 1663, 1669,  
 1675, 1682, 1689, 1695, 1702, 1707,  
 1713, 1719, 1724, 1727, 1732, 1736,  
 1740, 1744, 1748, 1752, 1758, 1764,  
 1771, 1776, 1780, 1784, 1788, 1793,  
 1797, 1801, 1805, 1809, 1813, 1818,  
 1822, 1826, 1830, 1834, 1838, 1842,  
 1846, 1851, 1854, 1859, 1863, 1867,  
 1871, 1873, 1885, 1892, 1898, 1903,  
 1907, 1912, 1918, 1923, 1927, 1932,  
 1936, 1940, 1944, 1950, 1955, 1959,  
 1963, 1967, 1972, 1976, 1981, 1984,  
 1989, 1993, 1997, 2001, 2007, 2012,  
 2016, 2020, 2024, 2031, 2035, 2039,  
 2043, 2047, 2052, 2056, 2060, 2064,  
 2071, 2077, 2081, 2085, 2090, 2093,  
 2098, 2102, 2108, 2113, 2116, 2121,  
 2125, 2130, 2134, 2138, 2142, 2148,  
 2154, 2159, 2163, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2201, 2205,  
 2209, 2213, 2217, 2223, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2282, 2286, 2292, 2299,  
 2305, 2311, 2315, 2319, 2325, 2329,  
 2333, 2338, 2342, 2346, 2350, 2356,  
 2362, 2368, 2374, 2381, 2387, 2393,  
 2399, 2403, 2407, 2413, 2418, 2422,  
 2426, 2430, 2434, 2438, 2442, 2446,  
 2451, 2455, 2459, 2463, 2469, 2475,  
 2480, 2483, 2488, 2492, 2497, 2502,  
 2506, 2512, 2516, 2520, 2524, 2528,  
 2533, 2537, 2541, 2545, 2549, 2553,  
 2557, 2561, 2567, 2572, 2576, 2580,  
 2584, 2589, 2592, 2597, 2601, 2605,  
 2609, 2615, 2620, 2624, 2628, 2632,  
 2637, 2641, 2650, 2654, 2658, 2662,  
 2666, 2673, 2677, 2681, 2685, 2689

op\_logsumexp, 977, 986, 995, 1004, 1013,

1022, 1030, 1039, 1047, 1055, 1064,  
 1073, 1081, 1090, 1099, 1107, 1116,  
 1124, 1134, 1140, 1147, 1153, 1162,  
 1170, 1177, 1183, 1191, 1197, 1205,  
 1213, 1220, 1228, 1234, 1240, 1246,  
 1253, 1261, 1269, 1277, 1286, 1294,  
 1303, 1312, 1318, 1326, 1334, 1341,  
 1347, 1353, 1362, 1371, 1380, 1388,  
 1397, 1405, 1414, 1419, 1425, 1430,  
 1440, 1446, 1455, 1463, 1466, 1469,  
 1472, 1475, 1483, 1491, 1499, 1502,  
 1505, 1513, 1517, 1519, 1523, 1525,  
 1534, 1542, 1550, 1556, 1565, 1573,  
 1580, 1588, 1597, 1605, 1612, 1618,  
 1626, 1634, 1642, 1650, 1656, 1663,  
 1669, 1675, 1682, 1689, 1695, 1702,  
 1707, 1710, 1713, 1716, 1719, 1727,  
 1736, 1744, 1752, 1756, 1758, 1764,  
 1771, 1780, 1788, 1797, 1805, 1813,  
 1822, 1830, 1838, 1846, 1854, 1863,  
 1871, 1880, 1882, 1892, 1898, 1907,  
 1912, 1919, 1927, 1936, 1944, 1950,  
 1959, 1967, 1976, 1984, 1993, 2001,  
 2007, 2016, 2024, 2031, 2039, 2047,  
 2056, 2064, 2071, 2077, 2085, 2093,  
 2102, 2108, 2116, 2125, 2134, 2142,  
 2148, 2151, 2154, 2163, 2171, 2179,  
 2187, 2194, 2201, 2209, 2217, 2221,  
 2223, 2232, 2240, 2243, 2246, 2253,  
 2259, 2266, 2269, 2272, 2275, 2278,  
 2286, 2292, 2299, 2305, 2311, 2319,  
 2325, 2333, 2342, 2350, 2356, 2362,  
 2368, 2374, 2381, 2387, 2390, 2393,  
 2399, 2407, 2414, 2422, 2430, 2438,  
 2446, 2455, 2463, 2467, 2469, 2475,  
 2483, 2492, 2497, 2506, 2512, 2520,  
 2528, 2537, 2545, 2553, 2561, 2565,  
 2567, 2576, 2584, 2592, 2601, 2609,  
 2615, 2624, 2632, 2641, 2650, 2658,  
 2666, 2673, 2681, 2689

op\_lstsq, 973, 977, 982, 986, 991, 995, 1000,  
 1004, 1009, 1013, 1018, 1022, 1026,  
 1030, 1035, 1039, 1043, 1047, 1051,  
 1055, 1060, 1064, 1069, 1073, 1077,  
 1081, 1086, 1090, 1095, 1099, 1103,  
 1107, 1112, 1116, 1121, 1124, 1130,  
 1134, 1140, 1147, 1153, 1158, 1162,  
 1167, 1170, 1177, 1183, 1187, 1191,



1194, 1197, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1234, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1274,  
 1277, 1282, 1286, 1290, 1294, 1299,  
 1303, 1308, 1312, 1318, 1322, 1326,  
 1330, 1334, 1341, 1347, 1350, 1353,  
 1358, 1362, 1367, 1371, 1376, 1380,  
 1384, 1388, 1393, 1397, 1401, 1405,  
 1410, 1414, 1420, 1422, 1425, 1428,  
 1431, 1436, 1440, 1446, 1451, 1455,  
 1459, 1463, 1469, 1475, 1479, 1483,  
 1487, 1491, 1495, 1499, 1505, 1509,  
 1513, 1519, 1525, 1530, 1534, 1538,  
 1542, 1546, 1550, 1556, 1561, 1565,  
 1569, 1573, 1580, 1584, 1588, 1593,  
 1597, 1601, 1605, 1612, 1618, 1622,  
 1626, 1630, 1634, 1639, 1642, 1650,  
 1656, 1663, 1669, 1675, 1682, 1689,  
 1695, 1702, 1704, 1707, 1713, 1719,  
 1724, 1727, 1732, 1736, 1740, 1744,  
 1748, 1752, 1758, 1764, 1771, 1776,  
 1780, 1784, 1788, 1793, 1797, 1801,  
 1805, 1809, 1813, 1818, 1822, 1826,  
 1830, 1834, 1838, 1842, 1846, 1851,  
 1854, 1859, 1863, 1867, 1871, 1876,  
 1880, 1885, 1892, 1898, 1900, 1909,  
 1912, 1919, 1923, 1927, 1932, 1936,  
 1940, 1944, 1950, 1955, 1959, 1963,  
 1967, 1972, 1976, 1981, 1984, 1989,  
 1993, 1997, 2001, 2008, 2012, 2016,  
 2020, 2024, 2031, 2035, 2039, 2043,  
 2047, 2052, 2056, 2060, 2064, 2068,  
 2071, 2077, 2081, 2085, 2090, 2094,  
 2098, 2102, 2108, 2113, 2116, 2121,  
 2125, 2130, 2134, 2138, 2142, 2148,  
 2154, 2159, 2163, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2201, 2205,  
 2209, 2213, 2217, 2223, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2282, 2286, 2292, 2299,  
 2305, 2311, 2315, 2319, 2325, 2329,  
 2333, 2338, 2342, 2346, 2350, 2356,  
 2362, 2365, 2368, 2374, 2381, 2387,  
 2393, 2396, 2399, 2403, 2407, 2414,  
 2418, 2422, 2426, 2430, 2434, 2438,  
 2443, 2446, 2451, 2455, 2459, 2463,  
 2469, 2475, 2480, 2483, 2488, 2492,  
 2495, 2497, 2502, 2506, 2512, 2516,  
 2520, 2524, 2528, 2533, 2537, 2541,  
 2545, 2549, 2553, 2557, 2561, 2568,  
 2572, 2576, 2580, 2584, 2589, 2592,  
 2597, 2601, 2605, 2609, 2615, 2620,  
 2624, 2628, 2632, 2637, 2641, 2650,  
 2654, 2658, 2662, 2666, 2673, 2677,  
 2681, 2685, 2689  
 op\_lu\_factor, 977, 986, 995, 1004, 1013,  
 1022, 1030, 1039, 1047, 1055, 1064,  
 1073, 1081, 1090, 1099, 1107, 1116,  
 1124, 1134, 1140, 1147, 1153, 1162,  
 1170, 1177, 1183, 1191, 1194, 1197,  
 1205, 1213, 1220, 1228, 1235, 1240,  
 1246, 1253, 1261, 1269, 1277, 1286,  
 1294, 1303, 1312, 1318, 1326, 1334,  
 1341, 1347, 1350, 1353, 1362, 1371,  
 1380, 1388, 1397, 1405, 1414, 1420,  
 1422, 1425, 1428, 1431, 1440, 1446,  
 1455, 1463, 1469, 1475, 1483, 1491,  
 1499, 1505, 1513, 1519, 1525, 1534,  
 1542, 1550, 1556, 1565, 1573, 1580,  
 1588, 1597, 1605, 1612, 1618, 1626,  
 1634, 1642, 1650, 1656, 1663, 1669,  
 1675, 1682, 1689, 1695, 1702, 1704,  
 1707, 1713, 1719, 1727, 1736, 1744,  
 1752, 1758, 1764, 1771, 1780, 1788,  
 1797, 1805, 1813, 1822, 1830, 1838,  
 1846, 1855, 1863, 1871, 1880, 1886,  
 1892, 1898, 1901, 1907, 1909, 1919,  
 1927, 1936, 1944, 1950, 1959, 1967,  
 1976, 1985, 1993, 2001, 2008, 2016,  
 2024, 2031, 2039, 2047, 2056, 2064,  
 2068, 2071, 2077, 2085, 2094, 2102,  
 2108, 2116, 2125, 2134, 2142, 2148,  
 2154, 2163, 2171, 2179, 2187, 2194,  
 2201, 2209, 2217, 2223, 2232, 2240,  
 2246, 2253, 2259, 2266, 2272, 2278,  
 2286, 2292, 2299, 2305, 2311, 2319,  
 2325, 2333, 2342, 2350, 2356, 2362,  
 2365, 2368, 2374, 2381, 2387, 2393,  
 2396, 2399, 2407, 2414, 2422, 2430,  
 2438, 2446, 2455, 2463, 2469, 2475,  
 2484, 2492, 2495, 2497, 2506, 2512,  
 2520, 2528, 2537, 2545, 2553, 2561,  
 2568, 2576, 2584, 2592, 2601, 2609,  
 2615, 2624, 2632, 2641, 2650, 2658,  
 2666, 2673, 2681, 2689  
 op\_map, 977, 986, 995, 1004, 1013, 1022,



- 1030, 1039, 1047, 1055, 1064, 1073,  
 1081, 1090, 1099, 1107, 1116, 1125,  
 1134, 1140, 1147, 1153, 1162, 1170,  
 1174, 1177, 1183, 1191, 1197, 1205,  
 1213, 1217, 1220, 1228, 1235, 1237,  
 1240, 1243, 1246, 1253, 1261, 1269,  
 1278, 1286, 1294, 1303, 1312, 1318,  
 1326, 1334, 1338, 1341, 1347, 1353,  
 1362, 1371, 1380, 1388, 1397, 1405,  
 1414, 1417, 1420, 1425, 1431, 1440,  
 1446, 1455, 1463, 1469, 1475, 1483,  
 1491, 1499, 1505, 1513, 1519, 1525,  
 1534, 1542, 1550, 1554, 1556, 1565,  
 1573, 1580, 1588, 1597, 1605, 1612,  
 1618, 1626, 1634, 1643, 1650, 1656,  
 1663, 1669, 1675, 1682, 1689, 1695,  
 1702, 1707, 1713, 1719, 1728, 1736,  
 1744, 1752, 1758, 1761, 1764, 1771,  
 1780, 1788, 1797, 1805, 1813, 1822,  
 1830, 1838, 1846, 1855, 1863, 1871,  
 1880, 1886, 1892, 1898, 1907, 1912,  
 1914, 1927, 1936, 1944, 1950, 1959,  
 1967, 1976, 1985, 1993, 2001, 2008,  
 2016, 2024, 2031, 2039, 2047, 2056,  
 2064, 2071, 2077, 2085, 2094, 2102,  
 2108, 2116, 2125, 2134, 2142, 2148,  
 2154, 2163, 2171, 2179, 2187, 2194,  
 2201, 2209, 2217, 2223, 2232, 2240,  
 2246, 2250, 2253, 2256, 2259, 2263,  
 2266, 2272, 2278, 2286, 2292, 2299,  
 2302, 2305, 2311, 2319, 2325, 2333,  
 2342, 2350, 2353, 2356, 2359, 2362,  
 2368, 2374, 2381, 2387, 2393, 2399,  
 2407, 2414, 2422, 2430, 2438, 2446,  
 2455, 2463, 2469, 2472, 2475, 2484,  
 2492, 2497, 2506, 2509, 2512, 2520,  
 2528, 2537, 2545, 2553, 2561, 2568,  
 2576, 2584, 2592, 2601, 2609, 2613,  
 2615, 2624, 2632, 2641, 2647, 2650,  
 2658, 2666, 2670, 2673, 2681, 2689,  
 1191, 1197, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1235, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1274,  
 1278, 1282, 1286, 1290, 1294, 1299,  
 1303, 1308, 1312, 1318, 1322, 1326,  
 1330, 1334, 1341, 1347, 1353, 1358,  
 1362, 1367, 1371, 1376, 1380, 1384,  
 1388, 1393, 1397, 1401, 1405, 1410,  
 1414, 1420, 1425, 1431, 1436, 1440,  
 1447, 1451, 1455, 1459, 1463, 1469,  
 1475, 1479, 1483, 1487, 1491, 1495,  
 1499, 1505, 1510, 1513, 1519, 1525,  
 1530, 1534, 1538, 1542, 1546, 1550,  
 1556, 1561, 1565, 1569, 1573, 1580,  
 1584, 1588, 1593, 1597, 1601, 1605,  
 1612, 1618, 1622, 1626, 1630, 1634,  
 1639, 1643, 1650, 1656, 1663, 1669,  
 1675, 1682, 1689, 1695, 1702, 1707,  
 1713, 1719, 1724, 1728, 1732, 1736,  
 1740, 1744, 1748, 1752, 1758, 1764,  
 1771, 1776, 1780, 1784, 1788, 1793,  
 1797, 1801, 1805, 1809, 1813, 1818,  
 1822, 1826, 1830, 1834, 1838, 1842,  
 1846, 1851, 1855, 1859, 1863, 1867,  
 1871, 1876, 1880, 1886, 1892, 1898,  
 1903, 1907, 1912, 1919, 1921, 1932,  
 1936, 1940, 1944, 1950, 1955, 1959,  
 1963, 1967, 1972, 1976, 1981, 1985,  
 1989, 1993, 1997, 2001, 2008, 2012,  
 2016, 2020, 2024, 2031, 2035, 2039,  
 2043, 2047, 2052, 2056, 2060, 2064,  
 2071, 2077, 2081, 2085, 2090, 2094,  
 2098, 2102, 2108, 2113, 2117, 2121,  
 2125, 2130, 2134, 2138, 2142, 2148,  
 2154, 2159, 2163, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2201, 2205,  
 2209, 2213, 2217, 2223, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2282, 2286, 2292, 2299,  
 2305, 2311, 2315, 2319, 2325, 2330,  
 2333, 2338, 2342, 2346, 2350, 2356,  
 2362, 2368, 2374, 2381, 2387, 2393,  
 2399, 2403, 2407, 2414, 2418, 2422,  
 2426, 2430, 2434, 2438, 2443, 2446,  
 2451, 2455, 2459, 2463, 2469, 2475,  
 2480, 2484, 2488, 2492, 2497, 2502,  
 2506, 2512, 2516, 2520, 2524, 2528,  
 2533, 2537, 2541, 2545, 2549, 2553,  
 op\_matmul, 973, 977, 982, 986, 991, 995,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1027, 1030, 1035, 1039, 1043, 1047,  
 1051, 1055, 1060, 1064, 1069, 1073,  
 1077, 1081, 1086, 1090, 1095, 1099,  
 1103, 1107, 1112, 1116, 1121, 1125,  
 1130, 1134, 1140, 1147, 1153, 1158,  
 1162, 1167, 1171, 1177, 1183, 1187,

- 2557, 2561, 2568, 2572, 2576, 2580,  
 2584, 2589, 2592, 2597, 2601, 2605,  
 2609, 2615, 2620, 2624, 2628, 2632,  
 2637, 2641, 2650, 2654, 2658, 2662,  
 2666, 2673, 2677, 2681, 2685, 2689
- op\_max*, 973, 977, 982, 986, 991, 995, 1000,  
 1004, 1009, 1013, 1018, 1022, 1027,  
 1030, 1035, 1039, 1043, 1047, 1052,  
 1055, 1060, 1064, 1069, 1073, 1077,  
 1081, 1086, 1090, 1095, 1099, 1103,  
 1107, 1112, 1116, 1121, 1125, 1130,  
 1134, 1140, 1147, 1153, 1158, 1162,  
 1167, 1171, 1177, 1183, 1187, 1191,  
 1197, 1201, 1205, 1209, 1213, 1220,  
 1224, 1228, 1235, 1240, 1246, 1253,  
 1257, 1261, 1265, 1269, 1274, 1278,  
 1282, 1286, 1290, 1294, 1299, 1303,  
 1308, 1312, 1318, 1322, 1326, 1330,  
 1334, 1341, 1347, 1353, 1358, 1362,  
 1367, 1371, 1376, 1380, 1384, 1388,  
 1393, 1397, 1401, 1405, 1410, 1414,  
 1420, 1425, 1431, 1436, 1440, 1447,  
 1451, 1455, 1459, 1463, 1469, 1475,  
 1479, 1483, 1487, 1491, 1495, 1499,  
 1505, 1510, 1513, 1519, 1525, 1530,  
 1534, 1538, 1542, 1546, 1550, 1556,  
 1561, 1565, 1569, 1573, 1580, 1584,  
 1588, 1593, 1597, 1601, 1605, 1612,  
 1618, 1622, 1626, 1630, 1634, 1639,  
 1643, 1650, 1656, 1663, 1669, 1675,  
 1682, 1689, 1695, 1702, 1707, 1713,  
 1719, 1724, 1728, 1732, 1736, 1740,  
 1744, 1748, 1752, 1758, 1764, 1771,  
 1776, 1780, 1784, 1788, 1793, 1797,  
 1801, 1805, 1810, 1813, 1818, 1822,  
 1826, 1830, 1834, 1838, 1842, 1846,  
 1851, 1855, 1859, 1863, 1867, 1871,  
 1876, 1880, 1886, 1892, 1898, 1903,  
 1907, 1912, 1919, 1923, 1927, 1929,  
 1940, 1944, 1950, 1955, 1959, 1963,  
 1967, 1972, 1976, 1981, 1985, 1989,  
 1993, 1997, 2001, 2008, 2012, 2016,  
 2020, 2024, 2031, 2035, 2039, 2043,  
 2047, 2052, 2056, 2060, 2064, 2071,  
 2077, 2081, 2085, 2090, 2094, 2098,  
 2102, 2108, 2113, 2117, 2121, 2125,  
 2130, 2134, 2138, 2142, 2148, 2154,  
 2159, 2163, 2167, 2171, 2175, 2179,
- 2183, 2187, 2194, 2201, 2205, 2209,  
 2213, 2217, 2223, 2228, 2232, 2236,  
 2240, 2246, 2253, 2259, 2266, 2272,  
 2278, 2282, 2286, 2292, 2299, 2305,  
 2311, 2315, 2319, 2325, 2330, 2333,  
 2338, 2342, 2346, 2350, 2356, 2362,  
 2368, 2374, 2381, 2387, 2393, 2399,  
 2403, 2407, 2414, 2418, 2422, 2426,  
 2430, 2434, 2438, 2443, 2446, 2451,  
 2455, 2459, 2463, 2469, 2475, 2480,  
 2484, 2488, 2492, 2497, 2502, 2506,  
 2512, 2516, 2520, 2525, 2528, 2533,  
 2537, 2541, 2545, 2549, 2553, 2557,  
 2561, 2568, 2572, 2576, 2580, 2584,  
 2589, 2593, 2597, 2601, 2605, 2609,  
 2615, 2620, 2624, 2628, 2632, 2637,  
 2641, 2650, 2654, 2658, 2662, 2666,  
 2673, 2677, 2681, 2685, 2689
- op\_max\_pool*, 977, 986, 995, 1004, 1013,  
 1022, 1030, 1039, 1047, 1055, 1064,  
 1073, 1081, 1090, 1099, 1107, 1116,  
 1125, 1134, 1137, 1140, 1144, 1147,  
 1150, 1153, 1162, 1171, 1177, 1180,  
 1183, 1191, 1197, 1205, 1213, 1220,  
 1228, 1232, 1235, 1240, 1246, 1250,  
 1253, 1261, 1269, 1278, 1286, 1294,  
 1303, 1312, 1315, 1318, 1326, 1334,  
 1341, 1344, 1347, 1353, 1362, 1371,  
 1380, 1388, 1397, 1405, 1414, 1420,  
 1425, 1431, 1440, 1444, 1447, 1455,  
 1463, 1469, 1475, 1483, 1491, 1499,  
 1505, 1513, 1519, 1525, 1534, 1542,  
 1550, 1556, 1565, 1573, 1577, 1580,  
 1588, 1597, 1605, 1609, 1612, 1615,  
 1618, 1626, 1634, 1643, 1650, 1656,  
 1663, 1669, 1675, 1682, 1689, 1695,  
 1702, 1707, 1713, 1719, 1728, 1736,  
 1744, 1752, 1758, 1764, 1768, 1771,  
 1780, 1788, 1797, 1805, 1813, 1822,  
 1830, 1838, 1846, 1855, 1863, 1871,  
 1880, 1886, 1889, 1892, 1895, 1898,  
 1907, 1912, 1919, 1927, 1936, 1944,  
 1946, 1959, 1967, 1976, 1985, 1993,  
 2001, 2005, 2008, 2016, 2024, 2028,  
 2031, 2039, 2047, 2056, 2064, 2071,  
 2074, 2077, 2085, 2094, 2102, 2105,  
 2108, 2117, 2125, 2134, 2142, 2145,  
 2148, 2154, 2163, 2171, 2179, 2187,

- 2191, 2194, 2198, 2201, 2209, 2217,  
 2223, 2232, 2240, 2246, 2253, 2259,  
 2266, 2272, 2278, 2286, 2289, 2292,  
 2296, 2299, 2305, 2308, 2311, 2319,  
 2322, 2325, 2333, 2342, 2350, 2356,  
 2362, 2368, 2371, 2374, 2378, 2381,  
 2384, 2387, 2393, 2399, 2407, 2411,  
 2414, 2422, 2430, 2438, 2447, 2455,  
 2463, 2469, 2475, 2484, 2492, 2497,  
 2506, 2512, 2520, 2528, 2537, 2545,  
 2553, 2561, 2568, 2576, 2584, 2593,  
 2601, 2609, 2616, 2624, 2632, 2641,  
 2650, 2658, 2666, 2673, 2681, 2689
- op\_maximum*, 973, 977, 982, 986, 991, 995,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1027, 1031, 1035, 1039, 1043, 1047,  
 1052, 1055, 1060, 1064, 1069, 1073,  
 1077, 1081, 1086, 1090, 1095, 1099,  
 1103, 1107, 1112, 1116, 1121, 1125,  
 1130, 1134, 1140, 1147, 1153, 1158,  
 1162, 1167, 1171, 1177, 1183, 1187,  
 1191, 1197, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1235, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1274,  
 1278, 1282, 1286, 1290, 1294, 1299,  
 1303, 1308, 1312, 1318, 1322, 1326,  
 1330, 1334, 1341, 1347, 1353, 1358,  
 1362, 1367, 1371, 1376, 1380, 1384,  
 1388, 1393, 1397, 1401, 1405, 1410,  
 1414, 1420, 1425, 1431, 1436, 1440,  
 1447, 1451, 1455, 1459, 1463, 1469,  
 1475, 1479, 1483, 1487, 1491, 1495,  
 1499, 1505, 1510, 1514, 1519, 1525,  
 1530, 1534, 1538, 1542, 1546, 1550,  
 1556, 1561, 1565, 1569, 1573, 1580,  
 1584, 1588, 1593, 1597, 1601, 1605,  
 1612, 1618, 1622, 1626, 1630, 1634,  
 1639, 1643, 1650, 1656, 1663, 1669,  
 1675, 1682, 1689, 1695, 1702, 1707,  
 1713, 1719, 1724, 1728, 1732, 1736,  
 1740, 1744, 1748, 1752, 1758, 1764,  
 1771, 1776, 1780, 1784, 1788, 1793,  
 1797, 1801, 1805, 1810, 1813, 1818,  
 1822, 1826, 1830, 1834, 1838, 1842,  
 1846, 1851, 1855, 1859, 1863, 1867,  
 1871, 1876, 1880, 1886, 1892, 1898,  
 1903, 1907, 1912, 1919, 1923, 1927,  
 1932, 1936, 1938, 1950, 1955, 1959,
- 1963, 1967, 1972, 1976, 1981, 1985,  
 1989, 1993, 1997, 2001, 2008, 2012,  
 2016, 2020, 2024, 2031, 2035, 2039,  
 2043, 2047, 2052, 2056, 2060, 2064,  
 2071, 2077, 2081, 2085, 2090, 2094,  
 2098, 2102, 2108, 2113, 2117, 2121,  
 2125, 2130, 2134, 2138, 2142, 2148,  
 2154, 2159, 2163, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2201, 2205,  
 2209, 2213, 2217, 2223, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2282, 2286, 2292, 2299,  
 2305, 2311, 2315, 2319, 2325, 2330,  
 2334, 2338, 2342, 2346, 2350, 2356,  
 2362, 2368, 2374, 2381, 2387, 2393,  
 2399, 2403, 2407, 2414, 2418, 2422,  
 2426, 2430, 2434, 2438, 2443, 2447,  
 2451, 2455, 2459, 2463, 2469, 2475,  
 2480, 2484, 2488, 2492, 2498, 2502,  
 2506, 2512, 2516, 2520, 2525, 2528,  
 2533, 2537, 2541, 2545, 2549, 2553,  
 2557, 2561, 2568, 2572, 2576, 2580,  
 2584, 2589, 2593, 2597, 2601, 2605,  
 2609, 2616, 2620, 2624, 2628, 2632,  
 2637, 2641, 2650, 2654, 2658, 2662,  
 2666, 2673, 2677, 2681, 2685, 2689
- op\_mean*, 973, 977, 982, 986, 991, 995, 1000,  
 1004, 1009, 1013, 1018, 1022, 1027,  
 1031, 1035, 1039, 1043, 1047, 1052,  
 1056, 1060, 1064, 1069, 1073, 1077,  
 1081, 1086, 1090, 1095, 1099, 1103,  
 1107, 1112, 1116, 1121, 1125, 1130,  
 1134, 1140, 1147, 1153, 1158, 1162,  
 1167, 1171, 1177, 1183, 1187, 1191,  
 1197, 1201, 1205, 1209, 1213, 1220,  
 1224, 1228, 1235, 1240, 1246, 1253,  
 1257, 1261, 1265, 1269, 1274, 1278,  
 1282, 1286, 1290, 1294, 1299, 1303,  
 1308, 1312, 1318, 1322, 1326, 1330,  
 1334, 1341, 1347, 1353, 1358, 1362,  
 1367, 1371, 1376, 1380, 1384, 1388,  
 1393, 1397, 1401, 1405, 1410, 1414,  
 1420, 1425, 1431, 1437, 1440, 1447,  
 1451, 1455, 1459, 1463, 1469, 1475,  
 1479, 1483, 1487, 1491, 1495, 1499,  
 1505, 1510, 1514, 1519, 1525, 1530,  
 1534, 1538, 1542, 1546, 1550, 1556,  
 1561, 1565, 1569, 1573, 1580, 1584,

1588, 1593, 1597, 1601, 1605, 1612,  
 1618, 1622, 1626, 1630, 1634, 1639,  
 1643, 1650, 1656, 1663, 1669, 1675,  
 1682, 1689, 1695, 1702, 1707, 1713,  
 1719, 1724, 1728, 1732, 1736, 1740,  
 1744, 1748, 1752, 1758, 1764, 1771,  
 1776, 1780, 1784, 1788, 1793, 1797,  
 1801, 1805, 1810, 1814, 1818, 1822,  
 1826, 1830, 1834, 1838, 1842, 1846,  
 1851, 1855, 1859, 1863, 1867, 1871,  
 1876, 1880, 1886, 1892, 1898, 1903,  
 1907, 1912, 1919, 1923, 1927, 1932,  
 1936, 1940, 1944, 1950, 1953, 1963,  
 1967, 1972, 1976, 1981, 1985, 1989,  
 1993, 1997, 2001, 2008, 2012, 2016,  
 2020, 2024, 2031, 2035, 2039, 2043,  
 2047, 2052, 2056, 2060, 2064, 2071,  
 2077, 2082, 2085, 2090, 2094, 2098,  
 2102, 2108, 2113, 2117, 2121, 2125,  
 2130, 2134, 2138, 2142, 2148, 2154,  
 2159, 2163, 2167, 2171, 2175, 2179,  
 2183, 2187, 2194, 2201, 2205, 2209,  
 2213, 2217, 2223, 2228, 2232, 2236,  
 2240, 2246, 2253, 2259, 2266, 2272,  
 2278, 2282, 2286, 2292, 2299, 2305,  
 2311, 2315, 2319, 2325, 2330, 2334,  
 2338, 2342, 2346, 2350, 2356, 2362,  
 2368, 2374, 2381, 2387, 2393, 2399,  
 2403, 2407, 2414, 2418, 2422, 2426,  
 2430, 2434, 2438, 2443, 2447, 2451,  
 2455, 2459, 2463, 2469, 2475, 2480,  
 2484, 2488, 2492, 2498, 2502, 2506,  
 2512, 2516, 2520, 2525, 2529, 2533,  
 2537, 2541, 2545, 2549, 2553, 2558,  
 2561, 2568, 2572, 2576, 2580, 2584,  
 2589, 2593, 2597, 2601, 2605, 2609,  
 2616, 2620, 2624, 2628, 2632, 2637,  
 2641, 2650, 2654, 2658, 2662, 2666,  
 2673, 2677, 2681, 2685, 2689  
  
 op\_median, 973, 977, 982, 986, 991, 995,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1027, 1031, 1035, 1039, 1043, 1047,  
 1052, 1056, 1060, 1064, 1069, 1073,  
 1077, 1081, 1086, 1090, 1095, 1099,  
 1103, 1107, 1112, 1116, 1121, 1125,  
 1130, 1134, 1140, 1147, 1153, 1158,  
 1162, 1167, 1171, 1177, 1183, 1187,  
 1191, 1197, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1235, 1240, 1246,  
 1253, 1257, 1261, 1265, 1269, 1274,  
 1278, 1282, 1286, 1290, 1294, 1299,  
 1303, 1308, 1312, 1318, 1322, 1326,  
 1330, 1334, 1341, 1347, 1353, 1358,  
 1362, 1367, 1371, 1376, 1380, 1384,  
 1388, 1393, 1397, 1401, 1405, 1410,  
 1414, 1420, 1425, 1431, 1437, 1440,  
 1447, 1451, 1455, 1459, 1463, 1469,  
 1475, 1479, 1483, 1487, 1491, 1495,  
 1499, 1505, 1510, 1514, 1519, 1526,  
 1530, 1534, 1538, 1542, 1546, 1550,  
 1556, 1561, 1565, 1569, 1573, 1580,  
 1584, 1588, 1593, 1597, 1601, 1605,  
 1612, 1618, 1622, 1626, 1631, 1634,  
 1639, 1643, 1650, 1656, 1663, 1669,  
 1675, 1682, 1689, 1695, 1702, 1707,  
 1713, 1719, 1724, 1728, 1732, 1736,  
 1740, 1744, 1748, 1752, 1759, 1764,  
 1771, 1776, 1780, 1785, 1788, 1793,  
 1797, 1801, 1805, 1810, 1814, 1818,  
 1822, 1826, 1830, 1834, 1838, 1843,  
 1846, 1851, 1855, 1859, 1863, 1867,  
 1871, 1876, 1880, 1886, 1892, 1898,  
 1903, 1907, 1912, 1919, 1923, 1927,  
 1932, 1936, 1940, 1944, 1950, 1955,  
 1959, 1961, 1972, 1976, 1981, 1985,  
 1989, 1993, 1997, 2001, 2008, 2012,  
 2016, 2020, 2024, 2031, 2035, 2039,  
 2044, 2047, 2052, 2056, 2060, 2064,  
 2071, 2077, 2082, 2085, 2090, 2094,  
 2098, 2102, 2108, 2113, 2117, 2121,  
 2125, 2130, 2134, 2138, 2142, 2148,  
 2154, 2159, 2163, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2201, 2205,  
 2209, 2213, 2217, 2223, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2282, 2286, 2292, 2299,  
 2305, 2311, 2315, 2319, 2325, 2330,  
 2334, 2338, 2342, 2346, 2350, 2356,  
 2362, 2368, 2374, 2381, 2387, 2393,  
 2399, 2403, 2407, 2414, 2418, 2422,  
 2426, 2430, 2434, 2438, 2443, 2447,  
 2451, 2455, 2459, 2463, 2469, 2475,  
 2480, 2484, 2488, 2492, 2498, 2502,  
 2506, 2512, 2516, 2520, 2525, 2529,  
 2533, 2537, 2541, 2545, 2549, 2553,  
 2558, 2561, 2568, 2572, 2576, 2580,

- 2584, 2589, 2593, 2597, 2601, 2605,  
2609, 2616, 2620, 2624, 2628, 2632,  
2637, 2641, 2650, 2654, 2658, 2663,  
2666, 2673, 2677, 2681, 2685, 2689
- op\_meshgrid, 973, 977, 982, 986, 991, 995,  
1000, 1004, 1009, 1013, 1018, 1022,  
1027, 1031, 1035, 1039, 1043, 1047,  
1052, 1056, 1060, 1064, 1069, 1073,  
1077, 1081, 1086, 1090, 1095, 1099,  
1103, 1107, 1112, 1116, 1121, 1125,  
1130, 1134, 1140, 1147, 1153, 1158,  
1162, 1167, 1171, 1177, 1183, 1187,  
1191, 1197, 1201, 1205, 1209, 1213,  
1220, 1224, 1228, 1235, 1240, 1246,  
1253, 1257, 1261, 1266, 1269, 1274,  
1278, 1282, 1286, 1290, 1294, 1299,  
1303, 1308, 1312, 1318, 1322, 1326,  
1330, 1334, 1341, 1347, 1353, 1358,  
1362, 1367, 1371, 1376, 1380, 1384,  
1388, 1393, 1397, 1401, 1405, 1410,  
1414, 1420, 1425, 1431, 1437, 1441,  
1447, 1451, 1455, 1459, 1463, 1469,  
1475, 1479, 1483, 1487, 1491, 1495,  
1499, 1505, 1510, 1514, 1519, 1526,  
1530, 1534, 1538, 1542, 1547, 1550,  
1557, 1561, 1565, 1569, 1573, 1580,  
1584, 1588, 1593, 1597, 1601, 1605,  
1612, 1618, 1622, 1626, 1631, 1634,  
1639, 1643, 1650, 1656, 1663, 1669,  
1675, 1682, 1689, 1695, 1702, 1707,  
1713, 1719, 1724, 1728, 1732, 1736,  
1740, 1744, 1748, 1752, 1759, 1764,  
1771, 1776, 1780, 1785, 1788, 1793,  
1797, 1801, 1805, 1810, 1814, 1818,  
1822, 1826, 1830, 1834, 1838, 1843,  
1846, 1851, 1855, 1859, 1863, 1867,  
1871, 1876, 1880, 1886, 1892, 1898,  
1903, 1907, 1912, 1919, 1923, 1927,  
1932, 1936, 1940, 1944, 1950, 1955,  
1959, 1963, 1967, 1969, 1981, 1985,  
1989, 1993, 1997, 2001, 2008, 2012,  
2016, 2020, 2024, 2031, 2035, 2039,  
2044, 2047, 2052, 2056, 2060, 2064,  
2071, 2077, 2082, 2086, 2090, 2094,  
2098, 2102, 2108, 2113, 2117, 2121,  
2125, 2130, 2134, 2138, 2142, 2148,  
2154, 2159, 2163, 2167, 2171, 2175,  
2179, 2183, 2187, 2194, 2201, 2205,  
2209, 2213, 2217, 2223, 2228, 2232,  
2236, 2240, 2246, 2253, 2259, 2266,  
2272, 2278, 2282, 2286, 2292, 2299,  
2305, 2311, 2315, 2319, 2325, 2330,  
2334, 2338, 2342, 2346, 2350, 2356,  
2362, 2368, 2374, 2381, 2388, 2393,  
2399, 2403, 2407, 2414, 2418, 2422,  
2426, 2430, 2434, 2438, 2443, 2447,  
2451, 2455, 2459, 2463, 2470, 2475,  
2480, 2484, 2488, 2492, 2498, 2502,  
2506, 2512, 2516, 2520, 2525, 2529,  
2533, 2537, 2541, 2545, 2549, 2553,  
2558, 2562, 2568, 2572, 2576, 2580,  
2584, 2589, 2593, 2597, 2601, 2605,  
2609, 2616, 2620, 2624, 2628, 2632,  
2637, 2641, 2650, 2654, 2658, 2663,  
2666, 2673, 2677, 2681, 2685, 2689
- op\_min, 973, 977, 982, 986, 991, 995, 1000,  
1004, 1009, 1013, 1018, 1022, 1027,  
1031, 1035, 1039, 1043, 1047, 1052,  
1056, 1060, 1064, 1069, 1073, 1077,  
1081, 1086, 1090, 1095, 1099, 1103,  
1107, 1112, 1116, 1121, 1125, 1130,  
1134, 1141, 1147, 1153, 1158, 1162,  
1167, 1171, 1177, 1183, 1187, 1191,  
1197, 1201, 1205, 1209, 1213, 1220,  
1224, 1228, 1235, 1240, 1246, 1253,  
1257, 1261, 1266, 1269, 1274, 1278,  
1282, 1286, 1291, 1294, 1299, 1303,  
1308, 1312, 1318, 1322, 1326, 1330,  
1334, 1341, 1347, 1353, 1358, 1362,  
1367, 1371, 1376, 1380, 1385, 1388,  
1393, 1397, 1401, 1405, 1410, 1414,  
1420, 1425, 1431, 1437, 1441, 1447,  
1451, 1455, 1459, 1463, 1469, 1475,  
1479, 1483, 1487, 1491, 1495, 1499,  
1505, 1510, 1514, 1520, 1526, 1530,  
1534, 1538, 1542, 1547, 1550, 1557,  
1561, 1565, 1569, 1573, 1580, 1584,  
1588, 1593, 1597, 1601, 1605, 1612,  
1618, 1622, 1626, 1631, 1635, 1639,  
1643, 1650, 1656, 1663, 1669, 1676,  
1682, 1689, 1695, 1702, 1707, 1713,  
1719, 1724, 1728, 1732, 1736, 1740,  
1744, 1748, 1752, 1759, 1764, 1772,  
1776, 1780, 1785, 1789, 1793, 1797,  
1801, 1805, 1810, 1814, 1818, 1822,  
1826, 1830, 1834, 1838, 1843, 1847,

- 1851, 1855, 1859, 1863, 1867, 1871,  
 1876, 1880, 1886, 1892, 1898, 1903,  
 1907, 1912, 1919, 1923, 1927, 1932,  
 1936, 1940, 1944, 1951, 1955, 1959,  
 1963, 1967, 1972, 1976, 1978, 1989,  
 1993, 1997, 2001, 2008, 2012, 2016,  
 2020, 2024, 2031, 2035, 2039, 2044,  
 2048, 2052, 2056, 2060, 2064, 2071,  
 2077, 2082, 2086, 2090, 2094, 2098,  
 2102, 2108, 2113, 2117, 2121, 2125,  
 2130, 2134, 2138, 2142, 2148, 2154,  
 2159, 2163, 2167, 2171, 2175, 2179,  
 2183, 2187, 2194, 2201, 2205, 2209,  
 2213, 2217, 2223, 2228, 2232, 2236,  
 2240, 2246, 2253, 2259, 2266, 2272,  
 2278, 2282, 2286, 2292, 2299, 2305,  
 2311, 2315, 2319, 2325, 2330, 2334,  
 2338, 2342, 2346, 2350, 2356, 2362,  
 2368, 2374, 2381, 2388, 2393, 2399,  
 2403, 2407, 2414, 2418, 2422, 2426,  
 2430, 2434, 2438, 2443, 2447, 2451,  
 2455, 2459, 2463, 2470, 2475, 2480,  
 2484, 2488, 2492, 2498, 2502, 2506,  
 2512, 2516, 2520, 2525, 2529, 2533,  
 2537, 2541, 2545, 2549, 2553, 2558,  
 2562, 2568, 2572, 2576, 2580, 2584,  
 2589, 2593, 2597, 2601, 2605, 2609,  
 2616, 2620, 2624, 2628, 2632, 2637,  
 2641, 2650, 2654, 2658, 2663, 2667,  
 2673, 2677, 2681, 2685, 2689
- op\_minimum*, 973, 977, 982, 986, 991, 995,  
 1000, 1004, 1009, 1013, 1018, 1022,  
 1027, 1031, 1035, 1039, 1043, 1047,  
 1052, 1056, 1060, 1064, 1069, 1073,  
 1077, 1081, 1086, 1090, 1095, 1099,  
 1103, 1107, 1112, 1116, 1121, 1125,  
 1130, 1134, 1141, 1147, 1153, 1158,  
 1162, 1167, 1171, 1177, 1183, 1187,  
 1191, 1197, 1201, 1205, 1209, 1213,  
 1220, 1224, 1228, 1235, 1240, 1247,  
 1253, 1257, 1261, 1266, 1270, 1274,  
 1278, 1282, 1286, 1291, 1294, 1299,  
 1303, 1308, 1312, 1318, 1322, 1326,  
 1330, 1334, 1341, 1347, 1353, 1358,  
 1362, 1367, 1371, 1376, 1380, 1385,  
 1388, 1393, 1397, 1401, 1405, 1410,  
 1414, 1420, 1425, 1431, 1437, 1441,  
 1447, 1451, 1455, 1459, 1463, 1469,  
 1475, 1479, 1483, 1487, 1491, 1495,  
 1499, 1505, 1510, 1514, 1520, 1526,  
 1530, 1534, 1538, 1542, 1547, 1551,  
 1557, 1561, 1565, 1569, 1573, 1580,  
 1584, 1588, 1593, 1597, 1601, 1605,  
 1612, 1618, 1622, 1626, 1631, 1635,  
 1639, 1643, 1650, 1656, 1663, 1669,  
 1676, 1682, 1689, 1695, 1702, 1707,  
 1713, 1719, 1724, 1728, 1732, 1736,  
 1740, 1744, 1748, 1752, 1759, 1764,  
 1772, 1776, 1780, 1785, 1789, 1793,  
 1797, 1801, 1805, 1810, 1814, 1818,  
 1822, 1826, 1830, 1834, 1838, 1843,  
 1847, 1851, 1855, 1859, 1863, 1867,  
 1871, 1876, 1880, 1886, 1892, 1898,  
 1903, 1907, 1912, 1919, 1923, 1927,  
 1932, 1936, 1940, 1944, 1951, 1955,  
 1959, 1963, 1967, 1972, 1976, 1981,  
 1985, 1987, 1998, 2001, 2008, 2012,  
 2016, 2021, 2024, 2031, 2035, 2039,  
 2044, 2048, 2052, 2056, 2060, 2064,  
 2071, 2077, 2082, 2086, 2090, 2094,  
 2098, 2102, 2108, 2113, 2117, 2121,  
 2125, 2130, 2134, 2138, 2142, 2148,  
 2154, 2159, 2163, 2167, 2171, 2175,  
 2179, 2183, 2187, 2194, 2201, 2205,  
 2209, 2213, 2217, 2224, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2283, 2286, 2293, 2299,  
 2305, 2311, 2315, 2319, 2325, 2330,  
 2334, 2338, 2342, 2346, 2350, 2356,  
 2362, 2368, 2374, 2381, 2388, 2393,  
 2399, 2403, 2407, 2414, 2418, 2422,  
 2426, 2430, 2434, 2438, 2443, 2447,  
 2451, 2455, 2459, 2463, 2470, 2475,  
 2480, 2484, 2488, 2492, 2498, 2502,  
 2506, 2512, 2516, 2520, 2525, 2529,  
 2533, 2537, 2541, 2545, 2549, 2553,  
 2558, 2562, 2568, 2572, 2576, 2580,  
 2584, 2589, 2593, 2597, 2601, 2605,  
 2609, 2616, 2620, 2624, 2628, 2632,  
 2637, 2641, 2650, 2654, 2658, 2663,  
 2667, 2673, 2677, 2681, 2686, 2689
- op\_mod*, 973, 977, 982, 986, 991, 995, 1000,  
 1004, 1009, 1013, 1018, 1022, 1027,  
 1031, 1035, 1039, 1043, 1047, 1052,  
 1056, 1060, 1064, 1069, 1073, 1077,  
 1081, 1086, 1090, 1095, 1099, 1103,

1107, 1112, 1116, 1121, 1125, 1130,  
 1134, 1141, 1147, 1153, 1158, 1162,  
 1167, 1171, 1177, 1183, 1187, 1191,  
 1197, 1201, 1205, 1209, 1213, 1220,  
 1224, 1228, 1235, 1240, 1247, 1253,  
 1257, 1261, 1266, 1270, 1274, 1278,  
 1282, 1286, 1291, 1295, 1299, 1303,  
 1308, 1312, 1318, 1322, 1326, 1330,  
 1334, 1341, 1347, 1353, 1358, 1362,  
 1367, 1371, 1376, 1380, 1385, 1389,  
 1393, 1397, 1401, 1405, 1410, 1414,  
 1420, 1425, 1431, 1437, 1441, 1447,  
 1451, 1455, 1459, 1463, 1469, 1475,  
 1479, 1483, 1487, 1491, 1495, 1499,  
 1505, 1510, 1514, 1520, 1526, 1530,  
 1534, 1538, 1542, 1547, 1551, 1557,  
 1561, 1565, 1569, 1573, 1580, 1584,  
 1588, 1593, 1597, 1601, 1605, 1612,  
 1618, 1622, 1626, 1631, 1635, 1639,  
 1643, 1650, 1656, 1663, 1669, 1676,  
 1682, 1689, 1695, 1702, 1707, 1713,  
 1719, 1724, 1728, 1732, 1736, 1740,  
 1744, 1748, 1752, 1759, 1764, 1772,  
 1776, 1780, 1785, 1789, 1793, 1797,  
 1801, 1805, 1810, 1814, 1818, 1822,  
 1826, 1830, 1834, 1838, 1843, 1847,  
 1851, 1855, 1859, 1863, 1867, 1871,  
 1876, 1880, 1886, 1892, 1898, 1903,  
 1907, 1912, 1919, 1923, 1927, 1932,  
 1936, 1940, 1944, 1951, 1955, 1959,  
 1963, 1967, 1972, 1976, 1981, 1985,  
 1989, 1993, 1995, 2008, 2012, 2016,  
 2021, 2024, 2031, 2035, 2039, 2044,  
 2048, 2052, 2056, 2060, 2064, 2071,  
 2077, 2082, 2086, 2090, 2094, 2098,  
 2102, 2109, 2113, 2117, 2121, 2125,  
 2130, 2134, 2138, 2142, 2148, 2154,  
 2159, 2163, 2167, 2171, 2175, 2179,  
 2184, 2187, 2194, 2201, 2205, 2209,  
 2213, 2217, 2224, 2228, 2232, 2236,  
 2240, 2246, 2253, 2259, 2266, 2272,  
 2278, 2283, 2286, 2293, 2299, 2305,  
 2311, 2315, 2319, 2325, 2330, 2334,  
 2338, 2342, 2346, 2350, 2356, 2362,  
 2368, 2374, 2381, 2388, 2393, 2399,  
 2403, 2407, 2414, 2418, 2422, 2426,  
 2430, 2435, 2438, 2443, 2447, 2451,  
 2455, 2459, 2463, 2470, 2475, 2480,  
 2484, 2488, 2492, 2498, 2502, 2506,  
 2512, 2516, 2520, 2525, 2529, 2533,  
 2537, 2541, 2545, 2549, 2553, 2558,  
 2562, 2568, 2572, 2576, 2580, 2584,  
 2589, 2593, 2597, 2601, 2605, 2609,  
 2616, 2620, 2624, 2628, 2632, 2637,  
 2641, 2650, 2654, 2658, 2663, 2667,  
 2673, 2677, 2681, 2686, 2689  
 op\_moments, 977, 986, 995, 1004, 1013, 1022,  
 1031, 1039, 1047, 1056, 1064, 1073,  
 1081, 1090, 1099, 1107, 1116, 1125,  
 1134, 1137, 1141, 1144, 1147, 1150,  
 1154, 1162, 1171, 1177, 1180, 1183,  
 1191, 1197, 1205, 1213, 1220, 1228,  
 1232, 1235, 1240, 1247, 1250, 1253,  
 1261, 1270, 1278, 1286, 1295, 1303,  
 1312, 1315, 1318, 1326, 1334, 1341,  
 1344, 1347, 1353, 1362, 1371, 1380,  
 1389, 1397, 1405, 1414, 1420, 1425,  
 1431, 1441, 1444, 1447, 1455, 1463,  
 1469, 1475, 1483, 1491, 1499, 1505,  
 1514, 1520, 1526, 1534, 1542, 1551,  
 1557, 1565, 1573, 1577, 1580, 1588,  
 1597, 1605, 1609, 1612, 1615, 1618,  
 1626, 1635, 1643, 1650, 1656, 1663,  
 1669, 1676, 1682, 1689, 1695, 1702,  
 1707, 1713, 1720, 1728, 1736, 1744,  
 1752, 1759, 1764, 1768, 1772, 1780,  
 1789, 1797, 1805, 1814, 1822, 1830,  
 1838, 1847, 1855, 1863, 1871, 1880,  
 1886, 1889, 1892, 1895, 1898, 1907,  
 1912, 1919, 1927, 1936, 1944, 1947,  
 1951, 1959, 1967, 1976, 1985, 1993,  
 2001, 2003, 2016, 2025, 2028, 2031,  
 2039, 2048, 2056, 2064, 2071, 2074,  
 2077, 2086, 2094, 2102, 2105, 2109,  
 2117, 2125, 2134, 2142, 2145, 2148,  
 2154, 2163, 2171, 2179, 2187, 2191,  
 2194, 2198, 2201, 2209, 2217, 2224,  
 2232, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2287, 2289, 2293, 2296,  
 2299, 2305, 2308, 2311, 2319, 2322,  
 2325, 2334, 2342, 2350, 2356, 2362,  
 2368, 2371, 2374, 2378, 2381, 2384,  
 2388, 2393, 2399, 2407, 2411, 2414,  
 2422, 2430, 2438, 2447, 2455, 2463,  
 2470, 2475, 2484, 2492, 2498, 2506,  
 2512, 2520, 2529, 2537, 2545, 2553,



- 2562, 2568, 2576, 2584, 2593, 2601,  
2609, 2616, 2624, 2632, 2641, 2650,  
2658, 2667, 2673, 2681, 2690
- op\_moveaxis*, 973, 977, 982, 986, 991, 995,  
1000, 1004, 1009, 1013, 1018, 1022,  
1027, 1031, 1035, 1039, 1043, 1047,  
1052, 1056, 1060, 1064, 1069, 1073,  
1077, 1081, 1086, 1090, 1095, 1099,  
1103, 1107, 1112, 1116, 1121, 1125,  
1130, 1134, 1141, 1147, 1154, 1158,  
1162, 1167, 1171, 1177, 1183, 1188,  
1191, 1197, 1201, 1205, 1209, 1213,  
1220, 1224, 1228, 1235, 1240, 1247,  
1253, 1257, 1261, 1266, 1270, 1274,  
1278, 1282, 1286, 1291, 1295, 1299,  
1303, 1308, 1312, 1318, 1322, 1326,  
1330, 1334, 1341, 1347, 1353, 1358,  
1362, 1367, 1371, 1376, 1380, 1385,  
1389, 1393, 1397, 1402, 1405, 1410,  
1414, 1420, 1425, 1431, 1437, 1441,  
1447, 1451, 1455, 1459, 1463, 1469,  
1475, 1479, 1483, 1487, 1491, 1496,  
1499, 1505, 1510, 1514, 1520, 1526,  
1530, 1534, 1538, 1542, 1547, 1551,  
1557, 1561, 1565, 1569, 1573, 1580,  
1584, 1588, 1593, 1597, 1601, 1605,  
1612, 1618, 1622, 1626, 1631, 1635,  
1639, 1643, 1650, 1656, 1663, 1669,  
1676, 1682, 1689, 1695, 1702, 1707,  
1713, 1720, 1724, 1728, 1732, 1736,  
1740, 1744, 1748, 1752, 1759, 1764,  
1772, 1776, 1780, 1785, 1789, 1793,  
1797, 1802, 1805, 1810, 1814, 1818,  
1822, 1826, 1830, 1834, 1838, 1843,  
1847, 1851, 1855, 1859, 1863, 1867,  
1871, 1876, 1880, 1886, 1892, 1898,  
1903, 1907, 1912, 1919, 1923, 1927,  
1932, 1936, 1940, 1944, 1951, 1955,  
1959, 1963, 1967, 1972, 1976, 1981,  
1985, 1989, 1993, 1998, 2002, 2008,  
2010, 2021, 2025, 2031, 2035, 2039,  
2044, 2048, 2052, 2056, 2060, 2064,  
2071, 2077, 2082, 2086, 2090, 2094,  
2098, 2102, 2109, 2113, 2117, 2121,  
2125, 2130, 2134, 2138, 2142, 2148,  
2154, 2159, 2163, 2167, 2171, 2175,  
2179, 2184, 2188, 2194, 2201, 2205,  
2209, 2213, 2217, 2224, 2228, 2232,  
2236, 2240, 2246, 2253, 2259, 2266,  
2272, 2278, 2283, 2287, 2293, 2299,  
2305, 2311, 2315, 2319, 2326, 2330,  
2334, 2338, 2342, 2346, 2350, 2356,  
2362, 2368, 2374, 2381, 2388, 2393,  
2399, 2403, 2407, 2414, 2418, 2422,  
2426, 2430, 2435, 2439, 2443, 2447,  
2451, 2455, 2459, 2463, 2470, 2475,  
2480, 2484, 2488, 2492, 2498, 2502,  
2506, 2512, 2516, 2520, 2525, 2529,  
2533, 2537, 2541, 2545, 2549, 2553,  
2558, 2562, 2568, 2572, 2576, 2580,  
2584, 2589, 2593, 2597, 2601, 2605,  
2609, 2616, 2620, 2624, 2628, 2632,  
2637, 2641, 2650, 2654, 2658, 2663,  
2667, 2673, 2677, 2681, 2686, 2690
- op\_multi\_hot*, 977, 986, 995, 1004, 1013,  
1022, 1031, 1039, 1047, 1056, 1064,  
1073, 1081, 1090, 1099, 1107, 1116,  
1125, 1134, 1137, 1141, 1144, 1147,  
1150, 1154, 1162, 1171, 1177, 1180,  
1183, 1192, 1197, 1205, 1213, 1220,  
1228, 1232, 1235, 1240, 1247, 1250,  
1253, 1261, 1270, 1278, 1286, 1295,  
1303, 1312, 1315, 1318, 1326, 1334,  
1341, 1344, 1347, 1353, 1362, 1371,  
1380, 1389, 1397, 1406, 1414, 1420,  
1425, 1431, 1441, 1444, 1447, 1455,  
1463, 1469, 1475, 1483, 1491, 1500,  
1505, 1514, 1520, 1526, 1534, 1542,  
1551, 1557, 1565, 1573, 1577, 1580,  
1588, 1597, 1605, 1609, 1612, 1615,  
1618, 1626, 1635, 1643, 1650, 1656,  
1663, 1669, 1676, 1682, 1689, 1695,  
1702, 1707, 1713, 1720, 1728, 1736,  
1744, 1752, 1759, 1764, 1768, 1772,  
1780, 1789, 1797, 1806, 1814, 1822,  
1830, 1838, 1847, 1855, 1863, 1871,  
1880, 1886, 1889, 1892, 1895, 1898,  
1907, 1912, 1919, 1927, 1936, 1944,  
1947, 1951, 1959, 1967, 1976, 1985,  
1993, 2002, 2005, 2008, 2016, 2025,  
2026, 2039, 2048, 2056, 2064, 2071,  
2074, 2077, 2086, 2094, 2102, 2105,  
2109, 2117, 2125, 2134, 2142, 2145,  
2148, 2154, 2163, 2171, 2179, 2188,  
2191, 2194, 2198, 2201, 2209, 2217,  
2224, 2232, 2240, 2246, 2253, 2259,



- 2266, 2272, 2278, 2287, 2289, 2293,  
2296, 2299, 2305, 2308, 2311, 2319,  
2322, 2326, 2334, 2342, 2350, 2356,  
2362, 2368, 2371, 2374, 2378, 2381,  
2384, 2388, 2394, 2399, 2407, 2411,  
2414, 2422, 2430, 2439, 2447, 2455,  
2463, 2470, 2475, 2484, 2492, 2498,  
2506, 2512, 2520, 2529, 2537, 2545,  
2553, 2562, 2568, 2576, 2584, 2593,  
2601, 2609, 2616, 2624, 2632, 2641,  
2650, 2658, 2667, 2673, 2681, 2690
- op\_multiply, 973, 977, 982, 986, 991, 995,  
1000, 1004, 1009, 1013, 1018, 1022,  
1027, 1031, 1035, 1039, 1043, 1047,  
1052, 1056, 1060, 1064, 1069, 1073,  
1077, 1081, 1086, 1090, 1095, 1099,  
1103, 1107, 1112, 1116, 1121, 1125,  
1130, 1134, 1141, 1147, 1154, 1158,  
1162, 1167, 1171, 1177, 1183, 1188,  
1192, 1197, 1201, 1205, 1209, 1213,  
1220, 1224, 1228, 1235, 1241, 1247,  
1253, 1257, 1261, 1266, 1270, 1274,  
1278, 1282, 1286, 1291, 1295, 1299,  
1303, 1308, 1312, 1318, 1322, 1326,  
1330, 1334, 1341, 1347, 1353, 1358,  
1362, 1367, 1371, 1376, 1380, 1385,  
1389, 1393, 1397, 1402, 1406, 1410,  
1414, 1420, 1425, 1431, 1437, 1441,  
1447, 1451, 1455, 1459, 1463, 1469,  
1475, 1479, 1483, 1487, 1491, 1496,  
1500, 1505, 1510, 1514, 1520, 1526,  
1530, 1534, 1538, 1542, 1547, 1551,  
1557, 1561, 1565, 1569, 1573, 1580,  
1584, 1588, 1593, 1597, 1601, 1605,  
1612, 1618, 1622, 1626, 1631, 1635,  
1639, 1643, 1650, 1656, 1663, 1669,  
1676, 1682, 1689, 1695, 1702, 1707,  
1713, 1720, 1724, 1728, 1732, 1736,  
1740, 1744, 1748, 1752, 1759, 1764,  
1772, 1776, 1780, 1785, 1789, 1793,  
1797, 1802, 1806, 1810, 1814, 1818,  
1822, 1826, 1830, 1834, 1838, 1843,  
1847, 1851, 1855, 1859, 1863, 1867,  
1871, 1876, 1880, 1886, 1892, 1898,  
1903, 1907, 1912, 1919, 1923, 1927,  
1932, 1936, 1940, 1944, 1951, 1955,  
1959, 1963, 1967, 1972, 1976, 1981,  
1985, 1989, 1993, 1998, 2002, 2008,  
2012, 2016, 2018, 2031, 2036, 2040,  
2044, 2048, 2052, 2056, 2060, 2064,  
2071, 2077, 2082, 2086, 2090, 2094,  
2098, 2102, 2109, 2113, 2117, 2121,  
2125, 2130, 2134, 2138, 2142, 2148,  
2155, 2159, 2163, 2167, 2171, 2175,  
2179, 2184, 2188, 2194, 2201, 2205,  
2209, 2213, 2217, 2224, 2228, 2232,  
2236, 2240, 2246, 2253, 2259, 2266,  
2272, 2278, 2283, 2287, 2293, 2299,  
2305, 2311, 2315, 2319, 2326, 2330,  
2334, 2338, 2342, 2346, 2350, 2356,  
2362, 2368, 2374, 2381, 2388, 2394,  
2399, 2403, 2407, 2414, 2418, 2422,  
2426, 2430, 2435, 2439, 2443, 2447,  
2451, 2455, 2459, 2463, 2470, 2475,  
2480, 2484, 2488, 2492, 2498, 2502,  
2506, 2512, 2516, 2520, 2525, 2529,  
2533, 2537, 2541, 2545, 2549, 2553,  
2558, 2562, 2568, 2572, 2576, 2580,  
2584, 2589, 2593, 2597, 2601, 2605,  
2609, 2616, 2620, 2624, 2628, 2632,  
2637, 2641, 2650, 2654, 2658, 2663,  
2667, 2673, 2677, 2681, 2686, 2690
- op\_nan\_to\_num, 973, 977, 982, 986, 991, 995,  
1000, 1004, 1009, 1013, 1018, 1022,  
1027, 1031, 1035, 1039, 1043, 1047,  
1052, 1056, 1060, 1064, 1069, 1073,  
1077, 1081, 1086, 1090, 1095, 1099,  
1103, 1107, 1112, 1116, 1121, 1125,  
1130, 1134, 1141, 1147, 1154, 1158,  
1162, 1167, 1171, 1177, 1183, 1188,  
1192, 1197, 1201, 1205, 1209, 1213,  
1220, 1224, 1228, 1235, 1241, 1247,  
1253, 1257, 1261, 1266, 1270, 1274,  
1278, 1282, 1286, 1291, 1295, 1299,  
1303, 1308, 1312, 1318, 1322, 1326,  
1330, 1334, 1341, 1347, 1353, 1358,  
1362, 1367, 1371, 1376, 1380, 1385,  
1389, 1393, 1397, 1402, 1406, 1410,  
1414, 1420, 1425, 1431, 1437, 1441,  
1447, 1451, 1455, 1459, 1463, 1469,  
1475, 1479, 1483, 1487, 1491, 1496,  
1500, 1506, 1510, 1514, 1520, 1526,  
1530, 1534, 1538, 1542, 1547, 1551,  
1557, 1561, 1565, 1569, 1573, 1580,  
1584, 1588, 1593, 1597, 1601, 1605,  
1612, 1618, 1622, 1626, 1631, 1635,

- 1639, 1643, 1650, 1656, 1663, 1669,  
 1676, 1682, 1689, 1696, 1702, 1707,  
 1713, 1720, 1724, 1728, 1732, 1736,  
 1740, 1744, 1748, 1752, 1759, 1764,  
 1772, 1776, 1780, 1785, 1789, 1793,  
 1797, 1802, 1806, 1810, 1814, 1818,  
 1822, 1826, 1830, 1834, 1838, 1843,  
 1847, 1851, 1855, 1859, 1863, 1867,  
 1871, 1876, 1880, 1886, 1892, 1898,  
 1903, 1907, 1912, 1919, 1923, 1927,  
 1932, 1936, 1940, 1944, 1951, 1955,  
 1959, 1963, 1967, 1972, 1976, 1981,  
 1985, 1989, 1993, 1998, 2002, 2008,  
 2012, 2016, 2021, 2025, 2031, 2033,  
 2044, 2048, 2052, 2056, 2060, 2064,  
 2071, 2077, 2082, 2086, 2090, 2094,  
 2098, 2102, 2109, 2113, 2117, 2121,  
 2125, 2130, 2134, 2138, 2142, 2148,  
 2155, 2159, 2163, 2167, 2171, 2175,  
 2179, 2184, 2188, 2194, 2201, 2205,  
 2209, 2213, 2217, 2224, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2283, 2287, 2293, 2299,  
 2305, 2311, 2315, 2319, 2326, 2330,  
 2334, 2338, 2342, 2346, 2350, 2356,  
 2362, 2368, 2374, 2381, 2388, 2394,  
 2399, 2403, 2407, 2414, 2418, 2422,  
 2426, 2430, 2435, 2439, 2443, 2447,  
 2451, 2455, 2459, 2463, 2470, 2475,  
 2480, 2484, 2488, 2492, 2498, 2502,  
 2506, 2512, 2516, 2520, 2525, 2529,  
 2533, 2537, 2541, 2545, 2549, 2553,  
 2558, 2562, 2568, 2572, 2576, 2580,  
 2584, 2589, 2593, 2597, 2601, 2605,  
 2609, 2616, 2620, 2624, 2628, 2632,  
 2637, 2641, 2650, 2654, 2658, 2663,  
 2667, 2673, 2677, 2681, 2686, 2690
- op\_ndim*, 973, 977, 982, 986, 991, 995, 1000,  
 1004, 1009, 1013, 1018, 1022, 1027,  
 1031, 1035, 1039, 1043, 1047, 1052,  
 1056, 1060, 1064, 1069, 1073, 1077,  
 1081, 1086, 1090, 1095, 1099, 1103,  
 1107, 1112, 1116, 1121, 1125, 1130,  
 1134, 1141, 1147, 1154, 1158, 1162,  
 1167, 1171, 1177, 1183, 1188, 1192,  
 1197, 1201, 1205, 1209, 1213, 1220,  
 1224, 1228, 1235, 1241, 1247, 1253,  
 1257, 1261, 1266, 1270, 1274, 1278,  
 1282, 1286, 1291, 1295, 1299, 1303,  
 1308, 1312, 1318, 1322, 1326, 1330,  
 1334, 1341, 1347, 1353, 1358, 1362,  
 1367, 1371, 1376, 1380, 1385, 1389,  
 1393, 1397, 1402, 1406, 1410, 1414,  
 1420, 1425, 1431, 1437, 1441, 1447,  
 1451, 1455, 1459, 1463, 1469, 1475,  
 1479, 1483, 1487, 1491, 1496, 1500,  
 1506, 1510, 1514, 1520, 1526, 1530,  
 1534, 1538, 1542, 1547, 1551, 1557,  
 1561, 1565, 1569, 1573, 1580, 1584,  
 1588, 1593, 1597, 1601, 1605, 1612,  
 1618, 1622, 1626, 1631, 1635, 1639,  
 1643, 1650, 1657, 1663, 1669, 1676,  
 1682, 1689, 1696, 1702, 1707, 1713,  
 1720, 1724, 1728, 1732, 1736, 1740,  
 1744, 1748, 1752, 1759, 1764, 1772,  
 1776, 1780, 1785, 1789, 1793, 1797,  
 1802, 1806, 1810, 1814, 1818, 1822,  
 1826, 1830, 1834, 1838, 1843, 1847,  
 1851, 1855, 1859, 1863, 1867, 1871,  
 1876, 1880, 1886, 1892, 1898, 1903,  
 1907, 1912, 1919, 1923, 1927, 1932,  
 1936, 1940, 1944, 1951, 1955, 1959,  
 1963, 1967, 1972, 1976, 1981, 1985,  
 1989, 1993, 1998, 2002, 2008, 2012,  
 2016, 2021, 2025, 2031, 2036, 2040,  
 2041, 2052, 2056, 2060, 2064, 2071,  
 2077, 2082, 2086, 2090, 2094, 2098,  
 2102, 2109, 2113, 2117, 2121, 2125,  
 2130, 2134, 2138, 2142, 2148, 2155,  
 2159, 2163, 2167, 2171, 2175, 2179,  
 2184, 2188, 2194, 2201, 2205, 2209,  
 2213, 2217, 2224, 2228, 2232, 2236,  
 2240, 2246, 2253, 2259, 2266, 2272,  
 2278, 2283, 2287, 2293, 2299, 2305,  
 2311, 2315, 2319, 2326, 2330, 2334,  
 2338, 2342, 2346, 2350, 2356, 2362,  
 2368, 2374, 2381, 2388, 2394, 2399,  
 2403, 2407, 2414, 2418, 2422, 2426,  
 2430, 2435, 2439, 2443, 2447, 2451,  
 2455, 2459, 2463, 2470, 2475, 2480,  
 2484, 2488, 2492, 2498, 2502, 2506,  
 2512, 2517, 2521, 2525, 2529, 2533,  
 2537, 2541, 2545, 2549, 2553, 2558,  
 2562, 2568, 2572, 2576, 2581, 2585,  
 2589, 2593, 2597, 2601, 2605, 2609,  
 2616, 2620, 2624, 2628, 2632, 2637,

- 2641, 2650, 2654, 2658, 2663, 2667,  
2673, 2677, 2681, 2686, 2690
- op\_negative, 973, 977, 982, 986, 991, 995,  
1000, 1004, 1009, 1013, 1018, 1022,  
1027, 1031, 1035, 1039, 1043, 1047,  
1052, 1056, 1060, 1064, 1069, 1073,  
1077, 1081, 1086, 1090, 1095, 1099,  
1103, 1107, 1112, 1116, 1121, 1125,  
1130, 1134, 1141, 1147, 1154, 1158,  
1162, 1167, 1171, 1177, 1183, 1188,  
1192, 1197, 1201, 1205, 1210, 1214,  
1220, 1224, 1228, 1235, 1241, 1247,  
1253, 1257, 1261, 1266, 1270, 1274,  
1278, 1282, 1286, 1291, 1295, 1299,  
1303, 1308, 1312, 1318, 1322, 1326,  
1330, 1334, 1341, 1348, 1353, 1358,  
1362, 1367, 1371, 1376, 1380, 1385,  
1389, 1393, 1397, 1402, 1406, 1410,  
1414, 1420, 1425, 1431, 1437, 1441,  
1447, 1451, 1455, 1460, 1464, 1469,  
1475, 1479, 1483, 1487, 1491, 1496,  
1500, 1506, 1510, 1514, 1520, 1526,  
1530, 1534, 1538, 1542, 1547, 1551,  
1557, 1561, 1565, 1569, 1573, 1580,  
1584, 1588, 1593, 1597, 1601, 1605,  
1612, 1618, 1623, 1627, 1631, 1635,  
1639, 1643, 1650, 1657, 1663, 1669,  
1676, 1682, 1689, 1696, 1702, 1707,  
1713, 1720, 1724, 1728, 1732, 1736,  
1740, 1744, 1748, 1752, 1759, 1764,  
1772, 1776, 1780, 1785, 1789, 1793,  
1797, 1802, 1806, 1810, 1814, 1818,  
1822, 1826, 1830, 1834, 1838, 1843,  
1847, 1851, 1855, 1859, 1863, 1867,  
1871, 1876, 1880, 1886, 1892, 1898,  
1903, 1907, 1912, 1919, 1923, 1927,  
1932, 1936, 1940, 1944, 1951, 1955,  
1959, 1963, 1967, 1972, 1976, 1981,  
1985, 1989, 1993, 1998, 2002, 2008,  
2012, 2016, 2021, 2025, 2031, 2036,  
2040, 2044, 2048, 2050, 2060, 2064,  
2071, 2077, 2082, 2086, 2090, 2094,  
2098, 2102, 2109, 2113, 2117, 2121,  
2125, 2130, 2134, 2138, 2142, 2148,  
2155, 2159, 2163, 2167, 2171, 2175,  
2179, 2184, 2188, 2194, 2201, 2205,  
2209, 2213, 2217, 2224, 2228, 2232,  
2236, 2240, 2246, 2253, 2259, 2266,  
2272, 2278, 2283, 2287, 2293, 2299,  
2305, 2311, 2315, 2319, 2326, 2330,  
2334, 2338, 2342, 2346, 2350, 2356,  
2362, 2368, 2374, 2381, 2388, 2394,  
2399, 2403, 2407, 2414, 2418, 2422,  
2426, 2430, 2435, 2439, 2443, 2447,  
2451, 2455, 2459, 2463, 2470, 2476,  
2480, 2484, 2488, 2492, 2498, 2502,  
2506, 2512, 2517, 2521, 2525, 2529,  
2533, 2537, 2541, 2545, 2549, 2553,  
2558, 2562, 2568, 2572, 2576, 2581,  
2585, 2589, 2593, 2597, 2601, 2605,  
2609, 2616, 2620, 2624, 2628, 2632,  
2637, 2641, 2650, 2654, 2658, 2663,  
2667, 2673, 2677, 2681, 2686, 2690
- op\_nonzero, 973, 977, 982, 986, 991, 995,  
1000, 1004, 1009, 1013, 1018, 1022,  
1027, 1031, 1035, 1039, 1043, 1047,  
1052, 1056, 1060, 1064, 1069, 1073,  
1077, 1081, 1086, 1090, 1095, 1099,  
1103, 1107, 1112, 1116, 1121, 1125,  
1130, 1134, 1141, 1147, 1154, 1158,  
1162, 1167, 1171, 1177, 1183, 1188,  
1192, 1197, 1201, 1205, 1210, 1214,  
1220, 1224, 1228, 1235, 1241, 1247,  
1253, 1257, 1261, 1266, 1270, 1274,  
1278, 1282, 1286, 1291, 1295, 1299,  
1303, 1308, 1312, 1318, 1322, 1326,  
1330, 1334, 1341, 1348, 1353, 1358,  
1362, 1367, 1371, 1376, 1380, 1385,  
1389, 1393, 1397, 1402, 1406, 1410,  
1414, 1420, 1425, 1431, 1437, 1441,  
1447, 1451, 1455, 1460, 1464, 1469,  
1475, 1479, 1483, 1487, 1491, 1496,  
1500, 1506, 1510, 1514, 1520, 1526,  
1530, 1534, 1538, 1542, 1547, 1551,  
1557, 1561, 1565, 1569, 1573, 1580,  
1584, 1588, 1593, 1597, 1601, 1605,  
1612, 1618, 1623, 1627, 1631, 1635,  
1639, 1643, 1650, 1657, 1663, 1669,  
1676, 1682, 1689, 1696, 1702, 1708,  
1713, 1720, 1724, 1728, 1732, 1736,  
1740, 1744, 1748, 1752, 1759, 1765,  
1772, 1776, 1780, 1785, 1789, 1793,  
1797, 1802, 1806, 1810, 1814, 1818,  
1822, 1826, 1830, 1834, 1838, 1843,  
1847, 1851, 1855, 1859, 1863, 1867,  
1871, 1876, 1880, 1886, 1892, 1898,

- 1903, 1907, 1912, 1919, 1923, 1927,  
 1932, 1936, 1940, 1944, 1951, 1955,  
 1959, 1963, 1967, 1972, 1976, 1981,  
 1985, 1989, 1993, 1998, 2002, 2008,  
 2012, 2016, 2021, 2025, 2031, 2036,  
 2040, 2044, 2048, 2052, 2056, 2058,  
 2071, 2077, 2082, 2086, 2090, 2094,  
 2098, 2102, 2109, 2113, 2117, 2121,  
 2125, 2130, 2134, 2138, 2142, 2148,  
 2155, 2159, 2163, 2167, 2171, 2175,  
 2179, 2184, 2188, 2194, 2201, 2205,  
 2209, 2213, 2217, 2224, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2283, 2287, 2293, 2299,  
 2305, 2311, 2315, 2319, 2326, 2330,  
 2334, 2338, 2342, 2346, 2350, 2356,  
 2362, 2368, 2374, 2381, 2388, 2394,  
 2399, 2403, 2407, 2414, 2418, 2422,  
 2426, 2430, 2435, 2439, 2443, 2447,  
 2451, 2455, 2459, 2463, 2470, 2476,  
 2480, 2484, 2488, 2492, 2498, 2502,  
 2506, 2512, 2517, 2521, 2525, 2529,  
 2533, 2537, 2541, 2545, 2549, 2553,  
 2558, 2562, 2568, 2572, 2576, 2581,  
 2585, 2589, 2593, 2597, 2601, 2605,  
 2609, 2616, 2620, 2624, 2628, 2632,  
 2637, 2641, 2650, 2654, 2658, 2663,  
 2667, 2673, 2677, 2681, 2686, 2690
- op\_norm*, 977, 986, 995, 1004, 1013, 1022,  
 1031, 1039, 1047, 1056, 1064, 1073,  
 1081, 1090, 1099, 1107, 1116, 1125,  
 1134, 1141, 1147, 1154, 1162, 1171,  
 1177, 1183, 1192, 1194, 1197, 1205,  
 1214, 1220, 1228, 1235, 1241, 1247,  
 1253, 1261, 1270, 1278, 1286, 1295,  
 1303, 1312, 1318, 1326, 1334, 1341,  
 1348, 1350, 1353, 1362, 1371, 1380,  
 1389, 1397, 1406, 1414, 1420, 1422,  
 1425, 1428, 1431, 1441, 1447, 1455,  
 1464, 1469, 1475, 1483, 1491, 1500,  
 1506, 1514, 1520, 1526, 1534, 1542,  
 1551, 1557, 1565, 1573, 1580, 1588,  
 1597, 1605, 1612, 1618, 1627, 1635,  
 1643, 1650, 1657, 1663, 1669, 1676,  
 1682, 1689, 1696, 1702, 1704, 1708,  
 1713, 1720, 1728, 1736, 1744, 1752,  
 1759, 1765, 1772, 1780, 1789, 1797,  
 1806, 1814, 1822, 1830, 1838, 1847,  
 1855, 1863, 1871, 1880, 1886, 1892,  
 1898, 1901, 1907, 1909, 1912, 1919,  
 1927, 1936, 1944, 1951, 1959, 1967,  
 1976, 1985, 1993, 2002, 2008, 2016,  
 2025, 2031, 2040, 2048, 2056, 2064,  
 2066, 2077, 2086, 2094, 2102, 2109,  
 2117, 2125, 2134, 2142, 2149, 2155,  
 2163, 2171, 2179, 2188, 2194, 2201,  
 2209, 2217, 2224, 2232, 2240, 2246,  
 2253, 2259, 2266, 2272, 2278, 2287,  
 2293, 2299, 2305, 2311, 2319, 2326,  
 2334, 2342, 2350, 2356, 2362, 2365,  
 2368, 2374, 2381, 2388, 2394, 2396,  
 2399, 2407, 2414, 2422, 2430, 2439,  
 2447, 2455, 2463, 2470, 2476, 2484,  
 2492, 2495, 2498, 2506, 2512, 2521,  
 2529, 2537, 2545, 2553, 2562, 2568,  
 2576, 2585, 2593, 2601, 2609, 2616,  
 2624, 2632, 2641, 2650, 2658, 2667,  
 2673, 2681, 2690
- op\_normalize*, 977, 986, 995, 1004, 1013,  
 1022, 1031, 1039, 1047, 1056, 1064,  
 1073, 1081, 1090, 1099, 1107, 1116,  
 1125, 1134, 1137, 1141, 1144, 1147,  
 1150, 1154, 1162, 1171, 1177, 1180,  
 1184, 1192, 1197, 1205, 1214, 1220,  
 1228, 1232, 1235, 1241, 1247, 1250,  
 1253, 1261, 1270, 1278, 1286, 1295,  
 1303, 1312, 1315, 1318, 1326, 1334,  
 1341, 1344, 1348, 1353, 1362, 1371,  
 1380, 1389, 1397, 1406, 1414, 1420,  
 1425, 1431, 1441, 1444, 1447, 1455,  
 1464, 1469, 1475, 1483, 1491, 1500,  
 1506, 1514, 1520, 1526, 1534, 1542,  
 1551, 1557, 1565, 1573, 1577, 1580,  
 1588, 1597, 1605, 1609, 1612, 1615,  
 1618, 1627, 1635, 1643, 1650, 1657,  
 1663, 1669, 1676, 1682, 1689, 1696,  
 1702, 1708, 1714, 1720, 1728, 1736,  
 1744, 1752, 1759, 1765, 1768, 1772,  
 1780, 1789, 1797, 1806, 1814, 1822,  
 1830, 1838, 1847, 1855, 1863, 1871,  
 1880, 1886, 1889, 1892, 1895, 1898,  
 1907, 1912, 1919, 1927, 1936, 1944,  
 1947, 1951, 1959, 1967, 1976, 1985,  
 1993, 2002, 2005, 2008, 2016, 2025,  
 2028, 2031, 2040, 2048, 2056, 2064,  
 2071, 2073, 2086, 2094, 2102, 2105,

- 2109, 2117, 2126, 2134, 2142, 2145,  
2149, 2155, 2163, 2171, 2180, 2188,  
2191, 2194, 2198, 2201, 2209, 2218,  
2224, 2232, 2240, 2246, 2253, 2259,  
2266, 2272, 2278, 2287, 2289, 2293,  
2296, 2299, 2305, 2308, 2311, 2320,  
2322, 2326, 2334, 2342, 2350, 2356,  
2362, 2368, 2371, 2374, 2378, 2381,  
2384, 2388, 2394, 2399, 2408, 2411,  
2414, 2422, 2431, 2439, 2447, 2455,  
2463, 2470, 2476, 2484, 2492, 2498,  
2506, 2512, 2521, 2529, 2537, 2545,  
2554, 2562, 2568, 2576, 2585, 2593,  
2601, 2609, 2616, 2624, 2632, 2641,  
2650, 2659, 2667, 2673, 2682, 2690
- `op_not_equal`, 973, 977, 982, 986, 991, 995,  
1000, 1005, 1009, 1013, 1018, 1023,  
1027, 1031, 1035, 1039, 1043, 1048,  
1052, 1056, 1060, 1064, 1069, 1073,  
1077, 1081, 1086, 1090, 1095, 1099,  
1103, 1107, 1112, 1116, 1121, 1125,  
1130, 1134, 1141, 1147, 1154, 1158,  
1163, 1167, 1171, 1177, 1184, 1188,  
1192, 1197, 1201, 1205, 1210, 1214,  
1220, 1224, 1229, 1235, 1241, 1247,  
1253, 1257, 1262, 1266, 1270, 1274,  
1278, 1282, 1286, 1291, 1295, 1299,  
1303, 1308, 1312, 1318, 1322, 1326,  
1330, 1335, 1341, 1348, 1353, 1358,  
1362, 1367, 1372, 1376, 1380, 1385,  
1389, 1393, 1398, 1402, 1406, 1410,  
1414, 1420, 1425, 1431, 1437, 1441,  
1447, 1451, 1455, 1460, 1464, 1469,  
1475, 1479, 1483, 1487, 1492, 1496,  
1500, 1506, 1510, 1514, 1520, 1526,  
1530, 1534, 1538, 1542, 1547, 1551,  
1557, 1561, 1565, 1569, 1573, 1580,  
1584, 1589, 1593, 1597, 1601, 1606,  
1612, 1618, 1623, 1627, 1631, 1635,  
1639, 1643, 1650, 1657, 1663, 1669,  
1676, 1682, 1689, 1696, 1702, 1708,  
1714, 1720, 1724, 1728, 1732, 1736,  
1740, 1744, 1748, 1753, 1759, 1765,  
1772, 1776, 1780, 1785, 1789, 1793,  
1798, 1802, 1806, 1810, 1814, 1818,  
1822, 1826, 1830, 1834, 1839, 1843,  
1847, 1851, 1855, 1859, 1863, 1867,  
1871, 1876, 1880, 1886, 1892, 1898,  
1903, 1907, 1912, 1919, 1923, 1927,  
1932, 1936, 1940, 1944, 1951, 1955,  
1959, 1963, 1967, 1972, 1976, 1981,  
1985, 1989, 1993, 1998, 2002, 2008,  
2012, 2016, 2021, 2025, 2031, 2036,  
2040, 2044, 2048, 2052, 2056, 2060,  
2065, 2071, 2077, 2079, 2090, 2094,  
2098, 2102, 2109, 2113, 2117, 2121,  
2126, 2130, 2134, 2138, 2142, 2149,  
2155, 2159, 2163, 2167, 2171, 2175,  
2180, 2184, 2188, 2194, 2201, 2205,  
2209, 2213, 2218, 2224, 2228, 2232,  
2236, 2240, 2246, 2253, 2259, 2266,  
2272, 2278, 2283, 2287, 2293, 2299,  
2305, 2311, 2315, 2320, 2326, 2330,  
2334, 2338, 2342, 2346, 2350, 2356,  
2362, 2368, 2374, 2381, 2388, 2394,  
2399, 2403, 2408, 2414, 2418, 2422,  
2426, 2431, 2435, 2439, 2443, 2447,  
2451, 2455, 2459, 2463, 2470, 2476,  
2480, 2484, 2488, 2492, 2498, 2502,  
2506, 2512, 2517, 2521, 2525, 2529,  
2533, 2537, 2541, 2545, 2549, 2554,  
2558, 2562, 2568, 2572, 2576, 2581,  
2585, 2589, 2593, 2597, 2601, 2605,  
2609, 2616, 2620, 2624, 2628, 2632,  
2637, 2641, 2650, 2654, 2659, 2663,  
2667, 2673, 2677, 2682, 2686, 2690
- `op_one_hot`, 977, 986, 995, 1005, 1013, 1023,  
1031, 1039, 1048, 1056, 1064, 1073,  
1081, 1090, 1099, 1108, 1116, 1125,  
1134, 1137, 1141, 1144, 1147, 1150,  
1154, 1163, 1171, 1177, 1180, 1184,  
1192, 1197, 1205, 1214, 1220, 1229,  
1232, 1235, 1241, 1247, 1250, 1253,  
1262, 1270, 1278, 1286, 1295, 1303,  
1312, 1315, 1318, 1326, 1335, 1341,  
1344, 1348, 1353, 1362, 1372, 1380,  
1389, 1398, 1406, 1414, 1420, 1426,  
1431, 1441, 1444, 1447, 1455, 1464,  
1469, 1475, 1483, 1492, 1500, 1506,  
1514, 1520, 1526, 1534, 1542, 1551,  
1557, 1565, 1573, 1577, 1580, 1589,  
1597, 1606, 1609, 1612, 1615, 1618,  
1627, 1635, 1643, 1650, 1657, 1663,  
1669, 1676, 1682, 1689, 1696, 1702,  
1708, 1714, 1720, 1728, 1736, 1744,  
1753, 1759, 1765, 1768, 1772, 1780,

- 1789, 1798, 1806, 1814, 1822, 1830,  
1839, 1847, 1855, 1863, 1871, 1880,  
1886, 1889, 1892, 1895, 1898, 1907,  
1913, 1919, 1927, 1936, 1944, 1947,  
1951, 1959, 1967, 1976, 1985, 1993,  
2002, 2005, 2008, 2016, 2025, 2028,  
2031, 2040, 2048, 2056, 2065, 2071,  
2074, 2077, 2086, 2094, 2102, 2104,  
2117, 2126, 2134, 2142, 2145, 2149,  
2155, 2163, 2171, 2180, 2188, 2191,  
2194, 2198, 2201, 2209, 2218, 2224,  
2232, 2240, 2246, 2253, 2259, 2266,  
2272, 2278, 2287, 2289, 2293, 2296,  
2299, 2305, 2308, 2311, 2320, 2322,  
2326, 2334, 2342, 2350, 2356, 2363,  
2368, 2371, 2374, 2378, 2381, 2385,  
2388, 2394, 2399, 2408, 2411, 2414,  
2422, 2431, 2439, 2447, 2455, 2463,  
2470, 2476, 2484, 2492, 2498, 2506,  
2512, 2521, 2529, 2537, 2545, 2554,  
2562, 2568, 2576, 2585, 2593, 2601,  
2609, 2616, 2624, 2632, 2641, 2650,  
2659, 2667, 2673, 2682, 2690
- `op_one_hot()`, 2758
- `op_ones`, 973, 977, 982, 986, 991, 995, 1000,  
1005, 1009, 1013, 1018, 1023, 1027,  
1031, 1035, 1039, 1043, 1048, 1052,  
1056, 1060, 1064, 1069, 1073, 1077,  
1081, 1086, 1090, 1095, 1099, 1103,  
1108, 1112, 1116, 1121, 1125, 1130,  
1134, 1141, 1148, 1154, 1158, 1163,  
1167, 1171, 1177, 1184, 1188, 1192,  
1197, 1201, 1205, 1210, 1214, 1220,  
1224, 1229, 1235, 1241, 1247, 1253,  
1257, 1262, 1266, 1270, 1274, 1278,  
1282, 1286, 1291, 1295, 1299, 1303,  
1308, 1312, 1318, 1322, 1326, 1330,  
1335, 1341, 1348, 1353, 1358, 1362,  
1367, 1372, 1376, 1380, 1385, 1389,  
1393, 1398, 1402, 1406, 1410, 1414,  
1420, 1426, 1431, 1437, 1441, 1447,  
1451, 1455, 1460, 1464, 1469, 1475,  
1479, 1483, 1487, 1492, 1496, 1500,  
1506, 1510, 1514, 1520, 1526, 1530,  
1534, 1538, 1542, 1547, 1551, 1557,  
1561, 1565, 1569, 1573, 1580, 1584,  
1589, 1593, 1597, 1601, 1606, 1612,  
1618, 1623, 1627, 1631, 1635, 1639,  
1643, 1650, 1657, 1663, 1669, 1676,  
1682, 1689, 1696, 1702, 1708, 1714,  
1720, 1724, 1728, 1732, 1736, 1740,  
1744, 1748, 1753, 1759, 1765, 1772,  
1776, 1780, 1785, 1789, 1793, 1798,  
1802, 1806, 1810, 1814, 1818, 1822,  
1826, 1830, 1834, 1839, 1843, 1847,  
1851, 1855, 1859, 1863, 1867, 1871,  
1876, 1880, 1886, 1892, 1898, 1903,  
1907, 1913, 1919, 1923, 1927, 1932,  
1936, 1940, 1944, 1951, 1955, 1959,  
1963, 1967, 1972, 1976, 1981, 1985,  
1989, 1993, 1998, 2002, 2008, 2012,  
2016, 2021, 2025, 2031, 2036, 2040,  
2044, 2048, 2052, 2056, 2060, 2065,  
2071, 2077, 2082, 2086, 2088, 2098,  
2102, 2109, 2113, 2117, 2122, 2126,  
2130, 2134, 2138, 2142, 2149, 2155,  
2159, 2163, 2167, 2171, 2176, 2180,  
2184, 2188, 2194, 2201, 2205, 2209,  
2214, 2218, 2224, 2228, 2232, 2236,  
2240, 2246, 2253, 2259, 2266, 2272,  
2278, 2283, 2287, 2293, 2299, 2305,  
2311, 2316, 2320, 2326, 2330, 2334,  
2338, 2342, 2346, 2350, 2356, 2363,  
2368, 2374, 2381, 2388, 2394, 2399,  
2404, 2408, 2414, 2418, 2422, 2427,  
2431, 2435, 2439, 2443, 2447, 2451,  
2455, 2459, 2463, 2470, 2476, 2480,  
2484, 2488, 2492, 2498, 2502, 2506,  
2512, 2517, 2521, 2525, 2529, 2533,  
2537, 2541, 2545, 2550, 2554, 2558,  
2562, 2568, 2572, 2576, 2581, 2585,  
2589, 2593, 2597, 2601, 2605, 2609,  
2616, 2620, 2624, 2628, 2632, 2637,  
2641, 2650, 2655, 2659, 2663, 2667,  
2673, 2678, 2682, 2686, 2690
- `op_ones_like`, 973, 977, 982, 986, 991, 995,  
1001, 1005, 1009, 1013, 1019, 1023,  
1027, 1031, 1035, 1039, 1044, 1048,  
1052, 1056, 1060, 1064, 1069, 1073,  
1077, 1081, 1086, 1090, 1095, 1099,  
1103, 1108, 1112, 1116, 1121, 1125,  
1130, 1134, 1141, 1148, 1154, 1159,  
1163, 1167, 1171, 1177, 1184, 1188,  
1192, 1197, 1201, 1205, 1210, 1214,  
1220, 1225, 1229, 1235, 1241, 1247,  
1253, 1258, 1262, 1266, 1270, 1274,

- 1278, 1282, 1286, 1291, 1295, 1299,  
1303, 1308, 1312, 1318, 1322, 1326,  
1331, 1335, 1341, 1348, 1353, 1358,  
1362, 1368, 1372, 1376, 1380, 1385,  
1389, 1394, 1398, 1402, 1406, 1410,  
1414, 1420, 1426, 1431, 1437, 1441,  
1447, 1451, 1455, 1460, 1464, 1469,  
1475, 1479, 1483, 1488, 1492, 1496,  
1500, 1506, 1510, 1514, 1520, 1526,  
1530, 1534, 1538, 1542, 1547, 1551,  
1557, 1561, 1565, 1569, 1573, 1580,  
1585, 1589, 1593, 1597, 1602, 1606,  
1612, 1618, 1623, 1627, 1631, 1635,  
1639, 1643, 1650, 1657, 1663, 1670,  
1676, 1682, 1689, 1696, 1702, 1708,  
1714, 1720, 1724, 1728, 1732, 1736,  
1740, 1744, 1749, 1753, 1759, 1765,  
1772, 1776, 1780, 1785, 1789, 1794,  
1798, 1802, 1806, 1810, 1814, 1818,  
1822, 1826, 1830, 1835, 1839, 1843,  
1847, 1851, 1855, 1859, 1863, 1867,  
1871, 1876, 1880, 1886, 1892, 1898,  
1903, 1907, 1913, 1919, 1923, 1927,  
1932, 1936, 1940, 1944, 1951, 1955,  
1959, 1963, 1967, 1972, 1976, 1981,  
1985, 1989, 1993, 1998, 2002, 2008,  
2012, 2016, 2021, 2025, 2031, 2036,  
2040, 2044, 2048, 2052, 2056, 2061,  
2065, 2071, 2077, 2082, 2086, 2090,  
2094, 2096, 2109, 2113, 2117, 2122,  
2126, 2130, 2134, 2138, 2142, 2149,  
2155, 2159, 2163, 2167, 2171, 2176,  
2180, 2184, 2188, 2194, 2201, 2205,  
2209, 2214, 2218, 2224, 2228, 2232,  
2236, 2240, 2246, 2253, 2259, 2266,  
2272, 2278, 2283, 2287, 2293, 2299,  
2305, 2311, 2316, 2320, 2326, 2330,  
2334, 2338, 2342, 2346, 2350, 2356,  
2363, 2368, 2374, 2381, 2388, 2394,  
2399, 2404, 2408, 2414, 2418, 2422,  
2427, 2431, 2435, 2439, 2443, 2447,  
2451, 2455, 2459, 2463, 2470, 2476,  
2480, 2484, 2488, 2492, 2498, 2502,  
2506, 2512, 2517, 2521, 2525, 2529,  
2533, 2537, 2541, 2545, 2550, 2554,  
2558, 2562, 2568, 2572, 2576, 2581,  
2585, 2589, 2593, 2597, 2601, 2605,  
2609, 2616, 2620, 2624, 2628, 2632,  
2637, 2641, 2650, 2655, 2659, 2663,  
2667, 2673, 2678, 2682, 2686, 2690
- op\_outer, 973, 977, 982, 986, 991, 995, 1001,  
1005, 1009, 1013, 1019, 1023, 1027,  
1031, 1035, 1039, 1044, 1048, 1052,  
1056, 1060, 1064, 1069, 1073, 1077,  
1081, 1086, 1090, 1095, 1099, 1104,  
1108, 1112, 1116, 1121, 1125, 1130,  
1134, 1141, 1148, 1154, 1159, 1163,  
1167, 1171, 1177, 1184, 1188, 1192,  
1197, 1201, 1205, 1210, 1214, 1220,  
1225, 1229, 1235, 1241, 1247, 1253,  
1258, 1262, 1266, 1270, 1274, 1278,  
1282, 1286, 1291, 1295, 1299, 1303,  
1308, 1312, 1318, 1322, 1326, 1331,  
1335, 1341, 1348, 1353, 1358, 1362,  
1368, 1372, 1376, 1380, 1385, 1389,  
1394, 1398, 1402, 1406, 1410, 1414,  
1420, 1426, 1431, 1437, 1441, 1447,  
1451, 1455, 1460, 1464, 1469, 1475,  
1479, 1483, 1488, 1492, 1496, 1500,  
1506, 1510, 1514, 1520, 1526, 1530,  
1534, 1538, 1542, 1547, 1551, 1557,  
1561, 1565, 1569, 1573, 1580, 1585,  
1589, 1593, 1597, 1602, 1606, 1612,  
1618, 1623, 1627, 1631, 1635, 1639,  
1643, 1650, 1657, 1663, 1670, 1676,  
1682, 1689, 1696, 1702, 1708, 1714,  
1720, 1724, 1728, 1732, 1736, 1740,  
1744, 1749, 1753, 1759, 1765, 1772,  
1776, 1780, 1785, 1789, 1794, 1798,  
1802, 1806, 1810, 1814, 1818, 1822,  
1826, 1830, 1835, 1839, 1843, 1847,  
1851, 1855, 1859, 1863, 1867, 1871,  
1876, 1880, 1886, 1892, 1898, 1903,  
1907, 1913, 1919, 1923, 1927, 1932,  
1936, 1940, 1944, 1951, 1955, 1959,  
1963, 1967, 1972, 1976, 1981, 1985,  
1989, 1993, 1998, 2002, 2008, 2012,  
2016, 2021, 2025, 2031, 2036, 2040,  
2044, 2048, 2052, 2056, 2061, 2065,  
2071, 2077, 2082, 2086, 2090, 2094,  
2098, 2102, 2109, 2110, 2122, 2126,  
2130, 2134, 2138, 2142, 2149, 2155,  
2159, 2163, 2167, 2171, 2176, 2180,  
2184, 2188, 2194, 2201, 2205, 2209,  
2214, 2218, 2224, 2228, 2232, 2236,  
2240, 2246, 2253, 2259, 2266, 2272,



- 2278, 2283, 2287, 2293, 2299, 2305,  
2311, 2316, 2320, 2326, 2330, 2334,  
2338, 2342, 2346, 2350, 2356, 2363,  
2368, 2374, 2381, 2388, 2394, 2399,  
2404, 2408, 2414, 2418, 2422, 2427,  
2431, 2435, 2439, 2443, 2447, 2451,  
2455, 2459, 2463, 2470, 2476, 2480,  
2484, 2488, 2492, 2498, 2502, 2506,  
2512, 2517, 2521, 2525, 2529, 2533,  
2537, 2541, 2545, 2550, 2554, 2558,  
2562, 2568, 2572, 2576, 2581, 2585,  
2589, 2593, 2597, 2601, 2605, 2609,  
2616, 2620, 2624, 2628, 2633, 2637,  
2641, 2650, 2655, 2659, 2663, 2667,  
2673, 2678, 2682, 2686, 2690
- op\_pad, 973, 977, 982, 986, 991, 995, 1001,  
1005, 1009, 1013, 1019, 1023, 1027,  
1031, 1035, 1039, 1044, 1048, 1052,  
1056, 1060, 1064, 1069, 1073, 1077,  
1081, 1086, 1090, 1095, 1099, 1104,  
1108, 1112, 1116, 1121, 1125, 1130,  
1134, 1141, 1148, 1154, 1159, 1163,  
1167, 1171, 1177, 1184, 1188, 1192,  
1197, 1201, 1205, 1210, 1214, 1220,  
1225, 1229, 1235, 1241, 1247, 1253,  
1258, 1262, 1266, 1270, 1274, 1278,  
1282, 1286, 1291, 1295, 1299, 1303,  
1308, 1312, 1318, 1322, 1326, 1331,  
1335, 1341, 1348, 1353, 1358, 1362,  
1368, 1372, 1376, 1380, 1385, 1389,  
1394, 1398, 1402, 1406, 1410, 1414,  
1420, 1426, 1431, 1437, 1441, 1447,  
1451, 1455, 1460, 1464, 1469, 1475,  
1479, 1483, 1488, 1492, 1496, 1500,  
1506, 1510, 1514, 1520, 1526, 1530,  
1534, 1538, 1542, 1547, 1551, 1557,  
1561, 1565, 1569, 1573, 1580, 1585,  
1589, 1593, 1597, 1602, 1606, 1612,  
1618, 1623, 1627, 1631, 1635, 1639,  
1643, 1650, 1657, 1663, 1670, 1676,  
1682, 1689, 1696, 1702, 1708, 1714,  
1720, 1724, 1728, 1732, 1736, 1740,  
1744, 1749, 1753, 1759, 1765, 1772,  
1776, 1780, 1785, 1789, 1794, 1798,  
1802, 1806, 1810, 1814, 1818, 1822,  
1826, 1830, 1835, 1839, 1843, 1847,  
1851, 1855, 1859, 1863, 1867, 1871,  
1876, 1880, 1886, 1892, 1898, 1903,  
1907, 1913, 1919, 1923, 1927, 1932,  
1936, 1940, 1944, 1951, 1955, 1959,  
1963, 1967, 1972, 1976, 1981, 1985,  
1989, 1993, 1998, 2002, 2008, 2012,  
2016, 2021, 2025, 2031, 2036, 2040,  
2044, 2048, 2052, 2056, 2061, 2065,  
2071, 2077, 2082, 2086, 2090, 2094,  
2098, 2102, 2109, 2113, 2117, 2119,  
2130, 2134, 2138, 2142, 2149, 2155,  
2159, 2163, 2167, 2171, 2176, 2180,  
2184, 2188, 2194, 2201, 2205, 2209,  
2214, 2218, 2224, 2228, 2232, 2236,  
2240, 2246, 2253, 2259, 2266, 2272,  
2278, 2283, 2287, 2293, 2299, 2305,  
2311, 2316, 2320, 2326, 2330, 2334,  
2338, 2342, 2346, 2350, 2356, 2363,  
2368, 2374, 2381, 2388, 2394, 2399,  
2404, 2408, 2414, 2418, 2422, 2427,  
2431, 2435, 2439, 2443, 2447, 2451,  
2455, 2459, 2463, 2470, 2476, 2480,  
2484, 2488, 2492, 2498, 2502, 2506,  
2512, 2517, 2521, 2525, 2529, 2533,  
2537, 2541, 2545, 2550, 2554, 2558,  
2562, 2568, 2572, 2577, 2581, 2585,  
2589, 2593, 2597, 2601, 2605, 2609,  
2616, 2620, 2624, 2628, 2633, 2637,  
2641, 2650, 2655, 2659, 2663, 2667,  
2673, 2678, 2682, 2686, 2690
- op\_pmax (op\_maximum), 1938
- op\_pmin (op\_minimum), 1987
- op\_power, 973, 977, 982, 986, 991, 995, 1001,  
1005, 1009, 1013, 1019, 1023, 1027,  
1031, 1035, 1039, 1044, 1048, 1052,  
1056, 1060, 1064, 1069, 1073, 1077,  
1081, 1086, 1090, 1095, 1099, 1104,  
1108, 1112, 1117, 1121, 1125, 1130,  
1134, 1141, 1148, 1154, 1159, 1163,  
1167, 1171, 1177, 1184, 1188, 1192,  
1197, 1201, 1206, 1210, 1214, 1220,  
1225, 1229, 1235, 1241, 1247, 1253,  
1258, 1262, 1266, 1270, 1274, 1278,  
1282, 1286, 1291, 1295, 1299, 1303,  
1308, 1312, 1318, 1322, 1326, 1331,  
1335, 1341, 1348, 1353, 1358, 1362,  
1368, 1372, 1376, 1380, 1385, 1389,  
1394, 1398, 1402, 1406, 1410, 1414,  
1420, 1426, 1431, 1437, 1441, 1447,  
1451, 1455, 1460, 1464, 1470, 1475,



- 1479, 1483, 1488, 1492, 1496, 1500,  
1506, 1510, 1514, 1520, 1526, 1530,  
1534, 1538, 1542, 1547, 1551, 1557,  
1561, 1565, 1569, 1573, 1580, 1585,  
1589, 1593, 1597, 1602, 1606, 1612,  
1619, 1623, 1627, 1631, 1635, 1639,  
1643, 1650, 1657, 1663, 1670, 1676,  
1682, 1689, 1696, 1702, 1708, 1714,  
1720, 1724, 1728, 1732, 1736, 1740,  
1744, 1749, 1753, 1759, 1765, 1772,  
1776, 1780, 1785, 1789, 1794, 1798,  
1802, 1806, 1810, 1814, 1818, 1822,  
1826, 1830, 1835, 1839, 1843, 1847,  
1851, 1855, 1859, 1863, 1867, 1872,  
1876, 1880, 1886, 1892, 1898, 1903,  
1907, 1913, 1919, 1923, 1927, 1932,  
1936, 1940, 1944, 1951, 1955, 1959,  
1963, 1967, 1972, 1976, 1981, 1985,  
1989, 1993, 1998, 2002, 2008, 2012,  
2016, 2021, 2025, 2031, 2036, 2040,  
2044, 2048, 2052, 2056, 2061, 2065,  
2071, 2077, 2082, 2086, 2090, 2094,  
2098, 2102, 2109, 2113, 2117, 2122,  
2126, 2127, 2138, 2142, 2149, 2155,  
2159, 2163, 2167, 2171, 2176, 2180,  
2184, 2188, 2194, 2201, 2205, 2209,  
2214, 2218, 2224, 2228, 2232, 2236,  
2240, 2246, 2253, 2259, 2266, 2272,  
2278, 2283, 2287, 2293, 2299, 2305,  
2311, 2316, 2320, 2326, 2330, 2334,  
2338, 2342, 2346, 2350, 2356, 2363,  
2368, 2374, 2381, 2388, 2394, 2399,  
2404, 2408, 2414, 2418, 2423, 2427,  
2431, 2435, 2439, 2443, 2447, 2451,  
2455, 2459, 2463, 2470, 2476, 2480,  
2484, 2488, 2492, 2498, 2502, 2506,  
2512, 2517, 2521, 2525, 2529, 2533,  
2537, 2541, 2545, 2550, 2554, 2558,  
2562, 2568, 2572, 2577, 2581, 2585,  
2589, 2593, 2597, 2601, 2605, 2609,  
2616, 2620, 2624, 2628, 2633, 2637,  
2641, 2651, 2655, 2659, 2663, 2667,  
2673, 2678, 2682, 2686, 2690
- op\_prod, 973, 978, 982, 986, 991, 995, 1001,  
1005, 1009, 1013, 1019, 1023, 1027,  
1031, 1035, 1039, 1044, 1048, 1052,  
1056, 1060, 1064, 1069, 1073, 1077,  
1081, 1086, 1090, 1095, 1099, 1104,  
1108, 1112, 1117, 1121, 1125, 1130,  
1134, 1141, 1148, 1154, 1159, 1163,  
1167, 1171, 1177, 1184, 1188, 1192,  
1197, 1201, 1206, 1210, 1214, 1220,  
1225, 1229, 1235, 1241, 1247, 1253,  
1258, 1262, 1266, 1270, 1274, 1278,  
1282, 1286, 1291, 1295, 1299, 1304,  
1308, 1312, 1318, 1322, 1326, 1331,  
1335, 1341, 1348, 1353, 1358, 1362,  
1368, 1372, 1376, 1380, 1385, 1389,  
1394, 1398, 1402, 1406, 1410, 1414,  
1420, 1426, 1431, 1437, 1441, 1447,  
1451, 1455, 1460, 1464, 1470, 1475,  
1479, 1483, 1488, 1492, 1496, 1500,  
1506, 1510, 1514, 1520, 1526, 1530,  
1534, 1538, 1542, 1547, 1551, 1557,  
1561, 1565, 1569, 1573, 1580, 1585,  
1589, 1593, 1597, 1602, 1606, 1612,  
1619, 1623, 1627, 1631, 1635, 1639,  
1643, 1650, 1657, 1663, 1670, 1676,  
1682, 1689, 1696, 1702, 1708, 1714,  
1720, 1724, 1728, 1732, 1736, 1740,  
1744, 1749, 1753, 1759, 1765, 1772,  
1776, 1780, 1785, 1789, 1794, 1798,  
1802, 1806, 1810, 1814, 1818, 1822,  
1826, 1830, 1835, 1839, 1843, 1847,  
1851, 1855, 1859, 1863, 1867, 1872,  
1876, 1880, 1886, 1892, 1898, 1903,  
1907, 1913, 1919, 1923, 1927, 1932,  
1936, 1940, 1945, 1951, 1955, 1959,  
1963, 1967, 1972, 1976, 1981, 1985,  
1989, 1993, 1998, 2002, 2008, 2012,  
2016, 2021, 2025, 2031, 2036, 2040,  
2044, 2048, 2052, 2056, 2061, 2065,  
2071, 2077, 2082, 2086, 2090, 2094,  
2098, 2102, 2109, 2113, 2117, 2122,  
2126, 2130, 2134, 2136, 2149, 2155,  
2159, 2163, 2167, 2171, 2176, 2180,  
2184, 2188, 2194, 2201, 2205, 2209,  
2214, 2218, 2224, 2228, 2232, 2236,  
2240, 2246, 2253, 2259, 2266, 2272,  
2278, 2283, 2287, 2293, 2299, 2305,  
2311, 2316, 2320, 2326, 2330, 2334,  
2338, 2342, 2346, 2350, 2356, 2363,  
2368, 2374, 2381, 2388, 2394, 2399,  
2404, 2408, 2414, 2418, 2423, 2427,  
2431, 2435, 2439, 2443, 2447, 2451,  
2455, 2459, 2464, 2470, 2476, 2480,

- 2484, 2488, 2492, 2498, 2502, 2506,  
 2513, 2517, 2521, 2525, 2529, 2533,  
 2537, 2541, 2545, 2550, 2554, 2558,  
 2562, 2568, 2572, 2577, 2581, 2585,  
 2589, 2593, 2597, 2601, 2605, 2610,  
 2616, 2620, 2624, 2629, 2633, 2637,  
 2641, 2651, 2655, 2659, 2663, 2667,  
 2673, 2678, 2682, 2686, 2690
- op\_psnr*, 978, 987, 995, 1005, 1014, 1023,  
 1031, 1039, 1048, 1056, 1064, 1073,  
 1082, 1090, 1099, 1108, 1117, 1125,  
 1135, 1138, 1141, 1144, 1148, 1150,  
 1154, 1163, 1171, 1177, 1180, 1184,  
 1192, 1197, 1206, 1214, 1221, 1229,  
 1232, 1235, 1241, 1247, 1250, 1253,  
 1262, 1270, 1278, 1286, 1295, 1304,  
 1312, 1315, 1318, 1326, 1335, 1341,  
 1344, 1348, 1353, 1362, 1372, 1380,  
 1389, 1398, 1406, 1414, 1420, 1426,  
 1431, 1441, 1444, 1447, 1455, 1464,  
 1470, 1475, 1483, 1492, 1500, 1506,  
 1514, 1520, 1526, 1534, 1542, 1551,  
 1557, 1565, 1573, 1577, 1580, 1589,  
 1597, 1606, 1609, 1612, 1615, 1619,  
 1627, 1635, 1643, 1650, 1657, 1663,  
 1670, 1676, 1683, 1689, 1696, 1702,  
 1708, 1714, 1720, 1728, 1736, 1745,  
 1753, 1759, 1765, 1769, 1772, 1780,  
 1789, 1798, 1806, 1814, 1822, 1830,  
 1839, 1847, 1855, 1863, 1872, 1880,  
 1886, 1889, 1892, 1895, 1898, 1907,  
 1913, 1919, 1928, 1936, 1945, 1948,  
 1951, 1959, 1967, 1976, 1985, 1993,  
 2002, 2005, 2008, 2016, 2025, 2028,  
 2031, 2040, 2048, 2056, 2065, 2071,  
 2074, 2077, 2086, 2094, 2102, 2105,  
 2109, 2117, 2126, 2134, 2142, 2144,  
 2155, 2163, 2172, 2180, 2188, 2191,  
 2194, 2198, 2201, 2209, 2218, 2224,  
 2232, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2287, 2289, 2293, 2296,  
 2299, 2305, 2308, 2311, 2320, 2322,  
 2326, 2334, 2342, 2350, 2357, 2363,  
 2368, 2371, 2374, 2378, 2381, 2385,  
 2388, 2394, 2399, 2408, 2411, 2414,  
 2423, 2431, 2439, 2447, 2455, 2464,  
 2470, 2476, 2484, 2492, 2498, 2506,  
 2513, 2521, 2529, 2537, 2545, 2554,  
 2562, 2568, 2577, 2585, 2593, 2601,  
 2610, 2616, 2624, 2633, 2641, 2651,  
 2659, 2667, 2673, 2682, 2690
- op\_qr*, 978, 987, 995, 1005, 1014, 1023, 1031,  
 1039, 1048, 1056, 1064, 1073, 1082,  
 1090, 1099, 1108, 1117, 1125, 1135,  
 1141, 1148, 1154, 1163, 1171, 1177,  
 1184, 1192, 1197, 1206, 1214, 1221,  
 1229, 1235, 1241, 1247, 1254, 1262,  
 1270, 1278, 1286, 1295, 1304, 1312,  
 1318, 1327, 1335, 1341, 1348, 1353,  
 1362, 1372, 1380, 1389, 1398, 1406,  
 1414, 1420, 1426, 1431, 1441, 1447,  
 1455, 1464, 1466, 1470, 1472, 1475,  
 1483, 1492, 1500, 1502, 1506, 1514,  
 1517, 1520, 1523, 1526, 1534, 1542,  
 1551, 1557, 1565, 1573, 1580, 1589,  
 1597, 1606, 1612, 1619, 1627, 1635,  
 1643, 1650, 1657, 1663, 1670, 1676,  
 1683, 1689, 1696, 1702, 1708, 1710,  
 1714, 1717, 1720, 1728, 1736, 1745,  
 1753, 1756, 1759, 1765, 1772, 1780,  
 1789, 1798, 1806, 1814, 1822, 1830,  
 1839, 1847, 1855, 1863, 1872, 1880,  
 1883, 1886, 1892, 1898, 1907, 1913,  
 1919, 1928, 1936, 1945, 1951, 1959,  
 1967, 1976, 1985, 1993, 2002, 2008,  
 2016, 2025, 2031, 2040, 2048, 2056,  
 2065, 2071, 2077, 2086, 2094, 2102,  
 2109, 2117, 2126, 2134, 2143, 2149,  
 2150, 2163, 2172, 2180, 2188, 2194,  
 2201, 2209, 2218, 2221, 2224, 2232,  
 2240, 2243, 2246, 2253, 2259, 2266,  
 2269, 2272, 2275, 2278, 2287, 2293,  
 2299, 2305, 2311, 2320, 2326, 2334,  
 2342, 2350, 2357, 2363, 2368, 2374,  
 2381, 2388, 2390, 2394, 2399, 2408,  
 2414, 2423, 2431, 2439, 2447, 2455,  
 2464, 2467, 2470, 2476, 2484, 2492,  
 2498, 2506, 2513, 2521, 2529, 2537,  
 2545, 2554, 2562, 2565, 2568, 2577,  
 2585, 2593, 2601, 2610, 2616, 2624,  
 2633, 2641, 2651, 2659, 2667, 2673,  
 2682, 2690
- op\_quantile*, 973, 978, 982, 987, 991, 995,  
 1001, 1005, 1009, 1014, 1019, 1023,  
 1027, 1031, 1035, 1039, 1044, 1048,  
 1052, 1056, 1060, 1064, 1069, 1073,

- 1077, 1082, 1086, 1090, 1095, 1099,  
 1104, 1108, 1112, 1117, 1121, 1125,  
 1130, 1135, 1141, 1148, 1154, 1159,  
 1163, 1167, 1171, 1177, 1184, 1188,  
 1192, 1197, 1201, 1206, 1210, 1214,  
 1221, 1225, 1229, 1235, 1241, 1247,  
 1254, 1258, 1262, 1266, 1270, 1274,  
 1278, 1282, 1286, 1291, 1295, 1299,  
 1304, 1308, 1312, 1318, 1322, 1327,  
 1331, 1335, 1341, 1348, 1353, 1358,  
 1362, 1368, 1372, 1376, 1380, 1385,  
 1389, 1394, 1398, 1402, 1406, 1410,  
 1414, 1420, 1426, 1431, 1437, 1441,  
 1447, 1451, 1455, 1460, 1464, 1470,  
 1475, 1479, 1483, 1488, 1492, 1496,  
 1500, 1506, 1510, 1514, 1520, 1526,  
 1530, 1534, 1538, 1542, 1547, 1551,  
 1557, 1561, 1565, 1569, 1573, 1580,  
 1585, 1589, 1593, 1597, 1602, 1606,  
 1612, 1619, 1623, 1627, 1631, 1635,  
 1639, 1643, 1650, 1657, 1663, 1670,  
 1676, 1683, 1689, 1696, 1702, 1708,  
 1714, 1720, 1724, 1728, 1732, 1736,  
 1740, 1745, 1749, 1753, 1759, 1765,  
 1772, 1776, 1781, 1785, 1789, 1794,  
 1798, 1802, 1806, 1810, 1814, 1818,  
 1822, 1826, 1830, 1835, 1839, 1843,  
 1847, 1851, 1855, 1859, 1863, 1867,  
 1872, 1876, 1880, 1886, 1892, 1898,  
 1903, 1907, 1913, 1919, 1923, 1928,  
 1932, 1936, 1940, 1945, 1951, 1955,  
 1959, 1963, 1968, 1972, 1976, 1981,  
 1985, 1989, 1993, 1998, 2002, 2008,  
 2012, 2016, 2021, 2025, 2031, 2036,  
 2040, 2044, 2048, 2052, 2056, 2061,  
 2065, 2071, 2077, 2082, 2086, 2090,  
 2094, 2098, 2102, 2109, 2113, 2117,  
 2122, 2126, 2130, 2134, 2138, 2143,  
 2149, 2155, 2156, 2167, 2172, 2176,  
 2180, 2184, 2188, 2194, 2201, 2205,  
 2209, 2214, 2218, 2224, 2228, 2232,  
 2236, 2240, 2246, 2253, 2259, 2266,  
 2272, 2278, 2283, 2287, 2293, 2299,  
 2305, 2311, 2316, 2320, 2326, 2330,  
 2334, 2338, 2342, 2346, 2350, 2357,  
 2363, 2368, 2374, 2381, 2388, 2394,  
 2399, 2404, 2408, 2414, 2418, 2423,  
 2427, 2431, 2435, 2439, 2443, 2447,  
 2451, 2455, 2459, 2464, 2470, 2476,  
 2480, 2484, 2488, 2492, 2498, 2502,  
 2506, 2513, 2517, 2521, 2525, 2529,  
 2533, 2537, 2541, 2545, 2550, 2554,  
 2558, 2562, 2568, 2573, 2577, 2581,  
 2585, 2589, 2593, 2597, 2601, 2605,  
 2610, 2616, 2620, 2624, 2629, 2633,  
 2637, 2641, 2651, 2655, 2659, 2663,  
 2667, 2674, 2678, 2682, 2686, 2690
- op\_ravel, 973, 978, 982, 987, 991, 996, 1001,  
 1005, 1009, 1014, 1019, 1023, 1027,  
 1031, 1035, 1039, 1044, 1048, 1052,  
 1056, 1060, 1064, 1069, 1073, 1077,  
 1082, 1086, 1090, 1095, 1099, 1104,  
 1108, 1113, 1117, 1121, 1125, 1130,  
 1135, 1141, 1148, 1154, 1159, 1163,  
 1167, 1171, 1177, 1184, 1188, 1192,  
 1197, 1202, 1206, 1210, 1214, 1221,  
 1225, 1229, 1235, 1241, 1247, 1254,  
 1258, 1262, 1266, 1270, 1274, 1278,  
 1282, 1286, 1291, 1295, 1299, 1304,  
 1308, 1312, 1318, 1322, 1327, 1331,  
 1335, 1341, 1348, 1353, 1358, 1362,  
 1368, 1372, 1376, 1381, 1385, 1389,  
 1394, 1398, 1402, 1406, 1410, 1414,  
 1420, 1426, 1431, 1437, 1441, 1447,  
 1451, 1455, 1460, 1464, 1470, 1475,  
 1479, 1484, 1488, 1492, 1496, 1500,  
 1506, 1510, 1514, 1520, 1526, 1530,  
 1534, 1538, 1542, 1547, 1551, 1557,  
 1561, 1565, 1569, 1573, 1580, 1585,  
 1589, 1593, 1597, 1602, 1606, 1612,  
 1619, 1623, 1627, 1631, 1635, 1639,  
 1643, 1650, 1657, 1663, 1670, 1676,  
 1683, 1689, 1696, 1702, 1708, 1714,  
 1720, 1724, 1728, 1732, 1736, 1740,  
 1745, 1749, 1753, 1759, 1765, 1772,  
 1776, 1781, 1785, 1789, 1794, 1798,  
 1802, 1806, 1810, 1814, 1818, 1822,  
 1826, 1830, 1835, 1839, 1843, 1847,  
 1851, 1855, 1859, 1863, 1868, 1872,  
 1876, 1880, 1886, 1892, 1898, 1903,  
 1907, 1913, 1919, 1923, 1928, 1932,  
 1936, 1940, 1945, 1951, 1955, 1959,  
 1963, 1968, 1972, 1976, 1981, 1985,  
 1989, 1993, 1998, 2002, 2008, 2012,  
 2016, 2021, 2025, 2031, 2036, 2040,  
 2044, 2048, 2052, 2057, 2061, 2065,

- 2071, 2077, 2082, 2086, 2090, 2094,  
 2098, 2102, 2109, 2113, 2117, 2122,  
 2126, 2130, 2134, 2138, 2143, 2149,  
 2155, 2159, 2163, 2165, 2176, 2180,  
 2184, 2188, 2195, 2201, 2205, 2210,  
 2214, 2218, 2224, 2228, 2232, 2236,  
 2240, 2246, 2253, 2259, 2267, 2272,  
 2278, 2283, 2287, 2293, 2300, 2305,  
 2312, 2316, 2320, 2326, 2330, 2334,  
 2338, 2342, 2346, 2350, 2357, 2363,  
 2368, 2375, 2381, 2388, 2394, 2399,  
 2404, 2408, 2414, 2419, 2423, 2427,  
 2431, 2435, 2439, 2443, 2447, 2451,  
 2455, 2459, 2464, 2470, 2476, 2480,  
 2484, 2488, 2492, 2498, 2502, 2506,  
 2513, 2517, 2521, 2525, 2529, 2533,  
 2537, 2541, 2545, 2550, 2554, 2558,  
 2562, 2568, 2573, 2577, 2581, 2585,  
 2589, 2593, 2597, 2601, 2605, 2610,  
 2616, 2620, 2624, 2629, 2633, 2637,  
 2641, 2651, 2655, 2659, 2663, 2667,  
 2674, 2678, 2682, 2686, 2690
- op\_real*, 974, 978, 982, 987, 991, 996, 1001,  
 1005, 1009, 1014, 1019, 1023, 1027,  
 1031, 1035, 1039, 1044, 1048, 1052,  
 1056, 1060, 1064, 1069, 1073, 1077,  
 1082, 1086, 1091, 1095, 1099, 1104,  
 1108, 1113, 1117, 1121, 1125, 1130,  
 1135, 1141, 1148, 1154, 1159, 1163,  
 1167, 1171, 1177, 1184, 1188, 1192,  
 1197, 1202, 1206, 1210, 1214, 1221,  
 1225, 1229, 1235, 1241, 1247, 1254,  
 1258, 1262, 1266, 1270, 1274, 1278,  
 1282, 1286, 1291, 1295, 1300, 1304,  
 1308, 1312, 1318, 1322, 1327, 1331,  
 1335, 1341, 1348, 1353, 1358, 1362,  
 1368, 1372, 1376, 1381, 1385, 1389,  
 1394, 1398, 1402, 1406, 1410, 1414,  
 1420, 1426, 1431, 1437, 1441, 1447,  
 1451, 1455, 1460, 1464, 1470, 1475,  
 1479, 1484, 1488, 1492, 1496, 1500,  
 1506, 1510, 1514, 1520, 1526, 1530,  
 1534, 1538, 1542, 1547, 1551, 1557,  
 1561, 1565, 1569, 1574, 1580, 1585,  
 1589, 1593, 1597, 1602, 1606, 1612,  
 1619, 1623, 1627, 1631, 1635, 1639,  
 1643, 1650, 1657, 1663, 1670, 1676,  
 1683, 1690, 1696, 1702, 1708, 1714,  
 1720, 1724, 1728, 1732, 1736, 1740,  
 1745, 1749, 1753, 1759, 1765, 1772,  
 1776, 1781, 1785, 1789, 1794, 1798,  
 1802, 1806, 1810, 1814, 1818, 1822,  
 1826, 1830, 1835, 1839, 1843, 1847,  
 1851, 1855, 1859, 1863, 1868, 1872,  
 1876, 1880, 1886, 1892, 1899, 1903,  
 1907, 1913, 1919, 1923, 1928, 1932,  
 1936, 1941, 1945, 1951, 1955, 1959,  
 1963, 1968, 1972, 1976, 1981, 1985,  
 1989, 1993, 1998, 2002, 2008, 2012,  
 2016, 2021, 2025, 2031, 2036, 2040,  
 2044, 2048, 2052, 2057, 2061, 2065,  
 2071, 2078, 2082, 2086, 2090, 2094,  
 2098, 2102, 2109, 2113, 2117, 2122,  
 2126, 2130, 2134, 2138, 2143, 2149,  
 2155, 2159, 2163, 2167, 2172, 2173,  
 2184, 2188, 2195, 2201, 2205, 2210,  
 2214, 2218, 2224, 2228, 2232, 2236,  
 2241, 2246, 2253, 2259, 2267, 2272,  
 2278, 2283, 2287, 2293, 2300, 2305,  
 2312, 2316, 2320, 2326, 2330, 2334,  
 2338, 2342, 2346, 2350, 2357, 2363,  
 2368, 2375, 2381, 2388, 2394, 2400,  
 2404, 2408, 2414, 2419, 2423, 2427,  
 2431, 2435, 2439, 2443, 2447, 2451,  
 2455, 2460, 2464, 2470, 2476, 2480,  
 2484, 2488, 2492, 2498, 2502, 2506,  
 2513, 2517, 2521, 2525, 2529, 2533,  
 2537, 2541, 2545, 2550, 2554, 2558,  
 2562, 2568, 2573, 2577, 2581, 2585,  
 2589, 2593, 2597, 2601, 2606, 2610,  
 2616, 2620, 2624, 2629, 2633, 2637,  
 2641, 2651, 2655, 2659, 2663, 2667,  
 2674, 2678, 2682, 2686, 2690
- op\_reciprocal*, 974, 978, 983, 987, 991, 996,  
 1001, 1005, 1010, 1014, 1019, 1023,  
 1027, 1031, 1035, 1039, 1044, 1048,  
 1052, 1056, 1060, 1064, 1069, 1073,  
 1078, 1082, 1086, 1091, 1095, 1099,  
 1104, 1108, 1113, 1117, 1121, 1125,  
 1131, 1135, 1141, 1148, 1154, 1159,  
 1163, 1167, 1171, 1177, 1184, 1188,  
 1192, 1197, 1202, 1206, 1210, 1214,  
 1221, 1225, 1229, 1235, 1241, 1247,  
 1254, 1258, 1262, 1266, 1270, 1274,  
 1278, 1282, 1286, 1291, 1295, 1300,  
 1304, 1308, 1312, 1318, 1322, 1327,

1331, 1335, 1341, 1348, 1353, 1358,  
 1362, 1368, 1372, 1376, 1381, 1385,  
 1389, 1394, 1398, 1402, 1406, 1410,  
 1414, 1420, 1426, 1431, 1437, 1441,  
 1447, 1451, 1455, 1460, 1464, 1470,  
 1475, 1479, 1484, 1488, 1492, 1496,  
 1500, 1506, 1510, 1514, 1520, 1526,  
 1530, 1534, 1538, 1543, 1547, 1551,  
 1557, 1561, 1565, 1569, 1574, 1580,  
 1585, 1589, 1593, 1597, 1602, 1606,  
 1612, 1619, 1623, 1627, 1631, 1635,  
 1639, 1643, 1650, 1657, 1663, 1670,  
 1676, 1683, 1690, 1696, 1702, 1708,  
 1714, 1720, 1724, 1728, 1732, 1736,  
 1741, 1745, 1749, 1753, 1759, 1765,  
 1772, 1776, 1781, 1785, 1789, 1794,  
 1798, 1802, 1806, 1810, 1814, 1818,  
 1822, 1826, 1830, 1835, 1839, 1843,  
 1847, 1851, 1855, 1859, 1863, 1868,  
 1872, 1876, 1880, 1886, 1892, 1899,  
 1903, 1907, 1913, 1919, 1924, 1928,  
 1932, 1936, 1941, 1945, 1951, 1955,  
 1959, 1963, 1968, 1972, 1976, 1981,  
 1985, 1989, 1993, 1998, 2002, 2008,  
 2012, 2016, 2021, 2025, 2031, 2036,  
 2040, 2044, 2048, 2052, 2057, 2061,  
 2065, 2071, 2078, 2082, 2086, 2090,  
 2094, 2098, 2102, 2109, 2113, 2117,  
 2122, 2126, 2130, 2134, 2138, 2143,  
 2149, 2155, 2159, 2163, 2167, 2172,  
 2176, 2180, 2181, 2195, 2201, 2205,  
 2210, 2214, 2218, 2224, 2228, 2232,  
 2236, 2241, 2246, 2253, 2259, 2267,  
 2273, 2278, 2283, 2287, 2293, 2300,  
 2305, 2312, 2316, 2320, 2326, 2330,  
 2334, 2338, 2342, 2346, 2351, 2357,  
 2363, 2368, 2375, 2381, 2388, 2394,  
 2400, 2404, 2408, 2414, 2419, 2423,  
 2427, 2431, 2435, 2439, 2443, 2447,  
 2451, 2455, 2460, 2464, 2470, 2476,  
 2480, 2484, 2488, 2493, 2498, 2502,  
 2506, 2513, 2517, 2521, 2525, 2529,  
 2533, 2537, 2541, 2545, 2550, 2554,  
 2558, 2562, 2568, 2573, 2577, 2581,  
 2585, 2589, 2593, 2597, 2601, 2606,  
 2610, 2616, 2620, 2624, 2629, 2633,  
 2637, 2641, 2651, 2655, 2659, 2663,  
 2667, 2674, 2678, 2682, 2686, 2690

op\_relu, 978, 987, 996, 1005, 1014, 1023,  
 1031, 1039, 1048, 1056, 1064, 1073,  
 1082, 1091, 1099, 1108, 1117, 1125,  
 1135, 1138, 1141, 1144, 1148, 1150,  
 1154, 1163, 1171, 1177, 1180, 1184,  
 1192, 1197, 1206, 1214, 1221, 1229,  
 1232, 1235, 1241, 1247, 1250, 1254,  
 1262, 1270, 1278, 1286, 1295, 1304,  
 1312, 1315, 1318, 1327, 1335, 1341,  
 1344, 1348, 1353, 1362, 1372, 1381,  
 1389, 1398, 1406, 1414, 1420, 1426,  
 1431, 1441, 1444, 1447, 1455, 1464,  
 1470, 1475, 1484, 1492, 1500, 1506,  
 1514, 1520, 1526, 1534, 1543, 1551,  
 1557, 1565, 1574, 1577, 1580, 1589,  
 1597, 1606, 1609, 1612, 1615, 1619,  
 1627, 1635, 1643, 1651, 1657, 1663,  
 1670, 1676, 1683, 1690, 1696, 1702,  
 1708, 1714, 1720, 1728, 1736, 1745,  
 1753, 1759, 1765, 1769, 1772, 1781,  
 1789, 1798, 1806, 1814, 1822, 1831,  
 1839, 1847, 1855, 1863, 1872, 1880,  
 1886, 1889, 1892, 1895, 1899, 1907,  
 1913, 1919, 1928, 1936, 1945, 1948,  
 1951, 1959, 1968, 1976, 1985, 1993,  
 2002, 2005, 2008, 2016, 2025, 2028,  
 2031, 2040, 2048, 2057, 2065, 2071,  
 2074, 2078, 2086, 2094, 2102, 2105,  
 2109, 2117, 2126, 2134, 2143, 2145,  
 2149, 2155, 2163, 2172, 2180, 2188,  
 2189, 2198, 2201, 2210, 2218, 2224,  
 2232, 2241, 2246, 2253, 2259, 2267,  
 2273, 2278, 2287, 2290, 2293, 2296,  
 2300, 2306, 2308, 2312, 2320, 2322,  
 2326, 2334, 2342, 2351, 2357, 2363,  
 2368, 2371, 2375, 2378, 2381, 2385,  
 2388, 2394, 2400, 2408, 2411, 2414,  
 2423, 2431, 2439, 2447, 2455, 2464,  
 2470, 2476, 2484, 2493, 2498, 2506,  
 2513, 2521, 2529, 2537, 2546, 2554,  
 2562, 2568, 2577, 2585, 2593, 2601,  
 2610, 2616, 2624, 2633, 2641, 2651,  
 2659, 2667, 2674, 2682, 2690

op\_relu6, 978, 987, 996, 1005, 1014, 1023,  
 1031, 1039, 1048, 1056, 1065, 1073,  
 1082, 1091, 1099, 1108, 1117, 1125,  
 1135, 1138, 1141, 1144, 1148, 1150,  
 1154, 1163, 1171, 1177, 1180, 1184,

- 1192, 1197, 1206, 1214, 1221, 1229,  
 1232, 1235, 1241, 1247, 1250, 1254,  
 1262, 1270, 1278, 1286, 1295, 1304,  
 1312, 1315, 1318, 1327, 1335, 1341,  
 1344, 1348, 1353, 1362, 1372, 1381,  
 1389, 1398, 1406, 1414, 1420, 1426,  
 1431, 1441, 1444, 1447, 1455, 1464,  
 1470, 1475, 1484, 1492, 1500, 1506,  
 1514, 1520, 1526, 1534, 1543, 1551,  
 1557, 1565, 1574, 1577, 1580, 1589,  
 1597, 1606, 1609, 1613, 1615, 1619,  
 1627, 1635, 1643, 1651, 1657, 1663,  
 1670, 1676, 1683, 1690, 1696, 1702,  
 1708, 1714, 1720, 1728, 1736, 1745,  
 1753, 1759, 1765, 1769, 1772, 1781,  
 1789, 1798, 1806, 1814, 1822, 1831,  
 1839, 1847, 1855, 1864, 1872, 1880,  
 1886, 1889, 1892, 1895, 1899, 1907,  
 1913, 1919, 1928, 1936, 1945, 1948,  
 1951, 1959, 1968, 1976, 1985, 1994,  
 2002, 2005, 2008, 2017, 2025, 2028,  
 2031, 2040, 2048, 2057, 2065, 2071,  
 2074, 2078, 2086, 2094, 2102, 2105,  
 2109, 2117, 2126, 2134, 2143, 2145,  
 2149, 2155, 2163, 2172, 2180, 2188,  
 2191, 2195, 2196, 2210, 2218, 2224,  
 2232, 2241, 2246, 2253, 2259, 2267,  
 2273, 2279, 2287, 2290, 2293, 2296,  
 2300, 2306, 2308, 2312, 2320, 2322,  
 2326, 2334, 2342, 2351, 2357, 2363,  
 2368, 2371, 2375, 2378, 2381, 2385,  
 2388, 2394, 2400, 2408, 2411, 2414,  
 2423, 2431, 2439, 2447, 2455, 2464,  
 2470, 2476, 2484, 2493, 2498, 2506,  
 2513, 2521, 2529, 2537, 2546, 2554,  
 2562, 2568, 2577, 2585, 2593, 2601,  
 2610, 2616, 2624, 2633, 2641, 2651,  
 2659, 2667, 2674, 2682, 2690
- op\_repeat, 974, 978, 983, 987, 991, 996,  
 1001, 1005, 1010, 1014, 1019, 1023,  
 1027, 1031, 1035, 1040, 1044, 1048,  
 1052, 1056, 1060, 1065, 1069, 1073,  
 1078, 1082, 1086, 1091, 1095, 1099,  
 1104, 1108, 1113, 1117, 1121, 1125,  
 1131, 1135, 1141, 1148, 1154, 1159,  
 1163, 1167, 1171, 1177, 1184, 1188,  
 1192, 1197, 1202, 1206, 1210, 1214,  
 1221, 1225, 1229, 1235, 1241, 1247,  
 1254, 1258, 1262, 1266, 1270, 1274,  
 1278, 1282, 1286, 1291, 1295, 1300,  
 1304, 1308, 1312, 1318, 1323, 1327,  
 1331, 1335, 1341, 1348, 1353, 1358,  
 1362, 1368, 1372, 1376, 1381, 1385,  
 1389, 1394, 1398, 1402, 1406, 1410,  
 1414, 1420, 1426, 1431, 1437, 1441,  
 1447, 1451, 1455, 1460, 1464, 1470,  
 1475, 1479, 1484, 1488, 1492, 1496,  
 1500, 1506, 1510, 1514, 1520, 1526,  
 1530, 1534, 1538, 1543, 1547, 1551,  
 1557, 1561, 1565, 1569, 1574, 1580,  
 1585, 1589, 1593, 1597, 1602, 1606,  
 1613, 1619, 1623, 1627, 1631, 1635,  
 1639, 1643, 1651, 1657, 1663, 1670,  
 1676, 1683, 1690, 1696, 1702, 1708,  
 1714, 1720, 1724, 1728, 1732, 1736,  
 1741, 1745, 1749, 1753, 1759, 1765,  
 1772, 1776, 1781, 1785, 1789, 1794,  
 1798, 1802, 1806, 1810, 1814, 1818,  
 1822, 1826, 1831, 1835, 1839, 1843,  
 1847, 1851, 1855, 1859, 1864, 1868,  
 1872, 1876, 1880, 1886, 1892, 1899,  
 1903, 1907, 1913, 1919, 1924, 1928,  
 1932, 1936, 1941, 1945, 1951, 1955,  
 1959, 1963, 1968, 1972, 1976, 1981,  
 1985, 1989, 1994, 1998, 2002, 2008,  
 2012, 2017, 2021, 2025, 2031, 2036,  
 2040, 2044, 2048, 2052, 2057, 2061,  
 2065, 2071, 2078, 2082, 2086, 2090,  
 2094, 2098, 2103, 2109, 2113, 2117,  
 2122, 2126, 2130, 2134, 2139, 2143,  
 2149, 2155, 2159, 2163, 2168, 2172,  
 2176, 2180, 2184, 2188, 2195, 2201,  
 2203, 2214, 2218, 2224, 2228, 2232,  
 2236, 2241, 2246, 2253, 2259, 2267,  
 2273, 2279, 2283, 2287, 2293, 2300,  
 2306, 2312, 2316, 2320, 2326, 2330,  
 2334, 2338, 2342, 2346, 2351, 2357,  
 2363, 2368, 2375, 2381, 2388, 2394,  
 2400, 2404, 2408, 2414, 2419, 2423,  
 2427, 2431, 2435, 2439, 2443, 2447,  
 2451, 2455, 2460, 2464, 2470, 2476,  
 2480, 2484, 2488, 2493, 2498, 2502,  
 2506, 2513, 2517, 2521, 2525, 2529,  
 2533, 2537, 2541, 2546, 2550, 2554,  
 2558, 2562, 2568, 2573, 2577, 2581,  
 2585, 2589, 2593, 2597, 2601, 2606,

- 2610, 2616, 2620, 2624, 2629, 2633,  
 2637, 2641, 2651, 2655, 2659, 2663,  
 2667, 2674, 2678, 2682, 2686, 2690
- op\_reshape*, 974, 978, 983, 987, 991, 996,  
 1001, 1005, 1010, 1014, 1019, 1023,  
 1027, 1031, 1035, 1040, 1044, 1048,  
 1052, 1056, 1060, 1065, 1069, 1074,  
 1078, 1082, 1086, 1091, 1095, 1099,  
 1104, 1108, 1113, 1117, 1121, 1125,  
 1131, 1135, 1141, 1148, 1154, 1159,  
 1163, 1167, 1171, 1177, 1184, 1188,  
 1192, 1197, 1202, 1206, 1210, 1214,  
 1221, 1225, 1229, 1235, 1241, 1247,  
 1254, 1258, 1262, 1266, 1270, 1274,  
 1278, 1282, 1286, 1291, 1295, 1300,  
 1304, 1308, 1312, 1318, 1323, 1327,  
 1331, 1335, 1342, 1348, 1353, 1358,  
 1362, 1368, 1372, 1376, 1381, 1385,  
 1389, 1394, 1398, 1402, 1406, 1410,  
 1414, 1420, 1426, 1431, 1437, 1441,  
 1447, 1451, 1455, 1460, 1464, 1470,  
 1475, 1479, 1484, 1488, 1492, 1496,  
 1500, 1506, 1510, 1514, 1520, 1526,  
 1530, 1534, 1538, 1543, 1547, 1551,  
 1557, 1561, 1565, 1569, 1574, 1581,  
 1585, 1589, 1593, 1597, 1602, 1606,  
 1613, 1619, 1623, 1627, 1631, 1635,  
 1639, 1643, 1651, 1657, 1663, 1670,  
 1676, 1683, 1690, 1696, 1702, 1708,  
 1714, 1720, 1724, 1728, 1732, 1737,  
 1741, 1745, 1749, 1753, 1759, 1765,  
 1772, 1777, 1781, 1785, 1789, 1794,  
 1798, 1802, 1806, 1810, 1814, 1818,  
 1822, 1826, 1831, 1835, 1839, 1843,  
 1847, 1851, 1855, 1859, 1864, 1868,  
 1872, 1876, 1880, 1886, 1892, 1899,  
 1903, 1907, 1913, 1919, 1924, 1928,  
 1932, 1936, 1941, 1945, 1951, 1955,  
 1959, 1964, 1968, 1972, 1976, 1981,  
 1985, 1989, 1994, 1998, 2002, 2008,  
 2012, 2017, 2021, 2025, 2031, 2036,  
 2040, 2044, 2048, 2052, 2057, 2061,  
 2065, 2071, 2078, 2082, 2086, 2090,  
 2094, 2098, 2103, 2109, 2113, 2117,  
 2122, 2126, 2130, 2134, 2139, 2143,  
 2149, 2155, 2159, 2163, 2168, 2172,  
 2176, 2180, 2184, 2188, 2195, 2201,  
 2205, 2210, 2211, 2224, 2228, 2232,  
 2236, 2241, 2246, 2253, 2259, 2267,  
 2273, 2279, 2283, 2287, 2293, 2300,  
 2306, 2312, 2316, 2320, 2326, 2330,  
 2334, 2338, 2342, 2346, 2351, 2357,  
 2363, 2368, 2375, 2381, 2388, 2394,  
 2400, 2404, 2408, 2414, 2419, 2423,  
 2427, 2431, 2435, 2439, 2443, 2447,  
 2451, 2455, 2460, 2464, 2470, 2476,  
 2480, 2484, 2488, 2493, 2498, 2502,  
 2506, 2513, 2517, 2521, 2525, 2529,  
 2533, 2537, 2541, 2546, 2550, 2554,  
 2558, 2562, 2568, 2573, 2577, 2581,  
 2585, 2589, 2593, 2597, 2601, 2606,  
 2610, 2616, 2620, 2625, 2629, 2633,  
 2637, 2641, 2651, 2655, 2659, 2663,  
 2667, 2674, 2678, 2682, 2686, 2690
- op\_rfft*, 978, 987, 996, 1005, 1014, 1023,  
 1031, 1040, 1048, 1056, 1065, 1074,  
 1082, 1091, 1100, 1108, 1117, 1125,  
 1135, 1141, 1148, 1154, 1163, 1171,  
 1177, 1184, 1192, 1198, 1206, 1214,  
 1221, 1229, 1235, 1241, 1247, 1254,  
 1262, 1270, 1278, 1287, 1295, 1304,  
 1312, 1318, 1327, 1335, 1342, 1348,  
 1353, 1362, 1372, 1381, 1389, 1398,  
 1406, 1414, 1420, 1426, 1431, 1441,  
 1447, 1456, 1464, 1466, 1470, 1472,  
 1475, 1484, 1492, 1500, 1502, 1506,  
 1514, 1517, 1520, 1523, 1526, 1534,  
 1543, 1551, 1557, 1565, 1574, 1581,  
 1589, 1597, 1606, 1613, 1619, 1627,  
 1635, 1643, 1651, 1657, 1663, 1670,  
 1676, 1683, 1690, 1696, 1702, 1708,  
 1710, 1714, 1717, 1720, 1728, 1737,  
 1745, 1753, 1756, 1759, 1765, 1772,  
 1781, 1789, 1798, 1806, 1814, 1822,  
 1831, 1839, 1847, 1855, 1864, 1872,  
 1880, 1883, 1886, 1892, 1899, 1907,  
 1913, 1919, 1928, 1936, 1945, 1951,  
 1959, 1968, 1977, 1985, 1994, 2002,  
 2008, 2017, 2025, 2031, 2040, 2048,  
 2057, 2065, 2071, 2078, 2086, 2094,  
 2103, 2109, 2117, 2126, 2134, 2143,  
 2149, 2151, 2155, 2164, 2172, 2180,  
 2188, 2195, 2201, 2210, 2218, 2219,  
 2232, 2241, 2243, 2246, 2253, 2259,  
 2267, 2269, 2273, 2275, 2279, 2287,  
 2293, 2300, 2306, 2312, 2320, 2326,



- 2334, 2342, 2351, 2357, 2363, 2368,  
 2375, 2381, 2388, 2390, 2394, 2400,  
 2408, 2414, 2423, 2431, 2439, 2447,  
 2455, 2464, 2467, 2470, 2476, 2484,  
 2493, 2498, 2506, 2513, 2521, 2529,  
 2537, 2546, 2554, 2562, 2565, 2568,  
 2577, 2585, 2593, 2602, 2610, 2616,  
 2625, 2633, 2641, 2651, 2659, 2667,  
 2674, 2682, 2690
- op\_roll*, 974, 978, 983, 987, 992, 996, 1001,  
 1005, 1010, 1014, 1019, 1023, 1027,  
 1031, 1035, 1040, 1044, 1048, 1052,  
 1056, 1060, 1065, 1069, 1074, 1078,  
 1082, 1086, 1091, 1095, 1100, 1104,  
 1108, 1113, 1117, 1121, 1125, 1131,  
 1135, 1141, 1148, 1154, 1159, 1163,  
 1167, 1171, 1177, 1184, 1188, 1192,  
 1198, 1202, 1206, 1210, 1214, 1221,  
 1225, 1229, 1235, 1241, 1247, 1254,  
 1258, 1262, 1266, 1270, 1274, 1278,  
 1282, 1287, 1291, 1295, 1300, 1304,  
 1308, 1312, 1318, 1323, 1327, 1331,  
 1335, 1342, 1348, 1353, 1358, 1362,  
 1368, 1372, 1377, 1381, 1385, 1389,  
 1394, 1398, 1402, 1406, 1410, 1414,  
 1420, 1426, 1431, 1437, 1441, 1447,  
 1451, 1456, 1460, 1464, 1470, 1475,  
 1480, 1484, 1488, 1492, 1496, 1500,  
 1506, 1510, 1514, 1520, 1526, 1530,  
 1534, 1538, 1543, 1547, 1551, 1557,  
 1561, 1565, 1569, 1574, 1581, 1585,  
 1589, 1593, 1597, 1602, 1606, 1613,  
 1619, 1623, 1627, 1631, 1635, 1639,  
 1643, 1651, 1657, 1664, 1670, 1676,  
 1683, 1690, 1696, 1702, 1708, 1714,  
 1720, 1724, 1728, 1732, 1737, 1741,  
 1745, 1749, 1753, 1759, 1765, 1772,  
 1777, 1781, 1785, 1789, 1794, 1798,  
 1802, 1806, 1810, 1814, 1818, 1822,  
 1826, 1831, 1835, 1839, 1843, 1847,  
 1851, 1855, 1859, 1864, 1868, 1872,  
 1876, 1880, 1886, 1892, 1899, 1903,  
 1907, 1913, 1919, 1924, 1928, 1932,  
 1937, 1941, 1945, 1951, 1955, 1959,  
 1964, 1968, 1972, 1977, 1981, 1985,  
 1989, 1994, 1998, 2002, 2008, 2012,  
 2017, 2021, 2025, 2031, 2036, 2040,  
 2044, 2048, 2053, 2057, 2061, 2065,  
 2071, 2078, 2082, 2086, 2090, 2094,  
 2098, 2103, 2109, 2113, 2117, 2122,  
 2126, 2130, 2134, 2139, 2143, 2149,  
 2155, 2159, 2164, 2168, 2172, 2176,  
 2180, 2184, 2188, 2195, 2201, 2205,  
 2210, 2214, 2218, 2224, 2226, 2236,  
 2241, 2246, 2253, 2259, 2267, 2273,  
 2279, 2283, 2287, 2293, 2300, 2306,  
 2312, 2316, 2320, 2326, 2330, 2334,  
 2338, 2342, 2346, 2351, 2357, 2363,  
 2368, 2375, 2381, 2388, 2394, 2400,  
 2404, 2408, 2414, 2419, 2423, 2427,  
 2431, 2435, 2439, 2443, 2447, 2451,  
 2455, 2460, 2464, 2470, 2476, 2480,  
 2484, 2488, 2493, 2498, 2502, 2506,  
 2513, 2517, 2521, 2525, 2529, 2533,  
 2537, 2541, 2546, 2550, 2554, 2558,  
 2562, 2568, 2573, 2577, 2581, 2585,  
 2589, 2593, 2597, 2602, 2606, 2610,  
 2616, 2620, 2625, 2629, 2633, 2637,  
 2641, 2651, 2655, 2659, 2663, 2667,  
 2674, 2678, 2682, 2686, 2690
- op\_round*, 974, 978, 983, 987, 992, 996, 1001,  
 1005, 1010, 1014, 1019, 1023, 1027,  
 1031, 1035, 1040, 1044, 1048, 1052,  
 1056, 1060, 1065, 1069, 1074, 1078,  
 1082, 1087, 1091, 1095, 1100, 1104,  
 1108, 1113, 1117, 1121, 1125, 1131,  
 1135, 1141, 1148, 1154, 1159, 1163,  
 1167, 1171, 1177, 1184, 1188, 1192,  
 1198, 1202, 1206, 1210, 1214, 1221,  
 1225, 1229, 1235, 1241, 1247, 1254,  
 1258, 1262, 1266, 1270, 1274, 1278,  
 1282, 1287, 1291, 1295, 1300, 1304,  
 1308, 1312, 1318, 1323, 1327, 1331,  
 1335, 1342, 1348, 1353, 1358, 1362,  
 1368, 1372, 1377, 1381, 1385, 1389,  
 1394, 1398, 1402, 1406, 1410, 1415,  
 1420, 1426, 1431, 1437, 1441, 1447,  
 1451, 1456, 1460, 1464, 1470, 1476,  
 1480, 1484, 1488, 1492, 1496, 1500,  
 1506, 1510, 1514, 1520, 1526, 1530,  
 1534, 1538, 1543, 1547, 1551, 1557,  
 1561, 1565, 1570, 1574, 1581, 1585,  
 1589, 1593, 1597, 1602, 1606, 1613,  
 1619, 1623, 1627, 1631, 1635, 1639,  
 1643, 1651, 1657, 1664, 1670, 1676,  
 1683, 1690, 1696, 1703, 1708, 1714,



- 1720, 1724, 1728, 1732, 1737, 1741,  
 1745, 1749, 1753, 1759, 1765, 1772,  
 1777, 1781, 1785, 1789, 1794, 1798,  
 1802, 1806, 1810, 1814, 1818, 1822,  
 1826, 1831, 1835, 1839, 1843, 1847,  
 1851, 1855, 1859, 1864, 1868, 1872,  
 1876, 1880, 1886, 1892, 1899, 1903,  
 1907, 1913, 1919, 1924, 1928, 1932,  
 1937, 1941, 1945, 1951, 1955, 1959,  
 1964, 1968, 1972, 1977, 1981, 1985,  
 1989, 1994, 1998, 2002, 2008, 2012,  
 2017, 2021, 2025, 2031, 2036, 2040,  
 2044, 2048, 2053, 2057, 2061, 2065,  
 2071, 2078, 2082, 2086, 2090, 2094,  
 2098, 2103, 2109, 2113, 2117, 2122,  
 2126, 2130, 2134, 2139, 2143, 2149,  
 2155, 2159, 2164, 2168, 2172, 2176,  
 2180, 2184, 2188, 2195, 2201, 2206,  
 2210, 2214, 2218, 2224, 2228, 2232,  
 2234, 2247, 2253, 2259, 2267, 2273,  
 2279, 2283, 2287, 2293, 2300, 2306,  
 2312, 2316, 2320, 2326, 2330, 2334,  
 2338, 2342, 2346, 2351, 2357, 2363,  
 2368, 2375, 2381, 2388, 2394, 2400,  
 2404, 2408, 2414, 2419, 2423, 2427,  
 2431, 2435, 2439, 2443, 2447, 2451,  
 2456, 2460, 2464, 2470, 2476, 2480,  
 2484, 2488, 2493, 2498, 2502, 2507,  
 2513, 2517, 2521, 2525, 2529, 2533,  
 2537, 2541, 2546, 2550, 2554, 2558,  
 2562, 2568, 2573, 2577, 2581, 2585,  
 2589, 2593, 2597, 2602, 2606, 2610,  
 2616, 2620, 2625, 2629, 2633, 2637,  
 2641, 2651, 2655, 2659, 2663, 2667,  
 2674, 2678, 2682, 2686, 2690
- op\_rsqr, 978, 987, 996, 1005, 1014, 1023,  
 1031, 1040, 1048, 1056, 1065, 1074,  
 1082, 1091, 1100, 1108, 1117, 1125,  
 1135, 1141, 1148, 1154, 1163, 1171,  
 1177, 1184, 1192, 1198, 1206, 1214,  
 1221, 1229, 1235, 1241, 1247, 1254,  
 1262, 1270, 1278, 1287, 1295, 1304,  
 1312, 1319, 1327, 1335, 1342, 1348,  
 1353, 1362, 1372, 1381, 1389, 1398,  
 1406, 1415, 1420, 1426, 1431, 1441,  
 1447, 1456, 1464, 1466, 1470, 1472,  
 1476, 1484, 1492, 1500, 1502, 1506,  
 1514, 1517, 1520, 1523, 1526, 1534,  
 1543, 1551, 1557, 1565, 1574, 1581,  
 1589, 1597, 1606, 1613, 1619, 1627,  
 1635, 1643, 1651, 1657, 1664, 1670,  
 1676, 1683, 1690, 1696, 1703, 1708,  
 1710, 1714, 1717, 1720, 1728, 1737,  
 1745, 1753, 1756, 1759, 1765, 1772,  
 1781, 1789, 1798, 1806, 1814, 1822,  
 1831, 1839, 1847, 1855, 1864, 1872,  
 1880, 1883, 1886, 1892, 1899, 1907,  
 1913, 1919, 1928, 1937, 1945, 1951,  
 1959, 1968, 1977, 1985, 1994, 2002,  
 2008, 2017, 2025, 2031, 2040, 2048,  
 2057, 2065, 2071, 2078, 2086, 2094,  
 2103, 2109, 2117, 2126, 2134, 2143,  
 2149, 2151, 2155, 2164, 2172, 2180,  
 2188, 2195, 2201, 2210, 2218, 2221,  
 2224, 2232, 2241, 2242, 2253, 2259,  
 2267, 2269, 2273, 2275, 2279, 2287,  
 2293, 2300, 2306, 2312, 2320, 2326,  
 2334, 2342, 2351, 2357, 2363, 2368,  
 2375, 2381, 2388, 2391, 2394, 2400,  
 2408, 2414, 2423, 2431, 2439, 2447,  
 2456, 2464, 2467, 2470, 2476, 2484,  
 2493, 2498, 2507, 2513, 2521, 2529,  
 2537, 2546, 2554, 2562, 2565, 2568,  
 2577, 2585, 2593, 2602, 2610, 2616,  
 2625, 2633, 2642, 2651, 2659, 2667,  
 2674, 2682, 2690
- op\_scan, 978, 987, 996, 1005, 1014, 1023,  
 1031, 1040, 1048, 1056, 1065, 1074,  
 1082, 1091, 1100, 1108, 1117, 1125,  
 1135, 1141, 1148, 1154, 1163, 1171,  
 1174, 1177, 1184, 1192, 1198, 1206,  
 1214, 1217, 1221, 1229, 1235, 1237,  
 1241, 1243, 1247, 1254, 1262, 1270,  
 1278, 1287, 1295, 1304, 1312, 1319,  
 1327, 1335, 1338, 1342, 1348, 1354,  
 1362, 1372, 1381, 1389, 1398, 1406,  
 1415, 1417, 1420, 1426, 1431, 1441,  
 1447, 1456, 1464, 1470, 1476, 1484,  
 1492, 1500, 1506, 1514, 1520, 1526,  
 1535, 1543, 1551, 1554, 1557, 1565,  
 1574, 1581, 1589, 1597, 1606, 1613,  
 1619, 1627, 1635, 1643, 1651, 1657,  
 1664, 1670, 1676, 1683, 1690, 1696,  
 1703, 1708, 1714, 1720, 1728, 1737,  
 1745, 1753, 1759, 1761, 1765, 1772,  
 1781, 1789, 1798, 1806, 1814, 1822,

- 1831, 1839, 1847, 1855, 1864, 1872,  
 1881, 1886, 1893, 1899, 1907, 1913,  
 1916, 1919, 1928, 1937, 1945, 1951,  
 1960, 1968, 1977, 1985, 1994, 2002,  
 2008, 2017, 2025, 2031, 2040, 2048,  
 2057, 2065, 2071, 2078, 2086, 2094,  
 2103, 2109, 2117, 2126, 2134, 2143,  
 2149, 2155, 2164, 2172, 2180, 2188,  
 2195, 2201, 2210, 2218, 2224, 2232,  
 2241, 2247, 2248, 2256, 2260, 2263,  
 2267, 2273, 2279, 2287, 2293, 2300,  
 2302, 2306, 2312, 2320, 2326, 2334,  
 2343, 2351, 2353, 2357, 2359, 2363,  
 2369, 2375, 2381, 2388, 2394, 2400,  
 2408, 2414, 2423, 2431, 2439, 2447,  
 2456, 2464, 2470, 2472, 2476, 2484,  
 2493, 2498, 2507, 2509, 2513, 2521,  
 2529, 2537, 2546, 2554, 2562, 2568,  
 2577, 2585, 2593, 2602, 2610, 2613,  
 2616, 2625, 2633, 2642, 2647, 2651,  
 2659, 2667, 2670, 2674, 2682, 2690
- op\_scatter, 978, 987, 996, 1005, 1014, 1023,  
 1031, 1040, 1048, 1056, 1065, 1074,  
 1082, 1091, 1100, 1108, 1117, 1125,  
 1135, 1141, 1148, 1154, 1163, 1171,  
 1174, 1178, 1184, 1192, 1198, 1206,  
 1214, 1217, 1221, 1229, 1235, 1237,  
 1241, 1244, 1247, 1254, 1262, 1270,  
 1278, 1287, 1295, 1304, 1313, 1319,  
 1327, 1335, 1338, 1342, 1348, 1354,  
 1362, 1372, 1381, 1389, 1398, 1406,  
 1415, 1417, 1420, 1426, 1431, 1441,  
 1447, 1456, 1464, 1470, 1476, 1484,  
 1492, 1500, 1506, 1514, 1520, 1526,  
 1535, 1543, 1551, 1554, 1557, 1566,  
 1574, 1581, 1589, 1597, 1606, 1613,  
 1619, 1627, 1635, 1643, 1651, 1657,  
 1664, 1670, 1676, 1683, 1690, 1696,  
 1703, 1708, 1714, 1720, 1728, 1737,  
 1745, 1753, 1759, 1761, 1765, 1772,  
 1781, 1789, 1798, 1806, 1814, 1823,  
 1831, 1839, 1847, 1855, 1864, 1872,  
 1881, 1886, 1893, 1899, 1907, 1913,  
 1916, 1919, 1928, 1937, 1945, 1951,  
 1960, 1968, 1977, 1985, 1994, 2002,  
 2008, 2017, 2025, 2032, 2040, 2048,  
 2057, 2065, 2071, 2078, 2086, 2094,  
 2103, 2109, 2117, 2126, 2134, 2143,  
 2149, 2155, 2164, 2172, 2180, 2188,  
 2195, 2201, 2210, 2218, 2224, 2233,  
 2241, 2247, 2250, 2254, 2255, 2263,  
 2267, 2273, 2279, 2287, 2293, 2300,  
 2302, 2306, 2312, 2320, 2326, 2334,  
 2343, 2351, 2353, 2357, 2359, 2363,  
 2369, 2375, 2382, 2388, 2394, 2400,  
 2408, 2414, 2423, 2431, 2439, 2447,  
 2456, 2464, 2470, 2472, 2476, 2484,  
 2493, 2498, 2507, 2509, 2513, 2521,  
 2529, 2538, 2546, 2554, 2562, 2568,  
 2577, 2585, 2593, 2602, 2610, 2613,  
 2616, 2625, 2633, 2642, 2647, 2651,  
 2659, 2667, 2670, 2674, 2682, 2690
- op\_scatter\_update, 978, 987, 996, 1005,  
 1014, 1023, 1031, 1040, 1048, 1056,  
 1065, 1074, 1082, 1091, 1100, 1108,  
 1117, 1125, 1135, 1141, 1148, 1154,  
 1163, 1171, 1174, 1178, 1184, 1192,  
 1198, 1206, 1214, 1217, 1221, 1229,  
 1235, 1237, 1241, 1244, 1247, 1254,  
 1262, 1270, 1278, 1287, 1295, 1304,  
 1313, 1319, 1327, 1335, 1338, 1342,  
 1348, 1354, 1363, 1372, 1381, 1389,  
 1398, 1406, 1415, 1417, 1420, 1426,  
 1431, 1441, 1447, 1456, 1464, 1470,  
 1476, 1484, 1492, 1500, 1506, 1514,  
 1520, 1526, 1535, 1543, 1551, 1554,  
 1557, 1566, 1574, 1581, 1589, 1598,  
 1606, 1613, 1619, 1627, 1635, 1643,  
 1651, 1657, 1664, 1670, 1676, 1683,  
 1690, 1696, 1703, 1708, 1714, 1720,  
 1728, 1737, 1745, 1753, 1759, 1761,  
 1765, 1772, 1781, 1789, 1798, 1806,  
 1814, 1823, 1831, 1839, 1847, 1855,  
 1864, 1872, 1881, 1886, 1893, 1899,  
 1908, 1913, 1916, 1919, 1928, 1937,  
 1945, 1951, 1960, 1968, 1977, 1985,  
 1994, 2002, 2008, 2017, 2025, 2032,  
 2040, 2048, 2057, 2065, 2072, 2078,  
 2086, 2094, 2103, 2109, 2117, 2126,  
 2135, 2143, 2149, 2155, 2164, 2172,  
 2180, 2188, 2195, 2202, 2210, 2218,  
 2224, 2233, 2241, 2247, 2250, 2254,  
 2256, 2260, 2261, 2273, 2279, 2287,  
 2293, 2300, 2302, 2306, 2312, 2320,  
 2326, 2334, 2343, 2351, 2353, 2357,  
 2359, 2363, 2369, 2375, 2382, 2388,

- 2394, 2400, 2408, 2415, 2423, 2431,  
 2439, 2447, 2456, 2464, 2470, 2472,  
 2476, 2484, 2493, 2498, 2507, 2509,  
 2513, 2521, 2529, 2538, 2546, 2554,  
 2562, 2568, 2577, 2585, 2593, 2602,  
 2610, 2613, 2616, 2625, 2633, 2642,  
 2647, 2651, 2659, 2667, 2670, 2674,  
 2682, 2690
- op\_segment\_max, 978, 987, 996, 1005, 1014,  
 1023, 1031, 1040, 1048, 1056, 1065,  
 1074, 1082, 1091, 1100, 1108, 1117,  
 1125, 1135, 1141, 1148, 1154, 1163,  
 1171, 1178, 1184, 1192, 1198, 1206,  
 1214, 1221, 1229, 1235, 1241, 1247,  
 1254, 1262, 1270, 1278, 1287, 1295,  
 1304, 1313, 1319, 1327, 1335, 1342,  
 1348, 1354, 1363, 1372, 1381, 1389,  
 1398, 1406, 1415, 1421, 1426, 1432,  
 1441, 1447, 1456, 1464, 1466, 1470,  
 1472, 1476, 1484, 1492, 1500, 1502,  
 1506, 1514, 1517, 1520, 1523, 1526,  
 1535, 1543, 1551, 1557, 1566, 1574,  
 1581, 1589, 1598, 1606, 1613, 1619,  
 1627, 1635, 1643, 1651, 1657, 1664,  
 1670, 1676, 1683, 1690, 1696, 1703,  
 1708, 1710, 1714, 1717, 1720, 1728,  
 1737, 1745, 1753, 1756, 1759, 1765,  
 1772, 1781, 1789, 1798, 1806, 1814,  
 1823, 1831, 1839, 1847, 1855, 1864,  
 1872, 1881, 1883, 1886, 1893, 1899,  
 1908, 1913, 1920, 1928, 1937, 1945,  
 1951, 1960, 1968, 1977, 1985, 1994,  
 2002, 2008, 2017, 2025, 2032, 2040,  
 2048, 2057, 2065, 2072, 2078, 2086,  
 2094, 2103, 2109, 2117, 2126, 2135,  
 2143, 2149, 2151, 2155, 2164, 2172,  
 2180, 2188, 2195, 2202, 2210, 2218,  
 2221, 2224, 2233, 2241, 2243, 2247,  
 2254, 2260, 2267, 2268, 2275, 2279,  
 2287, 2293, 2300, 2306, 2312, 2320,  
 2326, 2334, 2343, 2351, 2357, 2363,  
 2369, 2375, 2382, 2388, 2391, 2394,  
 2400, 2408, 2415, 2423, 2431, 2439,  
 2447, 2456, 2464, 2467, 2470, 2476,  
 2484, 2493, 2498, 2507, 2513, 2521,  
 2529, 2538, 2546, 2554, 2562, 2565,  
 2569, 2577, 2585, 2593, 2602, 2610,  
 2616, 2625, 2633, 2642, 2651, 2659,
- 2667, 2674, 2682, 2690
- op\_segment\_sum, 978, 987, 996, 1005, 1014,  
 1023, 1031, 1040, 1048, 1056, 1065,  
 1074, 1082, 1091, 1100, 1108, 1117,  
 1125, 1135, 1141, 1148, 1154, 1163,  
 1171, 1178, 1184, 1192, 1198, 1206,  
 1214, 1221, 1229, 1236, 1241, 1247,  
 1254, 1262, 1270, 1278, 1287, 1295,  
 1304, 1313, 1319, 1327, 1335, 1342,  
 1348, 1354, 1363, 1372, 1381, 1389,  
 1398, 1406, 1415, 1421, 1426, 1432,  
 1441, 1447, 1456, 1464, 1466, 1470,  
 1472, 1476, 1484, 1492, 1500, 1503,  
 1506, 1514, 1517, 1520, 1523, 1526,  
 1535, 1543, 1551, 1557, 1566, 1574,  
 1581, 1589, 1598, 1606, 1613, 1619,  
 1627, 1635, 1643, 1651, 1657, 1664,  
 1670, 1676, 1683, 1690, 1696, 1703,  
 1708, 1710, 1714, 1717, 1720, 1728,  
 1737, 1745, 1753, 1756, 1759, 1765,  
 1772, 1781, 1789, 1798, 1806, 1814,  
 1823, 1831, 1839, 1847, 1856, 1864,  
 1872, 1881, 1883, 1887, 1893, 1899,  
 1908, 1913, 1920, 1928, 1937, 1945,  
 1951, 1960, 1968, 1977, 1985, 1994,  
 2002, 2009, 2017, 2025, 2032, 2040,  
 2048, 2057, 2065, 2072, 2078, 2086,  
 2095, 2103, 2109, 2117, 2126, 2135,  
 2143, 2149, 2152, 2155, 2164, 2172,  
 2180, 2188, 2195, 2202, 2210, 2218,  
 2221, 2224, 2233, 2241, 2243, 2247,  
 2254, 2260, 2267, 2269, 2273, 2274,  
 2287, 2293, 2300, 2306, 2312, 2320,  
 2326, 2334, 2343, 2351, 2357, 2363,  
 2369, 2375, 2382, 2388, 2391, 2394,  
 2400, 2408, 2415, 2423, 2431, 2439,  
 2447, 2456, 2464, 2467, 2470, 2476,  
 2485, 2493, 2498, 2507, 2513, 2521,  
 2529, 2538, 2546, 2554, 2562, 2565,  
 2569, 2577, 2585, 2593, 2602, 2610,  
 2616, 2625, 2633, 2642, 2651, 2659,  
 2667, 2674, 2682, 2690
- op\_select, 974, 978, 983, 987, 992, 996,  
 1001, 1005, 1010, 1014, 1019, 1023,  
 1027, 1031, 1035, 1040, 1044, 1048,  
 1052, 1056, 1060, 1065, 1069, 1074,  
 1078, 1082, 1087, 1091, 1095, 1100,  
 1104, 1108, 1113, 1117, 1121, 1126,

- 1131, 1135, 1141, 1148, 1154, 1159,  
 1163, 1167, 1171, 1178, 1184, 1188,  
 1192, 1198, 1202, 1206, 1210, 1214,  
 1221, 1225, 1229, 1236, 1241, 1247,  
 1254, 1258, 1262, 1266, 1270, 1274,  
 1279, 1282, 1287, 1291, 1295, 1300,  
 1304, 1308, 1313, 1319, 1323, 1327,  
 1331, 1335, 1342, 1348, 1354, 1358,  
 1363, 1368, 1372, 1377, 1381, 1385,  
 1389, 1394, 1398, 1402, 1406, 1410,  
 1415, 1421, 1426, 1432, 1437, 1441,  
 1447, 1451, 1456, 1460, 1464, 1470,  
 1476, 1480, 1484, 1488, 1492, 1496,  
 1500, 1506, 1510, 1514, 1520, 1526,  
 1530, 1535, 1539, 1543, 1547, 1551,  
 1557, 1561, 1566, 1570, 1574, 1581,  
 1585, 1589, 1593, 1598, 1602, 1606,  
 1613, 1619, 1623, 1627, 1631, 1635,  
 1639, 1644, 1651, 1657, 1664, 1670,  
 1676, 1683, 1690, 1696, 1703, 1708,  
 1714, 1720, 1724, 1729, 1732, 1737,  
 1741, 1745, 1749, 1753, 1759, 1765,  
 1772, 1777, 1781, 1785, 1789, 1794,  
 1798, 1802, 1806, 1810, 1814, 1818,  
 1823, 1826, 1831, 1835, 1839, 1843,  
 1847, 1851, 1856, 1859, 1864, 1868,  
 1872, 1876, 1881, 1887, 1893, 1899,  
 1903, 1908, 1913, 1920, 1924, 1928,  
 1932, 1937, 1941, 1945, 1951, 1955,  
 1960, 1964, 1968, 1972, 1977, 1981,  
 1986, 1989, 1994, 1998, 2002, 2009,  
 2012, 2017, 2021, 2025, 2032, 2036,  
 2040, 2044, 2048, 2053, 2057, 2061,  
 2065, 2072, 2078, 2082, 2086, 2090,  
 2095, 2098, 2103, 2109, 2113, 2117,  
 2122, 2126, 2130, 2135, 2139, 2143,  
 2149, 2155, 2159, 2164, 2168, 2172,  
 2176, 2180, 2184, 2188, 2195, 2202,  
 2206, 2210, 2214, 2218, 2224, 2228,  
 2233, 2237, 2241, 2247, 2254, 2260,  
 2267, 2273, 2279, 2280, 2293, 2300,  
 2306, 2312, 2316, 2320, 2326, 2330,  
 2334, 2338, 2343, 2347, 2351, 2357,  
 2363, 2369, 2375, 2382, 2388, 2394,  
 2400, 2404, 2408, 2415, 2419, 2423,  
 2427, 2431, 2435, 2439, 2443, 2447,  
 2451, 2456, 2460, 2464, 2470, 2476,  
 2480, 2485, 2489, 2493, 2498, 2502,  
 2507, 2513, 2517, 2521, 2525, 2529,  
 2533, 2538, 2541, 2546, 2550, 2554,  
 2558, 2562, 2569, 2573, 2577, 2581,  
 2585, 2589, 2593, 2597, 2602, 2606,  
 2610, 2616, 2620, 2625, 2629, 2633,  
 2637, 2642, 2651, 2655, 2659, 2663,  
 2667, 2674, 2678, 2682, 2686, 2690
- op\_selu, 978, 987, 996, 1005, 1014, 1023,  
 1031, 1040, 1048, 1056, 1065, 1074,  
 1082, 1091, 1100, 1108, 1117, 1126,  
 1135, 1138, 1141, 1144, 1148, 1151,  
 1154, 1163, 1172, 1178, 1180, 1184,  
 1192, 1198, 1206, 1214, 1221, 1229,  
 1232, 1236, 1241, 1247, 1250, 1254,  
 1262, 1270, 1279, 1287, 1295, 1304,  
 1313, 1315, 1319, 1327, 1335, 1342,  
 1344, 1348, 1354, 1363, 1372, 1381,  
 1389, 1398, 1406, 1415, 1421, 1426,  
 1432, 1441, 1444, 1448, 1456, 1464,  
 1470, 1476, 1484, 1492, 1500, 1506,  
 1514, 1520, 1526, 1535, 1543, 1551,  
 1557, 1566, 1574, 1577, 1581, 1589,  
 1598, 1606, 1609, 1613, 1615, 1619,  
 1627, 1635, 1644, 1651, 1657, 1664,  
 1670, 1676, 1683, 1690, 1696, 1703,  
 1708, 1714, 1720, 1729, 1737, 1745,  
 1753, 1759, 1765, 1769, 1772, 1781,  
 1789, 1798, 1806, 1814, 1823, 1831,  
 1839, 1847, 1856, 1864, 1872, 1881,  
 1887, 1889, 1893, 1895, 1899, 1908,  
 1913, 1920, 1928, 1937, 1945, 1948,  
 1951, 1960, 1968, 1977, 1986, 1994,  
 2002, 2005, 2009, 2017, 2025, 2028,  
 2032, 2040, 2048, 2057, 2065, 2072,  
 2074, 2078, 2086, 2095, 2103, 2106,  
 2109, 2117, 2126, 2135, 2143, 2145,  
 2149, 2155, 2164, 2172, 2180, 2188,  
 2191, 2195, 2198, 2202, 2210, 2218,  
 2224, 2233, 2241, 2247, 2254, 2260,  
 2267, 2273, 2279, 2287, 2288, 2296,  
 2300, 2306, 2308, 2312, 2320, 2322,  
 2326, 2334, 2343, 2351, 2357, 2363,  
 2369, 2371, 2375, 2378, 2382, 2385,  
 2388, 2394, 2400, 2408, 2411, 2415,  
 2423, 2431, 2439, 2447, 2456, 2464,  
 2470, 2476, 2485, 2493, 2498, 2507,  
 2513, 2521, 2529, 2538, 2546, 2554,  
 2562, 2569, 2577, 2585, 2593, 2602,

- 2610, 2616, 2625, 2633, 2642, 2651,  
2659, 2667, 2674, 2682, 2690
- `op_separable_conv`, 978, 987, 996, 1005,  
1014, 1023, 1031, 1040, 1048, 1056,  
1065, 1074, 1082, 1091, 1100, 1108,  
1117, 1126, 1135, 1138, 1141, 1144,  
1148, 1151, 1154, 1163, 1172, 1178,  
1180, 1184, 1192, 1198, 1206, 1214,  
1221, 1229, 1232, 1236, 1241, 1247,  
1250, 1254, 1262, 1270, 1279, 1287,  
1295, 1304, 1313, 1315, 1319, 1327,  
1335, 1342, 1344, 1348, 1354, 1363,  
1372, 1381, 1389, 1398, 1406, 1415,  
1421, 1426, 1432, 1441, 1444, 1448,  
1456, 1464, 1470, 1476, 1484, 1492,  
1500, 1506, 1514, 1520, 1526, 1535,  
1543, 1551, 1557, 1566, 1574, 1577,  
1581, 1589, 1598, 1606, 1609, 1613,  
1615, 1619, 1627, 1635, 1644, 1651,  
1657, 1664, 1670, 1676, 1683, 1690,  
1696, 1703, 1708, 1714, 1720, 1729,  
1737, 1745, 1753, 1759, 1765, 1769,  
1772, 1781, 1789, 1798, 1806, 1814,  
1823, 1831, 1839, 1847, 1856, 1864,  
1872, 1881, 1887, 1889, 1893, 1895,  
1899, 1908, 1913, 1920, 1928, 1937,  
1945, 1948, 1951, 1960, 1968, 1977,  
1986, 1994, 2002, 2005, 2009, 2017,  
2025, 2028, 2032, 2040, 2048, 2057,  
2065, 2072, 2074, 2078, 2086, 2095,  
2103, 2106, 2109, 2118, 2126, 2135,  
2143, 2145, 2149, 2155, 2164, 2172,  
2180, 2188, 2191, 2195, 2198, 2202,  
2210, 2218, 2224, 2233, 2241, 2247,  
2254, 2260, 2267, 2273, 2279, 2287,  
2290, 2293, 2295, 2306, 2308, 2312,  
2320, 2323, 2326, 2334, 2343, 2351,  
2357, 2363, 2369, 2371, 2375, 2378,  
2382, 2385, 2388, 2394, 2400, 2408,  
2411, 2415, 2423, 2431, 2439, 2447,  
2456, 2464, 2470, 2476, 2485, 2493,  
2498, 2507, 2513, 2521, 2529, 2538,  
2546, 2554, 2562, 2569, 2577, 2585,  
2594, 2602, 2610, 2616, 2625, 2633,  
2642, 2651, 2659, 2667, 2674, 2682,  
2690
- `op_shape`, 978, 987, 996, 1005, 1014, 1023,  
1031, 1040, 1048, 1056, 1065, 1074,  
1082, 1091, 1100, 1108, 1117, 1126,  
1135, 1141, 1148, 1154, 1163, 1172,  
1174, 1178, 1184, 1192, 1198, 1206,  
1214, 1217, 1221, 1229, 1236, 1237,  
1241, 1244, 1247, 1254, 1262, 1270,  
1279, 1287, 1295, 1304, 1313, 1319,  
1327, 1335, 1338, 1342, 1348, 1354,  
1363, 1372, 1381, 1389, 1398, 1406,  
1415, 1417, 1421, 1426, 1432, 1441,  
1448, 1456, 1464, 1470, 1476, 1484,  
1492, 1500, 1506, 1514, 1520, 1526,  
1535, 1543, 1551, 1554, 1557, 1566,  
1574, 1581, 1589, 1598, 1606, 1613,  
1619, 1627, 1635, 1644, 1651, 1657,  
1664, 1670, 1676, 1683, 1690, 1696,  
1703, 1708, 1714, 1720, 1729, 1737,  
1745, 1753, 1759, 1761, 1765, 1772,  
1781, 1789, 1798, 1806, 1814, 1823,  
1831, 1839, 1847, 1856, 1864, 1872,  
1881, 1887, 1893, 1899, 1908, 1913,  
1916, 1920, 1928, 1937, 1945, 1951,  
1960, 1968, 1977, 1986, 1994, 2002,  
2009, 2017, 2025, 2032, 2040, 2048,  
2057, 2065, 2072, 2078, 2086, 2095,  
2103, 2109, 2118, 2126, 2135, 2143,  
2149, 2155, 2164, 2172, 2180, 2188,  
2195, 2202, 2210, 2218, 2224, 2233,  
2241, 2247, 2250, 2254, 2256, 2260,  
2263, 2267, 2273, 2279, 2287, 2293,  
2300, 2301, 2312, 2320, 2326, 2334,  
2343, 2351, 2353, 2357, 2359, 2363,  
2369, 2375, 2382, 2388, 2394, 2400,  
2408, 2415, 2423, 2431, 2439, 2448,  
2456, 2464, 2470, 2472, 2476, 2485,  
2493, 2498, 2507, 2509, 2513, 2521,  
2529, 2538, 2546, 2554, 2562, 2569,  
2577, 2585, 2594, 2602, 2610, 2613,  
2617, 2625, 2633, 2642, 2647, 2651,  
2659, 2667, 2670, 2674, 2682, 2690
- `op_shape()`, 2746
- `op_sigmoid`, 978, 987, 996, 1005, 1014, 1023,  
1032, 1040, 1048, 1056, 1065, 1074,  
1082, 1091, 1100, 1108, 1117, 1126,  
1135, 1138, 1141, 1144, 1148, 1151,  
1154, 1163, 1172, 1178, 1180, 1184,  
1192, 1198, 1206, 1214, 1221, 1229,  
1232, 1236, 1241, 1247, 1250, 1254,  
1262, 1270, 1279, 1287, 1295, 1304,

- 1313, 1315, 1319, 1327, 1335, 1342,  
 1344, 1348, 1354, 1363, 1372, 1381,  
 1389, 1398, 1406, 1415, 1421, 1426,  
 1432, 1441, 1444, 1448, 1456, 1464,  
 1470, 1476, 1484, 1492, 1500, 1506,  
 1515, 1520, 1526, 1535, 1543, 1551,  
 1557, 1566, 1574, 1577, 1581, 1589,  
 1598, 1606, 1609, 1613, 1615, 1619,  
 1627, 1635, 1644, 1651, 1657, 1664,  
 1670, 1676, 1683, 1690, 1696, 1703,  
 1708, 1714, 1720, 1729, 1737, 1745,  
 1753, 1759, 1765, 1769, 1772, 1781,  
 1789, 1798, 1806, 1814, 1823, 1831,  
 1839, 1847, 1856, 1864, 1872, 1881,  
 1887, 1889, 1893, 1895, 1899, 1908,  
 1913, 1920, 1928, 1937, 1945, 1948,  
 1951, 1960, 1968, 1977, 1986, 1994,  
 2002, 2005, 2009, 2017, 2025, 2028,  
 2032, 2040, 2048, 2057, 2065, 2072,  
 2074, 2078, 2086, 2095, 2103, 2106,  
 2109, 2118, 2126, 2135, 2143, 2145,  
 2149, 2155, 2164, 2172, 2180, 2188,  
 2191, 2195, 2198, 2202, 2210, 2218,  
 2224, 2233, 2241, 2247, 2254, 2260,  
 2267, 2273, 2279, 2287, 2290, 2293,  
 2296, 2300, 2306, 2307, 2320, 2323,  
 2326, 2335, 2343, 2351, 2357, 2363,  
 2369, 2371, 2375, 2378, 2382, 2385,  
 2388, 2394, 2400, 2408, 2411, 2415,  
 2423, 2431, 2439, 2448, 2456, 2464,  
 2470, 2476, 2485, 2493, 2499, 2507,  
 2513, 2521, 2529, 2538, 2546, 2554,  
 2562, 2569, 2577, 2585, 2594, 2602,  
 2610, 2617, 2625, 2633, 2642, 2651,  
 2659, 2667, 2674, 2682, 2690
- op\_sign, 974, 978, 983, 987, 992, 996, 1001,  
 1005, 1010, 1014, 1019, 1023, 1027,  
 1032, 1035, 1040, 1044, 1048, 1052,  
 1057, 1060, 1065, 1069, 1074, 1078,  
 1082, 1087, 1091, 1095, 1100, 1104,  
 1108, 1113, 1117, 1121, 1126, 1131,  
 1135, 1141, 1148, 1154, 1159, 1163,  
 1167, 1172, 1178, 1184, 1188, 1192,  
 1198, 1202, 1206, 1210, 1214, 1221,  
 1225, 1229, 1236, 1241, 1247, 1254,  
 1258, 1262, 1266, 1270, 1274, 1279,  
 1282, 1287, 1291, 1295, 1300, 1304,  
 1308, 1313, 1319, 1323, 1327, 1331,  
 1335, 1342, 1348, 1354, 1358, 1363,  
 1368, 1372, 1377, 1381, 1385, 1389,  
 1394, 1398, 1402, 1406, 1410, 1415,  
 1421, 1426, 1432, 1437, 1441, 1448,  
 1451, 1456, 1460, 1464, 1470, 1476,  
 1480, 1484, 1488, 1492, 1496, 1500,  
 1506, 1510, 1515, 1520, 1526, 1530,  
 1535, 1539, 1543, 1547, 1551, 1557,  
 1561, 1566, 1570, 1574, 1581, 1585,  
 1589, 1593, 1598, 1602, 1606, 1613,  
 1619, 1623, 1627, 1631, 1635, 1639,  
 1644, 1651, 1657, 1664, 1670, 1676,  
 1683, 1690, 1696, 1703, 1708, 1714,  
 1720, 1724, 1729, 1732, 1737, 1741,  
 1745, 1749, 1753, 1759, 1765, 1772,  
 1777, 1781, 1785, 1789, 1794, 1798,  
 1802, 1806, 1810, 1815, 1818, 1823,  
 1827, 1831, 1835, 1839, 1843, 1847,  
 1851, 1856, 1859, 1864, 1868, 1872,  
 1876, 1881, 1887, 1893, 1899, 1903,  
 1908, 1913, 1920, 1924, 1928, 1932,  
 1937, 1941, 1945, 1951, 1955, 1960,  
 1964, 1968, 1972, 1977, 1981, 1986,  
 1989, 1994, 1998, 2002, 2009, 2012,  
 2017, 2021, 2025, 2032, 2036, 2040,  
 2044, 2048, 2053, 2057, 2061, 2065,  
 2072, 2078, 2082, 2086, 2090, 2095,  
 2098, 2103, 2109, 2113, 2118, 2122,  
 2126, 2130, 2135, 2139, 2143, 2149,  
 2155, 2159, 2164, 2168, 2172, 2176,  
 2180, 2184, 2188, 2195, 2202, 2206,  
 2210, 2214, 2218, 2224, 2228, 2233,  
 2237, 2241, 2247, 2254, 2260, 2267,  
 2273, 2279, 2283, 2287, 2293, 2300,  
 2306, 2312, 2313, 2326, 2330, 2335,  
 2338, 2343, 2347, 2351, 2357, 2363,  
 2369, 2375, 2382, 2388, 2394, 2400,  
 2404, 2408, 2415, 2419, 2423, 2427,  
 2431, 2435, 2439, 2443, 2448, 2451,  
 2456, 2460, 2464, 2470, 2476, 2480,  
 2485, 2489, 2493, 2499, 2502, 2507,  
 2513, 2517, 2521, 2525, 2530, 2533,  
 2538, 2542, 2546, 2550, 2554, 2558,  
 2562, 2569, 2573, 2577, 2581, 2585,  
 2589, 2594, 2597, 2602, 2606, 2610,  
 2617, 2620, 2625, 2629, 2633, 2637,  
 2642, 2651, 2655, 2659, 2663, 2667,  
 2674, 2678, 2682, 2686, 2690



- op\_silu*, 978, 987, 996, 1005, 1014, 1023,  
1032, 1040, 1048, 1057, 1065, 1074,  
1082, 1091, 1100, 1108, 1117, 1126,  
1135, 1138, 1141, 1144, 1148, 1151,  
1154, 1163, 1172, 1178, 1180, 1184,  
1192, 1198, 1206, 1214, 1221, 1229,  
1232, 1236, 1241, 1247, 1250, 1254,  
1262, 1270, 1279, 1287, 1295, 1304,  
1313, 1315, 1319, 1327, 1335, 1342,  
1344, 1348, 1354, 1363, 1372, 1381,  
1389, 1398, 1406, 1415, 1421, 1426,  
1432, 1441, 1444, 1448, 1456, 1464,  
1470, 1476, 1484, 1492, 1500, 1506,  
1515, 1520, 1527, 1535, 1543, 1551,  
1557, 1566, 1574, 1577, 1581, 1589,  
1598, 1606, 1609, 1613, 1615, 1619,  
1627, 1635, 1644, 1651, 1657, 1664,  
1670, 1676, 1683, 1690, 1696, 1703,  
1708, 1714, 1720, 1729, 1737, 1745,  
1753, 1760, 1765, 1769, 1772, 1781,  
1789, 1798, 1806, 1815, 1823, 1831,  
1839, 1847, 1856, 1864, 1872, 1881,  
1887, 1889, 1893, 1895, 1899, 1908,  
1913, 1920, 1928, 1937, 1945, 1948,  
1951, 1960, 1968, 1977, 1986, 1994,  
2002, 2005, 2009, 2017, 2025, 2028,  
2032, 2040, 2048, 2057, 2065, 2072,  
2074, 2078, 2086, 2095, 2103, 2106,  
2109, 2118, 2126, 2135, 2143, 2145,  
2149, 2155, 2164, 2172, 2180, 2188,  
2191, 2195, 2198, 2202, 2210, 2218,  
2224, 2233, 2241, 2247, 2254, 2260,  
2267, 2273, 2279, 2287, 2290, 2293,  
2296, 2300, 2306, 2308, 2312, 2320,  
2321, 2335, 2343, 2351, 2357, 2363,  
2369, 2371, 2375, 2378, 2382, 2385,  
2388, 2394, 2400, 2408, 2411, 2415,  
2423, 2431, 2439, 2448, 2456, 2464,  
2470, 2476, 2485, 2493, 2499, 2507,  
2513, 2521, 2530, 2538, 2546, 2554,  
2562, 2569, 2577, 2585, 2594, 2602,  
2610, 2617, 2625, 2633, 2642, 2651,  
2659, 2667, 2674, 2682, 2690  
1108, 1113, 1117, 1121, 1126, 1131,  
1135, 1141, 1148, 1154, 1159, 1163,  
1167, 1172, 1178, 1184, 1188, 1192,  
1198, 1202, 1206, 1210, 1214, 1221,  
1225, 1229, 1236, 1241, 1247, 1254,  
1258, 1262, 1266, 1270, 1274, 1279,  
1282, 1287, 1291, 1295, 1300, 1304,  
1308, 1313, 1319, 1323, 1327, 1331,  
1335, 1342, 1348, 1354, 1358, 1363,  
1368, 1372, 1377, 1381, 1385, 1389,  
1394, 1398, 1402, 1406, 1410, 1415,  
1421, 1426, 1432, 1437, 1442, 1448,  
1451, 1456, 1460, 1464, 1470, 1476,  
1480, 1484, 1488, 1492, 1496, 1500,  
1506, 1510, 1515, 1520, 1527, 1530,  
1535, 1539, 1543, 1547, 1551, 1558,  
1561, 1566, 1570, 1574, 1581, 1585,  
1589, 1593, 1598, 1602, 1606, 1613,  
1619, 1623, 1627, 1631, 1635, 1639,  
1644, 1651, 1657, 1664, 1670, 1676,  
1683, 1690, 1696, 1703, 1708, 1714,  
1720, 1724, 1729, 1732, 1737, 1741,  
1745, 1749, 1753, 1760, 1765, 1772,  
1777, 1781, 1785, 1789, 1794, 1798,  
1802, 1806, 1810, 1815, 1818, 1823,  
1827, 1831, 1835, 1839, 1843, 1847,  
1851, 1856, 1860, 1864, 1868, 1872,  
1876, 1881, 1887, 1893, 1899, 1903,  
1908, 1913, 1920, 1924, 1928, 1932,  
1937, 1941, 1945, 1951, 1955, 1960,  
1964, 1968, 1972, 1977, 1981, 1986,  
1990, 1994, 1998, 2002, 2009, 2013,  
2017, 2021, 2025, 2032, 2036, 2040,  
2044, 2048, 2053, 2057, 2061, 2065,  
2072, 2078, 2082, 2086, 2090, 2095,  
2098, 2103, 2109, 2113, 2118, 2122,  
2126, 2130, 2135, 2139, 2143, 2149,  
2155, 2159, 2164, 2168, 2172, 2176,  
2180, 2184, 2188, 2195, 2202, 2206,  
2210, 2214, 2218, 2224, 2228, 2233,  
2237, 2241, 2247, 2254, 2260, 2267,  
2273, 2279, 2283, 2287, 2293, 2300,  
2306, 2312, 2316, 2320, 2326, 2327,  
2338, 2343, 2347, 2351, 2357, 2363,  
2369, 2375, 2382, 2389, 2394, 2400,  
2404, 2408, 2415, 2419, 2423, 2427,  
2431, 2435, 2439, 2443, 2448, 2451,  
2456, 2460, 2464, 2471, 2476, 2480,
- op\_sin*, 974, 978, 983, 987, 992, 996, 1001,  
1005, 1010, 1014, 1019, 1023, 1027,  
1032, 1035, 1040, 1044, 1048, 1052,  
1057, 1061, 1065, 1069, 1074, 1078,  
1082, 1087, 1091, 1095, 1100, 1104,

- 2485, 2489, 2493, 2499, 2502, 2507,  
 2513, 2517, 2521, 2525, 2530, 2533,  
 2538, 2542, 2546, 2550, 2554, 2558,  
 2563, 2569, 2573, 2577, 2581, 2585,  
 2589, 2594, 2597, 2602, 2606, 2610,  
 2617, 2620, 2625, 2629, 2633, 2637,  
 2642, 2651, 2655, 2659, 2663, 2667,  
 2674, 2678, 2682, 2686, 2690
- op\_sinh*, 974, 978, 983, 987, 992, 996, 1001,  
 1005, 1010, 1014, 1019, 1023, 1027,  
 1032, 1036, 1040, 1044, 1048, 1052,  
 1057, 1061, 1065, 1069, 1074, 1078,  
 1082, 1087, 1091, 1095, 1100, 1104,  
 1108, 1113, 1117, 1121, 1126, 1131,  
 1135, 1142, 1148, 1154, 1159, 1163,  
 1167, 1172, 1178, 1184, 1188, 1192,  
 1198, 1202, 1206, 1210, 1214, 1221,  
 1225, 1229, 1236, 1241, 1247, 1254,  
 1258, 1262, 1266, 1270, 1274, 1279,  
 1282, 1287, 1291, 1295, 1300, 1304,  
 1308, 1313, 1319, 1323, 1327, 1331,  
 1335, 1342, 1348, 1354, 1358, 1363,  
 1368, 1372, 1377, 1381, 1385, 1389,  
 1394, 1398, 1402, 1406, 1410, 1415,  
 1421, 1426, 1432, 1437, 1442, 1448,  
 1451, 1456, 1460, 1464, 1470, 1476,  
 1480, 1484, 1488, 1492, 1496, 1500,  
 1506, 1510, 1515, 1521, 1527, 1530,  
 1535, 1539, 1543, 1547, 1551, 1558,  
 1561, 1566, 1570, 1574, 1581, 1585,  
 1589, 1593, 1598, 1602, 1606, 1613,  
 1619, 1623, 1627, 1631, 1636, 1639,  
 1644, 1651, 1657, 1664, 1670, 1677,  
 1683, 1690, 1696, 1703, 1708, 1714,  
 1720, 1724, 1729, 1732, 1737, 1741,  
 1745, 1749, 1753, 1760, 1765, 1773,  
 1777, 1781, 1785, 1790, 1794, 1798,  
 1802, 1806, 1810, 1815, 1818, 1823,  
 1827, 1831, 1835, 1839, 1843, 1848,  
 1851, 1856, 1860, 1864, 1868, 1872,  
 1876, 1881, 1887, 1893, 1899, 1903,  
 1908, 1913, 1920, 1924, 1928, 1932,  
 1937, 1941, 1945, 1952, 1955, 1960,  
 1964, 1968, 1972, 1977, 1981, 1986,  
 1990, 1994, 1998, 2002, 2009, 2013,  
 2017, 2021, 2025, 2032, 2036, 2040,  
 2044, 2048, 2053, 2057, 2061, 2065,  
 2072, 2078, 2082, 2087, 2090, 2095,  
 2099, 2103, 2109, 2113, 2118, 2122,  
 2126, 2130, 2135, 2139, 2143, 2149,  
 2155, 2159, 2164, 2168, 2172, 2176,  
 2180, 2184, 2188, 2195, 2202, 2206,  
 2210, 2214, 2218, 2224, 2228, 2233,  
 2237, 2241, 2247, 2254, 2260, 2267,  
 2273, 2279, 2283, 2287, 2293, 2300,  
 2306, 2312, 2316, 2320, 2326, 2330,  
 2335, 2336, 2347, 2351, 2357, 2363,  
 2369, 2375, 2382, 2389, 2394, 2400,  
 2404, 2408, 2415, 2419, 2423, 2427,  
 2431, 2435, 2439, 2443, 2448, 2451,  
 2456, 2460, 2464, 2471, 2476, 2480,  
 2485, 2489, 2493, 2499, 2502, 2507,  
 2513, 2517, 2521, 2525, 2530, 2533,  
 2538, 2542, 2546, 2550, 2554, 2558,  
 2563, 2569, 2573, 2577, 2581, 2585,  
 2589, 2594, 2597, 2602, 2606, 2610,  
 2617, 2620, 2625, 2629, 2633, 2637,  
 2642, 2651, 2655, 2659, 2663, 2668,  
 2674, 2678, 2682, 2686, 2690
- op\_size*, 974, 978, 983, 987, 992, 996, 1001,  
 1005, 1010, 1014, 1019, 1023, 1027,  
 1032, 1036, 1040, 1044, 1048, 1052,  
 1057, 1061, 1065, 1070, 1074, 1078,  
 1082, 1087, 1091, 1095, 1100, 1104,  
 1108, 1113, 1117, 1121, 1126, 1131,  
 1135, 1142, 1148, 1154, 1159, 1163,  
 1167, 1172, 1178, 1184, 1188, 1192,  
 1198, 1202, 1206, 1210, 1214, 1221,  
 1225, 1229, 1236, 1241, 1248, 1254,  
 1258, 1262, 1266, 1271, 1274, 1279,  
 1282, 1287, 1291, 1295, 1300, 1304,  
 1308, 1313, 1319, 1323, 1327, 1331,  
 1335, 1342, 1348, 1354, 1358, 1363,  
 1368, 1372, 1377, 1381, 1385, 1389,  
 1394, 1398, 1402, 1406, 1410, 1415,  
 1421, 1426, 1432, 1437, 1442, 1448,  
 1451, 1456, 1460, 1464, 1470, 1476,  
 1480, 1484, 1488, 1492, 1496, 1500,  
 1506, 1510, 1515, 1521, 1527, 1530,  
 1535, 1539, 1543, 1547, 1552, 1558,  
 1561, 1566, 1570, 1574, 1581, 1585,  
 1589, 1593, 1598, 1602, 1606, 1613,  
 1619, 1623, 1627, 1631, 1636, 1639,  
 1644, 1651, 1657, 1664, 1670, 1677,  
 1683, 1690, 1696, 1703, 1708, 1714,  
 1720, 1724, 1729, 1733, 1737, 1741,



- 1745, 1749, 1753, 1760, 1765, 1773,  
1777, 1781, 1785, 1790, 1794, 1798,  
1802, 1806, 1810, 1815, 1818, 1823,  
1827, 1831, 1835, 1839, 1843, 1848,  
1851, 1856, 1860, 1864, 1868, 1872,  
1876, 1881, 1887, 1893, 1899, 1903,  
1908, 1913, 1920, 1924, 1928, 1932,  
1937, 1941, 1945, 1952, 1955, 1960,  
1964, 1968, 1972, 1977, 1981, 1986,  
1990, 1994, 1998, 2002, 2009, 2013,  
2017, 2021, 2025, 2032, 2036, 2040,  
2044, 2049, 2053, 2057, 2061, 2065,  
2072, 2078, 2082, 2087, 2090, 2095,  
2099, 2103, 2109, 2113, 2118, 2122,  
2126, 2130, 2135, 2139, 2143, 2149,  
2155, 2159, 2164, 2168, 2172, 2176,  
2180, 2184, 2188, 2195, 2202, 2206,  
2210, 2214, 2218, 2224, 2228, 2233,  
2237, 2241, 2247, 2254, 2260, 2267,  
2273, 2279, 2283, 2287, 2293, 2300,  
2306, 2312, 2316, 2320, 2326, 2330,  
2335, 2338, 2343, 2344, 2357, 2363,  
2369, 2375, 2382, 2389, 2394, 2400,  
2404, 2408, 2415, 2419, 2423, 2427,  
2431, 2435, 2439, 2443, 2448, 2451,  
2456, 2460, 2464, 2471, 2476, 2480,  
2485, 2489, 2493, 2499, 2502, 2507,  
2513, 2517, 2521, 2525, 2530, 2533,  
2538, 2542, 2546, 2550, 2554, 2558,  
2563, 2569, 2573, 2577, 2581, 2585,  
2589, 2594, 2597, 2602, 2606, 2610,  
2617, 2621, 2625, 2629, 2633, 2637,  
2642, 2651, 2655, 2659, 2663, 2668,  
2674, 2678, 2682, 2686, 2690
- op\_slice, 978, 987, 996, 1005, 1014, 1023,  
1032, 1040, 1048, 1057, 1065, 1074,  
1082, 1091, 1100, 1108, 1117, 1126,  
1135, 1142, 1148, 1154, 1163, 1172,  
1174, 1178, 1184, 1192, 1198, 1206,  
1214, 1217, 1221, 1229, 1236, 1237,  
1241, 1244, 1248, 1254, 1262, 1271,  
1279, 1287, 1296, 1304, 1313, 1319,  
1327, 1335, 1338, 1342, 1348, 1354,  
1363, 1372, 1381, 1390, 1398, 1406,  
1415, 1417, 1421, 1426, 1432, 1442,  
1448, 1456, 1464, 1470, 1476, 1484,  
1492, 1500, 1506, 1515, 1521, 1527,  
1535, 1543, 1552, 1554, 1558, 1566,  
1574, 1581, 1589, 1598, 1606, 1613,  
1619, 1627, 1636, 1644, 1651, 1657,  
1664, 1670, 1677, 1683, 1690, 1696,  
1703, 1708, 1714, 1720, 1729, 1737,  
1745, 1753, 1760, 1761, 1765, 1773,  
1781, 1790, 1798, 1806, 1815, 1823,  
1831, 1839, 1848, 1856, 1864, 1872,  
1881, 1887, 1893, 1899, 1908, 1913,  
1916, 1920, 1928, 1937, 1945, 1952,  
1960, 1968, 1977, 1986, 1994, 2002,  
2009, 2017, 2025, 2032, 2040, 2049,  
2057, 2065, 2072, 2078, 2087, 2095,  
2103, 2109, 2118, 2126, 2135, 2143,  
2149, 2155, 2164, 2172, 2180, 2188,  
2195, 2202, 2210, 2218, 2225, 2233,  
2241, 2247, 2250, 2254, 2256, 2260,  
2263, 2267, 2273, 2279, 2287, 2294,  
2300, 2302, 2306, 2312, 2320, 2326,  
2335, 2343, 2351, 2352, 2359, 2363,  
2369, 2375, 2382, 2389, 2394, 2400,  
2408, 2415, 2423, 2431, 2439, 2448,  
2456, 2464, 2471, 2472, 2476, 2485,  
2493, 2499, 2507, 2509, 2513, 2521,  
2530, 2538, 2546, 2554, 2563, 2569,  
2577, 2585, 2594, 2602, 2610, 2613,  
2617, 2625, 2633, 2642, 2647, 2651,  
2659, 2668, 2670, 2674, 2682, 2690
- op\_slice\_update, 978, 987, 996, 1005, 1014,  
1023, 1032, 1040, 1048, 1057, 1065,  
1074, 1082, 1091, 1100, 1108, 1117,  
1126, 1135, 1142, 1148, 1155, 1163,  
1172, 1174, 1178, 1184, 1192, 1198,  
1206, 1214, 1217, 1221, 1229, 1236,  
1237, 1241, 1244, 1248, 1254, 1262,  
1271, 1279, 1287, 1296, 1304, 1313,  
1319, 1327, 1335, 1338, 1342, 1348,  
1354, 1363, 1372, 1381, 1390, 1398,  
1406, 1415, 1417, 1421, 1426, 1432,  
1442, 1448, 1456, 1464, 1470, 1476,  
1484, 1492, 1500, 1506, 1515, 1521,  
1527, 1535, 1543, 1552, 1554, 1558,  
1566, 1574, 1581, 1589, 1598, 1606,  
1613, 1619, 1627, 1636, 1644, 1651,  
1657, 1664, 1670, 1677, 1683, 1690,  
1696, 1703, 1708, 1714, 1721, 1729,  
1737, 1745, 1753, 1760, 1761, 1765,  
1773, 1781, 1790, 1798, 1806, 1815,  
1823, 1831, 1839, 1848, 1856, 1864,

- 1872, 1881, 1887, 1893, 1899, 1908,  
 1913, 1916, 1920, 1928, 1937, 1945,  
 1952, 1960, 1968, 1977, 1986, 1994,  
 2002, 2009, 2017, 2025, 2032, 2040,  
 2049, 2057, 2065, 2072, 2078, 2087,  
 2095, 2103, 2110, 2118, 2126, 2135,  
 2143, 2149, 2155, 2164, 2172, 2180,  
 2188, 2195, 2202, 2210, 2218, 2225,  
 2233, 2241, 2247, 2250, 2254, 2256,  
 2260, 2263, 2267, 2273, 2279, 2287,  
 2294, 2300, 2302, 2306, 2312, 2320,  
 2326, 2335, 2343, 2351, 2353, 2357,  
 2358, 2369, 2375, 2382, 2389, 2394,  
 2400, 2408, 2415, 2423, 2431, 2439,  
 2448, 2456, 2464, 2471, 2472, 2476,  
 2485, 2493, 2499, 2507, 2509, 2513,  
 2521, 2530, 2538, 2546, 2554, 2563,  
 2569, 2577, 2585, 2594, 2602, 2610,  
 2613, 2617, 2625, 2633, 2642, 2647,  
 2651, 2659, 2668, 2670, 2674, 2682,  
 2691
- op\_slogdet*, 978, 987, 996, 1005, 1014, 1023,  
 1032, 1040, 1048, 1057, 1065, 1074,  
 1082, 1091, 1100, 1108, 1117, 1126,  
 1135, 1142, 1148, 1155, 1163, 1172,  
 1178, 1184, 1192, 1194, 1198, 1206,  
 1214, 1221, 1229, 1236, 1241, 1248,  
 1254, 1262, 1271, 1279, 1287, 1296,  
 1304, 1313, 1319, 1327, 1335, 1342,  
 1348, 1350, 1354, 1363, 1372, 1381,  
 1390, 1398, 1406, 1415, 1421, 1422,  
 1426, 1428, 1432, 1442, 1448, 1456,  
 1464, 1470, 1476, 1484, 1492, 1500,  
 1506, 1515, 1521, 1527, 1535, 1543,  
 1552, 1558, 1566, 1574, 1581, 1589,  
 1598, 1606, 1613, 1619, 1627, 1636,  
 1644, 1651, 1657, 1664, 1670, 1677,  
 1683, 1690, 1696, 1703, 1704, 1708,  
 1714, 1721, 1729, 1737, 1745, 1753,  
 1760, 1765, 1773, 1781, 1790, 1798,  
 1806, 1815, 1823, 1831, 1839, 1848,  
 1856, 1864, 1872, 1881, 1887, 1893,  
 1899, 1901, 1908, 1909, 1913, 1920,  
 1928, 1937, 1945, 1952, 1960, 1968,  
 1977, 1986, 1994, 2003, 2009, 2017,  
 2026, 2032, 2040, 2049, 2057, 2065,  
 2068, 2072, 2078, 2087, 2095, 2103,  
 2110, 2118, 2126, 2135, 2143, 2149,  
 2155, 2164, 2172, 2180, 2188, 2195,  
 2202, 2210, 2218, 2225, 2233, 2241,  
 2247, 2254, 2260, 2267, 2273, 2279,  
 2288, 2294, 2300, 2306, 2312, 2320,  
 2326, 2335, 2343, 2351, 2357, 2363,  
 2364, 2375, 2382, 2389, 2394, 2396,  
 2400, 2408, 2415, 2423, 2431, 2440,  
 2448, 2456, 2464, 2471, 2476, 2485,  
 2493, 2495, 2499, 2507, 2513, 2521,  
 2530, 2538, 2546, 2554, 2563, 2569,  
 2577, 2585, 2594, 2602, 2610, 2617,  
 2625, 2633, 2642, 2651, 2659, 2668,  
 2674, 2682, 2691
- op\_softmax*, 978, 987, 996, 1005, 1014, 1023,  
 1032, 1040, 1048, 1057, 1065, 1074,  
 1082, 1091, 1100, 1108, 1117, 1126,  
 1135, 1138, 1142, 1144, 1148, 1151,  
 1155, 1163, 1172, 1178, 1180, 1184,  
 1193, 1198, 1206, 1214, 1221, 1229,  
 1232, 1236, 1241, 1248, 1250, 1254,  
 1262, 1271, 1279, 1287, 1296, 1304,  
 1313, 1315, 1319, 1327, 1335, 1342,  
 1344, 1348, 1354, 1363, 1372, 1381,  
 1390, 1398, 1407, 1415, 1421, 1426,  
 1432, 1442, 1444, 1448, 1456, 1464,  
 1470, 1476, 1484, 1492, 1501, 1506,  
 1515, 1521, 1527, 1535, 1543, 1552,  
 1558, 1566, 1574, 1577, 1581, 1589,  
 1598, 1606, 1609, 1613, 1615, 1619,  
 1627, 1636, 1644, 1651, 1657, 1664,  
 1670, 1677, 1683, 1690, 1696, 1703,  
 1708, 1714, 1721, 1729, 1737, 1745,  
 1753, 1760, 1765, 1769, 1773, 1781,  
 1790, 1798, 1807, 1815, 1823, 1831,  
 1839, 1848, 1856, 1864, 1872, 1881,  
 1887, 1889, 1893, 1895, 1899, 1908,  
 1913, 1920, 1928, 1937, 1945, 1948,  
 1952, 1960, 1968, 1977, 1986, 1994,  
 2003, 2005, 2009, 2017, 2026, 2028,  
 2032, 2040, 2049, 2057, 2065, 2072,  
 2074, 2078, 2087, 2095, 2103, 2106,  
 2110, 2118, 2126, 2135, 2143, 2145,  
 2149, 2155, 2164, 2172, 2180, 2189,  
 2191, 2195, 2198, 2202, 2210, 2218,  
 2225, 2233, 2241, 2247, 2254, 2260,  
 2267, 2273, 2279, 2288, 2290, 2294,  
 2296, 2300, 2306, 2308, 2312, 2320,  
 2323, 2327, 2335, 2343, 2351, 2357,

- 2363, 2369, 2370, 2378, 2382, 2385,  
 2389, 2395, 2400, 2408, 2411, 2415,  
 2423, 2431, 2440, 2448, 2456, 2464,  
 2471, 2476, 2485, 2493, 2499, 2507,  
 2513, 2521, 2530, 2538, 2546, 2554,  
 2563, 2569, 2577, 2585, 2594, 2602,  
 2610, 2617, 2625, 2633, 2642, 2651,  
 2659, 2668, 2674, 2682, 2691
- op\_softplus*, 978, 987, 996, 1005, 1014,  
 1023, 1032, 1040, 1048, 1057, 1065,  
 1074, 1082, 1091, 1100, 1108, 1117,  
 1126, 1135, 1138, 1142, 1144, 1148,  
 1151, 1155, 1163, 1172, 1178, 1180,  
 1184, 1193, 1198, 1206, 1214, 1221,  
 1229, 1232, 1236, 1242, 1248, 1250,  
 1254, 1262, 1271, 1279, 1287, 1296,  
 1304, 1313, 1315, 1319, 1327, 1335,  
 1342, 1344, 1348, 1354, 1363, 1372,  
 1381, 1390, 1398, 1407, 1415, 1421,  
 1426, 1432, 1442, 1444, 1448, 1456,  
 1464, 1470, 1476, 1484, 1492, 1501,  
 1506, 1515, 1521, 1527, 1535, 1543,  
 1552, 1558, 1566, 1574, 1577, 1581,  
 1589, 1598, 1606, 1609, 1613, 1615,  
 1619, 1627, 1636, 1644, 1651, 1657,  
 1664, 1670, 1677, 1683, 1690, 1696,  
 1703, 1708, 1714, 1721, 1729, 1737,  
 1745, 1753, 1760, 1765, 1769, 1773,  
 1781, 1790, 1798, 1807, 1815, 1823,  
 1831, 1839, 1848, 1856, 1864, 1872,  
 1881, 1887, 1889, 1893, 1895, 1899,  
 1908, 1913, 1920, 1928, 1937, 1945,  
 1948, 1952, 1960, 1968, 1977, 1986,  
 1994, 2003, 2005, 2009, 2017, 2026,  
 2028, 2032, 2040, 2049, 2057, 2065,  
 2072, 2074, 2078, 2087, 2095, 2103,  
 2106, 2110, 2118, 2126, 2135, 2143,  
 2145, 2149, 2155, 2164, 2172, 2180,  
 2189, 2191, 2195, 2198, 2202, 2210,  
 2218, 2225, 2233, 2241, 2247, 2254,  
 2260, 2267, 2273, 2279, 2288, 2290,  
 2294, 2296, 2300, 2306, 2308, 2312,  
 2320, 2323, 2327, 2335, 2343, 2351,  
 2357, 2363, 2369, 2371, 2375, 2376,  
 2385, 2389, 2395, 2400, 2408, 2411,  
 2415, 2423, 2431, 2440, 2448, 2456,  
 2464, 2471, 2476, 2485, 2493, 2499,  
 2507, 2513, 2521, 2530, 2538, 2546,
- 2554, 2563, 2569, 2577, 2585, 2594,  
 2602, 2610, 2617, 2625, 2633, 2642,  
 2651, 2659, 2668, 2674, 2682, 2691
- op\_softsign*, 978, 987, 996, 1005, 1014,  
 1023, 1032, 1040, 1048, 1057, 1065,  
 1074, 1082, 1091, 1100, 1108, 1117,  
 1126, 1135, 1138, 1142, 1144, 1148,  
 1151, 1155, 1163, 1172, 1178, 1180,  
 1184, 1193, 1198, 1206, 1214, 1221,  
 1229, 1232, 1236, 1242, 1248, 1250,  
 1254, 1262, 1271, 1279, 1287, 1296,  
 1304, 1313, 1315, 1319, 1327, 1335,  
 1342, 1345, 1348, 1354, 1363, 1372,  
 1381, 1390, 1398, 1407, 1415, 1421,  
 1426, 1432, 1442, 1444, 1448, 1456,  
 1464, 1470, 1476, 1484, 1492, 1501,  
 1507, 1515, 1521, 1527, 1535, 1543,  
 1552, 1558, 1566, 1574, 1577, 1581,  
 1589, 1598, 1606, 1609, 1613, 1615,  
 1619, 1627, 1636, 1644, 1651, 1657,  
 1664, 1670, 1677, 1683, 1690, 1697,  
 1703, 1708, 1714, 1721, 1729, 1737,  
 1745, 1753, 1760, 1765, 1769, 1773,  
 1781, 1790, 1798, 1807, 1815, 1823,  
 1831, 1839, 1848, 1856, 1864, 1872,  
 1881, 1887, 1889, 1893, 1895, 1899,  
 1908, 1913, 1920, 1928, 1937, 1945,  
 1948, 1952, 1960, 1968, 1977, 1986,  
 1994, 2003, 2005, 2009, 2017, 2026,  
 2028, 2032, 2041, 2049, 2057, 2065,  
 2072, 2074, 2078, 2087, 2095, 2103,  
 2106, 2110, 2118, 2126, 2135, 2143,  
 2145, 2149, 2156, 2164, 2172, 2180,  
 2189, 2191, 2195, 2198, 2202, 2210,  
 2218, 2225, 2233, 2241, 2247, 2254,  
 2260, 2267, 2273, 2279, 2288, 2290,  
 2294, 2296, 2300, 2306, 2308, 2312,  
 2320, 2323, 2327, 2335, 2343, 2351,  
 2357, 2363, 2369, 2371, 2375, 2378,  
 2382, 2383, 2395, 2400, 2408, 2411,  
 2415, 2423, 2431, 2440, 2448, 2456,  
 2464, 2471, 2476, 2485, 2493, 2499,  
 2507, 2513, 2521, 2530, 2538, 2546,  
 2554, 2563, 2569, 2577, 2585, 2594,  
 2602, 2610, 2617, 2625, 2633, 2642,  
 2651, 2659, 2668, 2674, 2682, 2691
- op\_solve*, 978, 987, 996, 1005, 1014, 1023,  
 1032, 1040, 1048, 1057, 1065, 1074,

- 1082, 1091, 1100, 1108, 1117, 1126,  
 1135, 1142, 1148, 1155, 1163, 1172,  
 1178, 1184, 1193, 1198, 1206, 1214,  
 1221, 1229, 1236, 1242, 1248, 1254,  
 1262, 1271, 1279, 1287, 1296, 1304,  
 1313, 1319, 1327, 1335, 1342, 1348,  
 1354, 1363, 1372, 1381, 1390, 1398,  
 1407, 1415, 1421, 1426, 1432, 1442,  
 1448, 1456, 1464, 1466, 1470, 1472,  
 1476, 1484, 1492, 1501, 1503, 1507,  
 1515, 1517, 1521, 1523, 1527, 1535,  
 1543, 1552, 1558, 1566, 1574, 1581,  
 1589, 1598, 1606, 1613, 1619, 1627,  
 1636, 1644, 1651, 1658, 1664, 1670,  
 1677, 1683, 1690, 1697, 1703, 1708,  
 1710, 1714, 1717, 1721, 1729, 1737,  
 1745, 1753, 1756, 1760, 1765, 1773,  
 1781, 1790, 1798, 1807, 1815, 1823,  
 1831, 1839, 1848, 1856, 1864, 1872,  
 1881, 1883, 1887, 1893, 1899, 1908,  
 1913, 1920, 1928, 1937, 1945, 1952,  
 1960, 1968, 1977, 1986, 1994, 2003,  
 2009, 2017, 2026, 2032, 2041, 2049,  
 2057, 2065, 2072, 2078, 2087, 2095,  
 2103, 2110, 2118, 2126, 2135, 2143,  
 2149, 2152, 2156, 2164, 2172, 2180,  
 2189, 2195, 2202, 2210, 2218, 2221,  
 2225, 2233, 2241, 2243, 2247, 2254,  
 2260, 2267, 2269, 2273, 2275, 2279,  
 2288, 2294, 2300, 2306, 2312, 2320,  
 2327, 2335, 2343, 2351, 2357, 2363,  
 2369, 2375, 2382, 2389, 2390, 2400,  
 2408, 2415, 2423, 2431, 2440, 2448,  
 2456, 2464, 2467, 2471, 2476, 2485,  
 2493, 2499, 2507, 2513, 2522, 2530,  
 2538, 2546, 2554, 2563, 2565, 2569,  
 2577, 2586, 2594, 2602, 2610, 2617,  
 2625, 2633, 2642, 2651, 2659, 2668,  
 2674, 2682, 2691
- op\_solve\_triangular*, 978, 987, 996, 1005,  
 1014, 1023, 1032, 1040, 1048, 1057,  
 1065, 1074, 1082, 1091, 1100, 1108,  
 1117, 1126, 1135, 1142, 1148, 1155,  
 1163, 1172, 1178, 1184, 1193, 1194,  
 1198, 1206, 1215, 1221, 1229, 1236,  
 1242, 1248, 1254, 1262, 1271, 1279,  
 1287, 1296, 1304, 1313, 1319, 1327,  
 1335, 1342, 1349, 1350, 1354, 1363,  
 1372, 1381, 1390, 1398, 1407, 1415,  
 1421, 1422, 1426, 1428, 1432, 1442,  
 1448, 1456, 1465, 1470, 1476, 1484,  
 1492, 1501, 1507, 1515, 1521, 1527,  
 1535, 1543, 1552, 1558, 1566, 1574,  
 1581, 1589, 1598, 1606, 1613, 1619,  
 1628, 1636, 1644, 1651, 1658, 1664,  
 1670, 1677, 1683, 1690, 1697, 1703,  
 1704, 1708, 1714, 1721, 1729, 1737,  
 1745, 1753, 1760, 1765, 1773, 1781,  
 1790, 1798, 1807, 1815, 1823, 1831,  
 1839, 1848, 1856, 1864, 1872, 1881,  
 1887, 1893, 1899, 1901, 1908, 1909,  
 1913, 1920, 1928, 1937, 1945, 1952,  
 1960, 1968, 1977, 1986, 1994, 2003,  
 2009, 2017, 2026, 2032, 2041, 2049,  
 2057, 2065, 2068, 2072, 2078, 2087,  
 2095, 2103, 2110, 2118, 2126, 2135,  
 2143, 2149, 2156, 2164, 2172, 2180,  
 2189, 2195, 2202, 2210, 2218, 2225,  
 2233, 2241, 2247, 2254, 2260, 2267,  
 2273, 2279, 2288, 2294, 2300, 2306,  
 2312, 2320, 2327, 2335, 2343, 2351,  
 2357, 2363, 2365, 2369, 2375, 2382,  
 2389, 2395, 2395, 2408, 2415, 2423,  
 2431, 2440, 2448, 2456, 2464, 2471,  
 2477, 2485, 2493, 2495, 2499, 2507,  
 2513, 2522, 2530, 2538, 2546, 2554,  
 2563, 2569, 2577, 2586, 2594, 2602,  
 2610, 2617, 2625, 2633, 2642, 2651,  
 2659, 2668, 2674, 2682, 2691
- op\_sort*, 974, 978, 983, 987, 992, 996, 1001,  
 1005, 1010, 1014, 1019, 1023, 1027,  
 1032, 1036, 1040, 1044, 1048, 1052,  
 1057, 1061, 1065, 1070, 1074, 1078,  
 1082, 1087, 1091, 1096, 1100, 1104,  
 1108, 1113, 1117, 1121, 1126, 1131,  
 1135, 1142, 1148, 1155, 1159, 1163,  
 1167, 1172, 1178, 1184, 1188, 1193,  
 1198, 1202, 1206, 1210, 1215, 1221,  
 1225, 1229, 1236, 1242, 1248, 1254,  
 1258, 1262, 1266, 1271, 1274, 1279,  
 1283, 1287, 1291, 1296, 1300, 1304,  
 1308, 1313, 1319, 1323, 1327, 1331,  
 1335, 1342, 1349, 1354, 1358, 1363,  
 1368, 1372, 1377, 1381, 1385, 1390,  
 1394, 1398, 1402, 1407, 1410, 1415,  
 1421, 1426, 1432, 1437, 1442, 1448,

- 1452, 1456, 1460, 1465, 1470, 1476,  
 1480, 1484, 1488, 1492, 1496, 1501,  
 1507, 1510, 1515, 1521, 1527, 1530,  
 1535, 1539, 1543, 1547, 1552, 1558,  
 1561, 1566, 1570, 1574, 1581, 1585,  
 1589, 1593, 1598, 1602, 1606, 1613,  
 1619, 1623, 1628, 1631, 1636, 1639,  
 1644, 1651, 1658, 1664, 1670, 1677,  
 1683, 1690, 1697, 1703, 1709, 1714,  
 1721, 1724, 1729, 1733, 1737, 1741,  
 1745, 1749, 1753, 1760, 1766, 1773,  
 1777, 1781, 1785, 1790, 1794, 1798,  
 1802, 1807, 1810, 1815, 1818, 1823,  
 1827, 1831, 1835, 1839, 1843, 1848,  
 1851, 1856, 1860, 1864, 1868, 1872,  
 1876, 1881, 1887, 1893, 1899, 1903,  
 1908, 1913, 1920, 1924, 1928, 1932,  
 1937, 1941, 1945, 1952, 1955, 1960,  
 1964, 1968, 1973, 1977, 1981, 1986,  
 1990, 1994, 1998, 2003, 2009, 2013,  
 2017, 2021, 2026, 2032, 2036, 2041,  
 2044, 2049, 2053, 2057, 2061, 2065,  
 2072, 2078, 2082, 2087, 2090, 2095,  
 2099, 2103, 2110, 2113, 2118, 2122,  
 2126, 2130, 2135, 2139, 2143, 2149,  
 2156, 2160, 2164, 2168, 2172, 2176,  
 2180, 2184, 2189, 2195, 2202, 2206,  
 2210, 2214, 2218, 2225, 2228, 2233,  
 2237, 2241, 2247, 2254, 2260, 2267,  
 2273, 2279, 2283, 2288, 2294, 2300,  
 2306, 2312, 2316, 2320, 2327, 2330,  
 2335, 2338, 2343, 2347, 2351, 2357,  
 2363, 2369, 2375, 2382, 2389, 2395,  
 2400, 2401, 2415, 2419, 2423, 2427,  
 2431, 2435, 2440, 2443, 2448, 2451,  
 2456, 2460, 2464, 2471, 2477, 2480,  
 2485, 2489, 2493, 2499, 2502, 2507,  
 2513, 2517, 2522, 2525, 2530, 2533,  
 2538, 2542, 2546, 2550, 2554, 2558,  
 2563, 2569, 2573, 2577, 2581, 2586,  
 2589, 2594, 2598, 2602, 2606, 2610,  
 2617, 2621, 2625, 2629, 2633, 2637,  
 2642, 2651, 2655, 2659, 2663, 2668,  
 2674, 2678, 2682, 2686, 2691
- op\_sparse\_categorical\_crossentropy*,  
 978, 987, 996, 1005, 1014, 1023,  
 1032, 1040, 1048, 1057, 1065, 1074,  
 1082, 1091, 1100, 1108, 1117, 1126,
- 1135, 1138, 1142, 1144, 1148, 1151,  
 1155, 1163, 1172, 1178, 1180, 1184,  
 1193, 1198, 1206, 1215, 1221, 1229,  
 1232, 1236, 1242, 1248, 1250, 1254,  
 1262, 1271, 1279, 1287, 1296, 1304,  
 1313, 1315, 1319, 1327, 1335, 1342,  
 1345, 1349, 1354, 1363, 1372, 1381,  
 1390, 1398, 1407, 1415, 1421, 1426,  
 1432, 1442, 1444, 1448, 1456, 1465,  
 1470, 1476, 1484, 1492, 1501, 1507,  
 1515, 1521, 1527, 1535, 1543, 1552,  
 1558, 1566, 1574, 1577, 1581, 1589,  
 1598, 1606, 1609, 1613, 1615, 1619,  
 1628, 1636, 1644, 1651, 1658, 1664,  
 1670, 1677, 1683, 1690, 1697, 1703,  
 1709, 1714, 1721, 1729, 1737, 1745,  
 1753, 1760, 1766, 1769, 1773, 1781,  
 1790, 1798, 1807, 1815, 1823, 1831,  
 1839, 1848, 1856, 1864, 1872, 1881,  
 1887, 1889, 1893, 1895, 1899, 1908,  
 1913, 1920, 1928, 1937, 1945, 1948,  
 1952, 1960, 1968, 1977, 1986, 1994,  
 2003, 2005, 2009, 2017, 2026, 2028,  
 2032, 2041, 2049, 2057, 2065, 2072,  
 2074, 2078, 2087, 2095, 2103, 2106,  
 2110, 2118, 2126, 2135, 2143, 2145,  
 2149, 2156, 2164, 2172, 2180, 2189,  
 2191, 2195, 2198, 2202, 2210, 2218,  
 2225, 2233, 2241, 2247, 2254, 2260,  
 2267, 2273, 2279, 2288, 2290, 2294,  
 2296, 2300, 2306, 2308, 2312, 2320,  
 2323, 2327, 2335, 2343, 2351, 2357,  
 2363, 2369, 2371, 2375, 2378, 2382,  
 2385, 2389, 2395, 2400, 2408, 2409,  
 2423, 2431, 2440, 2448, 2456, 2464,  
 2471, 2477, 2485, 2493, 2499, 2507,  
 2513, 2522, 2530, 2538, 2546, 2554,  
 2563, 2569, 2577, 2586, 2594, 2602,  
 2610, 2617, 2625, 2633, 2642, 2651,  
 2659, 2668, 2674, 2682, 2691
- op\_split*, 974, 978, 983, 987, 992, 996, 1001,  
 1005, 1010, 1014, 1019, 1023, 1027,  
 1032, 1036, 1040, 1044, 1048, 1052,  
 1057, 1061, 1065, 1070, 1074, 1078,  
 1082, 1087, 1091, 1096, 1100, 1104,  
 1108, 1113, 1117, 1121, 1126, 1131,  
 1135, 1142, 1148, 1155, 1159, 1163,  
 1167, 1172, 1178, 1185, 1188, 1193,

1198, 1202, 1206, 1210, 1215, 1221,  
 1225, 1229, 1236, 1242, 1248, 1254,  
 1258, 1262, 1266, 1271, 1274, 1279,  
 1283, 1287, 1291, 1296, 1300, 1304,  
 1308, 1313, 1319, 1323, 1327, 1331,  
 1335, 1342, 1349, 1354, 1358, 1363,  
 1368, 1372, 1377, 1381, 1385, 1390,  
 1394, 1398, 1402, 1407, 1410, 1415,  
 1421, 1426, 1432, 1437, 1442, 1448,  
 1452, 1456, 1460, 1465, 1470, 1476,  
 1480, 1484, 1488, 1492, 1496, 1501,  
 1507, 1510, 1515, 1521, 1527, 1530,  
 1535, 1539, 1543, 1547, 1552, 1558,  
 1561, 1566, 1570, 1574, 1581, 1585,  
 1589, 1593, 1598, 1602, 1606, 1613,  
 1619, 1623, 1628, 1631, 1636, 1639,  
 1644, 1651, 1658, 1664, 1670, 1677,  
 1683, 1690, 1697, 1703, 1709, 1715,  
 1721, 1724, 1729, 1733, 1737, 1741,  
 1745, 1749, 1753, 1760, 1766, 1773,  
 1777, 1781, 1785, 1790, 1794, 1798,  
 1802, 1807, 1810, 1815, 1818, 1823,  
 1827, 1831, 1835, 1839, 1843, 1848,  
 1851, 1856, 1860, 1864, 1868, 1872,  
 1876, 1881, 1887, 1893, 1899, 1903,  
 1908, 1913, 1920, 1924, 1928, 1933,  
 1937, 1941, 1945, 1952, 1955, 1960,  
 1964, 1968, 1973, 1977, 1981, 1986,  
 1990, 1994, 1998, 2003, 2009, 2013,  
 2017, 2021, 2026, 2032, 2036, 2041,  
 2044, 2049, 2053, 2057, 2061, 2065,  
 2072, 2078, 2082, 2087, 2090, 2095,  
 2099, 2103, 2110, 2113, 2118, 2122,  
 2126, 2130, 2135, 2139, 2143, 2150,  
 2156, 2160, 2164, 2168, 2172, 2176,  
 2180, 2184, 2189, 2195, 2202, 2206,  
 2210, 2214, 2218, 2225, 2228, 2233,  
 2237, 2241, 2247, 2254, 2260, 2267,  
 2273, 2279, 2283, 2288, 2294, 2300,  
 2306, 2312, 2316, 2320, 2327, 2330,  
 2335, 2338, 2343, 2347, 2351, 2357,  
 2363, 2369, 2375, 2382, 2389, 2395,  
 2400, 2404, 2408, 2415, 2416, 2427,  
 2432, 2435, 2440, 2443, 2448, 2451,  
 2456, 2460, 2464, 2471, 2477, 2480,  
 2485, 2489, 2493, 2499, 2502, 2507,  
 2513, 2517, 2522, 2525, 2530, 2533,  
 2538, 2542, 2546, 2550, 2555, 2558,  
 2563, 2569, 2573, 2577, 2581, 2586,  
 2589, 2594, 2598, 2602, 2606, 2610,  
 2617, 2621, 2625, 2629, 2633, 2637,  
 2642, 2651, 2655, 2660, 2663, 2668,  
 2674, 2678, 2683, 2686, 2691  
 op\_sqrt, 974, 978, 983, 987, 992, 996, 1001,  
 1006, 1010, 1014, 1019, 1024, 1027,  
 1032, 1036, 1040, 1044, 1049, 1052,  
 1057, 1061, 1065, 1070, 1074, 1078,  
 1082, 1087, 1091, 1096, 1100, 1104,  
 1108, 1113, 1117, 1121, 1126, 1131,  
 1135, 1142, 1148, 1155, 1159, 1164,  
 1167, 1172, 1178, 1185, 1188, 1193,  
 1198, 1202, 1206, 1210, 1215, 1221,  
 1225, 1230, 1236, 1242, 1248, 1254,  
 1258, 1263, 1266, 1271, 1274, 1279,  
 1283, 1287, 1291, 1296, 1300, 1304,  
 1308, 1313, 1319, 1323, 1327, 1331,  
 1336, 1342, 1349, 1354, 1358, 1363,  
 1368, 1373, 1377, 1381, 1385, 1390,  
 1394, 1399, 1402, 1407, 1411, 1415,  
 1421, 1426, 1432, 1437, 1442, 1448,  
 1452, 1456, 1460, 1465, 1470, 1476,  
 1480, 1484, 1488, 1493, 1496, 1501,  
 1507, 1510, 1515, 1521, 1527, 1530,  
 1535, 1539, 1543, 1547, 1552, 1558,  
 1561, 1566, 1570, 1574, 1581, 1585,  
 1590, 1593, 1598, 1602, 1607, 1613,  
 1619, 1623, 1628, 1631, 1636, 1639,  
 1644, 1651, 1658, 1664, 1670, 1677,  
 1683, 1690, 1697, 1703, 1709, 1715,  
 1721, 1724, 1729, 1733, 1737, 1741,  
 1745, 1749, 1754, 1760, 1766, 1773,  
 1777, 1781, 1785, 1790, 1794, 1799,  
 1802, 1807, 1810, 1815, 1818, 1823,  
 1827, 1831, 1835, 1840, 1843, 1848,  
 1851, 1856, 1860, 1864, 1868, 1872,  
 1876, 1881, 1887, 1893, 1899, 1903,  
 1908, 1913, 1920, 1924, 1928, 1933,  
 1937, 1941, 1945, 1952, 1955, 1960,  
 1964, 1968, 1973, 1977, 1981, 1986,  
 1990, 1994, 1998, 2003, 2009, 2013,  
 2017, 2021, 2026, 2032, 2036, 2041,  
 2044, 2049, 2053, 2057, 2061, 2066,  
 2072, 2078, 2082, 2087, 2090, 2095,  
 2099, 2103, 2110, 2113, 2118, 2122,  
 2127, 2130, 2135, 2139, 2143, 2150,  
 2156, 2160, 2164, 2168, 2172, 2176,

2181, 2184, 2189, 2195, 2202, 2206,  
 2210, 2214, 2219, 2225, 2228, 2233,  
 2237, 2241, 2247, 2254, 2260, 2267,  
 2273, 2279, 2283, 2288, 2294, 2300,  
 2306, 2312, 2316, 2321, 2327, 2330,  
 2335, 2338, 2343, 2347, 2351, 2357,  
 2363, 2369, 2375, 2382, 2389, 2395,  
 2400, 2404, 2409, 2415, 2419, 2423,  
 2424, 2435, 2440, 2443, 2448, 2452,  
 2456, 2460, 2464, 2471, 2477, 2480,  
 2485, 2489, 2493, 2499, 2503, 2507,  
 2513, 2517, 2522, 2525, 2530, 2533,  
 2538, 2542, 2546, 2550, 2555, 2558,  
 2563, 2569, 2573, 2577, 2581, 2586,  
 2589, 2594, 2598, 2602, 2606, 2610,  
 2617, 2621, 2625, 2629, 2633, 2637,  
 2642, 2651, 2655, 2660, 2663, 2668,  
 2674, 2678, 2683, 2686, 2691

op\_square, 974, 978, 983, 987, 992, 996,  
 1001, 1006, 1010, 1014, 1019, 1024,  
 1027, 1032, 1036, 1040, 1044, 1049,  
 1052, 1057, 1061, 1065, 1070, 1074,  
 1078, 1082, 1087, 1091, 1096, 1100,  
 1104, 1109, 1113, 1117, 1121, 1126,  
 1131, 1135, 1142, 1148, 1155, 1159,  
 1164, 1167, 1172, 1178, 1185, 1188,  
 1193, 1198, 1202, 1206, 1210, 1215,  
 1221, 1225, 1230, 1236, 1242, 1248,  
 1254, 1258, 1263, 1266, 1271, 1274,  
 1279, 1283, 1287, 1291, 1296, 1300,  
 1304, 1308, 1313, 1319, 1323, 1327,  
 1331, 1336, 1342, 1349, 1354, 1358,  
 1363, 1368, 1373, 1377, 1381, 1385,  
 1390, 1394, 1399, 1402, 1407, 1411,  
 1415, 1421, 1427, 1432, 1437, 1442,  
 1448, 1452, 1456, 1460, 1465, 1470,  
 1476, 1480, 1484, 1488, 1493, 1496,  
 1501, 1507, 1510, 1515, 1521, 1527,  
 1530, 1535, 1539, 1543, 1547, 1552,  
 1558, 1561, 1566, 1570, 1574, 1581,  
 1585, 1590, 1593, 1598, 1602, 1607,  
 1613, 1619, 1623, 1628, 1631, 1636,  
 1639, 1644, 1651, 1658, 1664, 1670,  
 1677, 1683, 1690, 1697, 1703, 1709,  
 1715, 1721, 1724, 1729, 1733, 1737,  
 1741, 1745, 1749, 1754, 1760, 1766,  
 1773, 1777, 1781, 1785, 1790, 1794,  
 1799, 1802, 1807, 1810, 1815, 1818,

1823, 1827, 1831, 1835, 1840, 1843,  
 1848, 1851, 1856, 1860, 1864, 1868,  
 1872, 1876, 1881, 1887, 1893, 1899,  
 1903, 1908, 1914, 1920, 1924, 1928,  
 1933, 1937, 1941, 1945, 1952, 1955,  
 1960, 1964, 1968, 1973, 1977, 1981,  
 1986, 1990, 1994, 1998, 2003, 2009,  
 2013, 2017, 2021, 2026, 2032, 2036,  
 2041, 2044, 2049, 2053, 2057, 2061,  
 2066, 2072, 2078, 2082, 2087, 2090,  
 2095, 2099, 2103, 2110, 2113, 2118,  
 2122, 2127, 2130, 2135, 2139, 2143,  
 2150, 2156, 2160, 2164, 2168, 2172,  
 2176, 2181, 2184, 2189, 2195, 2202,  
 2206, 2210, 2214, 2219, 2225, 2228,  
 2233, 2237, 2241, 2247, 2254, 2260,  
 2267, 2273, 2279, 2283, 2288, 2294,  
 2300, 2306, 2312, 2316, 2321, 2327,  
 2330, 2335, 2338, 2343, 2347, 2351,  
 2357, 2363, 2369, 2375, 2382, 2389,  
 2395, 2400, 2404, 2409, 2415, 2419,  
 2423, 2427, 2432, 2437, 2443, 2448,  
 2452, 2456, 2460, 2464, 2471, 2477,  
 2480, 2485, 2489, 2493, 2499, 2503,  
 2507, 2513, 2517, 2522, 2525, 2530,  
 2533, 2538, 2542, 2546, 2550, 2555,  
 2558, 2563, 2569, 2573, 2577, 2581,  
 2586, 2589, 2594, 2598, 2602, 2606,  
 2610, 2617, 2621, 2625, 2629, 2633,  
 2638, 2642, 2651, 2655, 2660, 2663,  
 2668, 2674, 2678, 2683, 2686, 2691

op\_squeeze, 974, 978, 983, 987, 992, 996,  
 1001, 1006, 1010, 1014, 1019, 1024,  
 1027, 1032, 1036, 1040, 1044, 1049,  
 1052, 1057, 1061, 1065, 1070, 1074,  
 1078, 1082, 1087, 1091, 1096, 1100,  
 1104, 1109, 1113, 1117, 1121, 1126,  
 1131, 1135, 1142, 1149, 1155, 1159,  
 1164, 1167, 1172, 1178, 1185, 1188,  
 1193, 1198, 1202, 1206, 1210, 1215,  
 1221, 1225, 1230, 1236, 1242, 1248,  
 1254, 1258, 1263, 1266, 1271, 1274,  
 1279, 1283, 1287, 1291, 1296, 1300,  
 1304, 1308, 1313, 1319, 1323, 1327,  
 1331, 1336, 1342, 1349, 1354, 1358,  
 1363, 1368, 1373, 1377, 1381, 1385,  
 1390, 1394, 1399, 1402, 1407, 1411,  
 1415, 1421, 1427, 1432, 1437, 1442,



- 1448, 1452, 1456, 1460, 1465, 1470,  
 1476, 1480, 1484, 1488, 1493, 1496,  
 1501, 1507, 1510, 1515, 1521, 1527,  
 1531, 1535, 1539, 1543, 1547, 1552,  
 1558, 1561, 1566, 1570, 1574, 1581,  
 1585, 1590, 1593, 1598, 1602, 1607,  
 1613, 1619, 1623, 1628, 1631, 1636,  
 1639, 1644, 1651, 1658, 1664, 1670,  
 1677, 1683, 1690, 1697, 1703, 1709,  
 1715, 1721, 1724, 1729, 1733, 1737,  
 1741, 1745, 1749, 1754, 1760, 1766,  
 1773, 1777, 1781, 1785, 1790, 1794,  
 1799, 1802, 1807, 1810, 1815, 1818,  
 1823, 1827, 1831, 1835, 1840, 1843,  
 1848, 1851, 1856, 1860, 1864, 1868,  
 1872, 1877, 1881, 1887, 1893, 1899,  
 1903, 1908, 1914, 1920, 1924, 1928,  
 1933, 1937, 1941, 1945, 1952, 1956,  
 1960, 1964, 1968, 1973, 1977, 1981,  
 1986, 1990, 1994, 1998, 2003, 2009,  
 2013, 2017, 2021, 2026, 2032, 2036,  
 2041, 2044, 2049, 2053, 2057, 2061,  
 2066, 2072, 2078, 2082, 2087, 2090,  
 2095, 2099, 2103, 2110, 2113, 2118,  
 2122, 2127, 2130, 2135, 2139, 2143,  
 2150, 2156, 2160, 2164, 2168, 2172,  
 2176, 2181, 2184, 2189, 2195, 2202,  
 2206, 2210, 2214, 2219, 2225, 2228,  
 2233, 2237, 2241, 2247, 2254, 2260,  
 2267, 2273, 2279, 2283, 2288, 2294,  
 2300, 2306, 2312, 2316, 2321, 2327,  
 2330, 2335, 2338, 2343, 2347, 2351,  
 2357, 2364, 2369, 2375, 2382, 2389,  
 2395, 2400, 2404, 2409, 2415, 2419,  
 2423, 2427, 2432, 2435, 2440, 2440,  
 2452, 2456, 2460, 2464, 2471, 2477,  
 2480, 2485, 2489, 2493, 2499, 2503,  
 2507, 2513, 2517, 2522, 2525, 2530,  
 2533, 2538, 2542, 2546, 2550, 2555,  
 2558, 2563, 2569, 2573, 2577, 2581,  
 2586, 2589, 2594, 2598, 2602, 2606,  
 2610, 2617, 2621, 2625, 2629, 2633,  
 2638, 2642, 2651, 2655, 2660, 2663,  
 2668, 2674, 2678, 2683, 2686, 2691  
 1082, 1087, 1091, 1096, 1100, 1104,  
 1109, 1113, 1117, 1121, 1126, 1131,  
 1135, 1142, 1149, 1155, 1159, 1164,  
 1167, 1172, 1178, 1185, 1188, 1193,  
 1198, 1202, 1206, 1210, 1215, 1221,  
 1225, 1230, 1236, 1242, 1248, 1254,  
 1258, 1263, 1266, 1271, 1274, 1279,  
 1283, 1287, 1291, 1296, 1300, 1304,  
 1309, 1313, 1319, 1323, 1327, 1331,  
 1336, 1342, 1349, 1354, 1358, 1363,  
 1368, 1373, 1377, 1381, 1385, 1390,  
 1394, 1399, 1402, 1407, 1411, 1415,  
 1421, 1427, 1432, 1437, 1442, 1448,  
 1452, 1456, 1460, 1465, 1470, 1476,  
 1480, 1484, 1488, 1493, 1496, 1501,  
 1507, 1510, 1515, 1521, 1527, 1531,  
 1535, 1539, 1543, 1547, 1552, 1558,  
 1562, 1566, 1570, 1574, 1581, 1585,  
 1590, 1593, 1598, 1602, 1607, 1613,  
 1619, 1623, 1628, 1631, 1636, 1639,  
 1644, 1651, 1658, 1664, 1671, 1677,  
 1683, 1690, 1697, 1703, 1709, 1715,  
 1721, 1724, 1729, 1733, 1737, 1741,  
 1745, 1749, 1754, 1760, 1766, 1773,  
 1777, 1781, 1785, 1790, 1794, 1799,  
 1802, 1807, 1810, 1815, 1819, 1823,  
 1827, 1831, 1835, 1840, 1843, 1848,  
 1851, 1856, 1860, 1864, 1868, 1872,  
 1877, 1881, 1887, 1893, 1899, 1903,  
 1908, 1914, 1920, 1924, 1928, 1933,  
 1937, 1941, 1945, 1952, 1956, 1960,  
 1964, 1968, 1973, 1977, 1981, 1986,  
 1990, 1994, 1998, 2003, 2009, 2013,  
 2017, 2021, 2026, 2032, 2036, 2041,  
 2044, 2049, 2053, 2057, 2061, 2066,  
 2072, 2078, 2082, 2087, 2090, 2095,  
 2099, 2103, 2110, 2113, 2118, 2122,  
 2127, 2130, 2135, 2139, 2143, 2150,  
 2156, 2160, 2164, 2168, 2172, 2176,  
 2181, 2184, 2189, 2195, 2202, 2206,  
 2210, 2214, 2219, 2225, 2229, 2233,  
 2237, 2241, 2247, 2254, 2260, 2267,  
 2273, 2279, 2283, 2288, 2294, 2300,  
 2306, 2312, 2316, 2321, 2327, 2330,  
 2335, 2339, 2343, 2347, 2351, 2357,  
 2364, 2369, 2375, 2382, 2389, 2395,  
 2400, 2404, 2409, 2415, 2419, 2423,  
 2427, 2432, 2435, 2440, 2443, 2448,  
 op\_stack, 974, 978, 983, 987, 992, 996, 1001,  
 1006, 1010, 1014, 1019, 1024, 1027,  
 1032, 1036, 1040, 1044, 1049, 1052,  
 1057, 1061, 1065, 1070, 1074, 1078,



- 2449, 2460, 2464, 2471, 2477, 2480,  
2485, 2489, 2493, 2499, 2503, 2507,  
2513, 2517, 2522, 2525, 2530, 2534,  
2538, 2542, 2546, 2550, 2555, 2558,  
2563, 2569, 2573, 2577, 2581, 2586,  
2589, 2594, 2598, 2602, 2606, 2610,  
2617, 2621, 2625, 2629, 2633, 2638,  
2642, 2651, 2655, 2660, 2663, 2668,  
2674, 2678, 2683, 2686, 2691
- op\_std, 974, 978, 983, 987, 992, 996, 1001,  
1006, 1010, 1014, 1019, 1024, 1027,  
1032, 1036, 1040, 1044, 1049, 1052,  
1057, 1061, 1065, 1070, 1074, 1078,  
1082, 1087, 1091, 1096, 1100, 1104,  
1109, 1113, 1117, 1121, 1126, 1131,  
1135, 1142, 1149, 1155, 1159, 1164,  
1167, 1172, 1178, 1185, 1188, 1193,  
1198, 1202, 1206, 1210, 1215, 1221,  
1225, 1230, 1236, 1242, 1248, 1254,  
1258, 1263, 1266, 1271, 1274, 1279,  
1283, 1287, 1291, 1296, 1300, 1304,  
1309, 1313, 1319, 1323, 1327, 1331,  
1336, 1342, 1349, 1354, 1359, 1363,  
1368, 1373, 1377, 1381, 1385, 1390,  
1394, 1399, 1402, 1407, 1411, 1415,  
1421, 1427, 1432, 1437, 1442, 1448,  
1452, 1456, 1460, 1465, 1470, 1476,  
1480, 1484, 1488, 1493, 1496, 1501,  
1507, 1510, 1515, 1521, 1527, 1531,  
1535, 1539, 1543, 1547, 1552, 1558,  
1562, 1566, 1570, 1574, 1581, 1585,  
1590, 1594, 1598, 1602, 1607, 1613,  
1619, 1623, 1628, 1631, 1636, 1639,  
1644, 1651, 1658, 1664, 1671, 1677,  
1683, 1690, 1697, 1703, 1709, 1715,  
1721, 1724, 1729, 1733, 1737, 1741,  
1745, 1749, 1754, 1760, 1766, 1773,  
1777, 1781, 1785, 1790, 1794, 1799,  
1802, 1807, 1810, 1815, 1819, 1823,  
1827, 1831, 1835, 1840, 1843, 1848,  
1851, 1856, 1860, 1864, 1868, 1872,  
1877, 1881, 1887, 1893, 1899, 1904,  
1908, 1914, 1920, 1924, 1928, 1933,  
1937, 1941, 1945, 1952, 1956, 1960,  
1964, 1968, 1973, 1977, 1981, 1986,  
1990, 1994, 1998, 2003, 2009, 2013,  
2017, 2021, 2026, 2032, 2036, 2041,  
2044, 2049, 2053, 2057, 2061, 2066,  
2072, 2078, 2082, 2087, 2090, 2095,  
2099, 2103, 2110, 2113, 2118, 2122,  
2127, 2131, 2135, 2139, 2143, 2150,  
2156, 2160, 2164, 2168, 2172, 2176,  
2181, 2184, 2189, 2195, 2202, 2206,  
2210, 2214, 2219, 2225, 2229, 2233,  
2237, 2241, 2247, 2254, 2260, 2267,  
2273, 2279, 2283, 2288, 2294, 2300,  
2306, 2312, 2316, 2321, 2327, 2330,  
2335, 2339, 2343, 2347, 2351, 2357,  
2364, 2369, 2375, 2382, 2389, 2395,  
2400, 2404, 2409, 2415, 2419, 2423,  
2427, 2432, 2435, 2440, 2443, 2448,  
2452, 2456, 2457, 2471, 2477, 2480,  
2485, 2489, 2493, 2499, 2503, 2507,  
2513, 2517, 2522, 2525, 2530, 2534,  
2538, 2542, 2546, 2550, 2555, 2558,  
2563, 2569, 2573, 2577, 2581, 2586,  
2589, 2594, 2598, 2602, 2606, 2610,  
2617, 2621, 2625, 2629, 2634, 2638,  
2642, 2651, 2655, 2660, 2663, 2668,  
2674, 2678, 2683, 2686, 2691
- op\_stft, 978, 987, 996, 1006, 1014, 1024,  
1032, 1040, 1049, 1057, 1065, 1074,  
1082, 1091, 1100, 1109, 1117, 1126,  
1135, 1142, 1149, 1155, 1164, 1172,  
1178, 1185, 1193, 1198, 1206, 1215,  
1221, 1230, 1236, 1242, 1248, 1254,  
1263, 1271, 1279, 1287, 1296, 1304,  
1313, 1319, 1327, 1336, 1342, 1349,  
1354, 1363, 1373, 1381, 1390, 1399,  
1407, 1415, 1421, 1427, 1432, 1442,  
1448, 1456, 1465, 1466, 1470, 1472,  
1476, 1484, 1493, 1501, 1503, 1507,  
1515, 1517, 1521, 1523, 1527, 1535,  
1543, 1552, 1558, 1566, 1574, 1581,  
1590, 1598, 1607, 1613, 1619, 1628,  
1636, 1644, 1651, 1658, 1664, 1671,  
1677, 1683, 1690, 1697, 1703, 1709,  
1710, 1715, 1717, 1721, 1729, 1737,  
1745, 1754, 1756, 1760, 1766, 1773,  
1781, 1790, 1799, 1807, 1815, 1823,  
1831, 1840, 1848, 1856, 1864, 1872,  
1881, 1883, 1887, 1893, 1899, 1908,  
1914, 1920, 1928, 1937, 1945, 1952,  
1960, 1968, 1977, 1986, 1994, 2003,  
2009, 2017, 2026, 2032, 2041, 2049,  
2057, 2066, 2072, 2078, 2087, 2095,

- 2103, 2110, 2118, 2127, 2135, 2143,  
 2150, 2152, 2156, 2164, 2172, 2181,  
 2189, 2195, 2202, 2210, 2219, 2221,  
 2225, 2233, 2241, 2243, 2247, 2254,  
 2260, 2267, 2269, 2273, 2275, 2279,  
 2288, 2294, 2300, 2306, 2312, 2321,  
 2327, 2335, 2343, 2351, 2357, 2364,  
 2369, 2375, 2382, 2389, 2391, 2395,  
 2400, 2409, 2415, 2423, 2432, 2440,  
 2448, 2456, 2464, 2465, 2477, 2485,  
 2493, 2499, 2507, 2513, 2522, 2530,  
 2538, 2546, 2555, 2563, 2565, 2569,  
 2578, 2586, 2594, 2602, 2610, 2617,  
 2625, 2634, 2642, 2651, 2660, 2668,  
 2674, 2683, 2691
- op\_stop\_gradient*, 978, 987, 996, 1006,  
 1014, 1024, 1032, 1040, 1049, 1057,  
 1065, 1074, 1082, 1091, 1100, 1109,  
 1118, 1126, 1135, 1142, 1149, 1155,  
 1164, 1172, 1174, 1178, 1185, 1193,  
 1198, 1207, 1215, 1217, 1221, 1230,  
 1236, 1238, 1242, 1244, 1248, 1254,  
 1263, 1271, 1279, 1287, 1296, 1304,  
 1313, 1319, 1327, 1336, 1338, 1342,  
 1349, 1354, 1363, 1373, 1381, 1390,  
 1399, 1407, 1415, 1417, 1421, 1427,  
 1432, 1442, 1448, 1456, 1465, 1471,  
 1476, 1484, 1493, 1501, 1507, 1515,  
 1521, 1527, 1535, 1543, 1552, 1554,  
 1558, 1566, 1574, 1581, 1590, 1598,  
 1607, 1613, 1620, 1628, 1636, 1644,  
 1651, 1658, 1664, 1671, 1677, 1683,  
 1690, 1697, 1703, 1709, 1715, 1721,  
 1729, 1737, 1745, 1754, 1760, 1761,  
 1766, 1773, 1781, 1790, 1799, 1807,  
 1815, 1823, 1831, 1840, 1848, 1856,  
 1864, 1873, 1881, 1887, 1893, 1899,  
 1908, 1914, 1916, 1920, 1928, 1937,  
 1945, 1952, 1960, 1968, 1977, 1986,  
 1994, 2003, 2009, 2017, 2026, 2032,  
 2041, 2049, 2057, 2066, 2072, 2078,  
 2087, 2095, 2103, 2110, 2118, 2127,  
 2135, 2143, 2150, 2156, 2164, 2172,  
 2181, 2189, 2195, 2202, 2210, 2219,  
 2225, 2233, 2241, 2247, 2250, 2254,  
 2256, 2260, 2263, 2267, 2273, 2279,  
 2288, 2294, 2300, 2302, 2306, 2312,  
 2321, 2327, 2335, 2343, 2351, 2353,  
 2357, 2359, 2364, 2369, 2375, 2382,  
 2389, 2395, 2400, 2409, 2415, 2423,  
 2432, 2440, 2448, 2456, 2464, 2471,  
 2472, 2485, 2493, 2499, 2507, 2509,  
 2513, 2522, 2530, 2538, 2546, 2555,  
 2563, 2569, 2578, 2586, 2594, 2602,  
 2610, 2613, 2617, 2625, 2634, 2642,  
 2647, 2652, 2660, 2668, 2670, 2674,  
 2683, 2691
- op\_subtract*, 974, 979, 983, 987, 992, 996,  
 1001, 1006, 1010, 1014, 1019, 1024,  
 1027, 1032, 1036, 1040, 1044, 1049,  
 1052, 1057, 1061, 1065, 1070, 1074,  
 1078, 1082, 1087, 1091, 1096, 1100,  
 1104, 1109, 1113, 1118, 1121, 1126,  
 1131, 1135, 1142, 1149, 1155, 1159,  
 1164, 1167, 1172, 1178, 1185, 1188,  
 1193, 1198, 1202, 1207, 1210, 1215,  
 1221, 1225, 1230, 1236, 1242, 1248,  
 1254, 1258, 1263, 1266, 1271, 1274,  
 1279, 1283, 1287, 1291, 1296, 1300,  
 1305, 1309, 1313, 1319, 1323, 1327,  
 1331, 1336, 1342, 1349, 1354, 1359,  
 1363, 1368, 1373, 1377, 1381, 1385,  
 1390, 1394, 1399, 1402, 1407, 1411,  
 1415, 1421, 1427, 1432, 1437, 1442,  
 1448, 1452, 1456, 1460, 1465, 1471,  
 1476, 1480, 1484, 1488, 1493, 1496,  
 1501, 1507, 1510, 1515, 1521, 1527,  
 1531, 1535, 1539, 1543, 1547, 1552,  
 1558, 1562, 1566, 1570, 1574, 1581,  
 1585, 1590, 1594, 1598, 1602, 1607,  
 1613, 1620, 1623, 1628, 1631, 1636,  
 1639, 1644, 1651, 1658, 1664, 1671,  
 1677, 1683, 1690, 1697, 1703, 1709,  
 1715, 1721, 1724, 1729, 1733, 1737,  
 1741, 1745, 1749, 1754, 1760, 1766,  
 1773, 1777, 1781, 1785, 1790, 1794,  
 1799, 1802, 1807, 1810, 1815, 1819,  
 1823, 1827, 1831, 1835, 1840, 1843,  
 1848, 1851, 1856, 1860, 1864, 1868,  
 1873, 1877, 1881, 1887, 1893, 1899,  
 1904, 1908, 1914, 1920, 1924, 1928,  
 1933, 1937, 1941, 1946, 1952, 1956,  
 1960, 1964, 1968, 1973, 1977, 1981,  
 1986, 1990, 1994, 1998, 2003, 2009,  
 2013, 2017, 2021, 2026, 2032, 2036,  
 2041, 2044, 2049, 2053, 2057, 2061,

- 2066, 2072, 2078, 2082, 2087, 2090,  
2095, 2099, 2103, 2110, 2113, 2118,  
2122, 2127, 2131, 2135, 2139, 2143,  
2150, 2156, 2160, 2164, 2168, 2172,  
2176, 2181, 2184, 2189, 2195, 2202,  
2206, 2210, 2214, 2219, 2225, 2229,  
2233, 2237, 2241, 2247, 2254, 2260,  
2267, 2273, 2279, 2283, 2288, 2294,  
2300, 2306, 2312, 2316, 2321, 2327,  
2330, 2335, 2339, 2343, 2347, 2351,  
2357, 2364, 2369, 2375, 2382, 2389,  
2395, 2400, 2404, 2409, 2415, 2419,  
2424, 2427, 2432, 2435, 2440, 2443,  
2448, 2452, 2456, 2460, 2464, 2471,  
2477, 2477, 2489, 2493, 2499, 2503,  
2507, 2514, 2517, 2522, 2525, 2530,  
2534, 2538, 2542, 2546, 2550, 2555,  
2558, 2563, 2569, 2573, 2578, 2581,  
2586, 2589, 2594, 2598, 2602, 2606,  
2611, 2617, 2621, 2625, 2629, 2634,  
2638, 2642, 2652, 2655, 2660, 2663,  
2668, 2674, 2678, 2683, 2686, 2691
- op\_sum, 974, 979, 983, 988, 992, 996, 1001,  
1006, 1010, 1015, 1019, 1024, 1027,  
1032, 1036, 1040, 1044, 1049, 1052,  
1057, 1061, 1065, 1070, 1074, 1078,  
1083, 1087, 1091, 1096, 1100, 1104,  
1109, 1113, 1118, 1121, 1126, 1131,  
1136, 1142, 1149, 1155, 1159, 1164,  
1167, 1172, 1178, 1185, 1188, 1193,  
1198, 1202, 1207, 1210, 1215, 1222,  
1225, 1230, 1236, 1242, 1248, 1254,  
1258, 1263, 1266, 1271, 1274, 1279,  
1283, 1287, 1291, 1296, 1300, 1305,  
1309, 1313, 1319, 1323, 1327, 1331,  
1336, 1342, 1349, 1354, 1359, 1363,  
1368, 1373, 1377, 1381, 1385, 1390,  
1394, 1399, 1402, 1407, 1411, 1415,  
1421, 1427, 1432, 1437, 1442, 1448,  
1452, 1456, 1460, 1465, 1471, 1476,  
1480, 1484, 1488, 1493, 1496, 1501,  
1507, 1510, 1515, 1521, 1527, 1531,  
1535, 1539, 1543, 1547, 1552, 1558,  
1562, 1566, 1570, 1574, 1581, 1585,  
1590, 1594, 1598, 1602, 1607, 1613,  
1620, 1623, 1628, 1631, 1636, 1639,  
1644, 1651, 1658, 1664, 1671, 1677,  
1684, 1690, 1697, 1703, 1709, 1715,  
1721, 1724, 1729, 1733, 1737, 1741,  
1746, 1749, 1754, 1760, 1766, 1773,  
1777, 1781, 1785, 1790, 1794, 1799,  
1802, 1807, 1810, 1815, 1819, 1823,  
1827, 1831, 1835, 1840, 1843, 1848,  
1852, 1856, 1860, 1864, 1868, 1873,  
1877, 1881, 1887, 1893, 1899, 1904,  
1908, 1914, 1920, 1924, 1929, 1933,  
1937, 1941, 1946, 1952, 1956, 1960,  
1964, 1968, 1973, 1977, 1981, 1986,  
1990, 1994, 1998, 2003, 2009, 2013,  
2017, 2021, 2026, 2032, 2036, 2041,  
2044, 2049, 2053, 2057, 2061, 2066,  
2072, 2078, 2082, 2087, 2091, 2095,  
2099, 2103, 2110, 2113, 2118, 2122,  
2127, 2131, 2135, 2139, 2143, 2150,  
2156, 2160, 2164, 2168, 2172, 2176,  
2181, 2184, 2189, 2195, 2202, 2206,  
2210, 2214, 2219, 2225, 2229, 2233,  
2237, 2241, 2247, 2254, 2260, 2267,  
2273, 2279, 2283, 2288, 2294, 2300,  
2306, 2312, 2316, 2321, 2327, 2330,  
2335, 2339, 2343, 2347, 2351, 2357,  
2364, 2369, 2375, 2382, 2389, 2395,  
2400, 2404, 2409, 2415, 2419, 2424,  
2427, 2432, 2435, 2440, 2443, 2448,  
2452, 2456, 2460, 2465, 2471, 2477,  
2480, 2485, 2486, 2499, 2503, 2507,  
2514, 2517, 2522, 2525, 2530, 2534,  
2538, 2542, 2546, 2550, 2555, 2558,  
2563, 2569, 2573, 2578, 2581, 2586,  
2589, 2594, 2598, 2602, 2606, 2611,  
2617, 2621, 2625, 2629, 2634, 2638,  
2642, 2652, 2655, 2660, 2663, 2668,  
2674, 2678, 2683, 2686, 2691
- op\_svd, 979, 988, 996, 1006, 1015, 1024,  
1032, 1040, 1049, 1057, 1065, 1074,  
1083, 1091, 1100, 1109, 1118, 1126,  
1136, 1142, 1149, 1155, 1164, 1172,  
1178, 1185, 1193, 1194, 1198, 1207,  
1215, 1222, 1230, 1236, 1242, 1248,  
1255, 1263, 1271, 1279, 1287, 1296,  
1305, 1313, 1319, 1328, 1336, 1342,  
1349, 1350, 1354, 1363, 1373, 1381,  
1390, 1399, 1407, 1415, 1421, 1422,  
1427, 1428, 1432, 1442, 1448, 1456,  
1465, 1471, 1476, 1484, 1493, 1501,  
1507, 1515, 1521, 1527, 1535, 1543,

1552, 1558, 1566, 1574, 1581, 1590,  
 1598, 1607, 1613, 1620, 1628, 1636,  
 1644, 1651, 1658, 1664, 1671, 1677,  
 1684, 1690, 1697, 1703, 1705, 1709,  
 1715, 1721, 1729, 1737, 1746, 1754,  
 1760, 1766, 1773, 1781, 1790, 1799,  
 1807, 1815, 1823, 1831, 1840, 1848,  
 1856, 1864, 1873, 1881, 1887, 1893,  
 1899, 1901, 1908, 1909, 1914, 1920,  
 1929, 1937, 1946, 1952, 1960, 1968,  
 1977, 1986, 1994, 2003, 2009, 2017,  
 2026, 2032, 2041, 2049, 2057, 2066,  
 2068, 2072, 2078, 2087, 2095, 2103,  
 2110, 2118, 2127, 2135, 2144, 2150,  
 2156, 2164, 2173, 2181, 2189, 2195,  
 2202, 2210, 2219, 2225, 2233, 2241,  
 2247, 2254, 2260, 2267, 2273, 2279,  
 2288, 2294, 2300, 2306, 2312, 2321,  
 2327, 2335, 2343, 2351, 2358, 2364,  
 2365, 2369, 2375, 2382, 2389, 2395,  
 2396, 2400, 2409, 2415, 2424, 2432,  
 2440, 2448, 2456, 2465, 2471, 2477,  
 2485, 2493, 2494, 2507, 2514, 2522,  
 2530, 2538, 2546, 2555, 2563, 2569,  
 2578, 2586, 2594, 2602, 2611, 2617,  
 2625, 2634, 2642, 2652, 2660, 2668,  
 2674, 2683, 2691

op\_swapaxes, 974, 979, 983, 988, 992, 996,  
 1001, 1006, 1010, 1015, 1019, 1024,  
 1027, 1032, 1036, 1040, 1044, 1049,  
 1052, 1057, 1061, 1065, 1070, 1074,  
 1078, 1083, 1087, 1091, 1096, 1100,  
 1104, 1109, 1113, 1118, 1122, 1126,  
 1131, 1136, 1142, 1149, 1155, 1159,  
 1164, 1167, 1172, 1178, 1185, 1188,  
 1193, 1198, 1202, 1207, 1210, 1215,  
 1222, 1225, 1230, 1236, 1242, 1248,  
 1255, 1258, 1263, 1266, 1271, 1275,  
 1279, 1283, 1287, 1291, 1296, 1300,  
 1305, 1309, 1313, 1319, 1323, 1328,  
 1331, 1336, 1342, 1349, 1354, 1359,  
 1363, 1368, 1373, 1377, 1381, 1385,  
 1390, 1394, 1399, 1402, 1407, 1411,  
 1415, 1421, 1427, 1432, 1437, 1442,  
 1448, 1452, 1456, 1460, 1465, 1471,  
 1476, 1480, 1484, 1488, 1493, 1496,  
 1501, 1507, 1510, 1515, 1521, 1527,  
 1531, 1535, 1539, 1543, 1547, 1552,

1558, 1562, 1566, 1570, 1574, 1581,  
 1585, 1590, 1594, 1598, 1602, 1607,  
 1613, 1620, 1623, 1628, 1631, 1636,  
 1640, 1644, 1651, 1658, 1664, 1671,  
 1677, 1684, 1690, 1697, 1703, 1709,  
 1715, 1721, 1725, 1729, 1733, 1737,  
 1741, 1746, 1749, 1754, 1760, 1766,  
 1773, 1777, 1782, 1785, 1790, 1794,  
 1799, 1802, 1807, 1810, 1815, 1819,  
 1823, 1827, 1831, 1835, 1840, 1843,  
 1848, 1852, 1856, 1860, 1864, 1868,  
 1873, 1877, 1881, 1887, 1893, 1899,  
 1904, 1908, 1914, 1920, 1924, 1929,  
 1933, 1937, 1941, 1946, 1952, 1956,  
 1960, 1964, 1969, 1973, 1977, 1982,  
 1986, 1990, 1994, 1998, 2003, 2009,  
 2013, 2017, 2021, 2026, 2032, 2036,  
 2041, 2044, 2049, 2053, 2057, 2061,  
 2066, 2072, 2078, 2082, 2087, 2091,  
 2095, 2099, 2103, 2110, 2113, 2118,  
 2122, 2127, 2131, 2135, 2139, 2144,  
 2150, 2156, 2160, 2164, 2168, 2173,  
 2176, 2181, 2184, 2189, 2195, 2202,  
 2206, 2210, 2214, 2219, 2225, 2229,  
 2233, 2237, 2241, 2247, 2254, 2260,  
 2267, 2273, 2279, 2283, 2288, 2294,  
 2300, 2306, 2312, 2316, 2321, 2327,  
 2330, 2335, 2339, 2343, 2347, 2351,  
 2358, 2364, 2369, 2375, 2382, 2389,  
 2395, 2400, 2404, 2409, 2415, 2419,  
 2424, 2427, 2432, 2435, 2440, 2443,  
 2448, 2452, 2456, 2460, 2465, 2471,  
 2477, 2481, 2485, 2489, 2493, 2499,  
 2500, 2514, 2517, 2522, 2525, 2530,  
 2534, 2538, 2542, 2546, 2550, 2555,  
 2558, 2563, 2569, 2573, 2578, 2581,  
 2586, 2589, 2594, 2598, 2602, 2606,  
 2611, 2617, 2621, 2625, 2629, 2634,  
 2638, 2642, 2652, 2655, 2660, 2663,  
 2668, 2675, 2678, 2683, 2686, 2691

op\_switch, 979, 988, 997, 1006, 1015, 1024,  
 1032, 1040, 1049, 1057, 1065, 1074,  
 1083, 1091, 1100, 1109, 1118, 1126,  
 1136, 1142, 1149, 1155, 1164, 1172,  
 1174, 1178, 1185, 1193, 1198, 1207,  
 1215, 1217, 1222, 1230, 1236, 1238,  
 1242, 1244, 1248, 1255, 1263, 1271,  
 1279, 1287, 1296, 1305, 1313, 1319,

- 1328, 1336, 1338, 1342, 1349, 1354,  
 1363, 1373, 1382, 1390, 1399, 1407,  
 1415, 1417, 1421, 1427, 1432, 1442,  
 1448, 1456, 1465, 1471, 1476, 1485,  
 1493, 1501, 1507, 1515, 1521, 1527,  
 1535, 1543, 1552, 1554, 1558, 1566,  
 1574, 1581, 1590, 1598, 1607, 1613,  
 1620, 1628, 1636, 1644, 1651, 1658,  
 1664, 1671, 1677, 1684, 1690, 1697,  
 1703, 1709, 1715, 1721, 1729, 1737,  
 1746, 1754, 1760, 1761, 1766, 1773,  
 1782, 1790, 1799, 1807, 1815, 1823,  
 1831, 1840, 1848, 1856, 1864, 1873,  
 1881, 1887, 1893, 1899, 1908, 1914,  
 1916, 1920, 1929, 1937, 1946, 1952,  
 1960, 1969, 1977, 1986, 1994, 2003,  
 2009, 2017, 2026, 2032, 2041, 2049,  
 2058, 2066, 2072, 2078, 2087, 2095,  
 2103, 2110, 2118, 2127, 2135, 2144,  
 2150, 2156, 2164, 2173, 2181, 2189,  
 2195, 2202, 2210, 2219, 2225, 2233,  
 2241, 2247, 2250, 2254, 2256, 2260,  
 2263, 2267, 2273, 2279, 2288, 2294,  
 2300, 2302, 2306, 2312, 2321, 2327,  
 2335, 2343, 2351, 2353, 2358, 2359,  
 2364, 2369, 2375, 2382, 2389, 2395,  
 2400, 2409, 2415, 2424, 2432, 2440,  
 2448, 2456, 2465, 2471, 2472, 2477,  
 2485, 2493, 2499, 2507, 2508, 2522,  
 2530, 2538, 2546, 2555, 2563, 2569,  
 2578, 2586, 2594, 2602, 2611, 2613,  
 2617, 2625, 2634, 2642, 2647, 2652,  
 2660, 2668, 2670, 2675, 2683, 2691
- op\_take, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1027,  
 1032, 1036, 1040, 1044, 1049, 1052,  
 1057, 1061, 1065, 1070, 1074, 1078,  
 1083, 1087, 1092, 1096, 1100, 1104,  
 1109, 1113, 1118, 1122, 1126, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1172, 1178, 1185, 1188, 1193,  
 1198, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1236, 1242, 1248, 1255,  
 1258, 1263, 1266, 1271, 1275, 1279,  
 1283, 1287, 1291, 1296, 1300, 1305,  
 1309, 1313, 1319, 1323, 1328, 1331,  
 1336, 1342, 1349, 1354, 1359, 1363,  
 1368, 1373, 1377, 1382, 1385, 1390,  
 1394, 1399, 1402, 1407, 1411, 1415,  
 1421, 1427, 1432, 1437, 1442, 1448,  
 1452, 1456, 1460, 1465, 1471, 1476,  
 1480, 1485, 1488, 1493, 1496, 1501,  
 1507, 1510, 1515, 1521, 1527, 1531,  
 1535, 1539, 1543, 1547, 1552, 1558,  
 1562, 1566, 1570, 1575, 1581, 1585,  
 1590, 1594, 1598, 1602, 1607, 1613,  
 1620, 1623, 1628, 1631, 1636, 1640,  
 1644, 1651, 1658, 1664, 1671, 1677,  
 1684, 1691, 1697, 1703, 1709, 1715,  
 1721, 1725, 1729, 1733, 1737, 1741,  
 1746, 1749, 1754, 1760, 1766, 1773,  
 1777, 1782, 1785, 1790, 1794, 1799,  
 1802, 1807, 1810, 1815, 1819, 1823,  
 1827, 1831, 1835, 1840, 1843, 1848,  
 1852, 1856, 1860, 1864, 1868, 1873,  
 1877, 1881, 1887, 1893, 1900, 1904,  
 1908, 1914, 1920, 1924, 1929, 1933,  
 1937, 1941, 1946, 1952, 1956, 1960,  
 1964, 1969, 1973, 1977, 1982, 1986,  
 1990, 1994, 1998, 2003, 2009, 2013,  
 2017, 2021, 2026, 2032, 2036, 2041,  
 2044, 2049, 2053, 2058, 2061, 2066,  
 2072, 2079, 2082, 2087, 2091, 2095,  
 2099, 2103, 2110, 2113, 2118, 2122,  
 2127, 2131, 2135, 2139, 2144, 2150,  
 2156, 2160, 2164, 2168, 2173, 2176,  
 2181, 2184, 2189, 2196, 2202, 2206,  
 2211, 2214, 2219, 2225, 2229, 2233,  
 2237, 2241, 2247, 2254, 2260, 2268,  
 2273, 2279, 2283, 2288, 2294, 2301,  
 2306, 2313, 2316, 2321, 2327, 2330,  
 2335, 2339, 2343, 2347, 2351, 2358,  
 2364, 2369, 2376, 2382, 2389, 2395,  
 2400, 2404, 2409, 2415, 2419, 2424,  
 2427, 2432, 2435, 2440, 2443, 2448,  
 2452, 2456, 2460, 2465, 2471, 2477,  
 2481, 2485, 2489, 2493, 2499, 2503,  
 2507, 2514, 2514, 2525, 2530, 2534,  
 2538, 2542, 2546, 2550, 2555, 2558,  
 2563, 2569, 2573, 2578, 2581, 2586,  
 2589, 2594, 2598, 2602, 2606, 2611,  
 2617, 2621, 2625, 2629, 2634, 2638,  
 2642, 2652, 2655, 2660, 2663, 2668,  
 2675, 2678, 2683, 2686, 2691
- op\_take\_along\_axis, 974, 979, 983, 988,  
 992, 997, 1001, 1006, 1010, 1015,

1019, 1024, 1027, 1032, 1036, 1040,  
 1044, 1049, 1052, 1057, 1061, 1065,  
 1070, 1074, 1078, 1083, 1087, 1092,  
 1096, 1100, 1104, 1109, 1113, 1118,  
 1122, 1126, 1131, 1136, 1142, 1149,  
 1155, 1159, 1164, 1168, 1172, 1178,  
 1185, 1188, 1193, 1198, 1202, 1207,  
 1210, 1215, 1222, 1225, 1230, 1236,  
 1242, 1248, 1255, 1258, 1263, 1266,  
 1271, 1275, 1279, 1283, 1287, 1291,  
 1296, 1300, 1305, 1309, 1313, 1319,  
 1323, 1328, 1331, 1336, 1342, 1349,  
 1354, 1359, 1363, 1368, 1373, 1377,  
 1382, 1385, 1390, 1394, 1399, 1402,  
 1407, 1411, 1415, 1421, 1427, 1432,  
 1437, 1442, 1448, 1452, 1456, 1460,  
 1465, 1471, 1476, 1480, 1485, 1488,  
 1493, 1496, 1501, 1507, 1510, 1515,  
 1521, 1527, 1531, 1535, 1539, 1544,  
 1547, 1552, 1558, 1562, 1566, 1570,  
 1575, 1581, 1585, 1590, 1594, 1598,  
 1602, 1607, 1613, 1620, 1623, 1628,  
 1631, 1636, 1640, 1644, 1651, 1658,  
 1664, 1671, 1677, 1684, 1691, 1697,  
 1703, 1709, 1715, 1721, 1725, 1729,  
 1733, 1737, 1741, 1746, 1749, 1754,  
 1760, 1766, 1773, 1777, 1782, 1785,  
 1790, 1794, 1799, 1802, 1807, 1810,  
 1815, 1819, 1823, 1827, 1831, 1835,  
 1840, 1843, 1848, 1852, 1856, 1860,  
 1864, 1868, 1873, 1877, 1881, 1887,  
 1893, 1900, 1904, 1908, 1914, 1920,  
 1924, 1929, 1933, 1937, 1941, 1946,  
 1952, 1956, 1960, 1964, 1969, 1973,  
 1977, 1982, 1986, 1990, 1994, 1998,  
 2003, 2009, 2013, 2017, 2021, 2026,  
 2032, 2036, 2041, 2044, 2049, 2053,  
 2058, 2061, 2066, 2072, 2079, 2082,  
 2087, 2091, 2095, 2099, 2103, 2110,  
 2114, 2118, 2122, 2127, 2131, 2135,  
 2139, 2144, 2150, 2156, 2160, 2164,  
 2168, 2173, 2176, 2181, 2184, 2189,  
 2196, 2202, 2206, 2211, 2214, 2219,  
 2225, 2229, 2233, 2237, 2242, 2247,  
 2254, 2260, 2268, 2273, 2279, 2283,  
 2288, 2294, 2301, 2306, 2313, 2316,  
 2321, 2327, 2330, 2335, 2339, 2343,  
 2347, 2351, 2358, 2364, 2369, 2376,  
 2382, 2389, 2395, 2401, 2404, 2409,  
 2415, 2419, 2424, 2427, 2432, 2435,  
 2440, 2443, 2448, 2452, 2456, 2460,  
 2465, 2471, 2477, 2481, 2485, 2489,  
 2493, 2499, 2503, 2507, 2514, 2517,  
 2522, 2522, 2534, 2538, 2542, 2546,  
 2550, 2555, 2558, 2563, 2569, 2573,  
 2578, 2581, 2586, 2590, 2594, 2598,  
 2602, 2606, 2611, 2617, 2621, 2625,  
 2629, 2634, 2638, 2642, 2652, 2655,  
 2660, 2663, 2668, 2675, 2678, 2683,  
 2686, 2691  
 op\_tan, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1027,  
 1032, 1036, 1040, 1044, 1049, 1052,  
 1057, 1061, 1065, 1070, 1074, 1078,  
 1083, 1087, 1092, 1096, 1100, 1104,  
 1109, 1113, 1118, 1122, 1126, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1172, 1178, 1185, 1188, 1193,  
 1198, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1236, 1242, 1248, 1255,  
 1258, 1263, 1266, 1271, 1275, 1279,  
 1283, 1287, 1291, 1296, 1300, 1305,  
 1309, 1313, 1319, 1323, 1328, 1331,  
 1336, 1342, 1349, 1354, 1359, 1363,  
 1368, 1373, 1377, 1382, 1385, 1390,  
 1394, 1399, 1402, 1407, 1411, 1415,  
 1421, 1427, 1432, 1437, 1442, 1448,  
 1452, 1456, 1460, 1465, 1471, 1476,  
 1480, 1485, 1488, 1493, 1496, 1501,  
 1507, 1510, 1515, 1521, 1527, 1531,  
 1535, 1539, 1544, 1547, 1552, 1558,  
 1562, 1566, 1570, 1575, 1581, 1585,  
 1590, 1594, 1598, 1602, 1607, 1613,  
 1620, 1623, 1628, 1631, 1636, 1640,  
 1644, 1652, 1658, 1664, 1671, 1677,  
 1684, 1691, 1697, 1703, 1709, 1715,  
 1721, 1725, 1729, 1733, 1737, 1741,  
 1746, 1749, 1754, 1760, 1766, 1773,  
 1777, 1782, 1785, 1790, 1794, 1799,  
 1802, 1807, 1810, 1815, 1819, 1823,  
 1827, 1832, 1835, 1840, 1843, 1848,  
 1852, 1856, 1860, 1864, 1868, 1873,  
 1877, 1881, 1887, 1893, 1900, 1904,  
 1908, 1914, 1920, 1924, 1929, 1933,  
 1937, 1941, 1946, 1952, 1956, 1960,  
 1964, 1969, 1973, 1977, 1982, 1986,

- 1990, 1994, 1998, 2003, 2009, 2013,  
 2017, 2021, 2026, 2032, 2036, 2041,  
 2044, 2049, 2053, 2058, 2061, 2066,  
 2072, 2079, 2082, 2087, 2091, 2095,  
 2099, 2103, 2110, 2114, 2118, 2122,  
 2127, 2131, 2135, 2139, 2144, 2150,  
 2156, 2160, 2164, 2168, 2173, 2176,  
 2181, 2184, 2189, 2196, 2202, 2206,  
 2211, 2214, 2219, 2225, 2229, 2233,  
 2237, 2242, 2247, 2254, 2260, 2268,  
 2274, 2279, 2283, 2288, 2294, 2301,  
 2306, 2313, 2316, 2321, 2327, 2330,  
 2335, 2339, 2343, 2347, 2352, 2358,  
 2364, 2369, 2376, 2382, 2389, 2395,  
 2401, 2404, 2409, 2415, 2419, 2424,  
 2427, 2432, 2435, 2440, 2443, 2448,  
 2452, 2456, 2460, 2465, 2471, 2477,  
 2481, 2485, 2489, 2494, 2499, 2503,  
 2507, 2514, 2517, 2522, 2525, 2530,  
 2531, 2542, 2547, 2550, 2555, 2558,  
 2563, 2569, 2573, 2578, 2581, 2586,  
 2590, 2594, 2598, 2602, 2606, 2611,  
 2617, 2621, 2625, 2629, 2634, 2638,  
 2642, 2652, 2655, 2660, 2663, 2668,  
 2675, 2678, 2683, 2686, 2691
- op\_tanh, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1028,  
 1032, 1036, 1040, 1044, 1049, 1052,  
 1057, 1061, 1066, 1070, 1074, 1078,  
 1083, 1087, 1092, 1096, 1100, 1104,  
 1109, 1113, 1118, 1122, 1126, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1172, 1178, 1185, 1188, 1193,  
 1198, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1236, 1242, 1248, 1255,  
 1258, 1263, 1266, 1271, 1275, 1279,  
 1283, 1287, 1291, 1296, 1300, 1305,  
 1309, 1313, 1319, 1323, 1328, 1331,  
 1336, 1342, 1349, 1354, 1359, 1363,  
 1368, 1373, 1377, 1382, 1385, 1390,  
 1394, 1399, 1402, 1407, 1411, 1415,  
 1421, 1427, 1432, 1437, 1442, 1448,  
 1452, 1456, 1460, 1465, 1471, 1476,  
 1480, 1485, 1488, 1493, 1496, 1501,  
 1507, 1511, 1515, 1521, 1527, 1531,  
 1535, 1539, 1544, 1547, 1552, 1558,  
 1562, 1566, 1570, 1575, 1581, 1585,  
 1590, 1594, 1598, 1602, 1607, 1614,  
 1620, 1623, 1628, 1631, 1636, 1640,  
 1644, 1652, 1658, 1664, 1671, 1677,  
 1684, 1691, 1697, 1703, 1709, 1715,  
 1721, 1725, 1729, 1733, 1737, 1741,  
 1746, 1749, 1754, 1760, 1766, 1773,  
 1777, 1782, 1785, 1790, 1794, 1799,  
 1802, 1807, 1810, 1815, 1819, 1823,  
 1827, 1832, 1835, 1840, 1843, 1848,  
 1852, 1856, 1860, 1865, 1868, 1873,  
 1877, 1881, 1887, 1893, 1900, 1904,  
 1908, 1914, 1920, 1924, 1929, 1933,  
 1937, 1941, 1946, 1952, 1956, 1960,  
 1964, 1969, 1973, 1977, 1982, 1986,  
 1990, 1995, 1998, 2003, 2009, 2013,  
 2018, 2021, 2026, 2032, 2036, 2041,  
 2044, 2049, 2053, 2058, 2061, 2066,  
 2072, 2079, 2082, 2087, 2091, 2095,  
 2099, 2103, 2110, 2114, 2118, 2122,  
 2127, 2131, 2135, 2139, 2144, 2150,  
 2156, 2160, 2164, 2168, 2173, 2176,  
 2181, 2184, 2189, 2196, 2202, 2206,  
 2211, 2214, 2219, 2225, 2229, 2233,  
 2237, 2242, 2247, 2254, 2260, 2268,  
 2274, 2279, 2283, 2288, 2294, 2301,  
 2307, 2313, 2316, 2321, 2327, 2330,  
 2335, 2339, 2343, 2347, 2352, 2358,  
 2364, 2369, 2376, 2382, 2389, 2395,  
 2401, 2404, 2409, 2415, 2419, 2424,  
 2427, 2432, 2435, 2440, 2444, 2448,  
 2452, 2456, 2460, 2465, 2471, 2477,  
 2481, 2485, 2489, 2494, 2499, 2503,  
 2507, 2514, 2517, 2522, 2525, 2530,  
 2534, 2538, 2539, 2550, 2555, 2558,  
 2563, 2569, 2573, 2578, 2581, 2586,  
 2590, 2594, 2598, 2602, 2606, 2611,  
 2617, 2621, 2625, 2629, 2634, 2638,  
 2642, 2652, 2655, 2660, 2663, 2668,  
 2675, 2678, 2683, 2686, 2691
- op\_tensordot, 974, 979, 983, 988, 992, 997,  
 1001, 1006, 1010, 1015, 1019, 1024,  
 1028, 1032, 1036, 1041, 1044, 1049,  
 1053, 1057, 1061, 1066, 1070, 1074,  
 1078, 1083, 1087, 1092, 1096, 1100,  
 1104, 1109, 1113, 1118, 1122, 1126,  
 1131, 1136, 1142, 1149, 1155, 1159,  
 1164, 1168, 1172, 1178, 1185, 1188,  
 1193, 1198, 1202, 1207, 1210, 1215,  
 1222, 1225, 1230, 1236, 1242, 1248,



1255, 1258, 1263, 1266, 1271, 1275,  
 1279, 1283, 1287, 1291, 1296, 1300,  
 1305, 1309, 1313, 1319, 1323, 1328,  
 1331, 1336, 1342, 1349, 1354, 1359,  
 1363, 1368, 1373, 1377, 1382, 1385,  
 1390, 1394, 1399, 1402, 1407, 1411,  
 1415, 1421, 1427, 1432, 1437, 1442,  
 1448, 1452, 1456, 1460, 1465, 1471,  
 1476, 1480, 1485, 1488, 1493, 1496,  
 1501, 1507, 1511, 1515, 1521, 1527,  
 1531, 1535, 1539, 1544, 1547, 1552,  
 1558, 1562, 1566, 1570, 1575, 1581,  
 1585, 1590, 1594, 1598, 1602, 1607,  
 1614, 1620, 1623, 1628, 1631, 1636,  
 1640, 1644, 1652, 1658, 1664, 1671,  
 1677, 1684, 1691, 1697, 1703, 1709,  
 1715, 1721, 1725, 1729, 1733, 1737,  
 1741, 1746, 1749, 1754, 1760, 1766,  
 1773, 1777, 1782, 1785, 1790, 1794,  
 1799, 1802, 1807, 1811, 1815, 1819,  
 1823, 1827, 1832, 1835, 1840, 1843,  
 1848, 1852, 1856, 1860, 1865, 1868,  
 1873, 1877, 1881, 1887, 1893, 1900,  
 1904, 1908, 1914, 1920, 1924, 1929,  
 1933, 1937, 1941, 1946, 1952, 1956,  
 1960, 1964, 1969, 1973, 1977, 1982,  
 1986, 1990, 1995, 1998, 2003, 2009,  
 2013, 2018, 2021, 2026, 2032, 2036,  
 2041, 2044, 2049, 2053, 2058, 2061,  
 2066, 2072, 2079, 2082, 2087, 2091,  
 2095, 2099, 2104, 2110, 2114, 2118,  
 2122, 2127, 2131, 2135, 2139, 2144,  
 2150, 2156, 2160, 2164, 2168, 2173,  
 2176, 2181, 2184, 2189, 2196, 2202,  
 2206, 2211, 2214, 2219, 2225, 2229,  
 2233, 2237, 2242, 2247, 2254, 2260,  
 2268, 2274, 2280, 2283, 2288, 2294,  
 2301, 2307, 2313, 2316, 2321, 2327,  
 2331, 2335, 2339, 2343, 2347, 2352,  
 2358, 2364, 2369, 2376, 2382, 2389,  
 2395, 2401, 2404, 2409, 2415, 2419,  
 2424, 2427, 2432, 2435, 2440, 2444,  
 2448, 2452, 2456, 2460, 2465, 2471,  
 2477, 2481, 2485, 2489, 2494, 2499,  
 2503, 2507, 2514, 2517, 2522, 2525,  
 2530, 2534, 2538, 2542, 2547, 2547,  
 2558, 2563, 2569, 2573, 2578, 2581,  
 2586, 2590, 2594, 2598, 2602, 2606,  
 2611, 2617, 2621, 2625, 2629, 2634,  
 2638, 2642, 2652, 2655, 2660, 2663,  
 2668, 2675, 2678, 2683, 2686, 2691

*op\_tile*, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1028,  
 1032, 1036, 1041, 1044, 1049, 1053,  
 1057, 1061, 1066, 1070, 1075, 1078,  
 1083, 1087, 1092, 1096, 1100, 1104,  
 1109, 1113, 1118, 1122, 1126, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1172, 1178, 1185, 1188, 1193,  
 1198, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1236, 1242, 1248, 1255,  
 1258, 1263, 1266, 1271, 1275, 1279,  
 1283, 1287, 1291, 1296, 1300, 1305,  
 1309, 1313, 1319, 1323, 1328, 1331,  
 1336, 1343, 1349, 1354, 1359, 1363,  
 1368, 1373, 1377, 1382, 1385, 1390,  
 1394, 1399, 1402, 1407, 1411, 1415,  
 1421, 1427, 1432, 1437, 1442, 1448,  
 1452, 1456, 1460, 1465, 1471, 1476,  
 1480, 1485, 1488, 1493, 1496, 1501,  
 1507, 1511, 1515, 1521, 1527, 1531,  
 1535, 1539, 1544, 1547, 1552, 1558,  
 1562, 1566, 1570, 1575, 1582, 1585,  
 1590, 1594, 1598, 1602, 1607, 1614,  
 1620, 1623, 1628, 1631, 1636, 1640,  
 1644, 1652, 1658, 1664, 1671, 1677,  
 1684, 1691, 1697, 1703, 1709, 1715,  
 1721, 1725, 1729, 1733, 1738, 1741,  
 1746, 1749, 1754, 1760, 1766, 1773,  
 1777, 1782, 1785, 1790, 1794, 1799,  
 1802, 1807, 1811, 1815, 1819, 1823,  
 1827, 1832, 1835, 1840, 1843, 1848,  
 1852, 1856, 1860, 1865, 1868, 1873,  
 1877, 1881, 1887, 1893, 1900, 1904,  
 1908, 1914, 1920, 1924, 1929, 1933,  
 1937, 1941, 1946, 1952, 1956, 1960,  
 1964, 1969, 1973, 1977, 1982, 1986,  
 1990, 1995, 1998, 2003, 2009, 2013,  
 2018, 2021, 2026, 2032, 2036, 2041,  
 2044, 2049, 2053, 2058, 2061, 2066,  
 2072, 2079, 2082, 2087, 2091, 2095,  
 2099, 2104, 2110, 2114, 2118, 2122,  
 2127, 2131, 2135, 2139, 2144, 2150,  
 2156, 2160, 2164, 2168, 2173, 2176,  
 2181, 2184, 2189, 2196, 2202, 2206,  
 2211, 2214, 2219, 2225, 2229, 2233,



- 2237, 2242, 2247, 2254, 2260, 2268,  
2274, 2280, 2283, 2288, 2294, 2301,  
2307, 2313, 2316, 2321, 2327, 2331,  
2335, 2339, 2343, 2347, 2352, 2358,  
2364, 2369, 2376, 2382, 2389, 2395,  
2401, 2404, 2409, 2415, 2419, 2424,  
2427, 2432, 2435, 2440, 2444, 2448,  
2452, 2456, 2460, 2465, 2471, 2477,  
2481, 2485, 2489, 2494, 2499, 2503,  
2507, 2514, 2517, 2522, 2526, 2530,  
2534, 2538, 2542, 2547, 2550, 2555,  
2555, 2569, 2573, 2578, 2581, 2586,  
2590, 2594, 2598, 2602, 2606, 2611,  
2617, 2621, 2626, 2629, 2634, 2638,  
2642, 2652, 2655, 2660, 2663, 2668,  
2675, 2678, 2683, 2686, 2691
- op\_top\_k, 979, 988, 997, 1006, 1015, 1024,  
1032, 1041, 1049, 1057, 1066, 1075,  
1083, 1092, 1101, 1109, 1118, 1126,  
1136, 1142, 1149, 1155, 1164, 1172,  
1178, 1185, 1193, 1199, 1207, 1215,  
1222, 1230, 1236, 1242, 1248, 1255,  
1263, 1271, 1279, 1288, 1296, 1305,  
1313, 1319, 1328, 1336, 1343, 1349,  
1354, 1363, 1373, 1382, 1390, 1399,  
1407, 1415, 1421, 1427, 1432, 1442,  
1448, 1457, 1465, 1466, 1471, 1472,  
1476, 1485, 1493, 1501, 1503, 1507,  
1515, 1517, 1521, 1523, 1527, 1535,  
1544, 1552, 1558, 1566, 1575, 1582,  
1590, 1598, 1607, 1614, 1620, 1628,  
1636, 1644, 1652, 1658, 1664, 1671,  
1677, 1684, 1691, 1697, 1703, 1709,  
1710, 1715, 1717, 1721, 1729, 1738,  
1746, 1754, 1756, 1760, 1766, 1773,  
1782, 1790, 1799, 1807, 1815, 1823,  
1832, 1840, 1848, 1856, 1865, 1873,  
1881, 1883, 1887, 1893, 1900, 1908,  
1914, 1920, 1929, 1937, 1946, 1952,  
1960, 1969, 1978, 1986, 1995, 2003,  
2009, 2018, 2026, 2032, 2041, 2049,  
2058, 2066, 2072, 2079, 2087, 2095,  
2104, 2110, 2118, 2127, 2135, 2144,  
2150, 2152, 2156, 2165, 2173, 2181,  
2189, 2196, 2202, 2211, 2219, 2221,  
2225, 2233, 2242, 2243, 2247, 2254,  
2260, 2268, 2269, 2274, 2275, 2280,  
2288, 2294, 2301, 2307, 2313, 2321,  
2327, 2335, 2343, 2352, 2358, 2364,  
2369, 2376, 2382, 2389, 2391, 2395,  
2401, 2409, 2415, 2424, 2432, 2440,  
2448, 2456, 2465, 2467, 2471, 2477,  
2485, 2494, 2499, 2507, 2514, 2522,  
2530, 2538, 2547, 2555, 2563, 2564,  
2578, 2586, 2594, 2603, 2611, 2617,  
2626, 2634, 2642, 2652, 2660, 2668,  
2675, 2683, 2691
- op\_trace, 974, 979, 983, 988, 992, 997, 1001,  
1006, 1010, 1015, 1019, 1024, 1028,  
1032, 1036, 1041, 1044, 1049, 1053,  
1057, 1061, 1066, 1070, 1075, 1078,  
1083, 1087, 1092, 1096, 1101, 1104,  
1109, 1113, 1118, 1122, 1126, 1131,  
1136, 1142, 1149, 1155, 1159, 1164,  
1168, 1172, 1178, 1185, 1188, 1193,  
1199, 1202, 1207, 1210, 1215, 1222,  
1225, 1230, 1236, 1242, 1248, 1255,  
1258, 1263, 1266, 1271, 1275, 1279,  
1283, 1288, 1291, 1296, 1300, 1305,  
1309, 1313, 1319, 1323, 1328, 1331,  
1336, 1343, 1349, 1354, 1359, 1363,  
1368, 1373, 1377, 1382, 1385, 1390,  
1394, 1399, 1402, 1407, 1411, 1415,  
1421, 1427, 1432, 1438, 1442, 1448,  
1452, 1457, 1460, 1465, 1471, 1476,  
1480, 1485, 1488, 1493, 1496, 1501,  
1507, 1511, 1515, 1521, 1527, 1531,  
1535, 1539, 1544, 1547, 1552, 1558,  
1562, 1566, 1570, 1575, 1582, 1585,  
1590, 1594, 1598, 1602, 1607, 1614,  
1620, 1623, 1628, 1631, 1636, 1640,  
1644, 1652, 1658, 1665, 1671, 1677,  
1684, 1691, 1697, 1703, 1709, 1715,  
1721, 1725, 1729, 1733, 1738, 1741,  
1746, 1749, 1754, 1760, 1766, 1773,  
1777, 1782, 1785, 1790, 1794, 1799,  
1802, 1807, 1811, 1815, 1819, 1823,  
1827, 1832, 1835, 1840, 1843, 1848,  
1852, 1856, 1860, 1865, 1868, 1873,  
1877, 1881, 1887, 1893, 1900, 1904,  
1908, 1914, 1920, 1924, 1929, 1933,  
1938, 1941, 1946, 1952, 1956, 1960,  
1964, 1969, 1973, 1978, 1982, 1986,  
1990, 1995, 1998, 2003, 2009, 2013,  
2018, 2021, 2026, 2032, 2036, 2041,  
2044, 2049, 2053, 2058, 2061, 2066,

- 2072, 2079, 2082, 2087, 2091, 2095,  
 2099, 2104, 2110, 2114, 2118, 2122,  
 2127, 2131, 2135, 2139, 2144, 2150,  
 2156, 2160, 2165, 2168, 2173, 2176,  
 2181, 2184, 2189, 2196, 2202, 2206,  
 2211, 2214, 2219, 2225, 2229, 2233,  
 2237, 2242, 2247, 2254, 2260, 2268,  
 2274, 2280, 2283, 2288, 2294, 2301,  
 2307, 2313, 2316, 2321, 2327, 2331,  
 2335, 2339, 2343, 2347, 2352, 2358,  
 2364, 2369, 2376, 2382, 2389, 2395,  
 2401, 2404, 2409, 2415, 2419, 2424,  
 2427, 2432, 2435, 2440, 2444, 2448,  
 2452, 2456, 2460, 2465, 2471, 2477,  
 2481, 2485, 2489, 2494, 2499, 2503,  
 2507, 2514, 2517, 2522, 2526, 2530,  
 2534, 2538, 2542, 2547, 2550, 2555,  
 2558, 2563, 2569, 2570, 2581, 2586,  
 2590, 2594, 2598, 2603, 2606, 2611,  
 2617, 2621, 2626, 2629, 2634, 2638,  
 2642, 2652, 2655, 2660, 2663, 2668,  
 2675, 2678, 2683, 2686, 2691
- op\_transpose*, 974, 979, 983, 988, 992, 997,  
 1001, 1006, 1010, 1015, 1019, 1024,  
 1028, 1032, 1036, 1041, 1044, 1049,  
 1053, 1057, 1061, 1066, 1070, 1075,  
 1078, 1083, 1087, 1092, 1096, 1101,  
 1104, 1109, 1113, 1118, 1122, 1126,  
 1131, 1136, 1142, 1149, 1155, 1159,  
 1164, 1168, 1172, 1178, 1185, 1188,  
 1193, 1199, 1202, 1207, 1210, 1215,  
 1222, 1225, 1230, 1236, 1242, 1248,  
 1255, 1258, 1263, 1266, 1271, 1275,  
 1279, 1283, 1288, 1291, 1296, 1300,  
 1305, 1309, 1313, 1319, 1323, 1328,  
 1331, 1336, 1343, 1349, 1354, 1359,  
 1363, 1368, 1373, 1377, 1382, 1385,  
 1390, 1394, 1399, 1402, 1407, 1411,  
 1416, 1421, 1427, 1432, 1438, 1442,  
 1448, 1452, 1457, 1460, 1465, 1471,  
 1477, 1480, 1485, 1488, 1493, 1496,  
 1501, 1507, 1511, 1515, 1521, 1527,  
 1531, 1535, 1539, 1544, 1547, 1552,  
 1558, 1562, 1566, 1570, 1575, 1582,  
 1585, 1590, 1594, 1598, 1602, 1607,  
 1614, 1620, 1623, 1628, 1632, 1636,  
 1640, 1644, 1652, 1658, 1665, 1671,  
 1677, 1684, 1691, 1697, 1704, 1709,  
 1715, 1721, 1725, 1729, 1733, 1738,  
 1741, 1746, 1749, 1754, 1760, 1766,  
 1773, 1777, 1782, 1786, 1790, 1794,  
 1799, 1802, 1807, 1811, 1815, 1819,  
 1823, 1827, 1832, 1835, 1840, 1844,  
 1848, 1852, 1856, 1860, 1865, 1868,  
 1873, 1877, 1881, 1887, 1893, 1900,  
 1904, 1908, 1914, 1920, 1924, 1929,  
 1933, 1938, 1941, 1946, 1952, 1956,  
 1960, 1964, 1969, 1973, 1978, 1982,  
 1986, 1990, 1995, 1998, 2003, 2009,  
 2013, 2018, 2021, 2026, 2032, 2036,  
 2041, 2044, 2049, 2053, 2058, 2061,  
 2066, 2072, 2079, 2083, 2087, 2091,  
 2095, 2099, 2104, 2110, 2114, 2118,  
 2122, 2127, 2131, 2135, 2139, 2144,  
 2150, 2156, 2160, 2165, 2168, 2173,  
 2176, 2181, 2184, 2189, 2196, 2202,  
 2206, 2211, 2214, 2219, 2225, 2229,  
 2233, 2237, 2242, 2247, 2254, 2260,  
 2268, 2274, 2280, 2283, 2288, 2294,  
 2301, 2307, 2313, 2316, 2321, 2327,  
 2331, 2335, 2339, 2343, 2347, 2352,  
 2358, 2364, 2369, 2376, 2382, 2389,  
 2395, 2401, 2404, 2409, 2415, 2419,  
 2424, 2427, 2432, 2435, 2440, 2444,  
 2448, 2452, 2456, 2460, 2465, 2471,  
 2477, 2481, 2485, 2489, 2494, 2499,  
 2503, 2507, 2514, 2517, 2522, 2526,  
 2530, 2534, 2538, 2542, 2547, 2550,  
 2555, 2559, 2563, 2569, 2573, 2578,  
 2578, 2590, 2594, 2598, 2603, 2606,  
 2611, 2617, 2621, 2626, 2629, 2634,  
 2638, 2642, 2652, 2655, 2660, 2664,  
 2668, 2675, 2678, 2683, 2686, 2691
- op\_tri*, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1028,  
 1032, 1036, 1041, 1044, 1049, 1053,  
 1057, 1061, 1066, 1070, 1075, 1078,  
 1083, 1087, 1092, 1096, 1101, 1104,  
 1109, 1113, 1118, 1122, 1126, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1172, 1178, 1185, 1188, 1193,  
 1199, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1236, 1242, 1248, 1255,  
 1258, 1263, 1267, 1271, 1275, 1279,  
 1283, 1288, 1291, 1296, 1300, 1305,  
 1309, 1313, 1320, 1323, 1328, 1331,

1336, 1343, 1349, 1354, 1359, 1363,  
1368, 1373, 1377, 1382, 1385, 1390,  
1394, 1399, 1402, 1407, 1411, 1416,  
1421, 1427, 1432, 1438, 1442, 1448,  
1452, 1457, 1460, 1465, 1471, 1477,  
1480, 1485, 1488, 1493, 1496, 1501,  
1507, 1511, 1515, 1521, 1527, 1531,  
1535, 1539, 1544, 1548, 1552, 1558,  
1562, 1566, 1570, 1575, 1582, 1585,  
1590, 1594, 1598, 1602, 1607, 1614,  
1620, 1623, 1628, 1632, 1636, 1640,  
1644, 1652, 1658, 1665, 1671, 1677,  
1684, 1691, 1697, 1704, 1709, 1715,  
1721, 1725, 1729, 1733, 1738, 1741,  
1746, 1749, 1754, 1760, 1766, 1773,  
1777, 1782, 1786, 1790, 1794, 1799,  
1802, 1807, 1811, 1815, 1819, 1823,  
1827, 1832, 1835, 1840, 1844, 1848,  
1852, 1856, 1860, 1865, 1868, 1873,  
1877, 1881, 1887, 1893, 1900, 1904,  
1908, 1914, 1920, 1924, 1929, 1933,  
1938, 1941, 1946, 1952, 1956, 1960,  
1964, 1969, 1973, 1978, 1982, 1986,  
1990, 1995, 1998, 2003, 2009, 2013,  
2018, 2021, 2026, 2032, 2036, 2041,  
2045, 2049, 2053, 2058, 2061, 2066,  
2072, 2079, 2083, 2087, 2091, 2095,  
2099, 2104, 2110, 2114, 2118, 2122,  
2127, 2131, 2135, 2139, 2144, 2150,  
2156, 2160, 2165, 2168, 2173, 2176,  
2181, 2184, 2189, 2196, 2202, 2206,  
2211, 2214, 2219, 2225, 2229, 2233,  
2237, 2242, 2248, 2254, 2260, 2268,  
2274, 2280, 2283, 2288, 2294, 2301,  
2307, 2313, 2316, 2321, 2327, 2331,  
2335, 2339, 2343, 2347, 2352, 2358,  
2364, 2369, 2376, 2382, 2389, 2395,  
2401, 2404, 2409, 2415, 2419, 2424,  
2427, 2432, 2435, 2440, 2444, 2448,  
2452, 2457, 2460, 2465, 2471, 2477,  
2481, 2485, 2489, 2494, 2499, 2503,  
2508, 2514, 2517, 2522, 2526, 2530,  
2534, 2538, 2542, 2547, 2550, 2555,  
2559, 2563, 2569, 2573, 2578, 2581,  
2586, 2586, 2598, 2603, 2606, 2611,  
2617, 2621, 2626, 2629, 2634, 2638,  
2643, 2652, 2655, 2660, 2664, 2668,  
2675, 2678, 2683, 2686, 2691

op\_tril, 974, 979, 983, 988, 992, 997, 1001,  
1006, 1010, 1015, 1019, 1024, 1028,  
1032, 1036, 1041, 1044, 1049, 1053,  
1057, 1061, 1066, 1070, 1075, 1078,  
1083, 1087, 1092, 1096, 1101, 1104,  
1109, 1113, 1118, 1122, 1126, 1131,  
1136, 1142, 1149, 1155, 1159, 1164,  
1168, 1172, 1178, 1185, 1188, 1193,  
1199, 1202, 1207, 1210, 1215, 1222,  
1225, 1230, 1236, 1242, 1248, 1255,  
1258, 1263, 1267, 1271, 1275, 1279,  
1283, 1288, 1292, 1296, 1300, 1305,  
1309, 1313, 1320, 1323, 1328, 1331,  
1336, 1343, 1349, 1355, 1359, 1363,  
1368, 1373, 1377, 1382, 1386, 1390,  
1394, 1399, 1402, 1407, 1411, 1416,  
1421, 1427, 1432, 1438, 1442, 1448,  
1452, 1457, 1460, 1465, 1471, 1477,  
1480, 1485, 1488, 1493, 1496, 1501,  
1507, 1511, 1515, 1521, 1527, 1531,  
1536, 1539, 1544, 1548, 1552, 1558,  
1562, 1566, 1570, 1575, 1582, 1585,  
1590, 1594, 1598, 1602, 1607, 1614,  
1620, 1623, 1628, 1632, 1636, 1640,  
1644, 1652, 1658, 1665, 1671, 1677,  
1684, 1691, 1697, 1704, 1709, 1715,  
1721, 1725, 1729, 1733, 1738, 1741,  
1746, 1749, 1754, 1760, 1766, 1773,  
1777, 1782, 1786, 1790, 1794, 1799,  
1802, 1807, 1811, 1815, 1819, 1823,  
1827, 1832, 1835, 1840, 1844, 1848,  
1852, 1856, 1860, 1865, 1868, 1873,  
1877, 1882, 1887, 1894, 1900, 1904,  
1908, 1914, 1920, 1924, 1929, 1933,  
1938, 1941, 1946, 1952, 1956, 1961,  
1964, 1969, 1973, 1978, 1982, 1986,  
1990, 1995, 1998, 2003, 2009, 2013,  
2018, 2021, 2026, 2032, 2036, 2041,  
2045, 2049, 2053, 2058, 2061, 2066,  
2072, 2079, 2083, 2087, 2091, 2095,  
2099, 2104, 2110, 2114, 2118, 2122,  
2127, 2131, 2135, 2139, 2144, 2150,  
2156, 2160, 2165, 2168, 2173, 2176,  
2181, 2184, 2189, 2196, 2202, 2206,  
2211, 2214, 2219, 2225, 2229, 2233,  
2237, 2242, 2248, 2254, 2260, 2268,  
2274, 2280, 2283, 2288, 2294, 2301,  
2307, 2313, 2316, 2321, 2327, 2331,

- 2335, 2339, 2343, 2347, 2352, 2358,  
 2364, 2369, 2376, 2382, 2389, 2395,  
 2401, 2404, 2409, 2415, 2419, 2424,  
 2427, 2432, 2435, 2440, 2444, 2448,  
 2452, 2457, 2460, 2465, 2471, 2477,  
 2481, 2485, 2489, 2494, 2499, 2503,  
 2508, 2514, 2517, 2522, 2526, 2530,  
 2534, 2538, 2542, 2547, 2550, 2555,  
 2559, 2563, 2569, 2573, 2578, 2581,  
 2586, 2590, 2594, 2595, 2606, 2611,  
 2617, 2621, 2626, 2629, 2634, 2638,  
 2643, 2652, 2655, 2660, 2664, 2668,  
 2675, 2678, 2683, 2686, 2691
- op\_triu*, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1028,  
 1032, 1036, 1041, 1044, 1049, 1053,  
 1057, 1061, 1066, 1070, 1075, 1078,  
 1083, 1087, 1092, 1096, 1101, 1104,  
 1109, 1113, 1118, 1122, 1126, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1172, 1179, 1185, 1188, 1193,  
 1199, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1236, 1242, 1248, 1255,  
 1258, 1263, 1267, 1271, 1275, 1279,  
 1283, 1288, 1292, 1296, 1300, 1305,  
 1309, 1314, 1320, 1323, 1328, 1331,  
 1336, 1343, 1349, 1355, 1359, 1363,  
 1368, 1373, 1377, 1382, 1386, 1390,  
 1394, 1399, 1402, 1407, 1411, 1416,  
 1421, 1427, 1432, 1438, 1442, 1448,  
 1452, 1457, 1460, 1465, 1471, 1477,  
 1480, 1485, 1488, 1493, 1496, 1501,  
 1507, 1511, 1515, 1521, 1527, 1531,  
 1536, 1539, 1544, 1548, 1552, 1558,  
 1562, 1567, 1570, 1575, 1582, 1585,  
 1590, 1594, 1598, 1602, 1607, 1614,  
 1620, 1623, 1628, 1632, 1636, 1640,  
 1644, 1652, 1658, 1665, 1671, 1677,  
 1684, 1691, 1697, 1704, 1709, 1715,  
 1721, 1725, 1729, 1733, 1738, 1741,  
 1746, 1749, 1754, 1760, 1766, 1773,  
 1777, 1782, 1786, 1790, 1794, 1799,  
 1802, 1807, 1811, 1815, 1819, 1824,  
 1827, 1832, 1835, 1840, 1844, 1848,  
 1852, 1856, 1860, 1865, 1868, 1873,  
 1877, 1882, 1887, 1894, 1900, 1904,  
 1908, 1914, 1920, 1924, 1929, 1933,  
 1938, 1941, 1946, 1952, 1956, 1961,
- 1964, 1969, 1973, 1978, 1982, 1986,  
 1990, 1995, 1998, 2003, 2009, 2013,  
 2018, 2021, 2026, 2033, 2036, 2041,  
 2045, 2049, 2053, 2058, 2061, 2066,  
 2072, 2079, 2083, 2087, 2091, 2095,  
 2099, 2104, 2110, 2114, 2118, 2122,  
 2127, 2131, 2135, 2139, 2144, 2150,  
 2156, 2160, 2165, 2168, 2173, 2176,  
 2181, 2184, 2189, 2196, 2202, 2206,  
 2211, 2214, 2219, 2225, 2229, 2234,  
 2237, 2242, 2248, 2255, 2261, 2268,  
 2274, 2280, 2283, 2288, 2294, 2301,  
 2307, 2313, 2316, 2321, 2327, 2331,  
 2335, 2339, 2344, 2347, 2352, 2358,  
 2364, 2370, 2376, 2382, 2389, 2395,  
 2401, 2404, 2409, 2415, 2419, 2424,  
 2427, 2432, 2435, 2440, 2444, 2448,  
 2452, 2457, 2460, 2465, 2471, 2477,  
 2481, 2485, 2489, 2494, 2499, 2503,  
 2508, 2514, 2517, 2522, 2526, 2530,  
 2534, 2538, 2542, 2547, 2550, 2555,  
 2559, 2563, 2569, 2573, 2578, 2581,  
 2586, 2590, 2594, 2598, 2603, 2603,  
 2617, 2621, 2626, 2629, 2634, 2638,  
 2643, 2652, 2655, 2660, 2664, 2668,  
 2675, 2678, 2683, 2687, 2691
- op\_unstack*, 979, 988, 997, 1006, 1015, 1024,  
 1032, 1041, 1049, 1057, 1066, 1075,  
 1083, 1092, 1101, 1109, 1118, 1126,  
 1136, 1142, 1149, 1155, 1164, 1172,  
 1174, 1179, 1185, 1193, 1199, 1207,  
 1215, 1217, 1222, 1230, 1236, 1238,  
 1242, 1244, 1248, 1255, 1263, 1271,  
 1279, 1288, 1296, 1305, 1314, 1320,  
 1328, 1336, 1338, 1343, 1349, 1355,  
 1364, 1373, 1382, 1390, 1399, 1407,  
 1416, 1417, 1421, 1427, 1432, 1442,  
 1448, 1457, 1465, 1471, 1477, 1485,  
 1493, 1501, 1507, 1515, 1521, 1527,  
 1536, 1544, 1552, 1554, 1558, 1567,  
 1575, 1582, 1590, 1599, 1607, 1614,  
 1620, 1628, 1636, 1644, 1652, 1658,  
 1665, 1671, 1677, 1684, 1691, 1697,  
 1704, 1709, 1715, 1721, 1729, 1738,  
 1746, 1754, 1760, 1761, 1766, 1773,  
 1782, 1790, 1799, 1807, 1815, 1824,  
 1832, 1840, 1848, 1856, 1865, 1873,  
 1882, 1887, 1894, 1900, 1909, 1914,

- 1916, 1920, 1929, 1938, 1946, 1952,  
 1961, 1969, 1978, 1986, 1995, 2003,  
 2009, 2018, 2026, 2033, 2041, 2049,  
 2058, 2066, 2073, 2079, 2087, 2095,  
 2104, 2110, 2118, 2127, 2136, 2144,  
 2150, 2156, 2165, 2173, 2181, 2189,  
 2196, 2203, 2211, 2219, 2225, 2234,  
 2242, 2248, 2250, 2255, 2256, 2261,  
 2263, 2268, 2274, 2280, 2288, 2294,  
 2301, 2302, 2307, 2313, 2321, 2327,  
 2335, 2344, 2352, 2353, 2358, 2359,  
 2364, 2370, 2376, 2383, 2389, 2395,  
 2401, 2409, 2415, 2424, 2432, 2440,  
 2448, 2457, 2465, 2471, 2472, 2477,  
 2485, 2494, 2499, 2508, 2509, 2514,  
 2522, 2530, 2539, 2547, 2555, 2563,  
 2569, 2578, 2586, 2594, 2603, 2611,  
 2611, 2626, 2634, 2643, 2647, 2652,  
 2660, 2668, 2670, 2675, 2683, 2691
- op\_var, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1028,  
 1032, 1036, 1041, 1044, 1049, 1053,  
 1057, 1061, 1066, 1070, 1075, 1078,  
 1083, 1087, 1092, 1096, 1101, 1104,  
 1109, 1113, 1118, 1122, 1126, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1172, 1179, 1185, 1188, 1193,  
 1199, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1236, 1242, 1248, 1255,  
 1258, 1263, 1267, 1271, 1275, 1279,  
 1283, 1288, 1292, 1296, 1300, 1305,  
 1309, 1314, 1320, 1323, 1328, 1331,  
 1336, 1343, 1349, 1355, 1359, 1364,  
 1368, 1373, 1377, 1382, 1386, 1390,  
 1394, 1399, 1402, 1407, 1411, 1416,  
 1422, 1427, 1433, 1438, 1442, 1448,  
 1452, 1457, 1460, 1465, 1471, 1477,  
 1480, 1485, 1488, 1493, 1496, 1501,  
 1507, 1511, 1515, 1521, 1527, 1531,  
 1536, 1539, 1544, 1548, 1552, 1558,  
 1562, 1567, 1570, 1575, 1582, 1585,  
 1590, 1594, 1599, 1602, 1607, 1614,  
 1620, 1623, 1628, 1632, 1636, 1640,  
 1644, 1652, 1658, 1665, 1671, 1677,  
 1684, 1691, 1697, 1704, 1709, 1715,  
 1721, 1725, 1729, 1733, 1738, 1741,  
 1746, 1749, 1754, 1760, 1766, 1773,  
 1777, 1782, 1786, 1790, 1794, 1799,
- 1802, 1807, 1811, 1815, 1819, 1824,  
 1827, 1832, 1835, 1840, 1844, 1848,  
 1852, 1856, 1860, 1865, 1868, 1873,  
 1877, 1882, 1887, 1894, 1900, 1904,  
 1909, 1914, 1921, 1924, 1929, 1933,  
 1938, 1941, 1946, 1952, 1956, 1961,  
 1964, 1969, 1973, 1978, 1982, 1986,  
 1990, 1995, 1999, 2003, 2009, 2013,  
 2018, 2022, 2026, 2033, 2036, 2041,  
 2045, 2049, 2053, 2058, 2061, 2066,  
 2073, 2079, 2083, 2087, 2091, 2095,  
 2099, 2104, 2110, 2114, 2118, 2122,  
 2127, 2131, 2136, 2139, 2144, 2150,  
 2156, 2160, 2165, 2168, 2173, 2176,  
 2181, 2184, 2189, 2196, 2203, 2206,  
 2211, 2214, 2219, 2225, 2229, 2234,  
 2237, 2242, 2248, 2255, 2261, 2268,  
 2274, 2280, 2284, 2288, 2294, 2301,  
 2307, 2313, 2316, 2321, 2327, 2331,  
 2335, 2339, 2344, 2347, 2352, 2358,  
 2364, 2370, 2376, 2383, 2389, 2395,  
 2401, 2404, 2409, 2416, 2419, 2424,  
 2427, 2432, 2435, 2440, 2444, 2448,  
 2452, 2457, 2460, 2465, 2471, 2477,  
 2481, 2485, 2489, 2494, 2499, 2503,  
 2508, 2514, 2517, 2522, 2526, 2530,  
 2534, 2539, 2542, 2547, 2550, 2555,  
 2559, 2563, 2569, 2573, 2578, 2581,  
 2586, 2590, 2594, 2598, 2603, 2606,  
 2611, 2617, 2618, 2629, 2634, 2638,  
 2643, 2652, 2655, 2660, 2664, 2668,  
 2675, 2678, 2683, 2687, 2691
- op\_vdot, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1028,  
 1032, 1036, 1041, 1044, 1049, 1053,  
 1057, 1061, 1066, 1070, 1075, 1078,  
 1083, 1087, 1092, 1096, 1101, 1104,  
 1109, 1113, 1118, 1122, 1126, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1172, 1179, 1185, 1189, 1193,  
 1199, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1237, 1242, 1248, 1255,  
 1258, 1263, 1267, 1271, 1275, 1279,  
 1283, 1288, 1292, 1296, 1300, 1305,  
 1309, 1314, 1320, 1323, 1328, 1331,  
 1336, 1343, 1349, 1355, 1359, 1364,  
 1368, 1373, 1377, 1382, 1386, 1390,  
 1394, 1399, 1403, 1407, 1411, 1416,

- 1422, 1427, 1433, 1438, 1442, 1448,  
 1452, 1457, 1460, 1465, 1471, 1477,  
 1480, 1485, 1488, 1493, 1497, 1501,  
 1507, 1511, 1515, 1521, 1527, 1531,  
 1536, 1539, 1544, 1548, 1552, 1558,  
 1562, 1567, 1570, 1575, 1582, 1585,  
 1590, 1594, 1599, 1602, 1607, 1614,  
 1620, 1623, 1628, 1632, 1636, 1640,  
 1644, 1652, 1658, 1665, 1671, 1677,  
 1684, 1691, 1697, 1704, 1709, 1715,  
 1721, 1725, 1729, 1733, 1738, 1741,  
 1746, 1749, 1754, 1760, 1766, 1773,  
 1777, 1782, 1786, 1790, 1794, 1799,  
 1803, 1807, 1811, 1815, 1819, 1824,  
 1827, 1832, 1835, 1840, 1844, 1848,  
 1852, 1857, 1860, 1865, 1868, 1873,  
 1877, 1882, 1888, 1894, 1900, 1904,  
 1909, 1914, 1921, 1924, 1929, 1933,  
 1938, 1941, 1946, 1952, 1956, 1961,  
 1964, 1969, 1973, 1978, 1982, 1986,  
 1990, 1995, 1999, 2003, 2010, 2013,  
 2018, 2022, 2026, 2033, 2036, 2041,  
 2045, 2049, 2053, 2058, 2061, 2066,  
 2073, 2079, 2083, 2087, 2091, 2096,  
 2099, 2104, 2110, 2114, 2118, 2122,  
 2127, 2131, 2136, 2139, 2144, 2150,  
 2156, 2160, 2165, 2168, 2173, 2176,  
 2181, 2185, 2189, 2196, 2203, 2206,  
 2211, 2214, 2219, 2225, 2229, 2234,  
 2237, 2242, 2248, 2255, 2261, 2268,  
 2274, 2280, 2284, 2288, 2294, 2301,  
 2307, 2313, 2316, 2321, 2327, 2331,  
 2335, 2339, 2344, 2347, 2352, 2358,  
 2364, 2370, 2376, 2383, 2389, 2395,  
 2401, 2404, 2409, 2416, 2419, 2424,  
 2427, 2432, 2436, 2440, 2444, 2448,  
 2452, 2457, 2460, 2465, 2471, 2477,  
 2481, 2485, 2489, 2494, 2499, 2503,  
 2508, 2514, 2517, 2522, 2526, 2530,  
 2534, 2539, 2542, 2547, 2550, 2555,  
 2559, 2563, 2570, 2573, 2578, 2581,  
 2586, 2590, 2594, 2598, 2603, 2606,  
 2611, 2617, 2621, 2626, 2626, 2638,  
 2643, 2652, 2655, 2660, 2664, 2668,  
 2675, 2678, 2683, 2687, 2691  
 1053, 1057, 1061, 1066, 1070, 1075,  
 1078, 1083, 1087, 1092, 1096, 1101,  
 1104, 1109, 1113, 1118, 1122, 1127,  
 1131, 1136, 1142, 1149, 1155, 1159,  
 1164, 1168, 1172, 1179, 1185, 1189,  
 1193, 1199, 1202, 1207, 1210, 1215,  
 1222, 1225, 1230, 1237, 1242, 1248,  
 1255, 1258, 1263, 1267, 1271, 1275,  
 1280, 1283, 1288, 1292, 1296, 1300,  
 1305, 1309, 1314, 1320, 1323, 1328,  
 1331, 1336, 1343, 1349, 1355, 1359,  
 1364, 1368, 1373, 1377, 1382, 1386,  
 1390, 1394, 1399, 1403, 1407, 1411,  
 1416, 1422, 1427, 1433, 1438, 1442,  
 1448, 1452, 1457, 1460, 1465, 1471,  
 1477, 1480, 1485, 1488, 1493, 1497,  
 1501, 1507, 1511, 1515, 1521, 1527,  
 1531, 1536, 1539, 1544, 1548, 1552,  
 1558, 1562, 1567, 1570, 1575, 1582,  
 1585, 1590, 1594, 1599, 1602, 1607,  
 1614, 1620, 1623, 1628, 1632, 1636,  
 1640, 1645, 1652, 1658, 1665, 1671,  
 1677, 1684, 1691, 1697, 1704, 1709,  
 1715, 1721, 1725, 1730, 1733, 1738,  
 1741, 1746, 1749, 1754, 1760, 1766,  
 1773, 1777, 1782, 1786, 1790, 1794,  
 1799, 1803, 1807, 1811, 1815, 1819,  
 1824, 1827, 1832, 1835, 1840, 1844,  
 1848, 1852, 1857, 1860, 1865, 1868,  
 1873, 1877, 1882, 1888, 1894, 1900,  
 1904, 1909, 1914, 1921, 1924, 1929,  
 1933, 1938, 1941, 1946, 1952, 1956,  
 1961, 1964, 1969, 1973, 1978, 1982,  
 1987, 1990, 1995, 1999, 2003, 2010,  
 2013, 2018, 2022, 2026, 2033, 2036,  
 2041, 2045, 2049, 2053, 2058, 2061,  
 2066, 2073, 2079, 2083, 2087, 2091,  
 2096, 2099, 2104, 2110, 2114, 2118,  
 2122, 2127, 2131, 2136, 2139, 2144,  
 2150, 2156, 2160, 2165, 2168, 2173,  
 2176, 2181, 2185, 2189, 2196, 2203,  
 2206, 2211, 2214, 2219, 2225, 2229,  
 2234, 2237, 2242, 2248, 2255, 2261,  
 2268, 2274, 2280, 2284, 2288, 2294,  
 2301, 2307, 2313, 2316, 2321, 2327,  
 2331, 2335, 2339, 2344, 2347, 2352,  
 2358, 2364, 2370, 2376, 2383, 2389,  
 2395, 2401, 2404, 2409, 2416, 2419,  
 op\_vectorize, 974, 979, 983, 988, 992, 997,  
 1001, 1006, 1010, 1015, 1019, 1024,  
 1028, 1032, 1036, 1041, 1044, 1049,

- 2424, 2427, 2432, 2436, 2440, 2444,  
2448, 2452, 2457, 2460, 2465, 2471,  
2477, 2481, 2486, 2489, 2494, 2499,  
2503, 2508, 2514, 2517, 2522, 2526,  
2530, 2534, 2539, 2542, 2547, 2550,  
2555, 2559, 2563, 2570, 2573, 2578,  
2581, 2586, 2590, 2594, 2598, 2603,  
2606, 2611, 2617, 2621, 2626, 2629,  
2634, 2634, 2652, 2655, 2660, 2664,  
2668, 2675, 2678, 2683, 2687, 2691
- op\_vectorized\_map, 979, 988, 997, 1006,  
1015, 1024, 1032, 1041, 1049, 1057,  
1066, 1075, 1083, 1092, 1101, 1109,  
1118, 1127, 1136, 1142, 1149, 1155,  
1164, 1173, 1174, 1179, 1185, 1193,  
1199, 1207, 1215, 1217, 1222, 1230,  
1237, 1238, 1242, 1244, 1248, 1255,  
1263, 1271, 1280, 1288, 1296, 1305,  
1314, 1320, 1328, 1336, 1338, 1343,  
1349, 1355, 1364, 1373, 1382, 1390,  
1399, 1407, 1416, 1417, 1422, 1427,  
1433, 1442, 1449, 1457, 1465, 1471,  
1477, 1485, 1493, 1501, 1507, 1515,  
1521, 1527, 1536, 1544, 1552, 1554,  
1558, 1567, 1575, 1582, 1590, 1599,  
1607, 1614, 1620, 1628, 1636, 1645,  
1652, 1658, 1665, 1671, 1677, 1684,  
1691, 1697, 1704, 1709, 1715, 1721,  
1730, 1738, 1746, 1754, 1760, 1761,  
1766, 1773, 1782, 1790, 1799, 1807,  
1815, 1824, 1832, 1840, 1848, 1857,  
1865, 1873, 1882, 1888, 1894, 1900,  
1909, 1914, 1916, 1921, 1929, 1938,  
1946, 1952, 1961, 1969, 1978, 1987,  
1995, 2003, 2010, 2018, 2026, 2033,  
2041, 2049, 2058, 2066, 2073, 2079,  
2087, 2096, 2104, 2110, 2118, 2127,  
2136, 2144, 2150, 2156, 2165, 2173,  
2181, 2189, 2196, 2203, 2211, 2219,  
2225, 2234, 2242, 2248, 2250, 2255,  
2256, 2261, 2263, 2268, 2274, 2280,  
2288, 2294, 2301, 2302, 2307, 2313,  
2321, 2327, 2335, 2344, 2352, 2353,  
2358, 2359, 2364, 2370, 2376, 2383,  
2389, 2395, 2401, 2409, 2416, 2424,  
2432, 2440, 2448, 2457, 2465, 2471,  
2472, 2477, 2486, 2494, 2499, 2508,  
2509, 2514, 2522, 2530, 2539, 2547,  
2555, 2563, 2570, 2578, 2586, 2594,  
2603, 2611, 2613, 2617, 2626, 2634,  
2643, 2643, 2660, 2668, 2670, 2675,  
2683, 2691
- op\_vstack, 974, 979, 983, 988, 992, 997,  
1001, 1006, 1010, 1015, 1019, 1024,  
1028, 1032, 1036, 1041, 1044, 1049,  
1053, 1057, 1061, 1066, 1070, 1075,  
1078, 1083, 1087, 1092, 1096, 1101,  
1104, 1109, 1113, 1118, 1122, 1127,  
1131, 1136, 1142, 1149, 1155, 1159,  
1164, 1168, 1173, 1179, 1185, 1189,  
1193, 1199, 1202, 1207, 1210, 1215,  
1222, 1225, 1230, 1237, 1242, 1248,  
1255, 1258, 1263, 1267, 1271, 1275,  
1280, 1283, 1288, 1292, 1296, 1300,  
1305, 1309, 1314, 1320, 1323, 1328,  
1331, 1336, 1343, 1349, 1355, 1359,  
1364, 1368, 1373, 1377, 1382, 1386,  
1390, 1394, 1399, 1403, 1407, 1411,  
1416, 1422, 1427, 1433, 1438, 1442,  
1449, 1452, 1457, 1460, 1465, 1471,  
1477, 1480, 1485, 1488, 1493, 1497,  
1501, 1507, 1511, 1515, 1521, 1527,  
1531, 1536, 1539, 1544, 1548, 1552,  
1558, 1562, 1567, 1570, 1575, 1582,  
1585, 1590, 1594, 1599, 1602, 1607,  
1614, 1620, 1623, 1628, 1632, 1636,  
1640, 1645, 1652, 1658, 1665, 1671,  
1677, 1684, 1691, 1697, 1704, 1709,  
1715, 1721, 1725, 1730, 1733, 1738,  
1741, 1746, 1749, 1754, 1760, 1766,  
1773, 1777, 1782, 1786, 1790, 1794,  
1799, 1803, 1807, 1811, 1815, 1819,  
1824, 1827, 1832, 1835, 1840, 1844,  
1848, 1852, 1857, 1860, 1865, 1868,  
1873, 1877, 1882, 1888, 1894, 1900,  
1904, 1909, 1914, 1921, 1924, 1929,  
1933, 1938, 1941, 1946, 1952, 1956,  
1961, 1964, 1969, 1973, 1978, 1982,  
1987, 1990, 1995, 1999, 2003, 2010,  
2013, 2018, 2022, 2026, 2033, 2037,  
2041, 2045, 2049, 2053, 2058, 2061,  
2066, 2073, 2079, 2083, 2087, 2091,  
2096, 2099, 2104, 2110, 2114, 2119,  
2122, 2127, 2131, 2136, 2139, 2144,  
2150, 2156, 2160, 2165, 2168, 2173,  
2176, 2181, 2185, 2189, 2196, 2203,



- 2206, 2211, 2214, 2219, 2225, 2229,  
 2234, 2237, 2242, 2248, 2255, 2261,  
 2268, 2274, 2280, 2284, 2288, 2294,  
 2301, 2307, 2313, 2316, 2321, 2327,  
 2331, 2335, 2339, 2344, 2347, 2352,  
 2358, 2364, 2370, 2376, 2383, 2389,  
 2395, 2401, 2404, 2409, 2416, 2419,  
 2424, 2427, 2432, 2436, 2440, 2444,  
 2448, 2452, 2457, 2460, 2465, 2471,  
 2477, 2481, 2486, 2489, 2494, 2499,  
 2503, 2508, 2514, 2517, 2522, 2526,  
 2530, 2534, 2539, 2542, 2547, 2550,  
 2555, 2559, 2563, 2570, 2573, 2578,  
 2581, 2586, 2590, 2594, 2598, 2603,  
 2606, 2611, 2617, 2621, 2626, 2629,  
 2634, 2638, 2643, 2652, 2652, 2664,  
 2668, 2675, 2678, 2683, 2687, 2691
- op\_where*, 974, 979, 983, 988, 992, 997, 1001,  
 1006, 1010, 1015, 1019, 1024, 1028,  
 1032, 1036, 1041, 1044, 1049, 1053,  
 1057, 1061, 1066, 1070, 1075, 1078,  
 1083, 1087, 1092, 1096, 1101, 1104,  
 1109, 1113, 1118, 1122, 1127, 1131,  
 1136, 1142, 1149, 1155, 1159, 1164,  
 1168, 1173, 1179, 1185, 1189, 1193,  
 1199, 1202, 1207, 1210, 1215, 1222,  
 1225, 1230, 1237, 1242, 1248, 1255,  
 1258, 1263, 1267, 1271, 1275, 1280,  
 1283, 1288, 1292, 1296, 1300, 1305,  
 1309, 1314, 1320, 1323, 1328, 1331,  
 1336, 1343, 1349, 1355, 1359, 1364,  
 1368, 1373, 1377, 1382, 1386, 1390,  
 1394, 1399, 1403, 1407, 1411, 1416,  
 1422, 1427, 1433, 1438, 1442, 1449,  
 1452, 1457, 1460, 1465, 1471, 1477,  
 1480, 1485, 1488, 1493, 1497, 1501,  
 1507, 1511, 1515, 1521, 1527, 1531,  
 1536, 1539, 1544, 1548, 1552, 1558,  
 1562, 1567, 1570, 1575, 1582, 1585,  
 1590, 1594, 1599, 1602, 1607, 1614,  
 1620, 1623, 1628, 1632, 1636, 1640,  
 1645, 1652, 1658, 1665, 1671, 1677,  
 1684, 1691, 1697, 1704, 1709, 1715,  
 1721, 1725, 1730, 1733, 1738, 1741,  
 1746, 1749, 1754, 1760, 1766, 1773,  
 1777, 1782, 1786, 1790, 1794, 1799,  
 1803, 1807, 1811, 1815, 1819, 1824,  
 1827, 1832, 1835, 1840, 1844, 1848,
- 1852, 1857, 1860, 1865, 1868, 1873,  
 1877, 1882, 1888, 1894, 1900, 1904,  
 1909, 1914, 1921, 1924, 1929, 1933,  
 1938, 1941, 1946, 1952, 1956, 1961,  
 1964, 1969, 1973, 1978, 1982, 1987,  
 1990, 1995, 1999, 2003, 2010, 2013,  
 2018, 2022, 2026, 2033, 2037, 2041,  
 2045, 2049, 2053, 2058, 2061, 2066,  
 2073, 2079, 2083, 2087, 2091, 2096,  
 2099, 2104, 2110, 2114, 2119, 2122,  
 2127, 2131, 2136, 2139, 2144, 2150,  
 2156, 2160, 2165, 2168, 2173, 2176,  
 2181, 2185, 2189, 2196, 2203, 2206,  
 2211, 2214, 2219, 2225, 2229, 2234,  
 2237, 2242, 2248, 2255, 2261, 2268,  
 2274, 2280, 2284, 2288, 2294, 2301,  
 2307, 2313, 2316, 2321, 2327, 2331,  
 2335, 2339, 2344, 2347, 2352, 2358,  
 2364, 2370, 2376, 2383, 2389, 2395,  
 2401, 2404, 2409, 2416, 2419, 2424,  
 2427, 2432, 2436, 2440, 2444, 2448,  
 2452, 2457, 2460, 2465, 2471, 2477,  
 2481, 2486, 2489, 2494, 2499, 2503,  
 2508, 2514, 2517, 2522, 2526, 2530,  
 2534, 2539, 2542, 2547, 2550, 2555,  
 2559, 2563, 2570, 2573, 2578, 2581,  
 2586, 2590, 2595, 2598, 2603, 2606,  
 2611, 2617, 2621, 2626, 2629, 2634,  
 2638, 2643, 2652, 2655, 2660, 2660,  
 2675, 2678, 2683, 2687, 2691
- op\_while\_loop*, 979, 988, 997, 1006, 1015,  
 1024, 1033, 1041, 1049, 1057, 1066,  
 1075, 1083, 1092, 1101, 1109, 1118,  
 1127, 1136, 1142, 1149, 1155, 1164,  
 1173, 1174, 1179, 1185, 1193, 1199,  
 1207, 1215, 1217, 1222, 1230, 1237,  
 1238, 1242, 1244, 1248, 1255, 1263,  
 1271, 1280, 1288, 1296, 1305, 1314,  
 1320, 1328, 1336, 1338, 1343, 1349,  
 1355, 1364, 1373, 1382, 1390, 1399,  
 1407, 1416, 1417, 1422, 1427, 1433,  
 1442, 1449, 1457, 1465, 1471, 1477,  
 1485, 1493, 1501, 1507, 1516, 1521,  
 1527, 1536, 1544, 1552, 1554, 1558,  
 1567, 1575, 1582, 1590, 1599, 1607,  
 1614, 1620, 1628, 1636, 1645, 1652,  
 1658, 1665, 1671, 1677, 1684, 1691,  
 1697, 1704, 1709, 1715, 1721, 1730,



- 1738, 1746, 1754, 1760, 1762, 1766,  
1773, 1782, 1790, 1799, 1807, 1815,  
1824, 1832, 1840, 1848, 1857, 1865,  
1873, 1882, 1888, 1894, 1900, 1909,  
1914, 1916, 1921, 1929, 1938, 1946,  
1952, 1961, 1969, 1978, 1987, 1995,  
2003, 2010, 2018, 2026, 2033, 2041,  
2049, 2058, 2066, 2073, 2079, 2087,  
2096, 2104, 2110, 2119, 2127, 2136,  
2144, 2150, 2156, 2165, 2173, 2181,  
2189, 2196, 2203, 2211, 2219, 2225,  
2234, 2242, 2248, 2250, 2255, 2256,  
2261, 2263, 2268, 2274, 2280, 2288,  
2294, 2301, 2302, 2307, 2313, 2321,  
2327, 2335, 2344, 2352, 2353, 2358,  
2359, 2364, 2370, 2376, 2383, 2389,  
2395, 2401, 2409, 2416, 2424, 2432,  
2440, 2449, 2457, 2465, 2471, 2473,  
2477, 2486, 2494, 2499, 2508, 2509,  
2514, 2522, 2530, 2539, 2547, 2555,  
2563, 2570, 2578, 2586, 2595, 2603,  
2611, 2613, 2618, 2626, 2634, 2643,  
2647, 2652, 2660, 2668, 2669, 2683,  
2691
- op\_zeros, 974, 979, 983, 988, 992, 997, 1001,  
1006, 1010, 1015, 1019, 1024, 1028,  
1033, 1036, 1041, 1044, 1049, 1053,  
1058, 1061, 1066, 1070, 1075, 1078,  
1083, 1087, 1092, 1096, 1101, 1104,  
1109, 1113, 1118, 1122, 1127, 1131,  
1136, 1142, 1149, 1155, 1159, 1164,  
1168, 1173, 1179, 1185, 1189, 1193,  
1199, 1202, 1207, 1211, 1215, 1222,  
1225, 1230, 1237, 1242, 1248, 1255,  
1258, 1263, 1267, 1271, 1275, 1280,  
1283, 1288, 1292, 1296, 1300, 1305,  
1309, 1314, 1320, 1323, 1328, 1331,  
1336, 1343, 1349, 1355, 1359, 1364,  
1368, 1373, 1377, 1382, 1386, 1390,  
1394, 1399, 1403, 1407, 1411, 1416,  
1422, 1427, 1433, 1438, 1442, 1449,  
1452, 1457, 1461, 1465, 1471, 1477,  
1480, 1485, 1488, 1493, 1497, 1501,  
1507, 1511, 1516, 1521, 1527, 1531,  
1536, 1539, 1544, 1548, 1552, 1558,  
1562, 1567, 1570, 1575, 1582, 1585,  
1590, 1594, 1599, 1602, 1607, 1614,  
1620, 1624, 1628, 1632, 1636, 1640,  
1645, 1652, 1658, 1665, 1671, 1677,  
1684, 1691, 1697, 1704, 1709, 1715,  
1721, 1725, 1730, 1733, 1738, 1741,  
1746, 1749, 1754, 1760, 1766, 1773,  
1777, 1782, 1786, 1790, 1794, 1799,  
1803, 1807, 1811, 1816, 1819, 1824,  
1827, 1832, 1835, 1840, 1844, 1848,  
1852, 1857, 1860, 1865, 1868, 1873,  
1877, 1882, 1888, 1894, 1900, 1904,  
1909, 1914, 1921, 1924, 1929, 1933,  
1938, 1941, 1946, 1952, 1956, 1961,  
1964, 1969, 1973, 1978, 1982, 1987,  
1990, 1995, 1999, 2003, 2010, 2013,  
2018, 2022, 2026, 2033, 2037, 2041,  
2045, 2049, 2053, 2058, 2061, 2066,  
2073, 2079, 2083, 2087, 2091, 2096,  
2099, 2104, 2110, 2114, 2119, 2122,  
2127, 2131, 2136, 2139, 2144, 2150,  
2156, 2160, 2165, 2168, 2173, 2176,  
2181, 2185, 2189, 2196, 2203, 2206,  
2211, 2214, 2219, 2225, 2229, 2234,  
2237, 2242, 2248, 2255, 2261, 2268,  
2274, 2280, 2284, 2288, 2294, 2301,  
2307, 2313, 2316, 2321, 2327, 2331,  
2336, 2339, 2344, 2347, 2352, 2358,  
2364, 2370, 2376, 2383, 2389, 2395,  
2401, 2404, 2409, 2416, 2419, 2424,  
2427, 2432, 2436, 2440, 2444, 2449,  
2452, 2457, 2460, 2465, 2471, 2477,  
2481, 2486, 2489, 2494, 2500, 2503,  
2508, 2514, 2518, 2522, 2526, 2530,  
2534, 2539, 2542, 2547, 2550, 2555,  
2559, 2563, 2570, 2573, 2578, 2582,  
2586, 2590, 2595, 2598, 2603, 2606,  
2611, 2618, 2621, 2626, 2629, 2634,  
2638, 2643, 2652, 2655, 2660, 2664,  
2668, 2675, 2675, 2687, 2691
- op\_zeros\_like, 974, 979, 983, 988, 992, 997,  
1001, 1006, 1010, 1015, 1019, 1024,  
1028, 1033, 1036, 1041, 1044, 1049,  
1053, 1058, 1061, 1066, 1070, 1075,  
1078, 1083, 1087, 1092, 1096, 1101,  
1104, 1109, 1113, 1118, 1122, 1127,  
1131, 1136, 1142, 1149, 1155, 1159,  
1164, 1168, 1173, 1179, 1185, 1189,  
1193, 1199, 1202, 1207, 1211, 1215,  
1222, 1225, 1230, 1237, 1242, 1248,  
1255, 1258, 1263, 1267, 1271, 1275,

1280, 1283, 1288, 1292, 1296, 1300,  
 1305, 1309, 1314, 1320, 1323, 1328,  
 1331, 1336, 1343, 1349, 1355, 1359,  
 1364, 1368, 1373, 1377, 1382, 1386,  
 1390, 1394, 1399, 1403, 1407, 1411,  
 1416, 1422, 1427, 1433, 1438, 1442,  
 1449, 1452, 1457, 1461, 1465, 1471,  
 1477, 1480, 1485, 1488, 1493, 1497,  
 1501, 1507, 1511, 1516, 1521, 1528,  
 1531, 1536, 1539, 1544, 1548, 1552,  
 1558, 1562, 1567, 1570, 1575, 1582,  
 1585, 1590, 1594, 1599, 1602, 1607,  
 1614, 1620, 1624, 1628, 1632, 1636,  
 1640, 1645, 1652, 1658, 1665, 1671,  
 1677, 1684, 1691, 1697, 1704, 1709,  
 1715, 1721, 1725, 1730, 1733, 1738,  
 1741, 1746, 1749, 1754, 1761, 1766,  
 1773, 1777, 1782, 1786, 1790, 1794,  
 1799, 1803, 1807, 1811, 1816, 1819,  
 1824, 1827, 1832, 1835, 1840, 1844,  
 1848, 1852, 1857, 1860, 1865, 1868,  
 1873, 1877, 1882, 1888, 1894, 1900,  
 1904, 1909, 1914, 1921, 1924, 1929,  
 1933, 1938, 1941, 1946, 1952, 1956,  
 1961, 1964, 1969, 1973, 1978, 1982,  
 1987, 1990, 1995, 1999, 2003, 2010,  
 2013, 2018, 2022, 2026, 2033, 2037,  
 2041, 2045, 2049, 2053, 2058, 2061,  
 2066, 2073, 2079, 2083, 2087, 2091,  
 2096, 2099, 2104, 2110, 2114, 2119,  
 2122, 2127, 2131, 2136, 2139, 2144,  
 2150, 2156, 2160, 2165, 2168, 2173,  
 2176, 2181, 2185, 2189, 2196, 2203,  
 2206, 2211, 2214, 2219, 2225, 2229,  
 2234, 2237, 2242, 2248, 2255, 2261,  
 2268, 2274, 2280, 2284, 2288, 2294,  
 2301, 2307, 2313, 2316, 2321, 2327,  
 2331, 2336, 2339, 2344, 2347, 2352,  
 2358, 2364, 2370, 2376, 2383, 2389,  
 2395, 2401, 2404, 2409, 2416, 2419,  
 2424, 2427, 2432, 2436, 2440, 2444,  
 2449, 2452, 2457, 2460, 2465, 2471,  
 2477, 2481, 2486, 2489, 2494, 2500,  
 2503, 2508, 2514, 2518, 2522, 2526,  
 2531, 2534, 2539, 2542, 2547, 2550,  
 2555, 2559, 2563, 2570, 2573, 2578,  
 2582, 2586, 2590, 2595, 2598, 2603,  
 2606, 2611, 2618, 2621, 2626, 2629,  
 2634, 2638, 2643, 2652, 2655, 2660,  
 2664, 2668, 2675, 2678, 2683, 2683  
 optimizer\_adadelta, 942, 946, 949, 951,  
 953, 956, 959, 961, 963, 966, 968,  
 971  
 optimizer\_adafactor, 944, 944, 949, 951,  
 953, 956, 959, 961, 963, 966, 968,  
 971  
 optimizer\_adagrad, 944, 946, 947, 951, 953,  
 956, 959, 961, 963, 966, 968, 971  
 optimizer\_adam, 944, 946, 949, 949, 953,  
 956, 959, 961, 963, 966, 968, 971  
 optimizer\_adam\_w, 944, 946, 949, 951, 953,  
 954, 959, 961, 963, 966, 968, 971  
 optimizer\_adamax, 944, 946, 949, 951, 951,  
 956, 959, 961, 963, 966, 968, 971  
 optimizer\_ftrl, 944, 946, 949, 951, 953,  
 956, 956, 961, 964, 966, 968, 971  
 optimizer\_lion, 944, 946, 949, 951, 953,  
 956, 959, 959, 964, 966, 968, 971  
 optimizer\_loss\_scale, 944, 946, 949, 951,  
 953, 956, 959, 961, 961, 966, 968,  
 971  
 optimizer\_loss\_scale(), 943, 946, 948,  
 951, 953, 955, 961, 963, 965, 968  
 optimizer\_nadam, 944, 946, 949, 951, 953,  
 956, 959, 961, 964, 964, 968, 971  
 optimizer\_rmsprop, 944, 947, 949, 951, 953,  
 956, 959, 961, 964, 966, 966, 971  
 optimizer\_sgd, 944, 947, 949, 951, 954, 956,  
 959, 961, 964, 966, 968, 969  
 pad\_sequences, 106, 134, 141, 143, 145, 146,  
 152, 154, 197, 201, 203, 207, 208,  
 211, 213, 215, 442, 942, 2691, 2742,  
 2748, 2753, 2756, 2758, 2763  
 plot(), 2696  
 plot.keras.src.models.model.Model,  
 2694  
 plot.keras\_training\_history, 2696  
 pop\_layer, 194, 198, 241, 243, 2697, 2750  
 predict.keras.src.models.model.Model,  
 139, 179, 2697, 2699, 2750, 2759  
 predict\_on\_batch, 139, 179, 2699, 2699,  
 2750, 2759  
 print.keras.src.models.model.Model  
 (summary.keras.src.models.model.Model),  
 2748  
 print.keras\_shape (shape), 2742

- process\_utils, 2700  
 quantize\_weights, 166, 194, 202, 2701, 2717  
 random\_beta, 2701, 2703–2712  
 random\_binomial, 2702, 2702, 2704–2712  
 random\_categorical, 2702, 2703, 2703, 2705–2712  
 random\_dropout, 2702–2704, 2704, 2706–2712  
 random\_gamma, 2702–2705, 2705, 2707–2712  
 random\_integer, 2702–2706, 2706, 2708–2712  
 random\_normal, 2702–2707, 2707, 2709–2712  
 random\_seed\_generator, 2702–2708, 2708, 2710–2712  
 random\_seed\_generator(), 2704–2707, 2710–2712  
 random\_shuffle, 2702–2709, 2709, 2711, 2712  
 random\_truncated\_normal, 2702–2710, 2710, 2712  
 random\_uniform, 2702–2711, 2711  
 register\_keras\_serializable, 178, 181, 195, 199, 200, 698, 750, 751, 2712, 2737, 2739, 2740, 2761, 2762  
 register\_keras\_serializable(), 167, 687  
 regularizer\_l1, 2714, 2715–2717  
 regularizer\_l1\_l2, 2714, 2714, 2716, 2717  
 regularizer\_l2, 2714, 2715, 2715, 2717  
 regularizer\_orthogonal, 2714–2716, 2716  
 reset\_state, 166, 194, 202, 2701, 2717  
 reset\_state(), 320, 639  
 rnn\_cell\_gru, 255, 258, 261, 265, 268, 272, 276, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 320, 322, 328, 332, 335, 340, 345, 350, 355, 360, 365, 369, 371, 375, 377, 381, 383, 387, 391, 395, 400, 405, 410, 415, 419, 423, 428, 433, 441, 446, 451, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 493, 494, 496, 501, 507, 510, 519, 526, 530, 535, 539, 541, 545, 548, 553, 558, 563, 568, 571, 575, 580, 585, 589, 594, 598, 602, 606, 610, 615, 620, 624, 628, 632, 636, 640, 643, 648, 653, 656, 658, 662, 666, 670, 674, 683, 686, 693, 697, 699, 702, 706, 709, 714, 718, 722, 726, 731, 735, 2719, 2721, 2723, 2724, 2726, 2729, 2731, 2731  
 rnn\_cell\_lstm, 255, 258, 261, 265, 268, 272, 276, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 320, 322, 328, 332, 335, 340, 345, 350, 355, 360, 365, 369, 371, 375, 377, 381, 383, 387, 391, 395, 400, 405, 410, 415, 419, 423, 428, 433, 441, 446, 451, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 494, 496, 501, 507, 510, 519, 526, 530, 535, 538, 539, 541, 545, 548, 553, 558, 563, 568, 571, 575, 580, 585, 589, 594, 598, 602, 606, 610, 615, 620, 624, 628, 632, 636, 640, 643, 648, 653, 656, 658, 662, 666, 670, 674, 683, 686, 693, 697, 699, 702, 706, 709, 714, 718, 722, 726, 731, 735, 2719, 2721, 2723, 2724, 2726, 2726, 2733, 2734, 2736  
 rnn\_cell\_simple, 255, 258, 261, 265, 269, 272, 276, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 320, 322, 328, 332, 336, 340, 345, 350, 355, 360, 365, 369, 371, 375, 377, 381, 383, 387, 391, 395, 400, 405, 410, 415, 419, 423, 428, 433, 441, 446, 451, 454, 457, 461, 465, 469, 473, 477, 481, 485, 490, 494, 496, 501, 507, 510, 519, 526, 530, 535, 539, 541, 545, 548, 553, 558, 563, 568, 571, 575, 580, 585, 589, 594, 598, 602, 606, 610, 615, 620, 624, 628, 632, 636, 640, 643, 648, 653, 656, 658, 662, 666, 670, 674, 683, 686, 693, 698, 699, 702, 706, 709, 714, 718, 722, 726, 731, 735, 2719, 2721, 2723, 2724, 2726, 2729, 2731, 2731  
 rnn\_cells\_stack, 255, 258, 261, 265, 269, 272, 276, 279, 283, 287, 290, 294, 298, 303, 308, 312, 318, 320, 322, 328, 332, 336, 340, 345, 350, 355, 360, 365, 369, 371, 375, 377, 381, 383, 387, 391, 395, 400, 405, 410, 415, 419, 423, 428, 433, 441, 446,

- 451, 454, 457, 461, 465, 469, 473,  
477, 481, 485, 490, 494, 496, 501,  
507, 510, 519, 526, 530, 535, 539,  
541, 545, 548, 553, 558, 563, 568,  
571, 575, 580, 585, 589, 594, 598,  
602, 606, 610, 615, 620, 624, 628,  
632, 636, 640, 643, 648, 653, 656,  
658, 662, 666, 670, 674, 683, 686,  
694, 698, 699, 702, 706, 709, 714,  
718, 722, 726, 731, 735, 2718, 2724,  
2726, 2729, 2731, 2734, 2736
- save\_model, 181, 698, 750, 751, 2713, 2736,  
2739, 2740, 2761
- save\_model(), 194
- save\_model\_config, 181, 698, 750, 751,  
2713, 2737, 2738, 2740, 2762
- save\_model\_config(), 194
- save\_model\_weights, 181, 698, 750, 751,  
2713, 2737, 2739, 2739, 2762
- serialize\_keras\_object, 178, 195, 199,  
200, 2713, 2740, 2762
- set.seed(), 2741
- set\_custom\_objects  
(get\_custom\_objects), 194
- set\_random\_seed, 106, 134, 141, 143, 145,  
146, 152, 154, 197, 201, 203, 207,  
209, 211, 213, 215, 442, 942, 2694,  
2741, 2748, 2753, 2756, 2758, 2763
- set\_vocabulary  
(layer\_text\_vectorization), 686
- set\_weights(get\_weights), 201
- shape, 2742
- shape(), 248
- split\_dataset, 105, 106, 134, 141, 143, 145,  
146, 152, 154, 197, 201, 203, 206,  
207, 209, 211, 213, 215, 442, 942,  
2694, 2742, 2746, 2753, 2756, 2758,  
2763
- summary.keras.src.models.model.Model,  
194, 198, 241, 243, 2697, 2748
- tensorflow::install\_tensorflow(), 238
- tensorflow::tf\_function(), 34
- test\_on\_batch, 139, 179, 2699, 2750, 2759
- text\_dataset\_from\_directory, 105, 106,  
134, 141, 143, 145, 146, 152, 154,  
197, 201, 203, 206, 207, 209, 211,  
213, 215, 442, 942, 2694, 2742,  
2747, 2748, 2751, 2756, 2758, 2763
- tfdatasets::dataset\_map(), 34
- timeseries\_dataset\_from\_array, 105, 106,  
134, 141, 143, 145, 146, 152, 154,  
197, 201, 203, 206, 207, 209, 211,  
213, 215, 442, 942, 2694, 2742,  
2748, 2753, 2753, 2758, 2763
- to\_categorical, 106, 134, 141, 143, 145,  
146, 152, 154, 197, 201, 203, 207,  
209, 211, 213, 215, 442, 941, 942,  
2694, 2742, 2748, 2753, 2756, 2757,  
2763
- train\_on\_batch, 139, 179, 2699, 2750, 2759
- unfreeze\_weights(freeze\_weights), 184
- unfreeze\_weights(), 242
- use\_backend, 2760
- use\_backend(), 140
- with\_custom\_object\_scope, 178, 181, 195,  
199, 200, 698, 750, 751, 2713, 2737,  
2739, 2740, 2760
- with\_custom\_object\_scope(), 167
- zip\_lists, 106, 134, 142, 143, 145, 146, 152,  
154, 197, 201, 203, 207, 209, 211,  
213, 215, 442, 942, 2694, 2742,  
2748, 2753, 2756, 2758, 2762